NAN YA PLASTICS CORPORATION

SPECIFICATION OF
LCD MODULE
PRODUCT NO.: LTCE9T372G6GKS

SPEC. NO.: LM372-6A-△0

CUSTOMER
APPROVED BY
DATE:

LCD DEPARTMENT
ELECTRONIC MATERIALS DIVISION
NAN YA PLASTICS CORPORATION
201, TUNG HWA N. ROAD, TAIPEI
TEL: 886-2-27122211 EXT. 5993~5995
FAX: 886-2-27178253
E-mail: lcdsales@npc.com.tw

JAN.09.2006

Q.C. DEPT.	DESIGN MANAGER	DESIGN CHECK	DESIGNER
			J.P. Weng

RECORDS OF REVISION

SPEC. NO.: LM372-6A

DATE	REVISED NO.	REF. PAGE	SUMMARY	DESIGN	CHECK
01.09.2006	0	1~23/23	First Issue	J.P. Weng	

1. MECHANICAL DATA

NO	ITEM	CONTENTS	UNIT
1	Product No.	LTCE9T372G6GKS	–
2	Module Size	136.1(W) X 92.6(H) X 7.5 Max.(D)	mm
3	Dot Size	0.285 (W) x 0.285 (H)	mm
4	Dot Pitch	0.3 (W) x 0.3 (H)	mm
5	Number of Dots	320 (W) x 240 (H)	Dot
6	Duty	1/240	–
7	LCD Display Mode	FSTN:Black and White(Normally Black/Negative Image)	–
8	Rear Polarizer	Transmission	–
9	Viewing Direction	6	O'clock
10	Backlight	LED	–
11	Controller	Excluded	–
12	Weight	110 (approx.)	g
13	Soldering	Lead Free	–

Note :

LTCE9T372G6GKS

Back Light
C : LED Back Light

Reflective/Transmissive
T : Transmission

Option
6 : Version
G : SPECIAL BACKLIGHT
K : High Contrast Ratio LC
S : RoHS Compliance

Mode/View Angle
G : Normally Black , 6 O'clock

RoHS Compliance.

Nan Ya guarantees that this project doesn't include any materials (6 materials) or includes less than specified quantities which are regulated by RoHS Compliance.

2. ABSOLUTE MAXIMUM RATINGS

(1) ELECTRICAL ABSOLUTE RATINGS

VSS=0V STANDARD

ITEM	SYMBOL	MIN	MAX	UNIT	COMMENT
Power Supply for Logic	VDD−VSS	−0.3	6.5	V	
Power Supply for LCM	VDD−VEE	0	27.0	V	
Input Voltage	VI	−0.3	VDD+0.3	V	
Static Electricity	−	−	−	−	Note 1

Note 1 LCM should be grounded during handling LCM.

(2) ENVIRONMENTAL ABSOLUTE MAXIMUM RATINGS

ITEM	WIDE TEMP.			
	OPERATING		STORAGE	
	MIN.	MAX.	MIN.	MAX.
Ambient Temperature	−20	70	−40	80
Humidity (Without Condensation)	Note 2,4		Note 3,4	

Note 2 Ta ≦ 70°C : 75%RH max

Note 3 Please refer to item of reliability test

Note 4 Background color will change slightly depending on ambient temperature. That phenomenon is reversible.

3. ELECTRICAL CHARACTERISTICS

3-1. ELECTRICAL CHARACTERISTICS OF LCM

ITEM	SYMBOL	CONDITION		MIN.	TYP.	MAX.	UNIT
Power Supply for Logic	VDD-VSS	-		4.5	5.0	5.5	V
				2.7	3.0	3.3	
Recommended LC Driving Voltage	VDD-VEE	Duty=1/240	-20°C	25.4	25.8	26.2	V
			0°C	24.0	24.4	24.8	
			25°C	23.0	23.4	23.8	
			50°C	22.1	22.5	22.9	
			70°C	21.4	21.8	22.2	
Input Voltage	VIH	H level		0.8VDD	-	VDD	V
	VIL	L level		0	-	0.2VDD	V
Power Supply Current	IDD	FLM = 70 Hz VDD = 5.0 V VDD-VEE = 23.4 V		-	12	16	mA
	IEE	PATTERN : □ ■ □ ■ □ ■ ■ □ ■ □ ■ □		-	12	16	mA
LCM 1931 C.I.E.	X	—		0.33	0.35	0.37	-
	Y			0.33	0.35	0.37	
LCM Surface Luminance	L	VAK=5V	All on	40	50	-	cd/m²
			All off	-	8	15	
B/L 1931 C.I.E.	X	—		0.29	0.31	0.33	-
	Y			0.29	0.31	0.33	

3-2.ELECTRICAL CHARACTERISTICS OF BACKLIGHT

Used LED Rating (Constant Voltage Driving) Temp.=25℃

ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT	REMARK
Peak forward current	I_P	–	–	200	mA	–
Maximum reverse voltage	V_R	–	–	5	V	–
Applied forward voltage	V_{AK}	–	5	–	V	–
Applied forward current	I_{AK}	–	–	120	mA	–
LED power consumption	P_F	–	–	1	W	–
LED life time	L_L	–	10000	–	hrs	at V_{AK} = 5 V (*1)

(*1) LED life time is defined as follows : The final brightness is at 50% of original brightness.

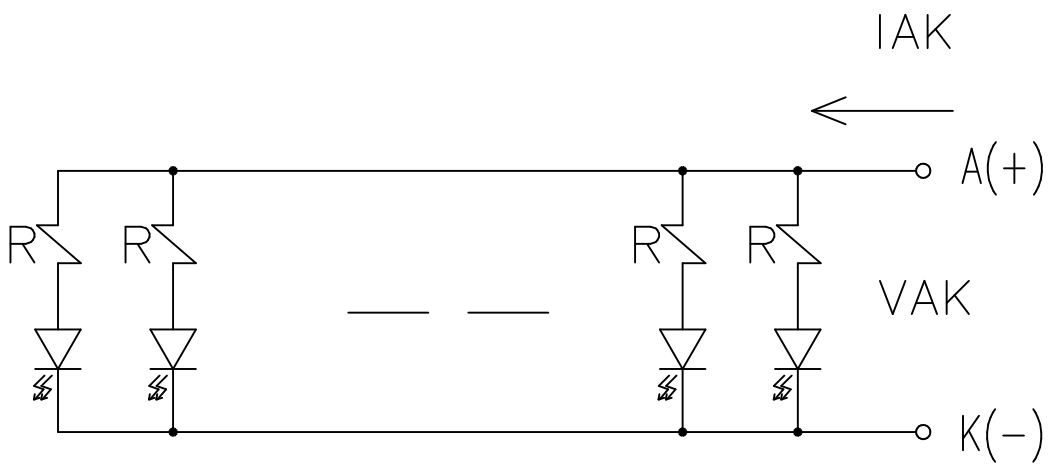

1x8 pcs

4. OPTICAL CHARACTERISTICS

AT V_{OP}

ITEM / MODE		Cr(Contrast Ratio)										θ(Viewing Angle)		φ(Viewing Angle)	
		−20℃		0℃		25℃		50℃		70℃		25℃		25℃	
		MIN.	TYP.	MIN.	TYP.	MIN.	TYP.	MIN.	TYP.	MIN.	TYP.	MIN.	TYP.	MIN.	TYP.
T	G	10	15	12	18	14	20	7	10	3.5	5	−	X−60	−	54−33
Note		NOTE 6										NOTE 5			

Note:

T: TRANSMISSIVE

G: NORMALLY BLACK

AT $\phi=0°$ $\theta=0°$

ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	NOTE
Response Time (rise)	Tr	−20℃	−	3300	3900	ms	NOTE 2
		0℃	−	750	900		
		25℃	−	300	360		
		50℃	−	100	120		
		70℃	−	65	80		
Response Time (fall)	Tf	−20℃	−	1800	2100	ms	NOTE 2
		0℃	−	300	360		
		25℃	−	150	180		
		50℃	−	50	60		
		70℃	−	30	40		

(NOTE 1)

Definition of Operation Voltage(Vop)

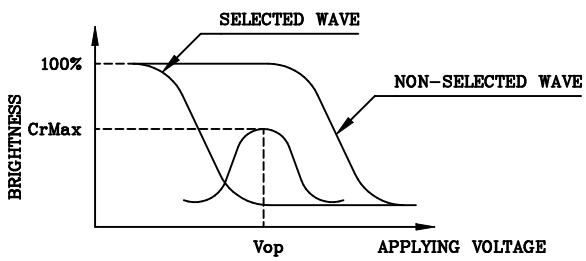

(positive type)

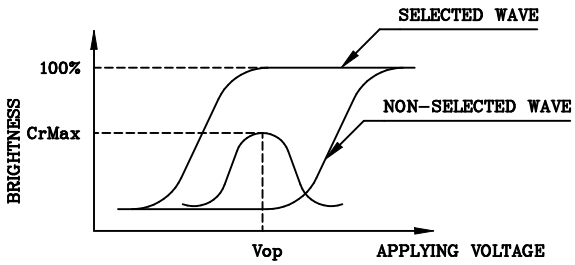

(negative type)

*Conditions

Viewing Angle : 0
Frame Frequency : 70Hz
Applying Waveform : 1/N duty 1/a bias

(NOTE 2)

Definition of Response Time(Tr,Tf)

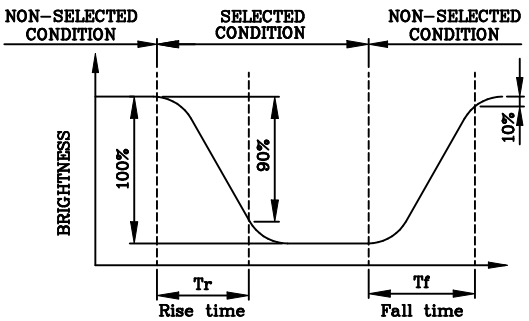

(positive type)

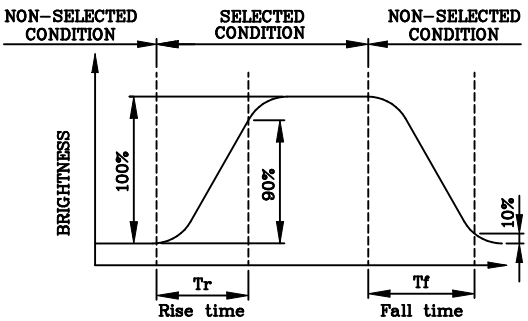

(negative type)

*Conditions

Operating Voltage : Vop
Viewing Angle (θ,ϕ) : (0,0)
Frame Frequency : 70Hz
Applying Waveform : 1/N duty 1/a bias

(NOTE 3)

Description of Measuring Equipment and Driving Waveforms

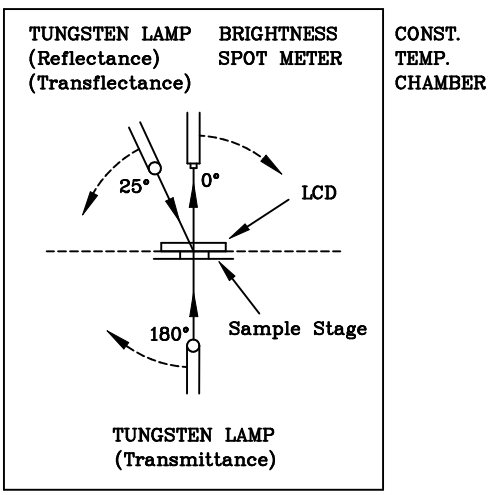

Multiplex Driving (1/N duty 1/a bias)

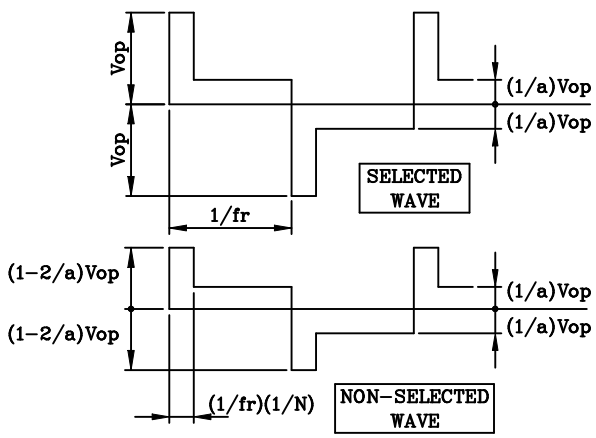

(NOTE 4)

Definition of Viewing Direction

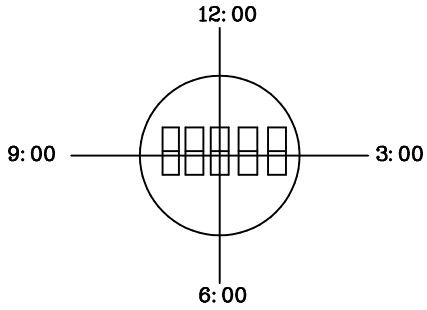

(NOTE 5)

Definition of Viewing Angle

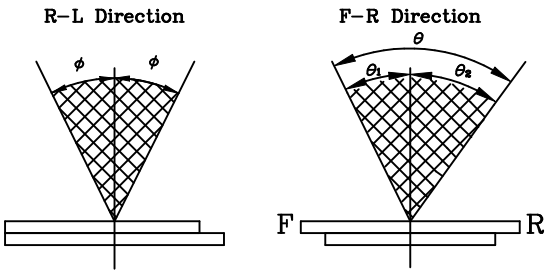

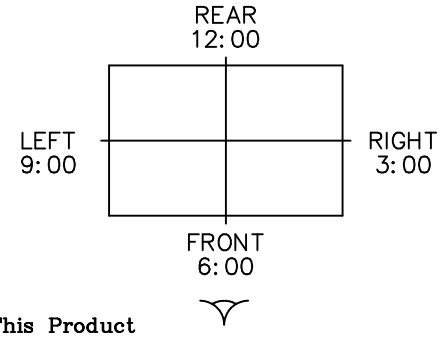

*For This Product

The Viewing Direction Is 6 O'clock

So $\theta 1 > \theta 2$

$$\theta = \theta_1 + \theta_2$$

*Conditions

Operating Voltage : Vop

Frame Frequency : 70Hz

Applying Waveform : 1/N duty 1/a bias

Contrast Ratio : larger than 2

(NOTE 6)

Definition of Contrast Ratio (Cr)

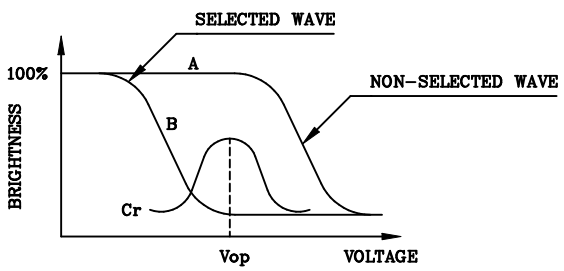

(positive type)

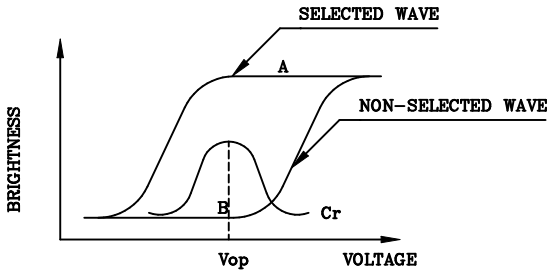

(negative type)

Contrast Ratio : Cr=A/B

*Conditions

Viewing Angle : 0

Frame Frequency : 70Hz

Applying Waveform : 1/N duty 1/a bias

5. BLOCK DIAGRAM

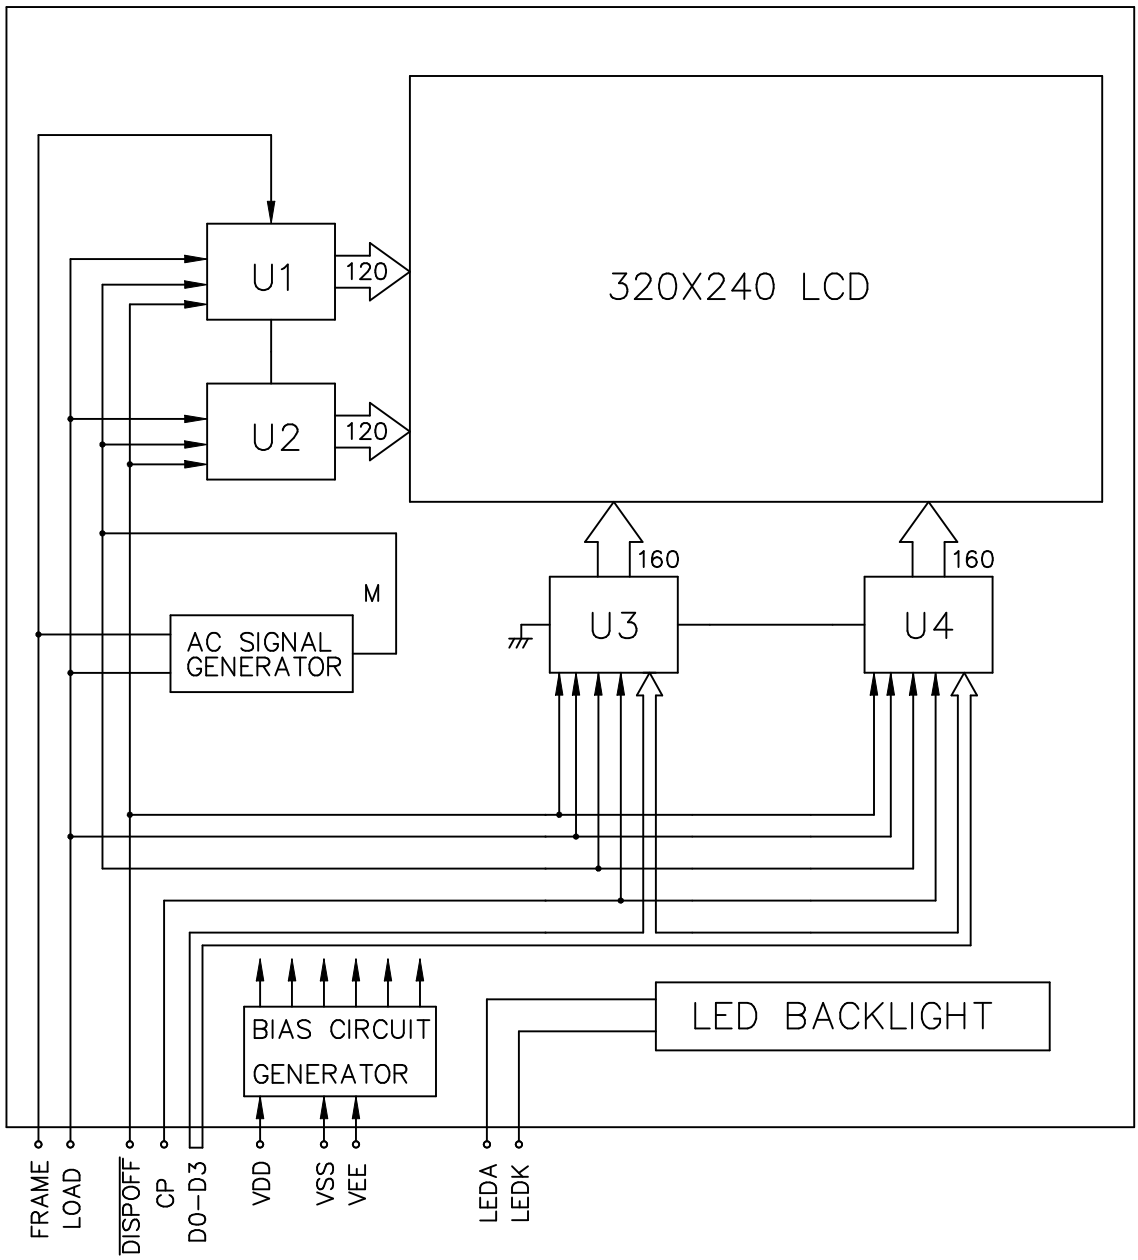

* AC SIGNAL SETTING

J1	J2	J3	J4	J5	J6	J7	J8
H	L	L	H	H	L	L	L

6. INTERNAL PIN CONNECTION

INTERFACE CONNECTOR : ELCO/6224-12P-S-A OR EQUIVALENT

PIN NO.	SYMBOL	LEVEL	FUNCTION
1	FRAME	H	FIRST LINE MARKER
2	LOAD	H→L	DATA LATCH
3	CP	H→L	DATA SHIFT
4	VDD	–	POWER SUPPLY FOR LOGIC
5	VSS	–	GND
6	VEE	–	POWER SUPPLY FOR LC
7	D0	H/L	DISPLAY DATA
8	D1		
9	D2		
10	D3		
11	$\overline{\text{DISPOFF}}$	H/L	H: ON/L: OFF
12	NC	–	–

LED CONNECTOR : 02ZR-8M(JST) OR EQUIVALENT

PIN NO.	SYMBOL	LEVEL	FUNCTION
1	LEDA	–	POWER SUPPLY FOR LED BACKLIGHT
2	LEDK	–	GND FOR LED BACKLIGHT

7.POWER SUPPLY

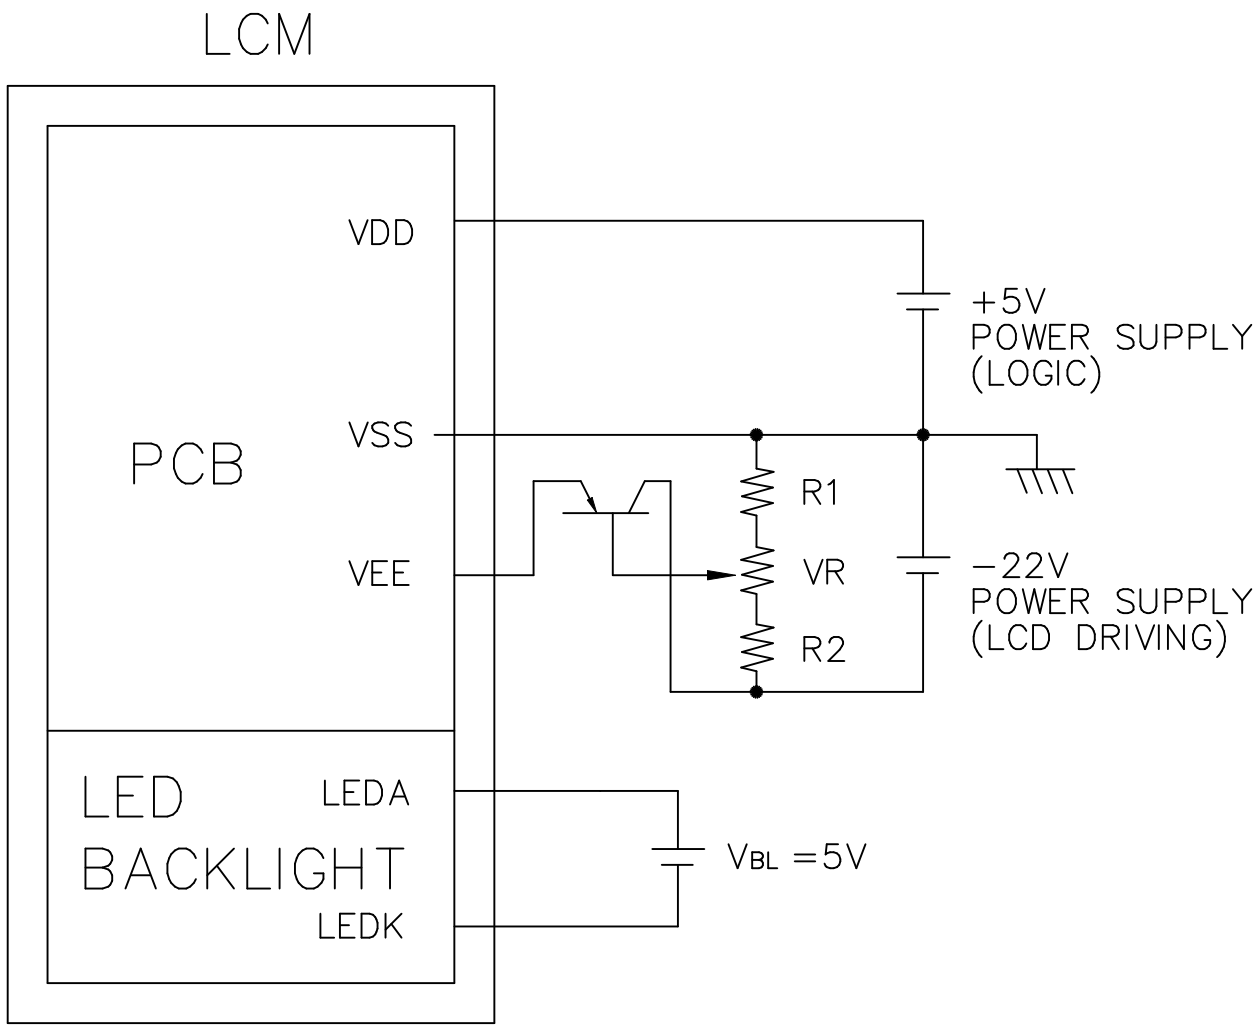

1.R1+VR+R2=10K~20KΩ

8. TIMING CHARACTERISTICS

8-1. INTERFACE TIMING

@VDD=2.5~5.5V

ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT
Shift Clock Period	t_{cp}	220	–	–	ns
"CP" PULSE WIDTH	t_W	90	–	–	ns
CLOCK RISE, FALL TIME	t_r , t_f	–	–	20	ns
DATA SETUP TIME	t_{DSU}	80	–	–	ns
DATA HOLD TIME	t_{DHD}	65	–	–	ns
"CP" → "LOAD" FALL TIME	t_{LSU}	100	–	–	ns
"LOAD" → "CP" FALL TIME	t_{LC}	100	–	–	ns
"FRAME" SETUP TIME	t_{SETUP}	100	–	–	ns
"FRAME" HOLD TIME	t_{HOLD}	100	–	–	ns
"LOAD" PULSE WIDTH	t_{WC}	110	–	–	ns

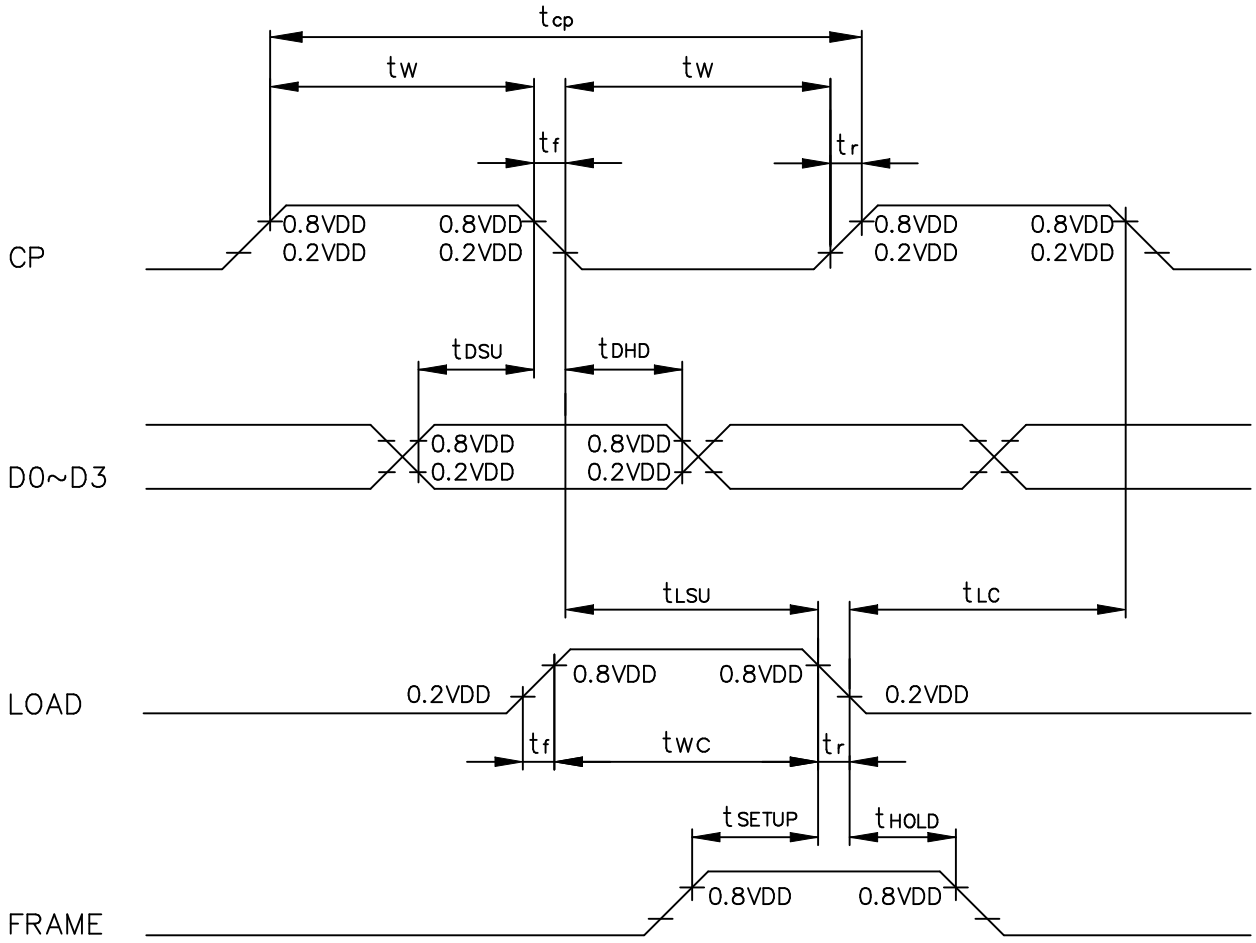

8-2. TIMING CHART OF INPUT SIGNALS

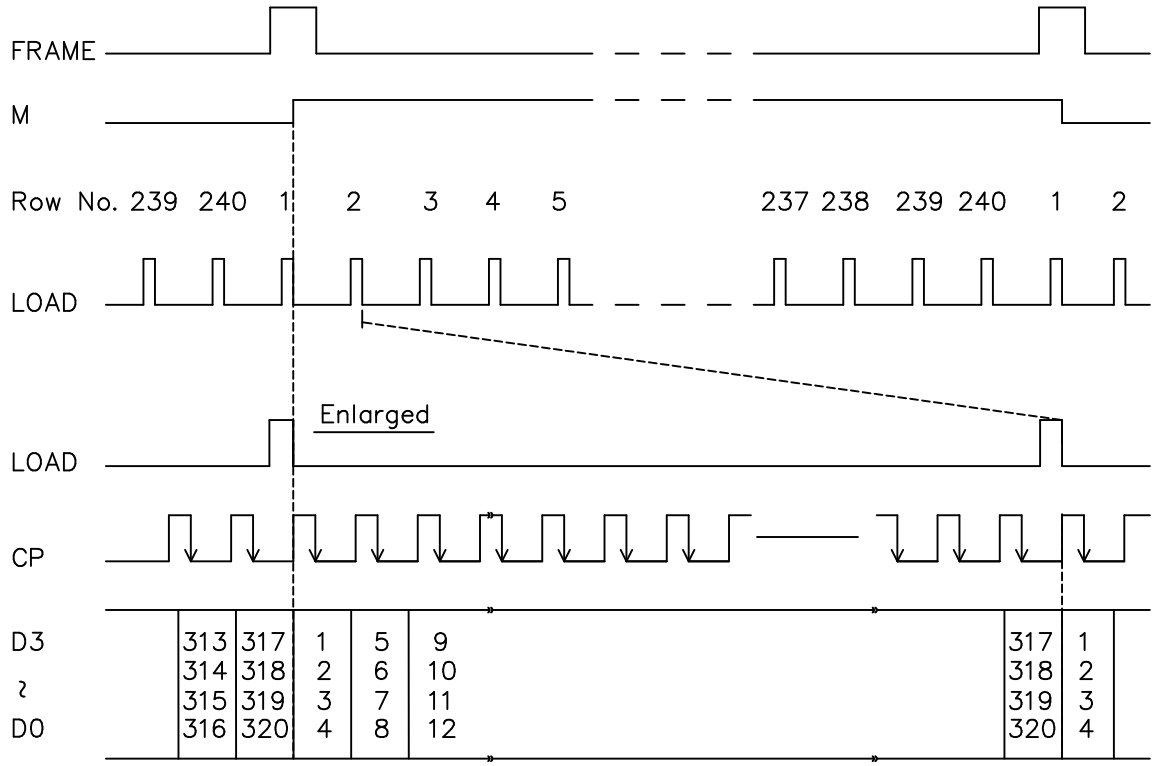

8-3. DISPLAY PATTERN

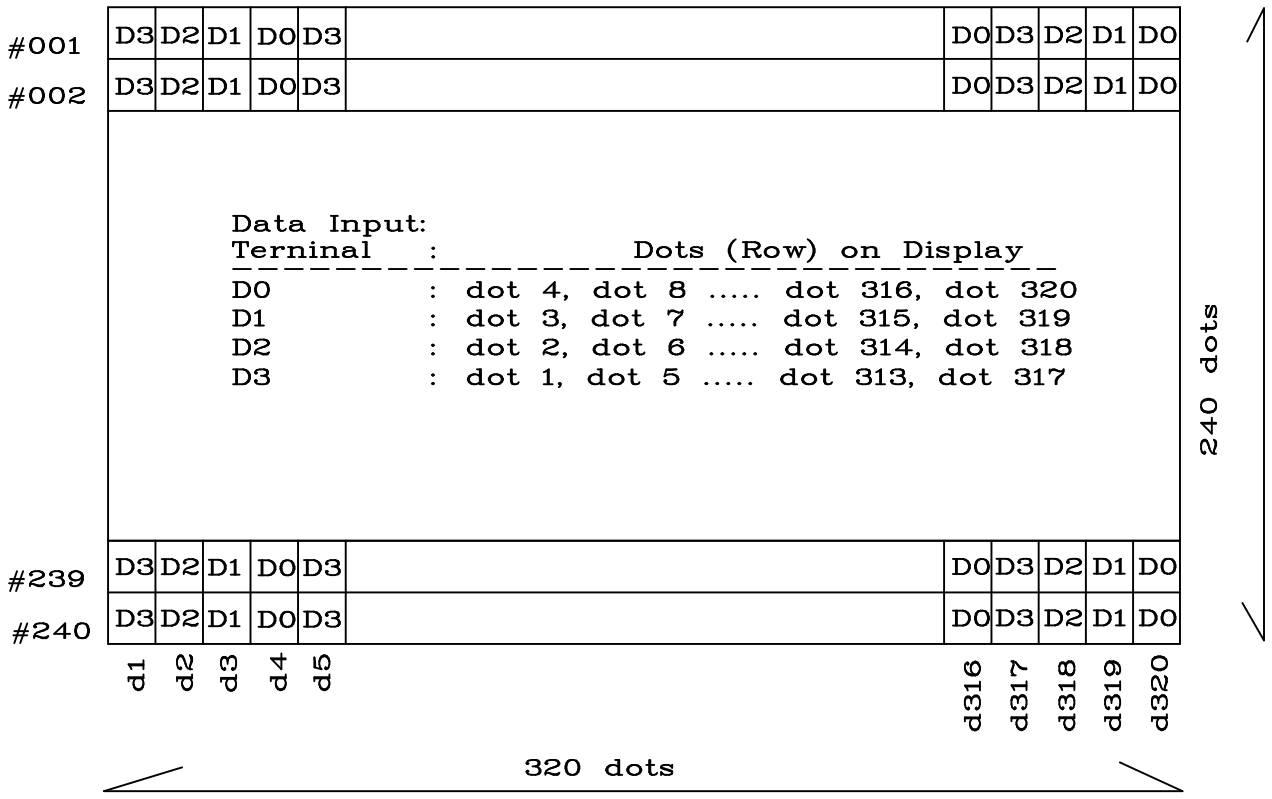

8-4. POWER ON/OFF TIMING

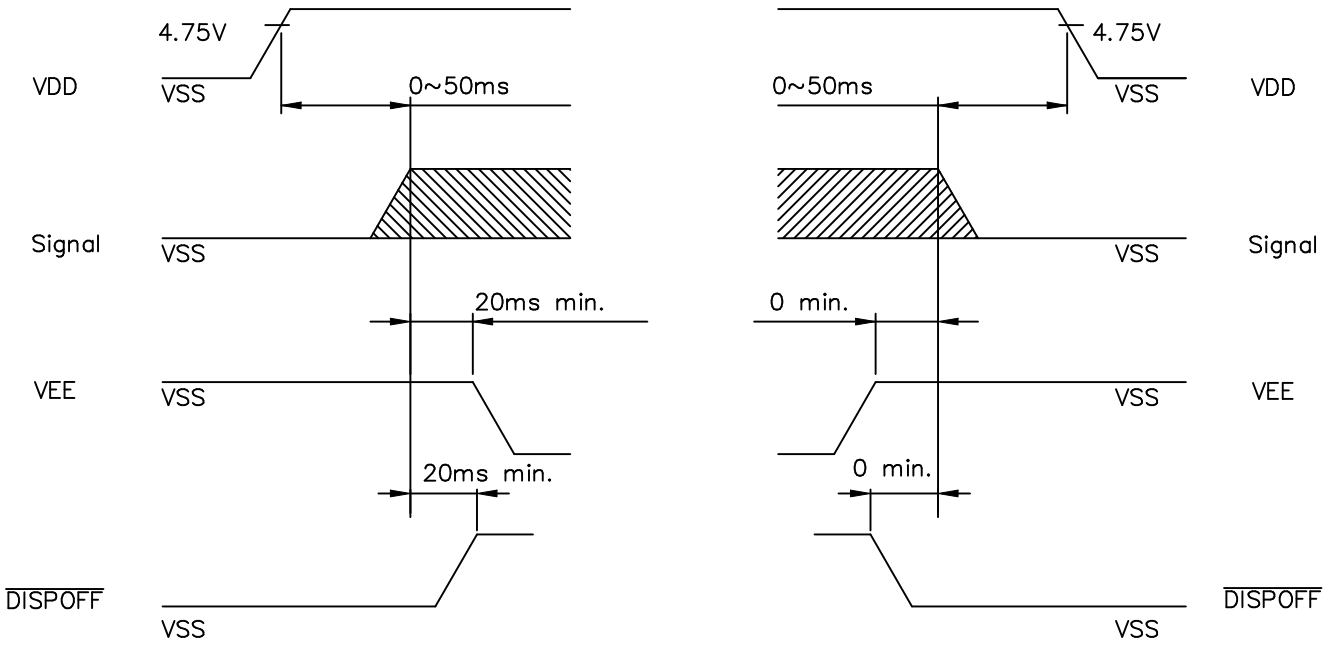

POWER ON

POWER OFF

The missing pixels may occur when the LCM is driven beyond above power timing sequence.

9. RELIABILITY TEST

NO	ITEM	CONDITION			STANDARD	NOTE
1	High Temp. Storage	70°C	120Hrs		Appearance without defect	
2	Low Temp. Storage	−20°C	120Hrs		Appearance without defect	
3	High Temp. & High Humi. Storage	50°C 90%RH	120Hrs		Appearance without defect	
4	High Temp. Operating Display	50°C	120Hrs		Appearance without defect	
5	Low Temp. Operating Display	0°C	120Hrs		Appearance without defect	
6	Thermal Shock	−20°C,30min → 70°C,30min ↑ (1cycle)			Appearance without defect	10 cycles

Inspection Provision

1.Purpose

The NAN YA inspection provision provides outgoing inspection provision and its expected quality level based on our outgoing inspection of NAN YA LCD produces.

2.Applicable Scope

The NAN YA inspection provision is applicable to the arrangement in regard to outgoing inspection and quality assurance after outgoing.

3.Technical Terms

3-1 NAN YA Technical Terms

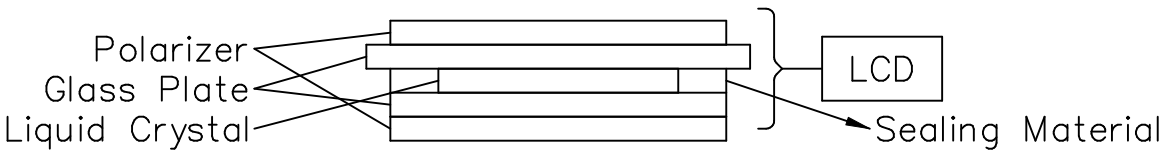

4.Outgoing Inspection

4-1 Inspection Method

MIL-STD-105E Level Ⅱ Regular inspection

4-2 Inspection Standard

	Item		AQL(%)	Remarks
Major Defect	Dots	Opens Shorts Erroneous operation	0.4	faults which substantially lower the practicality and the initial purpose difficult to achieve.
	Solder appearance	Shorts Loose		
	Cracks	Display surface cracks		

	Dimensions	External from Dimensions	0.4	
Minor Defect	Inside the glass	Black spots	0.65	faults which appear to pose almost no obstacle to the practicality, effective use, and operation.
	Polarizing plate	Scratches, foreign Matter, air bubbles, and peeling		
	Dots	Pinhole, deformation		
	Color tone	Color unevenness		
	Solder appearance	Cold solder Solder projections		

4-3 Inspection Provisions

*Viewing Area Definition

Fig. 1

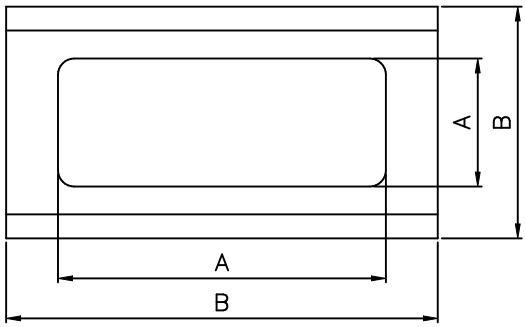

A : Zone Viewing Area
B : Zone Glass Plate Out Line

*Inspection place to be 500 to 1000 lux illuminance uniformly without glaring.
The distance between luminous source(daylight fluorescent lamp and cool white fluorescent lamp) and a sample to be 30cm to 50cm.

*Test and measurement are performed under the following conditions, unless otherwise specified.

Temperature	20± 15°C
Humidity	65± 20%R.H..
Pressure	860~1060hPa(mmbar)

In case of doubtful judgment, it is performed under the following conditions.

Temperature	20± 2°C
Humidity	65± 5%R.H..
Pressure	860~1060hPa(mmbar)

5.Specification for quality check

5-1 Electrical characteristics

NO.	Item	Criterion
1.	Non operational	Fail
2.	Miss operating	Fail
3.	Missing dot	Fail
4.	Contrast irregular	Fail
5.	Response time	Within Specified value
6.	LED backlight turn on/off	Within Specified value

5-2 External Appearance Defect

<table>
<tr><th>NO.</th><th>Item</th><th>Criterion</th></tr>
<tr><td>1.</td><td>Black spots, foreign matter, and white spots (Including light leakage due to pinholes of polarizing plates, etc.)</td><td>(1)-1-Spots(At non lighting condition)

<table>
<tr><th>Average Diameter(mm): D</th><th>Number of pieces permitted</th></tr>
<tr><td>D≦0.1</td><td>Ignore</td></tr>
<tr><td>0.1<D≦0.2</td><td>5</td></tr>
<tr><td>0.2<D≦0.3</td><td>2</td></tr>
<tr><td>0.3<D</td><td>0</td></tr>
</table>
Number of total pieces is set to within 5 pieces.

Note that when there are 2 pieces or more, they are not to be concentrated.
Set as: Average diameter = (Long diameter + Short diameter)/2

(1)-2-Blurred Spots(At lighting condition)

<table>
<tr><th>Average Diameter(mm): D</th><th>Number of pieces permitted</th></tr>
<tr><td>D≦0.3</td><td>Ignore</td></tr>
<tr><td>0.3<D≦0.75</td><td>5</td></tr>
<tr><td>0.75<D</td><td>0</td></tr>
</table>
Number of total pieces is set to within 5 pieces.

Note that when there are 2 pieces or more, they are not to be concentrated.
Set as: Average diameter = (Long diameter + Short diameter)/2</td></tr>
</table>

<table>
<tr><td>1.</td><td>Line</td><td>(1)-1-Lines(At non lighting condition)
<table><tr><th>Width(mm): W</th><th>Length(mm): L</th><th>Number of pieces permitted</th></tr><tr><td>W≦0.03</td><td>Ignore</td><td>Ignore</td></tr><tr><td>0.03<W≦0.08</td><td>L≦4</td><td>2</td></tr><tr><td>0.08<W≦0.1</td><td>L≦1</td><td>1</td></tr></table>Object exceeding 0.1mm follow the standards of the spots form.
Note that when there are 2 pieces or more, they are not to be concentrated.
(1)-2-Blurred Lines(At lighting condition)
<table><tr><th>Width(mm): W</th><th>Length(mm): L</th><th>Number of pieces permitted</th></tr><tr><td>W≦0.03</td><td>Ignore</td><td>Ignore</td></tr><tr><td>0.03<W≦0.08</td><td>L≦3</td><td>6</td></tr><tr><td>0.08<W</td><td>3<L</td><td>None</td></tr></table>Object exceeding 0.1mm follow the standards of the spots form.
Note that when there are 2 pieces or more, they are not to be concentrated.</td></tr>
<tr><td>2.</td><td>Scratches(Glass, reflection plates, and polarizing plates)</td><td>In accordance with black spots.
(At non lighting condition)</td></tr>
<tr><td>3.</td><td>Color irregular</td><td>Not remarkable color irregular.</td></tr>
</table>

<table>
<tr><td>4.</td><td>Air bubbles polarizing plates, and reflection plates</td><td colspan="2">
<table>
<tr><th>Average Diameter (mm): D</th><th>Number of pieces permitted</th></tr>
<tr><td>D≦0.3</td><td>Ignore</td></tr>
<tr><td>0.3<D</td><td>0</td></tr>
</table>
Average diameter = (Long diameter + Short diameter)/2
Note that when there are 4 pieces or more, they are not to be concentrated.
</td></tr>
<tr><td rowspan="5">5.</td><td rowspan="5">Cracks</td><td>(1)General crack
  </td><td>a≦5
b≦2
c≦t
Where, a and b are ignored when less that or equal 0.5. The numbers of pieces are set at up to 5 pieces.</td></tr>
<tr><td>(2)Corner crack
  </td><td>a≦2.5
b≦2.5
c≦t
a+b≦4</td></tr>
<tr><td>(3)Seal portion crack
 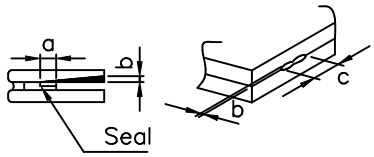 </td><td>a≦The seal width x1/3
b≦t x2/3
c≦5
The numbers of pieces are set at up to 5 pieces.</td></tr>
<tr><td>(4)ITO Pin crack
  </td><td>a≦5
b≦1/3 pin length
c≦t</td></tr>
<tr><td>(5)Progressive cracks</td><td>All taken to be unacceptable.</td></tr>
</table>

6.	Outer dimensions	Should be with in the tolerance.
7.	Newton ring(touch panel)	Orbicular of interference fringes is not allowed in the optimum contrast within the active area under viewing angle.
8.	Soldering	Should be no defective soldering such as shorting, loose terminal cold solder, peeling of printed circuit board pattern, improper mouting position, etc.

5-3 Dot Appearance Defect

NO.	Item	Criteria
1.	Pinhole	 Dot display a and b are each ≦0.2mm The overall total is taken be with in 10 units. Note that they are not to be concentrated.
2.	Missing	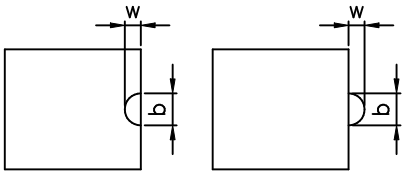 Dot display a and b are each ≦0.2mm The overall total is taken to be with in 10 units.
3.	Thick and thin display	 Taken to be within±1.5% of display character width(a) and height(b).

NOTICE:

- SAFETY
  1. If the LCD panel breaks, be careful not to get the liquid crystal to touch your skin.
  2. If the liquid crystal touches your skin or clothes, please wash it off immediately by using soap and water.

- HANDLING
  1. Avoid static electricity which can damage the CMOS LSI.
  2. Do not remove the panel or frame from the module.
  3. The polarizing plate of the display is very fragile. So, please handle it very carefully.
  4. Do not wipe the polarizing plate with a dry cloth, as it may easily scratch the surface of plate.
  5. Do not use ketonics solvent & Aromatic solvent, use a soft cloth soaked with a cleaning naphtha solvent.

- STORAGE
  1. Store the panel or module in a dark place where the temperature is 25°C±5°C and the humidity is below 65% RH.
  2. Do not place the module near organics solvents or corrosive gases.
  3. Do not crush, shake, or jolt the module.

- TERMS OF WARRANT
  1. Acceptance inspection period
     The period is within one month after the arrival of contracted commodity at the buyer's factory site.
  2. Applicable warrant period
     The period is within twelve months since the date of shipping out under normal using and storage conditions.

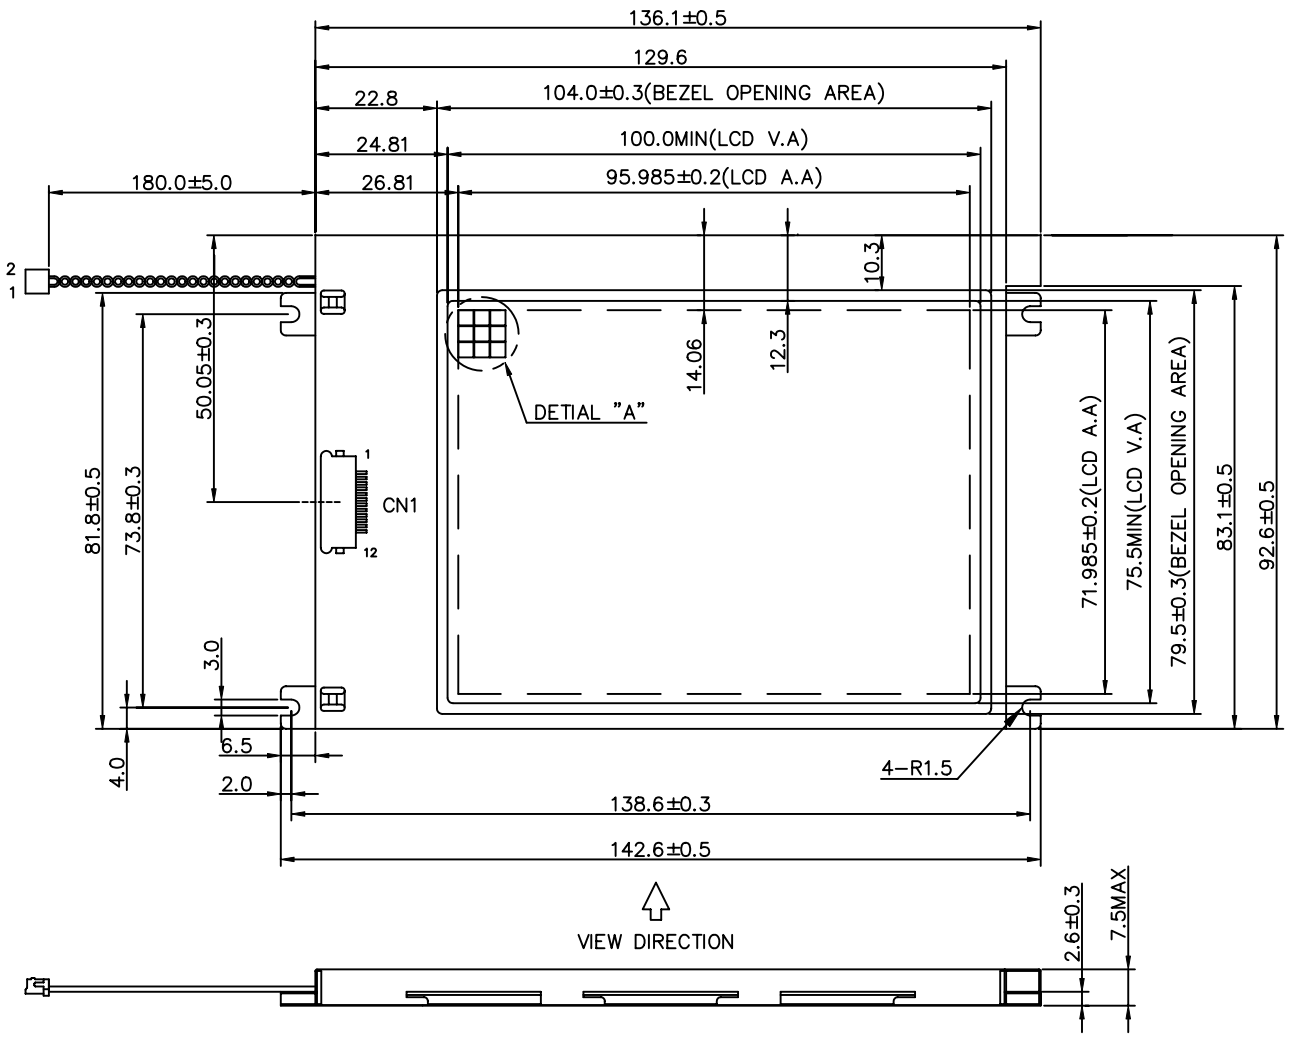



DETAIL "A"
(SCALE 40:1)

CN1: ELCO/6224-12P-S-A OR EQUIVALENT

Pin NO.	SIGNAL	LEVEL	FUNCTION
1	FRAME	H	FIRST LINE MARKER
2	LOAD	H→L	DATA LATCH
3	CP	H→L	DATA SHIFT
4	VDD	–	POWER SUPPLY FOR LOGIC
5	VSS	–	GND
6	VEE	–	POWER SUPPLY FOR LC
7	D0	H/L	DISPLAY DATA
8	D1		
9	D2		
10	D3		
11	$\overline{\text{DISPOFF}}$	H/L	H: ON/L: OFF
12	NC	–	–

NOTE:
1. RESOLUTION: 320x240 DOTS
2. BACKLIGHT: LED (WHITE)
3. FRAME : SUS 430
4. TOLERANCE NO SPECIFIED : ±0.5mm

REV. NO.	DESCRIPTION	DATE	DESIGN	CHECK	APPROVE
5					
4					
3					
2					
1					

南亞塑膠工業股份有限公司
NAN YA PLASTICS CORPORATION

製品圖

LTCE9T372G6GKS

APPROVE			THIRD ANGLE P.
CHECK			
DESIGN	Y. C. LIU	94.11.13	
DRAWN	Y. C. LIU	94.11.13	SCALE / UNIT
	NAME	DATE	1/1 / mm

DWG NO. M372AD6A (1/1) (0)

THE NOTES OF LCM USING

LCM is easy to damage.

Please follow the notes as bellows, and be careful of handling!

Correct handling

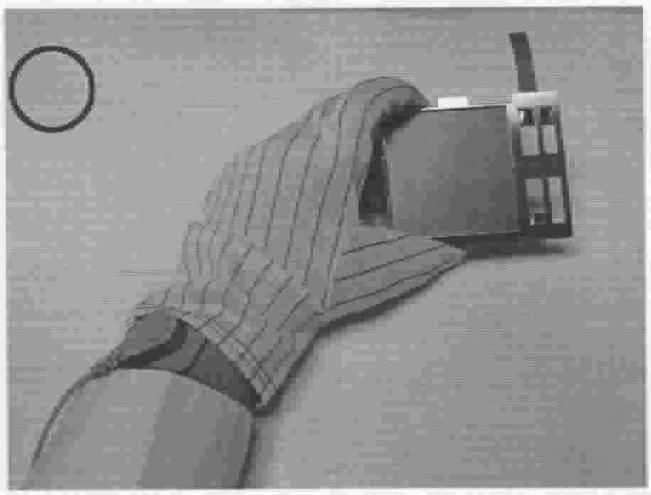

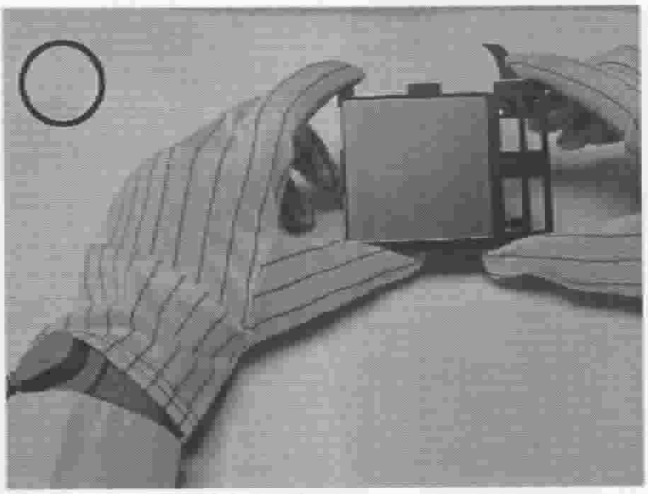

As above picture, please handle with glove by LCM edges and full EOS/ESD protection.

Incorrect handling

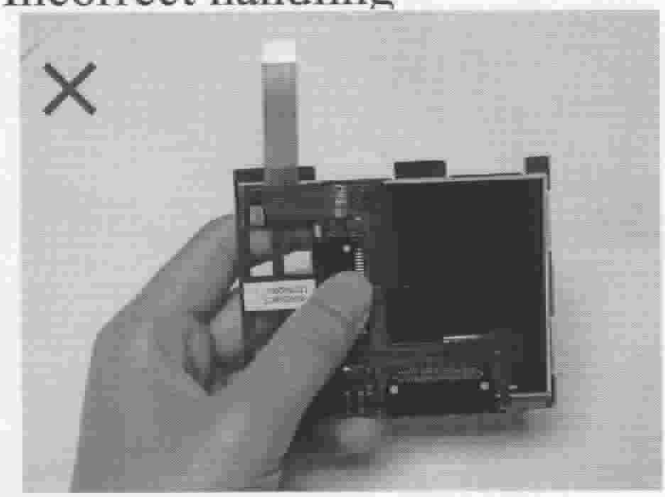

Please don't touch IC directly.

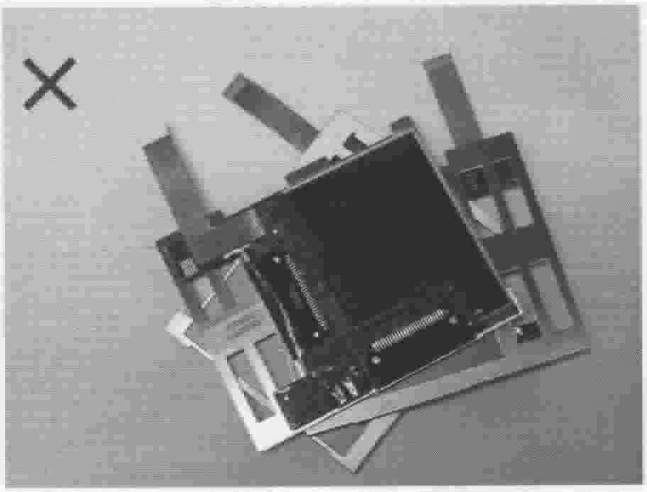

Please don't put one on another LCM.

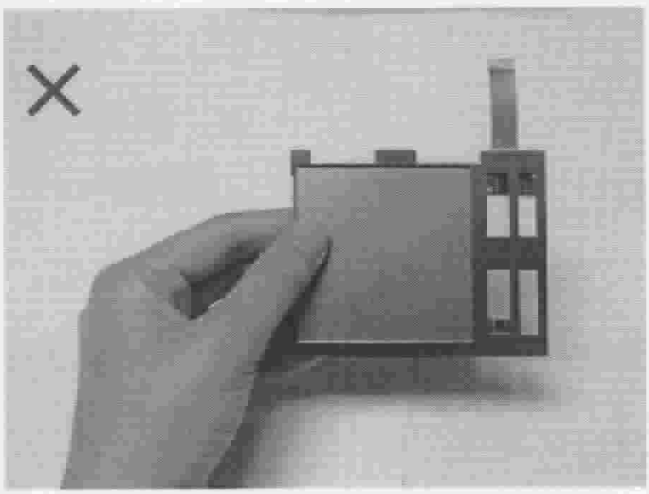

Please don't hold the surface of LCM.

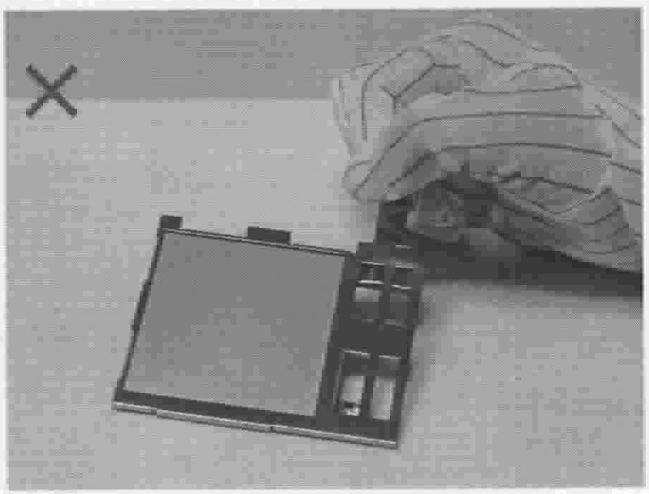

Please don't stretch interface of output.

THE NOTES OF LCD USING

LCD is easy damage.
Please follow notes as bellows, and be careful of handling!

Correct handling

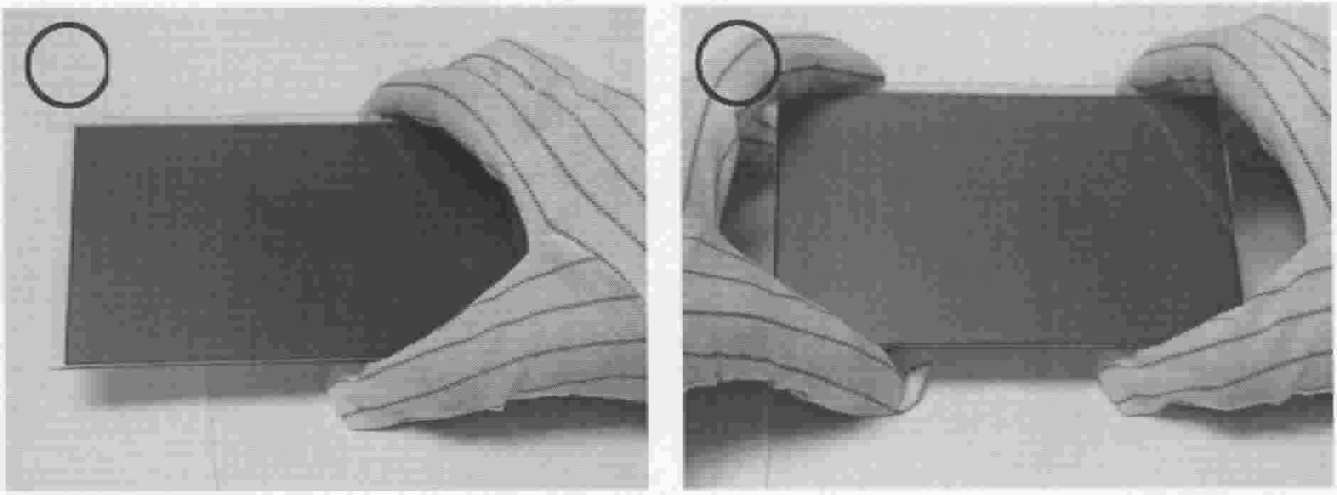

As above picture, please handle with glove by LCD edges and full EOS/ESD protection.

Incorrect handling

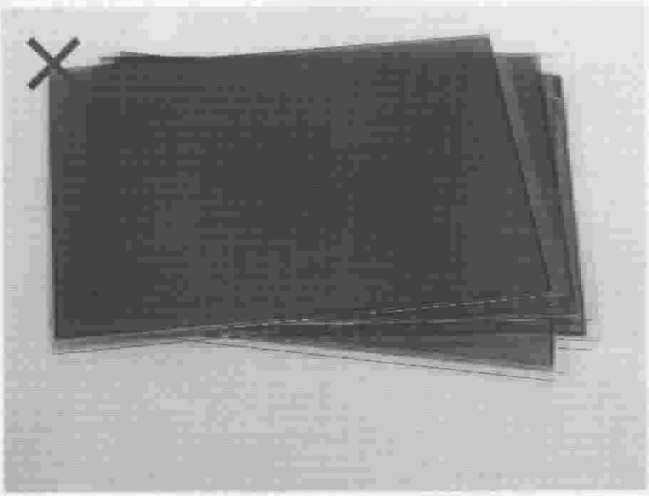

Please don't put one on another LCD.

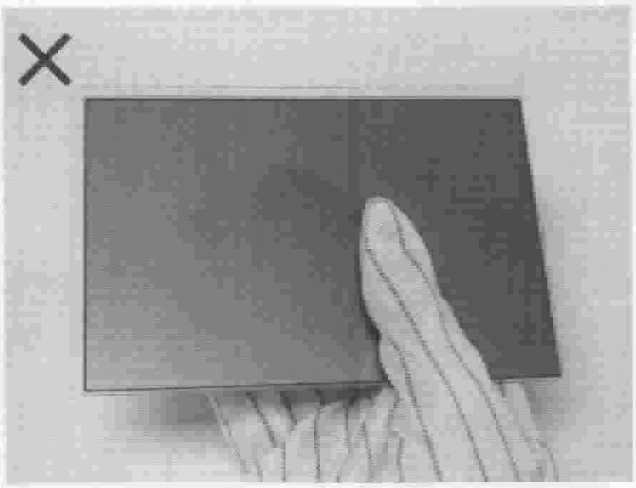

Please don't hold the surface of LCD.

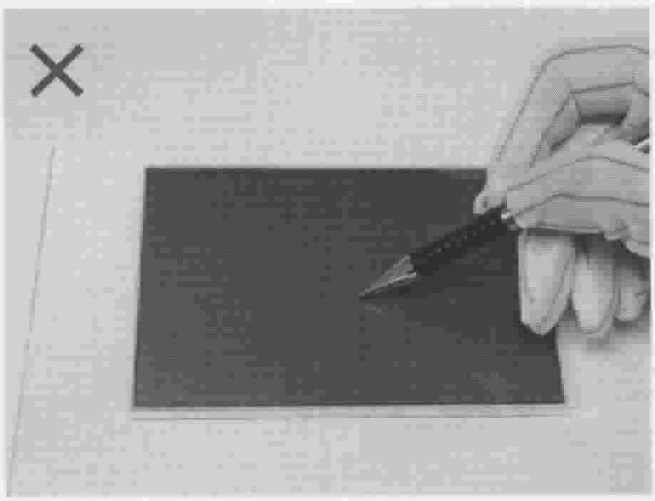

Please don't operate with sharp stick such as sharp pencil.

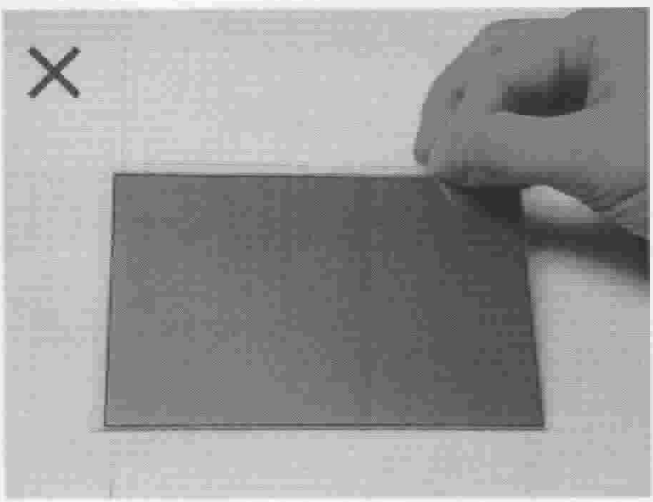

Please don't touch ITO glass without anti-static gloves.