



# PHOTOTRANSISTOR

## Industry Standard Single Channel 6 Pin DIP Optocoupler

### DEVICE TYPES

| Part No. | CTR % Min. | Part No. | CTR % Min. |
|----------|------------|----------|------------|
| 4N25     | 20         | MCT2     | 20         |
| 4N26     | 20         | MCT2E    | 20         |
| 4N27     | 10         | MCT270   | 50         |
| 4N28     | 10         | MCT271   | 45-90      |
| 4N35     | 100        | MCT272   | 75-150     |
| 4N36     | 100        | MCT273   | 125-250    |
| 4N37     | 100        | MCT274   | 225-400    |
| 4N38     | 10         | MCT275   | 70-90      |
| H11A1    | 50         | MCT276   | 15-60      |
| H11A2    | 20         | MCT277   | 100        |
| H11A3    | 20         |          |            |
| H11A4    | 10         |          |            |
| H11A5    | 30         |          |            |

### FEATURES


- Interfaces with Common Logic Families
- Input-output Coupling Capacitance < 0.5 pF
- Industry Standard Dual-in-line 6-pin Package
- Field Effect Stable by TRIOS®
- 5300 V<sub>RMS</sub> Isolation Test Voltage
- Underwriters Laboratory File #E52744
-  VDE #0884 Approval Available with Option 1

### APPLICATIONS

- AC Mains Detection
- Reed Relay Driving
- Switch Mode Power Supply Feedback
- Telephone Ring Detection
- Logic Ground Isolation
- Logic Coupling with High Frequency Noise Rejection

### Notes:

Designing with data sheet is covered in Application Note 45.

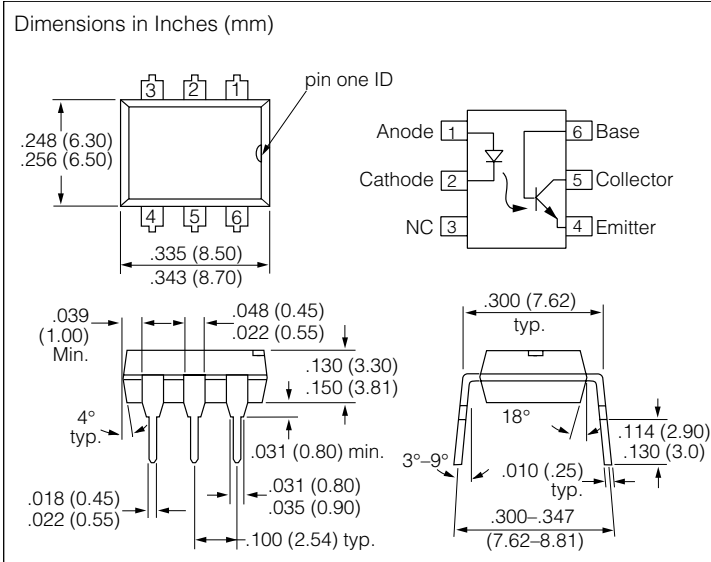

### DESCRIPTION

This data sheet presents five families of Infineon Industry Standard Single Channel Phototransistor Couplers. These families include the 4N25/26/27/28 types, the 4N35/36/37/38 couplers, the H11A1/A2/A3/A4/A5, the MCT2/2E, and MCT270/271/272/273/274/275/276/277 devices. Each optocoupler consists of Gallium Arsenide infrared LED and a silicon NPN phototransistor.

These couplers are Underwriters Laboratories (UL) listed to comply with a 5300 V<sub>RMS</sub> Isolation Test Voltage. This isolation performance is accomplished through Infineon double molding isolation manufacturing process. Compliance to VDE 0884 partial discharge isolation specification is available for these families by ordering option 1. Phototransistor gain stability, in the presence of high isolation voltages, is insured by incorporating a TRAnsparent IOOn Shield (TRIOS)® on the phototransistor substrate. These isolation processes and the Infineon IS09001 Quality program results in the highest isolation performance available for a commercial plastic phototransistor optocoupler.

The devices are available in lead formed configuration suitable for surface mounting and are available either on tape and reel, or in standard tube shipping containers.

**Maximum Ratings**  $T_A=25^\circ\text{C}$ **Emitter**

|   |        |
|---|--------|
| Reverse Voltage .....                           | 6.0 V  |
| Forward Current .....                           | 60 mA  |
| Surge Current ( $t \leq 10 \mu\text{s}$ ) ..... | 2.5 A  |
| Power Dissipation .....                         | 100 mW |

**Detector**

|  |        |
|--|--------|
| Collector-Emitter Breakdown Voltage .....        | 70 V   |
| Emitter-Base Breakdown Voltage .....             | 7.0 V  |
| Collector Current .....                          | 50 mA  |
| Collector Current ( $t < 1.0 \text{ ms}$ ) ..... | 100 mA |
| Power Dissipation .....                          | 150 mW |

**Package**

|   |   |
|---|---|
| Isolation Test Voltage .....  | 5300 V <sub>RMS</sub>                       |
| Creepage .....  | $\geq 7.0 \text{ mm}$                       |
| Clearance .....   | $\geq 7.0 \text{ mm}$                       |
| Isolation Thickness between Emitter and Detector .....  | $\geq 0.4 \text{ mm}$                       |
| Comparative Tracking Index per DIN IEC 112/VDE0303, part 1 .....  | 175   |
| Isolation Resistance  |   |
| $V_{IO}=500 \text{ V}$ , $T_A=25^\circ\text{C}$ .....   | $10^{12} \Omega$                            |
| $V_{IO}=500 \text{ V}$ , $T_A=100^\circ\text{C}$ .....  | $10^{11} \Omega$                            |
| Storage Temperature .....   | $-55^\circ\text{C}$ to $+150^\circ\text{C}$ |
| Operating Temperature .....   | $-55^\circ\text{C}$ to $+100^\circ\text{C}$ |
| Junction Temperature .....  | $100^\circ\text{C}$                         |
| Soldering Temperature (max. 10 s, dip soldering:<br>distance to seating plane $\geq 1.5 \text{ mm}$ ) ..... | $260^\circ\text{C}$                         |

**4N25/26/27/28—Characteristics**  $T_A=25^\circ\text{C}$ 

| Emitter                               |                    | Symbol               | Min. | Typ.      | Max.      | Unit          | Condition   |
|---------------------------------------|--------------------|----------------------|------|-----------|-----------|---------------|---|
| Forward Voltage*                      |                    | $V_F$                | —    | 1.3       | 1.5       | V             | $I_F=50 \text{ mA}$   |
| Reverse Current*                      |                    | $I_B$                | —    | 0.1       | 100       | $\mu\text{A}$ | $V_R=3.0 \text{ V}$   |
| Capacitance                           |                    | $C_O$                | —    | 25        | —         | pF            | $V_R=0$   |
| Detector                              |                    |                      |      |           |           |               |   |
| Breakdown Voltage*                    | Collector-Emitter  | $BV_{CEO}$           | 30   | —         | —         | V             | $I_C=1.0 \text{ mA}$  |
|                                       | Emitter-Collector  | $BV_{ECO}$           | 7.0  | —         | —         |               | $I_E=100 \mu\text{A}$   |
|                                       | Collector-Base     | $BV_{CBO}$           | 70   | —         | —         |               | $I_C=100 \mu\text{A}$   |
| $I_{CEO}(\text{dark})^*$              | 4N25/26/27<br>4N28 | —                    | —    | 5.0<br>10 | 50<br>100 | nA            | $V_{CE}=10 \text{ V}$ , (base open)                             |
| $I_{CBO}(\text{dark})^*$              | —                  | —                    | —    | 2.0       | 20        | nA            | $V_{CB}=10 \text{ V}$ , (emitter open)                          |
| Capacitance, Collector-Emitter        |                    | $C_{CE}$             | —    | 6.0       | —         | pF            | $V_{CE}=0$  |
| Package                               |                    |                      |      |           |           |               |   |
| DC Current Transfer Ratio*            | 4N25/26            | CTR                  | 20   | 50        | —         | %             | $V_{CE}=10 \text{ V}$ , $I_F=10 \text{ mA}$                     |
|                                       | 4N27/28            |                      | 10   | 30        | —         |               |   |
| Isolation Voltage*                    | 4N25               | $V_{IO}$             | 2500 | —         | —         | V             | Peak, 60 Hz   |
|                                       | 4N26/27            |                      | 1500 | —         | —         |               |   |
|                                       | 4N28               |                      | 500  | —         | —         |               |   |
| Saturation Voltage, Collector-Emitter |                    | $V_{CE(\text{sat})}$ | —    | —         | 0.5       | V             | $I_{CE}=2.0 \text{ mA}$ , $I_F=50 \text{ mA}$                   |
| Resistance, Input to Output*          |                    | $R_{IO}$             | 100  | —         | —         | G $\Omega$    | $V_{IO}=500 \text{ V}$  |
| Coupling Capacitance                  |                    | $C_{IO}$             | —    | 0.5       | —         | pF            | $f=1.0 \text{ MHz}$   |
| Rise and Fall Times                   |                    | $t_r, t_f$           | —    | 2.0       | —         | $\mu\text{s}$ | $I_F=10 \text{ mA}$<br>$V_{CE}=10 \text{ V}$ , $R_L=100 \Omega$ |

\* Indicates JEDEC registered values

www.DataSheet4U.com

**4N35/36/37/38—Characteristics**  $T_A=25^\circ\text{C}$ 

| Emitter                               |            | Symbol            | Min.      | Typ. | Max.       | Unit          | Condition  |
|---------------------------------------|------------|-------------------|-----------|------|------------|---------------|--|
| Forward Voltage*                      |            | $V_F$             | 0.9       | 1.3  | 1.5<br>1.7 | V             | $I_F=10\text{ mA}$<br>$I_F=10\text{ mA}, T_A=-55^\circ\text{C}$                  |
| Reverse Current*                      |            | $I_R$             |           | 0.1  | 10         | $\mu\text{A}$ | $V_R=6.0\text{ V}$   |
| Capacitance                           |            | $C_O$             |           | 25   | —          | pF            | $V_R=0, f=1.0\text{ MHz}$  |
| Detector                              |            |                   |           |      |            |               |  |
| Breakdown Voltage, Collector-Emitter* | 4N35/36/37 | $BV_{CEO}$        | 30        | —    | —          | V             | $I_C=1.0\text{ mA}$  |
|                                       | 4N38       |                   | 80        | —    | —          |               |  |
| Breakdown Voltage, Emitter-Collector* |            | $BV_{ECO}$        | 7.0       | —    | —          | V             | $I_E=100\text{ }\mu\text{A}$   |
| Breakdown Voltage, Collector-Base*    | 4N35/36/37 | $BV_{CBO}$        | 70        | —    | —          | V             | $I_C=100\text{ }\mu\text{A}, I_B=1.0\text{ }\mu\text{A}$                         |
|                                       | 4N38       |                   | 80        | —    | —          | —             |  |
| Leakage Current, Collector-Emitter*   | 4N35/36/37 | $I_{CEO}$         | —         | 5.0  | 50         | nA            | $V_{CE}=10\text{ V}, I_F=0$  |
|                                       | 4N38       |                   | —         | —    | 50         |               | $V_{CE}=60\text{ V}, I_F=0$  |
| Leakage Current, Collector-Emitter*   | 4N35/36/37 | $I_{CEO}$         | —         | —    | 500        | $\mu\text{A}$ | $V_{CE}=30\text{ V}, I_F=0, T_A=100^\circ\text{C}$                               |
|                                       | 4N38       |                   | —         | 6.0  | —          |               | $V_{CE}=60\text{ V}, I_F=0, T_A=100^\circ\text{C}$                               |
| Capacitance, Collector-Emitter        |            | $C_{CE}$          | —         | 6.0  | —          | pF            | $V_{CE}=0$   |
| Package                               |            |                   |           |      |            |               |  |
| DC Current Transfer Ratio*            | 4N35/36/37 | CTR               | 100       | —    | —          | %             | $V_{CE}=10\text{ V}, I_F=10\text{ mA},$  |
|                                       | 4N38       |                   | 20        | —    | —          |               | $V_{CE}=1.0\text{ V}, I_F=20\text{ mA}$  |
| DC Current Transfer Ratio*            | 4N35/36/37 | CTR               | 40        | 50   | —          | %             | $V_{CE}=10\text{ V}, I_F=10\text{ mA},$<br>$T_A=-55\text{ to }100^\circ\text{C}$ |
|                                       | 4N38       | —                 | —         | 30   | —          | —             |  |
| Resistance, Input to Output*          |            | $R_{IO}$          | $10^{11}$ | —    | —          | $\Omega$      | $V_{IO}=500\text{ V}$  |
| Coupling Capacitance                  |            | $C_{IO}$          | —         | 0.5  | —          | pF            | $f=1.0\text{ MHz}$   |
| Switching Time*                       |            | $t_{ON}, t_{OFF}$ | —         | 10   | —          | $\mu\text{s}$ | $I_C=2.0\text{ mA}, R_L=100\text{ }\Omega, V_{CC}=10\text{ V}$                   |

\* Indicates JEDEC registered value

**H11A1 through H11A5—Characteristics**  $T_A=25^\circ\text{C}$ 

| Emitter                               |             | Symbol            | Min. | Typ. | Max. | Unit          | Condition  |
|---------------------------------------|-------------|-------------------|------|------|------|---------------|--|
| Forward Voltage                       | H11A1–H11A4 | $V_F$             | —    | 1.1  | 1.5  | V             | $I_F=10\text{ mA}$   |
|                                       | H11A5       |                   | —    | 1.1  | 1.7  |               |  |
| Reverse Current                       |             | $I_R$             | —    | —    | 10   | $\mu\text{A}$ | $V_R=3.0\text{ V}$   |
| Capacitance                           |             | $C_O$             | —    | 50   | —    | pF            | $V_R=0, f=1.0\text{ MHz}$                                      |
| Detector                              |             |                   |      |      |      |               |  |
| Breakdown Voltage, Collector-Emitter  |             | $BV_{CEO}$        | 30   | —    | —    | V             | $I_C=1.0\text{ mA}, I_F=0\text{ mA}$                           |
| Breakdown Voltage, Emitter-Collector  |             | $BV_{ECO}$        | 7.0  | —    | —    | V             | $I_E=100\text{ }\mu\text{A}, I_F=0\text{ mA}$                  |
| Breakdown Voltage, Collector-Base     |             | $BV_{CBO}$        | 70   | —    | —    | V             | $I_C=10\text{ }\mu\text{A}, I_F=0\text{ mA}$                   |
| Leakage Current, Collector-Emitter    |             | $I_{CEO}$         | —    | 5.0  | 50   | nA            | $V_{CE}=10\text{ V}, I_F=0\text{ mA}$                          |
| Capacitance, Collector-Emitter        |             | $C_{CE}$          | —    | 6.0  | —    | pF            | $V_{CE}=0$   |
| Package                               |             |                   |      |      |      |               |  |
| DC Current Transfer Ratio             | H11A1       | CTR               | 50   | —    | —    | %             | $V_{CE}=10\text{ V}, I_F=10\text{ mA}$                         |
|                                       | H11A2/3     |                   | 20   | —    | —    |               |  |
|                                       | H11A4       |                   | 10   | —    | —    |               |  |
|                                       | H11A5       |                   | 30   | —    | —    |               |  |
| Saturation Voltage, Collector-Emitter |             | $V_{CEsat}$       | —    | —    | 0.4  | V             | $I_{CE}=0.5\text{ mA}, I_F=10\text{ mA}$                       |
| Capacitance, Input to Output          |             | $C_{IO}$          | —    | 0.5  | —    | pF            | —  |
| Switching Time                        |             | $t_{ON}, t_{OFF}$ | —    | 3.0  | —    | $\mu\text{s}$ | $I_C=2.0\text{ mA}, R_L=100\text{ }\Omega, V_{CE}=10\text{ V}$ |

**MCT2/MCT2E—Characteristics**  $T_A=25^\circ\text{C}$ 

| Emitter                        |                   | Symbol               | Min. | Typ. | Max. | Unit             | Condition  |
|--------------------------------|-------------------|----------------------|------|------|------|------------------|--|
| Forward Voltage                |                   | $V_F$                | —    | 1.1  | 1.5  | V                | $I_F=20\text{ mA}$   |
| Reverse Current                |                   | $I_R$                | —    | —    | 10   | $\mu\text{A}$    | $V_R=3.0\text{ V}$   |
| Capacitance                    |                   | $C_O$                | —    | 25   | —    | pF               | $V_R=0$ , $f=1.0\text{ MHz}$   |
| Detector                       |                   |                      |      |      |      |                  |  |
| Breakdown Voltage              | Collector-Emitter | $BV_{CEO}$           | 30   | —    | —    | V                | $I_C=1.0\text{ mA}$ , $I_F=0\text{ mA}$                              |
|                                | Emitter-Collector | $BV_{ECO}$           | 7.0  | —    | —    |                  | $I_E=100\text{ }\mu\text{A}$ , $I_F=0\text{ mA}$                     |
|                                | Collector-Base    | $BV_{CBO}$           | 70   | —    | —    |                  | $I_C=10\text{ }\mu\text{A}$ , $I_F=0\text{ mA}$                      |
| Leakage Current                | Collector-Emitter | $I_{CBO}$            | —    | 5.0  | 50   | nA               | $V_{CE}=10\text{ V}$ , $I_F=0$                                       |
|                                | Collector-Base    | $I_{CBO}$            | —    | —    | 20   | —                |  |
| Capacitance, Collector-Emitter | —                 | $C_{CE}$             | —    | 10   | —    | pF               | $V_{CE}=0$   |
| Package                        |                   |                      |      |      |      |                  |  |
| DC Current Transfer Ratio      |                   | CTR                  | 20   | 60   | —    | %                | $V_{CE}=10\text{ V}$ , $I_F=10\text{ mA}$                            |
| Capacitance, Input to Output   |                   | $C_{IO}$             | —    | 0.5  | —    | pF               | —  |
| Resistance, Input to Output    |                   | $R_{IO}$             | —    | 100  | —    | $\text{G}\Omega$ | —  |
| Switching Time                 |                   | $t_{ON}$ , $t_{OFF}$ | —    | 3.0  | —    | $\mu\text{s}$    | $I_C=2.0\text{ mA}$ , $R_L=100\text{ }\Omega$ , $V_{CE}=10\text{ V}$ |

**MCT270 through MCT277—Characteristics**  $T_A=25^\circ\text{C}$ 

| Emitter                                   |                   | Symbol               | Min. | Typ.      | Max. | Unit          | Condition   |
|---|-------------------|----------------------|------|-----------|------|---------------|---|
| Forward Voltage                           |                   | $V_F$                | —    | —         | 1.5  | V             | $I_F=20\text{ mA}$  |
| Reverse Current                           |                   | $I_R$                | —    | —         | 10   | $\mu\text{A}$ | $V_R=3.0\text{ V}$  |
| Capacitance                               |                   | $C_O$                | —    | 25        | —    | pF            | $V_R=0$ , $f=1.0\text{ MHz}$  |
| Detector                                  |                   |                      |      |           |      |               |   |
| Breakdown Voltage                         | Collector-Emitter | $BV_{CEO}$           | 30   | —         | —    | V             | $I_C=10\text{ }\mu\text{A}$ , $I_F=0\text{ mA}$                             |
|   | Emitter-Collector | $BV_{ECO}$           | 7.0  | —         | —    |               | $I_E=10\text{ }\mu\text{A}$ , $I_F=0\text{ mA}$                             |
|   | Collector-Base    | $BV_{CBO}$           | 70   | —         | —    |               | $I_C=10\text{ }\mu\text{A}$ , $I_F=0\text{ mA}$                             |
| Leakage Current, Collector-Emitter        |                   | $I_{CEO}$            | —    | —         | 50   | nA            | $V_{CE}=10\text{ V}$ , $I_F=0\text{ mA}$                                    |
| Package                                   |                   |                      |      |           |      |               |   |
| DC Current Transfer Ratio                 | MCT270            | CTR                  | 50   | —         | —    | %             | $V_{CE}=10\text{ V}$ , $I_F=10\text{ mA}$                                   |
|   | MCT271            |                      | 45   | —         | 90   |               |   |
|   | MCT272            |                      | 75   | —         | 150  |               |   |
|   | MCT273            |                      | 125  | —         | 250  |               |   |
|   | MCT274            |                      | 225  | —         | 400  |               |   |
|   | MCT275            |                      | 70   | —         | 210  |               |   |
|   | MCT276            |                      | 15   | —         | 60   |               |   |
|   | MCT277            |                      | 100  | —         | —    |               |   |
| Current Transfer Ratio, Collector–Emitter | MCT271–276        | $CTR_{CE}$           | 12.5 | —         | —    | %             | $V_{CE}=0.4\text{ V}$ , $I_F=16\text{ mA}$                                  |
|   | MCT277            |                      | 40   | —         | —    | —             |   |
| Collector–Emitter Saturation Voltage      |                   | $V_{CEsat}$          | —    | —         | 0.4  | V             | $I_{CE}=2.0\text{ mA}$ , $I_F=16\text{ mA}$                                 |
| Capacitance, Input to Output              |                   | $C_{IO}$             | —    | 0.5       | —    | pF            | —   |
| Resistance, Input to Output               |                   | $R_{IO}$             | —    | $10^{12}$ | —    | $\Omega$      | $V_{IO}=500\text{ VDC}$   |
| Switching Time                            | MCT270/272        | $t_{ON}$ , $t_{OFF}$ | —    | —         | 10   | $\mu\text{s}$ | $I_C=2.0\text{ mA}$ ,<br>$R_L=100\text{ }\Omega$ ,<br>$V_{CE}=5.0\text{ V}$ |
|   | MCT271            |                      | —    | —         | 7.0  |               |   |
|   | MCT273            |                      | —    | —         | 20   |               |   |
|   | MCT274            |                      | —    | —         | 25   |               |   |
|   | MCT275/277        |                      | —    | —         | 15   |               |   |
|   | MCT276            |                      | —    | —         | 3.5  |               |   |

Figure 1. Forward Voltage vs. Forward Current

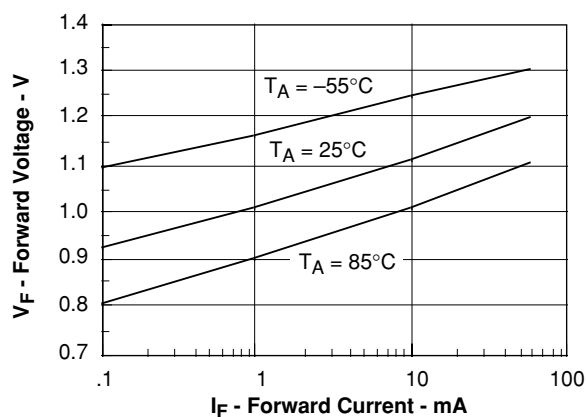
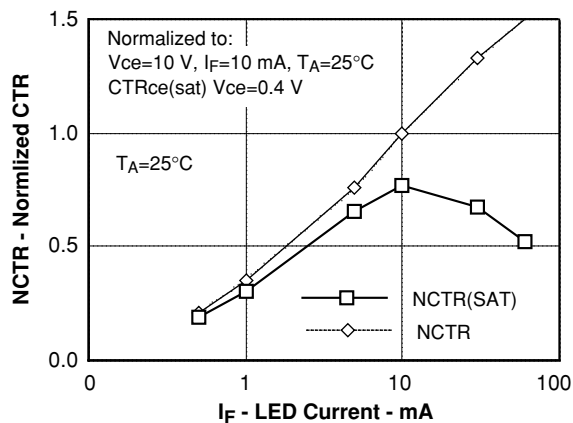
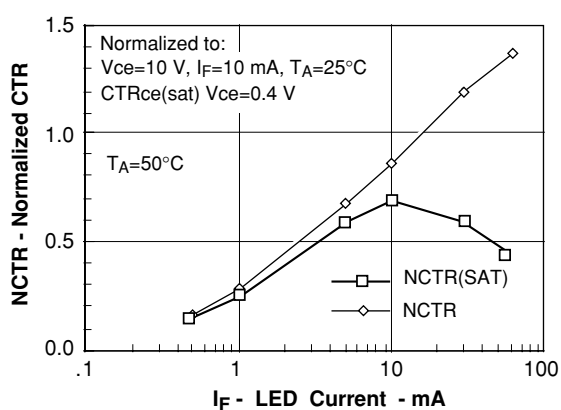
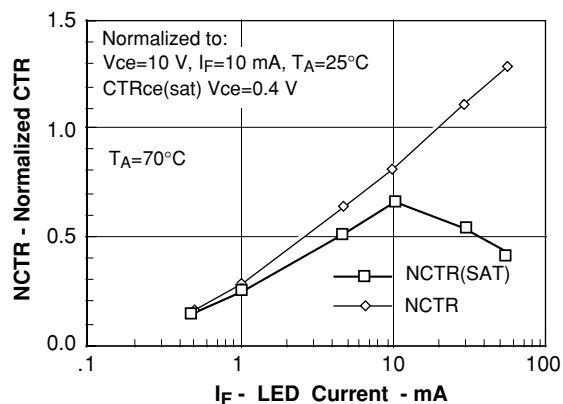
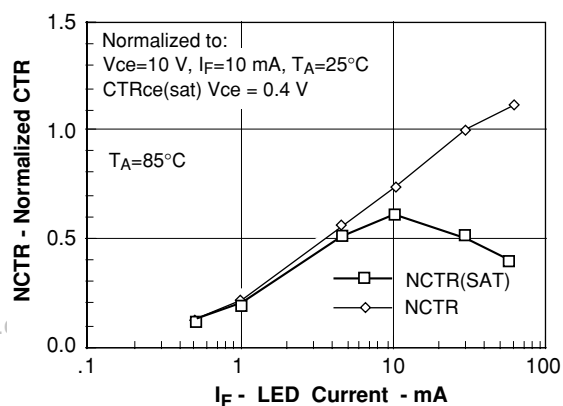
Figure 2. Normalized Non-saturated and Saturated CTR,  $T_A=25^\circ\text{C}$  vs. LED CurrentFigure 3. Normalized Non-saturated and Saturated CTR,  $T_A=50^\circ\text{C}$  vs. LED CurrentFigure 4. Normalized Non-saturated and Saturated CTR,  $T_A=70^\circ\text{C}$  vs. LED CurrentFigure 5. Normalized Non-saturated and Saturated CTR,  $T_A=85^\circ\text{C}$  vs. LED Current

Figure 6. Collector-emitter Current vs. Temperature and LED Current

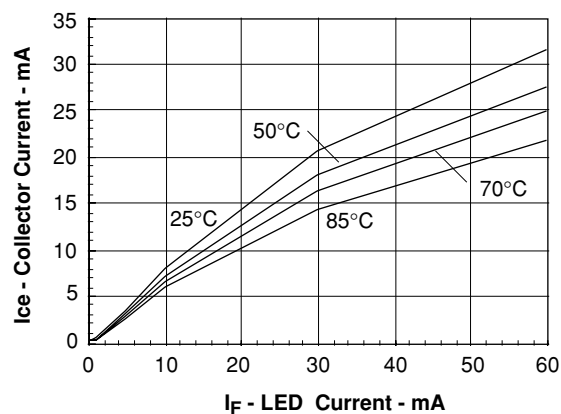


Figure 7. Collector-emitter Leakage Current vs. Temp.

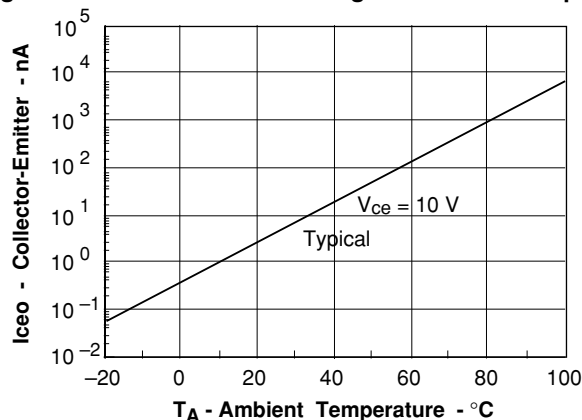


Figure 8. Normalized CTRcb vs. LED Current and Temp.

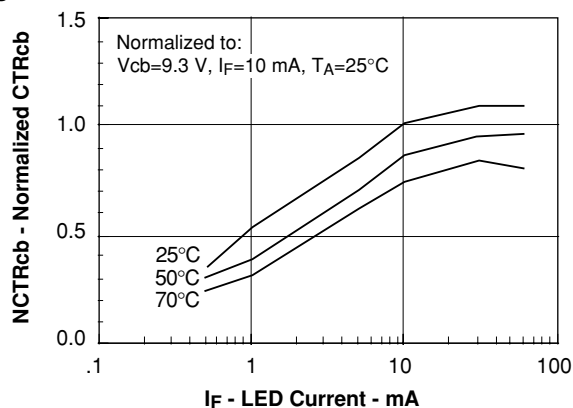
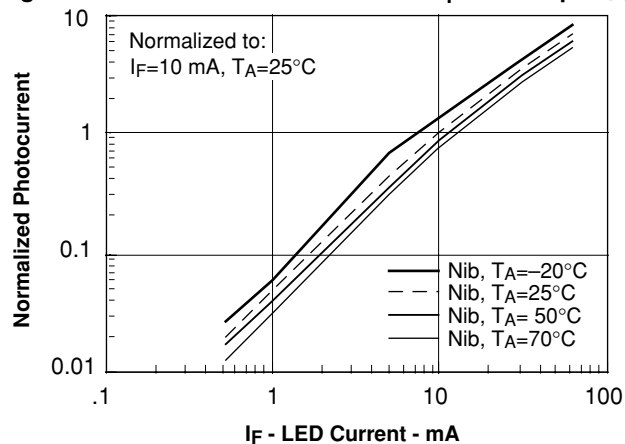
Figure 9. Normalized Photocurrent vs.  $I_F$  and Temp.

Figure 13. Switching Timing

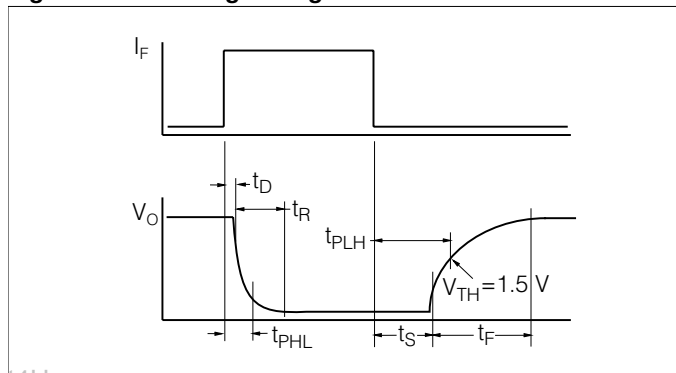


Figure 10. Normalized Non-saturated HFE vs. Base Current and Temperature

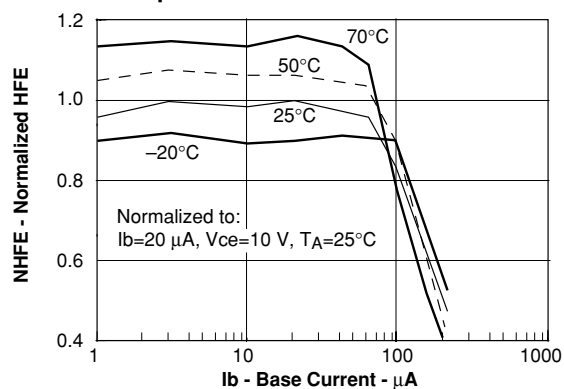


Figure 11. Normalized HFE vs. Base Current and Temp.

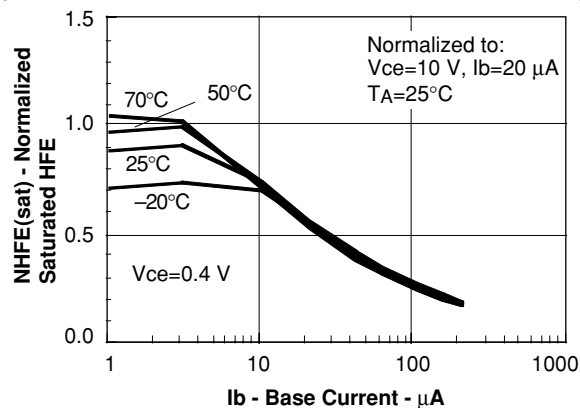


Figure 12. Propagation Delay vs. Collector Load Resistor

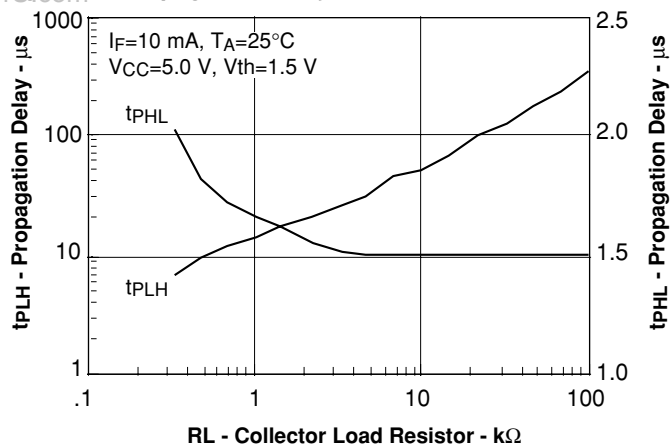


Figure 14. Switching Schematic

