



UNISONIC TECHNOLOGIES CO., LTD

L4863

CMOS IC

DUAL 2.2W AUDIO AMPLIFIER PLUS STEREO HEADPHONE FUNCTION

DESCRIPTION

The UTC **L4863** is a dual bridge-connected audio power amplifier. It combines dual bridge speaker amplifiers and stereo headphone amplifiers on one chip to simplify audio system design. In addition, the headphone input pin allows the amplifiers to operate in single-ended mode when driving stereo headphones.

The IC could deliver different power by packages as below (when connected to a 5V supply with less than 1.0% THD+N.):

- HTSSOP-20, 4Ω load: 2.2W
- HTSSOP-20, 3Ω load: 2.5W(with forced-air cooled)
- SOP/DIP , 8Ω load: 1.1W.

The UTC **L4863** features an externally controlled, low-power consumption shutdown mode, a stereo headphone amplifier mode, and thermal shutdown protection. It also utilizes circuitry to reduce "clicks and pops" during device turn-on.


FEATURES

- * "Click and pop" suppression
- * Thermal shutdown protection
- * Unity-gain stable
- * Stereo headphone amplifier mode

ORDERING INFORMATION


Order Number		Package	Packing
Normal	Lead Free Plating		
L4863-D16-T	L4863L-D16-T	DIP-16	Tube
L4863-S16-R	L4863L-S16-R	SOP-16	Tape Reel
L4863-S16-T	L4863L-S16-T	SOP-16	Tube
L4863-S18-R	L4863L-S18-R	SOP-18	Tape Reel
L4863-S18-T	L4863L-S18-T	SOP-18	Tube
L4863-N20-R	L4863L-N20-R	HTSSOP-20	Tape Reel
L4863-N20-T	L4863L-N20-T	HTSSOP-20	Tube

LM4863L-D16-T




- (1)Packing Type
- (2)Package Type
- (3)Lead Plating


- (1) R: Tape Reel, T: Tube
- (2) D16: DIP-16, S16: SOP-16, S18: SOP-18, N 20: HTSSOP-20
- (3) L: Lead Free Plating Blank: Pb/Sn




SOP-16



SOP-18



DIP-16




HTSSOP-20

*Pb-free plating product number: L4863L

L4863

CMOS IC

PIN CONFIGURATION

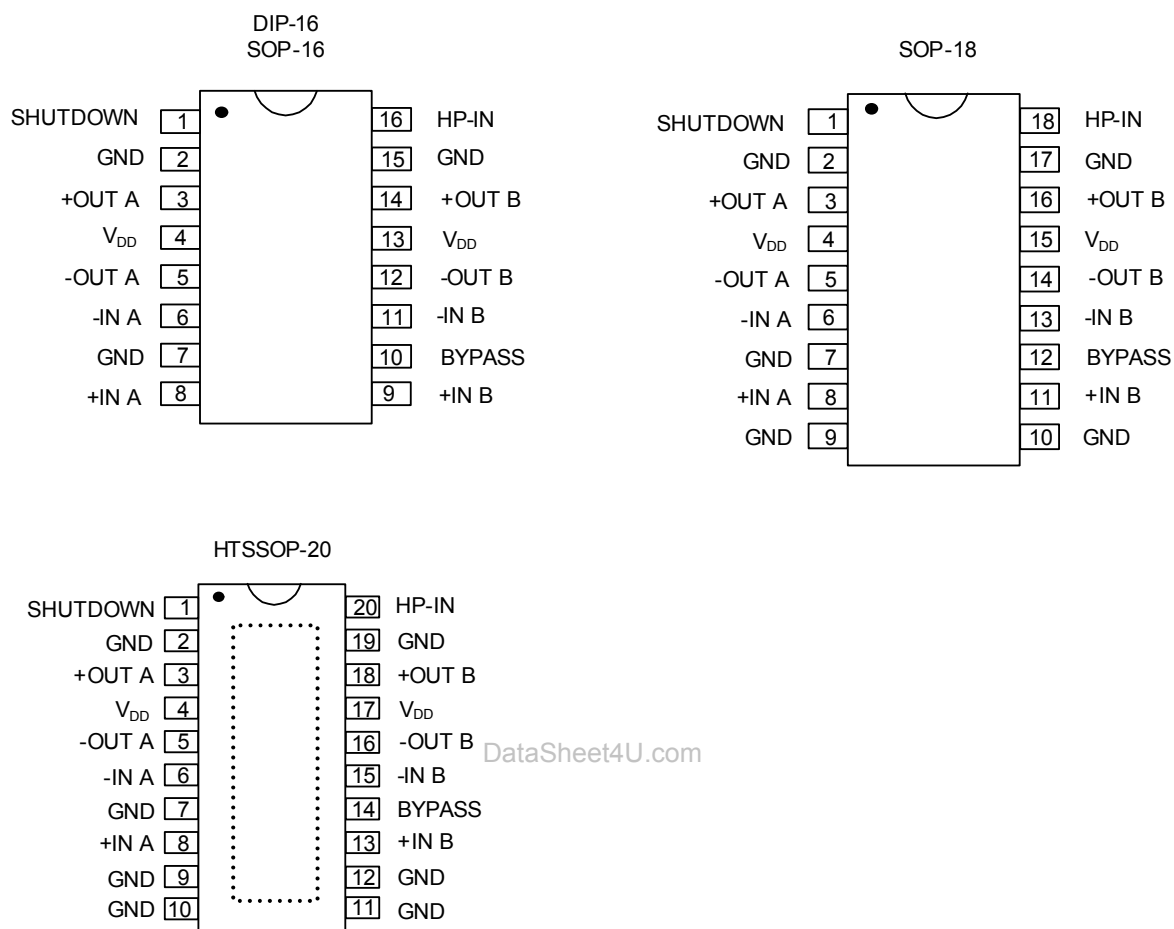

THERMAL DATA

PARAMETER		SYMBOL	RATINGS	UNIT
Thermal resistance (Junction to Ambient)	SOP-16	θ_{JA}	80	$^{\circ}\text{C}/\text{W}$
	SOP-18		90	$^{\circ}\text{C}/\text{W}$
	DIP-16		63	$^{\circ}\text{C}/\text{W}$
	HTSSOP-20		90	$^{\circ}\text{C}/\text{W}$
Thermal resistance (Junction to Case)	SOP-16	θ_{JC}	20	$^{\circ}\text{C}/\text{W}$
	SOP-18		2	$^{\circ}\text{C}/\text{W}$
	DIP-16		20	$^{\circ}\text{C}/\text{W}$
	HTSSOP-20		2	$^{\circ}\text{C}/\text{W}$

L4863

CMOS IC

■ ABSOLUTE MAXIMUM RATING

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V_{DD}	6.0	V
Recommended Supply Voltage Range	V_{DD}	2.0 ~ 5.5	V
Input Voltage	V_{IN}	$-0.3 \sim V_{DD}+0.3$	V
Power Dissipation	P_D	Internally limited	
Junction Temperature	T_J	+125	°C
Operating Temperature	T_{OPR}	-40 ~ +85	°C
Storage Temperature	T_{STG}	-65 ~ +150	°C

Note Absolute maximum ratings are those values beyond which the device could be permanently damaged.
Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ ELECTRICAL CHARACTERISTICS (Notes 1)($V_{DD}=5V$, $T_a=25^\circ C$, unless otherwise specified)


PARAMETER		SYMBOL	TEST CONDITIONS		MIM	TYP	MAX	UNIT	
FOR ENTIRE IC									
Supply Voltage		V _{DD}			2		5.5	V	
Quiescent Power Supply Current (Note 2)		I _{DD}	V _{IN} =0V, I _{OUT} =0A, HP-IN=0V		6	11.5	20	mA	
			V _{IN} =0V, I _{OUT} =0A, HP-IN=4V			5.8			
Shutdown Current		I _{SD}	V _{DD} applied to the SHUTDOWN pin		2	0.7		μA	
Headphone Input Voltage	High	V _{IH}			4			V	
	Low	V _{IL}					0.8	V	
FOR BRIDGED-MODE OPERATION									
Output Offset Voltage		V _{O(OFF)}	V _{IN} =0V			5	50	mV	
Output Power (measured at the device terminals)	HTSSOP-20	P _{OUT}	THD=1%, f=1kHz		R _L =3Ω		2.5		W
					R _L =4Ω		2.2		
			THD+N=10%, f=1kHz		R _L =3Ω		3.2		
	SOP/DIP				R _L =4Ω		2.7		W
			THD=1%, f=1kHz		R _L =8Ω	1.0	1.1		
			THD+N=10%, f=1kHz		R _L =8Ω		1.5		
		THD+N=1%, f=1kHz, R _L =32Ω				0.34		W	
Total Harmonic Distortion + Noise	HTSSOP-20	THD+N	20Hz≤f≤20kHz, R _L =4Ω, P _{OUT} =2W				0.3	%	
	SOP/DIP		A _{VD} =2, R _L =8Ω, P _{OUT} =1W				0.3		
Power Supply Rejection Ratio		PSRR	V _{DD} =5V, V _{RIPPLE} =200mV _{RMS} , R _L =8Ω, C _B =1.0μF			67		dB	
Channel Separation		X _{TALK}	f=1kHz, C _B =1.0μF			90		dB	
Signal To Noise Ratio		SNR	V _{DD} =5V, P _{OUT} =1.1W, R _L =8Ω			98		dB	
FOR SINGLE-ENDED OPERATION									
Output Offset Voltage		V _{O(OFF)}	V _{IN} =0V			5	50	mV	
Output Power		P _{OUT}	THD=0.5%, f=1kHz, R _L =32Ω		75	85		mW	
			THD+N=1%, f=1kHz, R _L =8Ω			340			
			THD+N=10%, f=1kHz, R _L =8Ω			440			
Total Harmonic Distortion + Noise		THD+N	A _V =-1, P _{OUT} =75mW, 20Hz≤f≤20kHz, R _L =32Ω			0.2		%	
Power Supply Rejection Ratio		PSRR	C _B =1.0μF, V _{RIPPLE} =200mV _{RMS} , f=1kHz			52		dB	
Channel Separation		X _{TALK}	f=1kHz, C _B =1.0μF			60		dB	
Signal To Noise Ratio		SNR	V _{DD} =5V, P _{OUT} =340mW, R _L =8Ω			95		dB	

Note: 1. All voltages are measured with respect to the ground (GND) pins, unless otherwise specified.

2. Depends on the offset voltage when a practical load is connected to the amplifier.

3. When driving 3Ω or 4Ω and operating on a 5V supply, the HTSSOP-20 package must be mounted to the circuit board that has a minimum of 2.5 in² of exposed, uninterrupted copper area connected to the exposed-DAP.

■ TYPICAL APPLICATION CIRCUIT

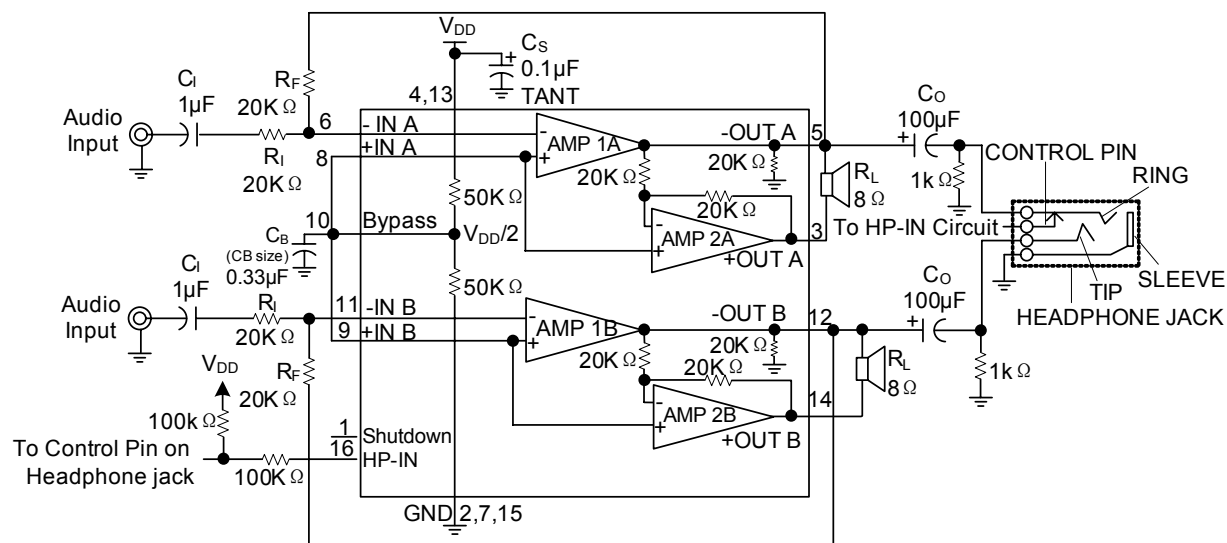

Note: Pin out shown for DIP-16 and SOP-16 packages. Refer to the PIN CONFIGURATION for the pin out of other packages.






Figure 1. Typical Audio Amplifier Application Circuit

■ EXTERNAL COMPONENTS DESCRIPTION

Components	Functional Description
R_i	The inverting input resistance, along with R_F , set the closed-loop gain. R_i , along with C_i form a high pass filter with $f_c = 1/(2\pi R_i C_i)$.
C_i	The input coupling capacitor blocks DC voltage at the amplifier's input terminals. C_i , along with R_i , create a high pass filter with $f_c = 1/(2\pi R_i C_i)$. Refer to the section. Selecting Proper External Components, for an explanation of determine the value of C_i .
R_F	The feedback resistance, along with R_i , set the closed-loop gain.
C_s	The supply bypass capacitor. Refer to the Power Supply Bypassing section for information about properly placing and selecting the value of, this capacitor.
C_B	The capacitor, C_B , filters the half-supply voltage present on the Bypass pin. Refer to the Selecting Proper External Components section for information concerning proper placement and selecting C_B 'S value.







L4863**CMOS IC****■ TYPICAL CHARACTERISTICS**







(For HTSSOP-20)


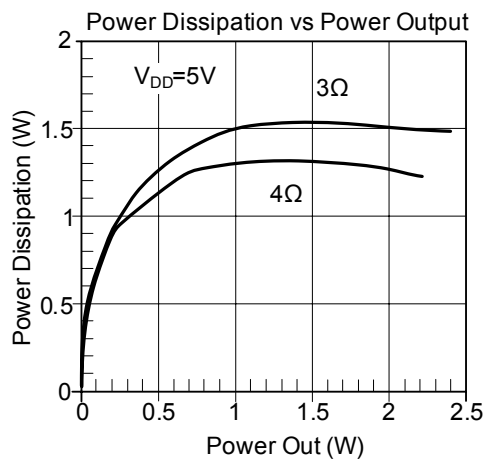
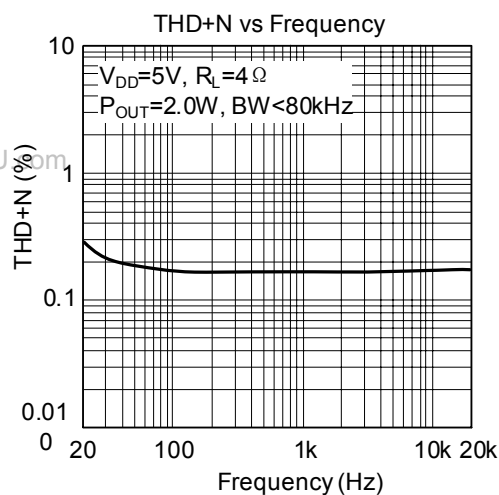
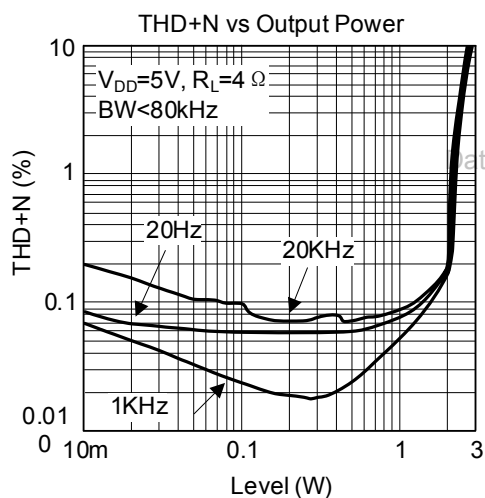
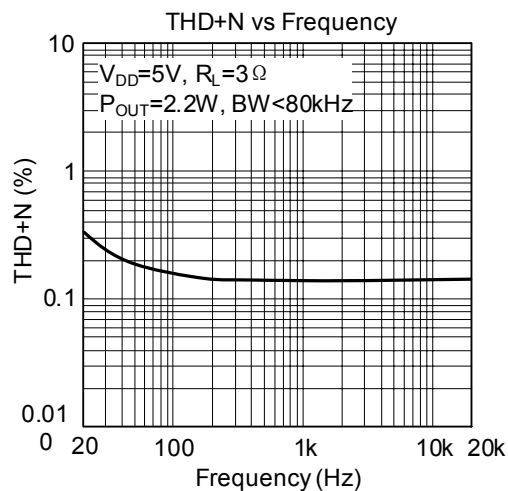
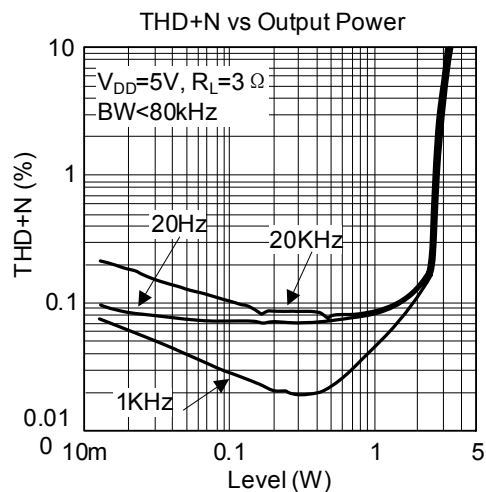


L4863**CMOS IC****■ TYPICAL CHARACTERISTICS(Cont.)**

(For DIP-16, SOP-16 and SOP-18)

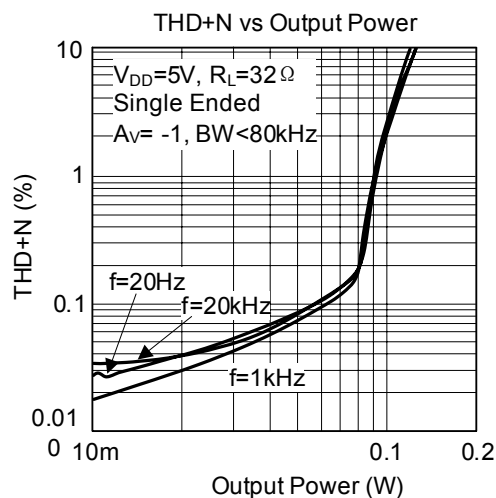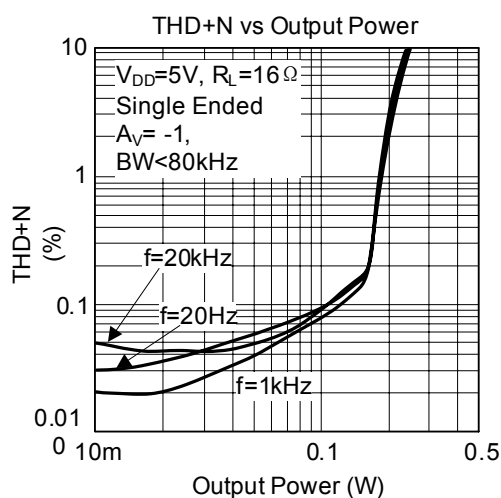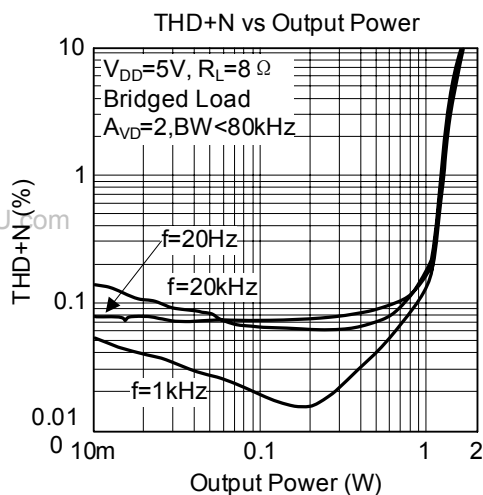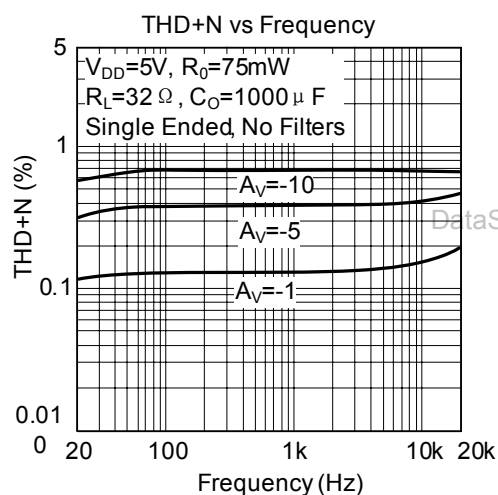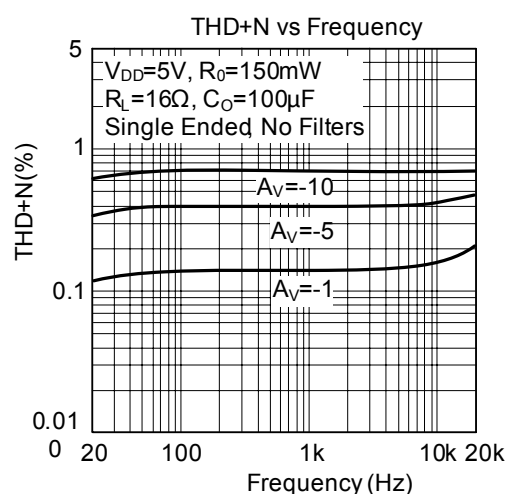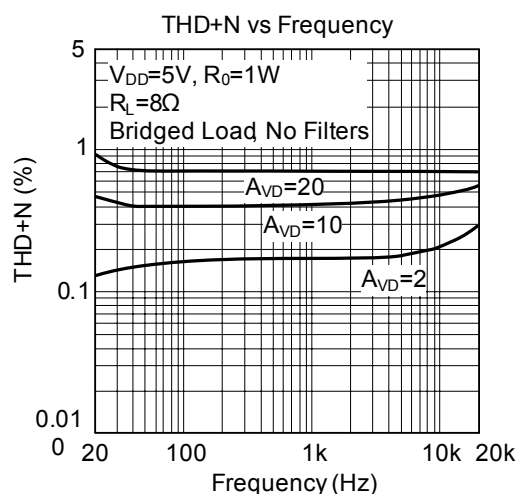

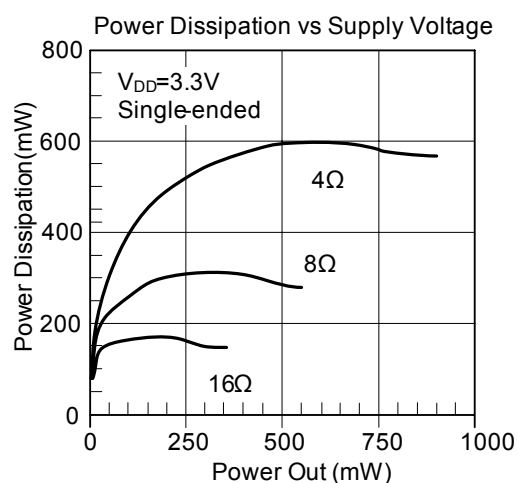
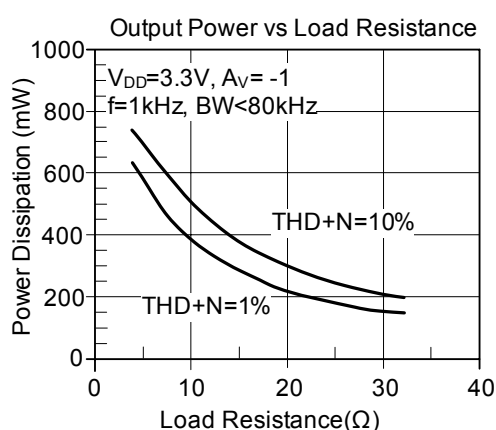
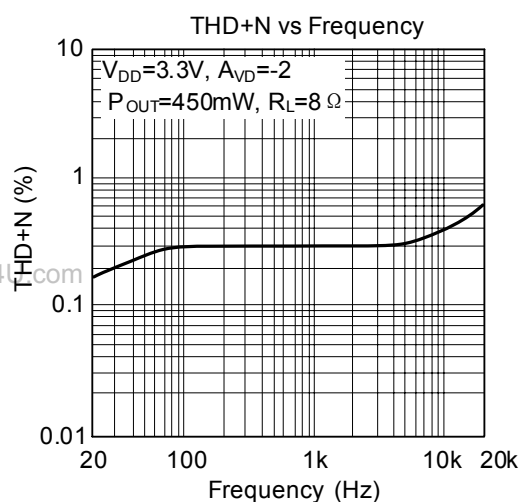
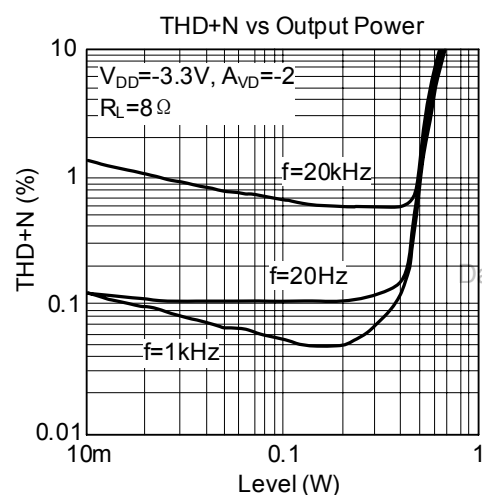
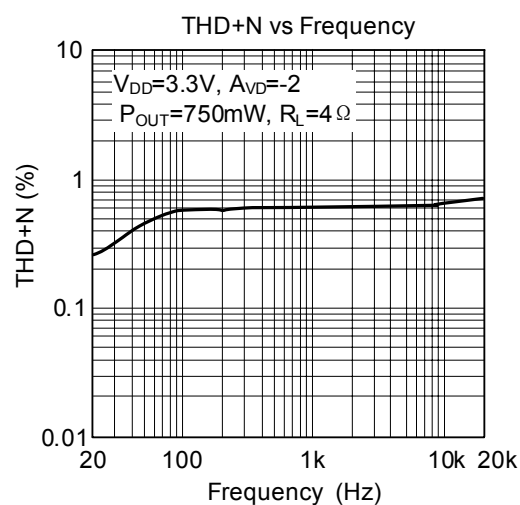
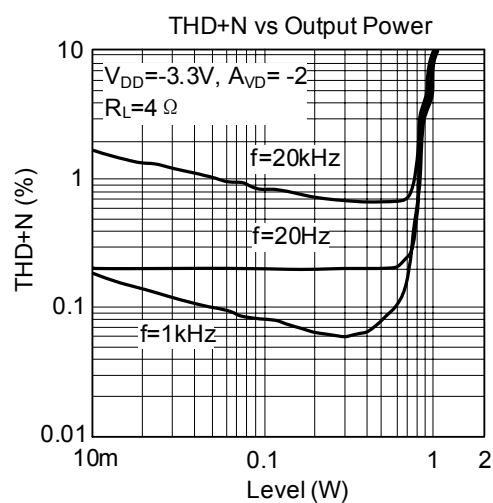
L4863**CMOS IC****■ TYPICAL CHARACTERISTICS(Cont.)**

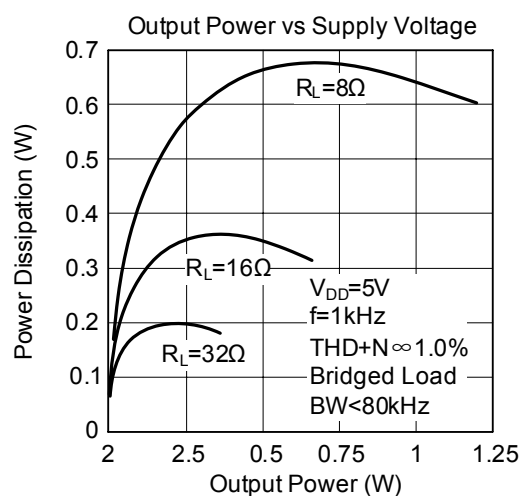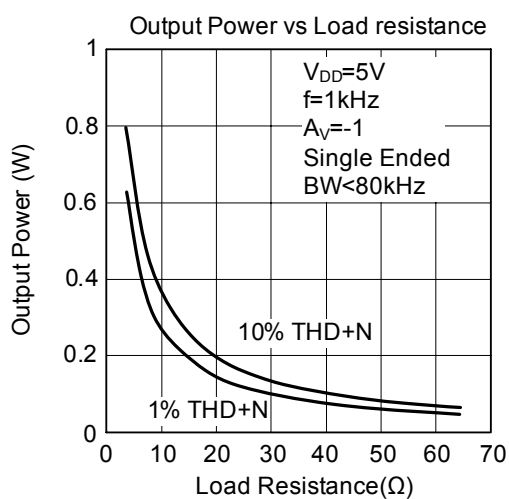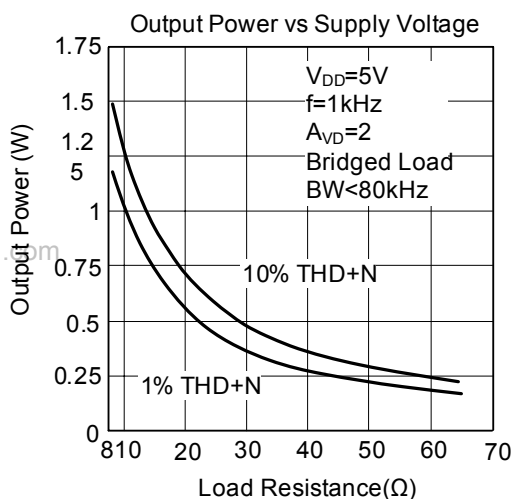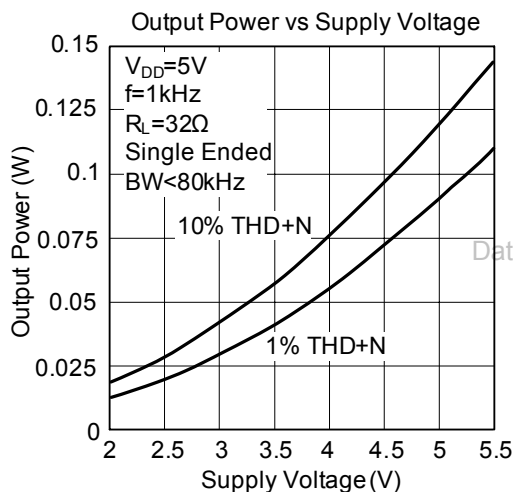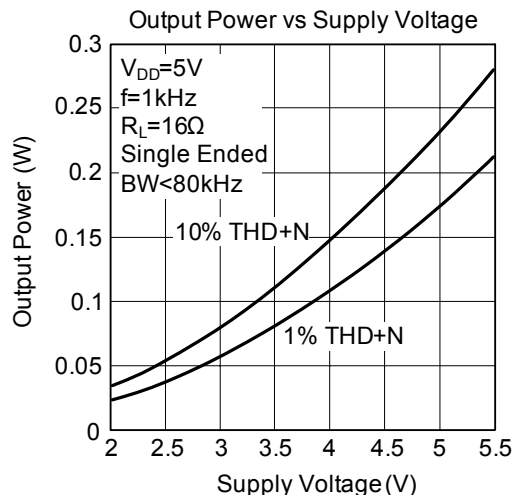
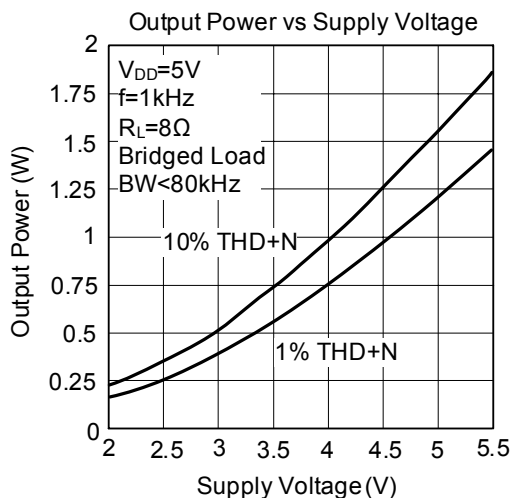
L4863**CMOS IC****■ TYPICAL CHARACTERISTICS(Cont.)**

L4863

CMOS IC

■ TYPICAL CHARACTERISTICS(Cont.)

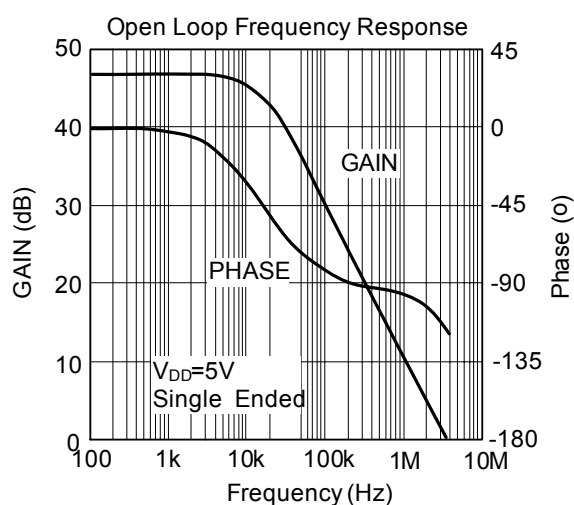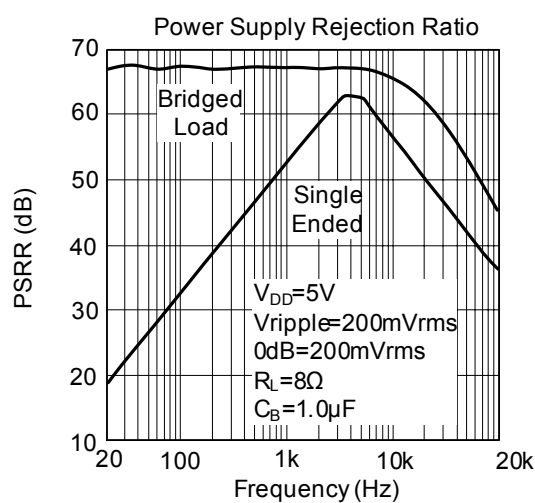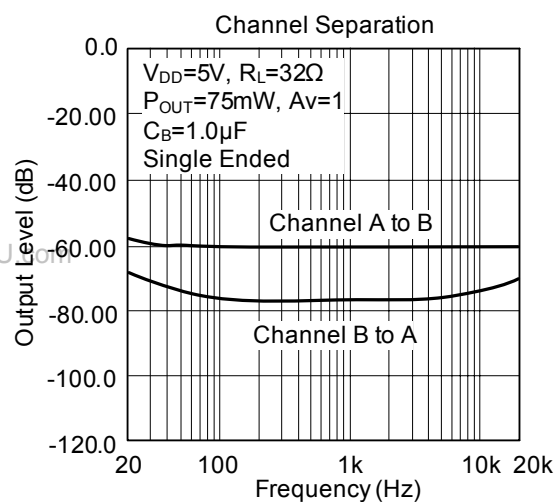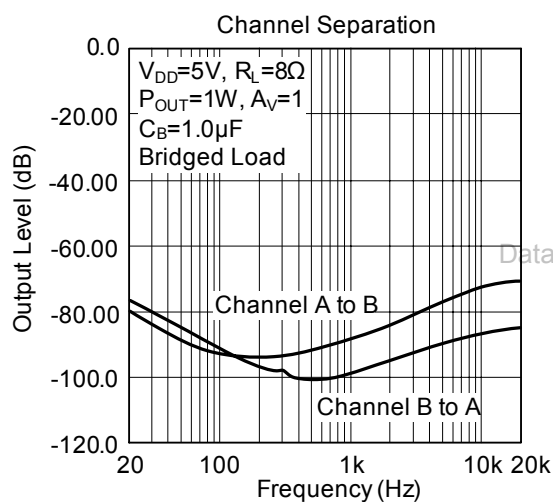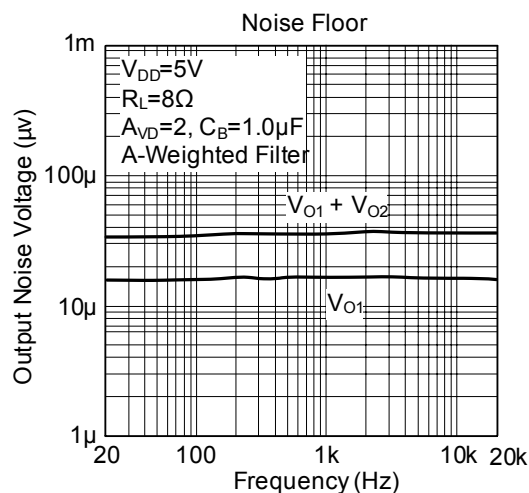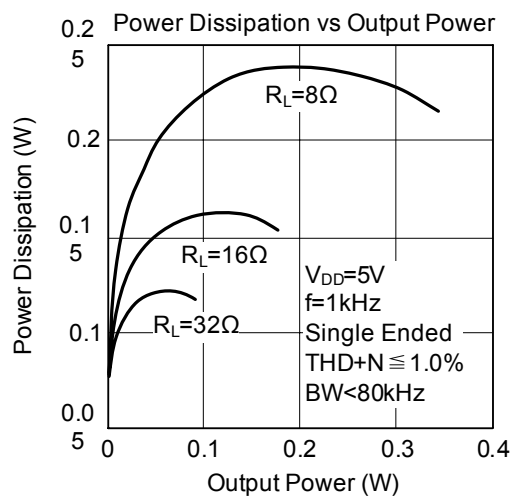

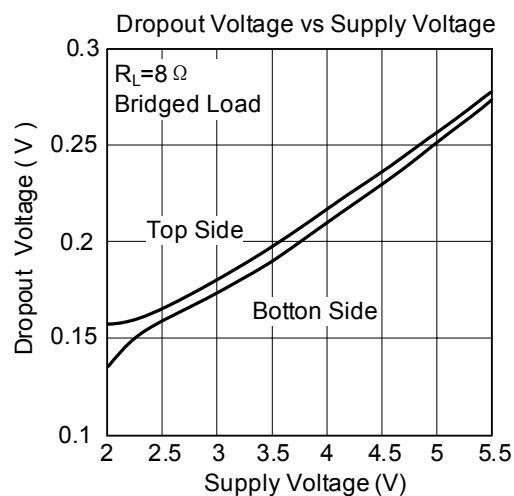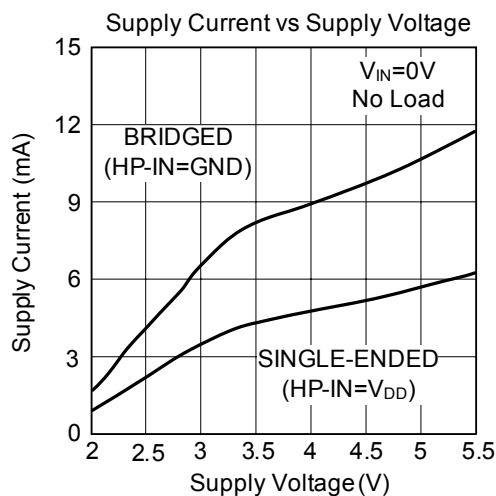L4863**CMOS IC****■ TYPICAL CHARACTERISTICS(Cont.)**

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.