

**SUPER FAST  
GLASS PASSIVATED RECTIFIERS**


REVERSE VOLTAGE - **100 to 600** Volts  
FORWARD CURRENT - **5.0** Amperes

**FEATURES**

- Glass passivated chip
- Super fast switching time for high efficiency
- Low forward voltage drop and high current capability
- Low reverse leakage current
- Plastic material has UL flammability classification 94V-0

**MECHANICAL DATA**

- Case : JEDEC DO-201AD molded plastic
- Polarity : Color band denotes cathode
- Weight : 0.04 ounces, 1.1 grams
- Mounting position : Any

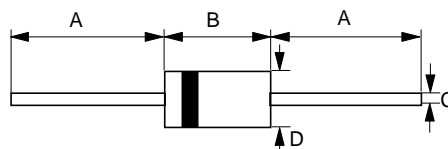**DO-201AD**


DO-201AD		
Dim.	Min.	Max.
A	25.4	-
B	7.30	9.50
C	1.20	1.30
D	4.80	5.30
All Dimensions in millimeter		

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**


Ratings at 25°C ambient temperature unless otherwise specified.  
Single phase, half wave, 60Hz, resistive or inductive load.  
For capacitive load, derate current by 20%

CHARACTERISTICS	SYMBOL	SF50BG	SF50DG	SF50FG	SF50GG	SF50HG	SF50JG	UNIT
Maximum Recurrent Peak Reverse Voltage	VRRM	100	200	300	400	500	600	V
Maximum RMS Voltage	VRMS	70	140	210	280	350	420	V
Maximum DC Blocking Voltage	VDC	100	200	300	400	500	400	V
Maximum Average Forward Rectified Current @TA=55°C	I(AV)	5.0						A
Peak Forward Surge Current 8.3ms single half sine-wave super imposed on rated load (JEDEC METHOD)	IFSM	150						A
Maximum forward Voltage at 5.0A DC	VF	0.95		1.25		1.3		V
Maximum DC Reverse Current at Rated DC Blocking Voltage @TJ=25°C @TJ=100°C	IR	5 300						uA uA
Maximum Reverse Recovery Time (Note 1)	TRR	35		40		50		ns
Typical Junction Capacitance (Note 2)	CJ	80				60		pF
Typical Thermal Resistance (Note 3)	RθJA	13						°C/W
Operating Temperature Range	TJ	-55 to +150						°C
Storage Temperature Range	TSTG	-55 to +150						°C


NOTES : 1.Measured with I<sub>F</sub>=0.5A,I<sub>R</sub>=1.0A,I<sub>RR</sub>=0.25A.  
2.Measured at 1.0MHz and applied reverse voltage of 4.0V DC.  
3.Thermal Resistance Junction to Ambient.

REV. 0, 13-Aug-2001, KDGf06


**FIG.1 - FORWARD CURRENT DERATING CURVE**

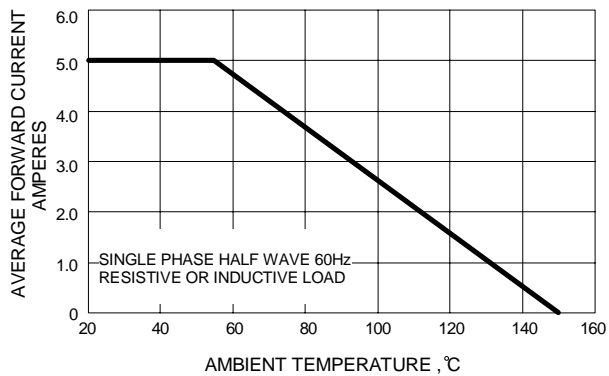

**FIG.2 - MAXIMUM NON-REPETITIVE SURGE CURRENT**

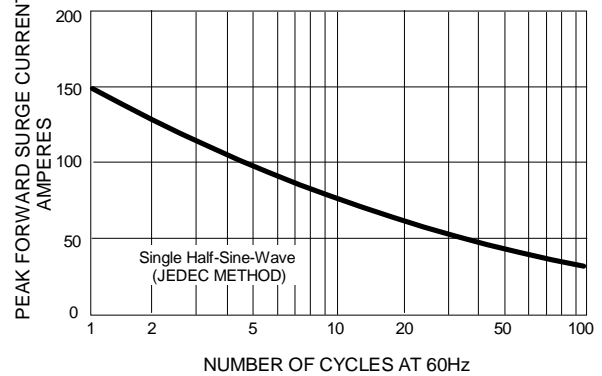

**FIG.3 - TYPICAL JUNCTION CAPACITANCE**

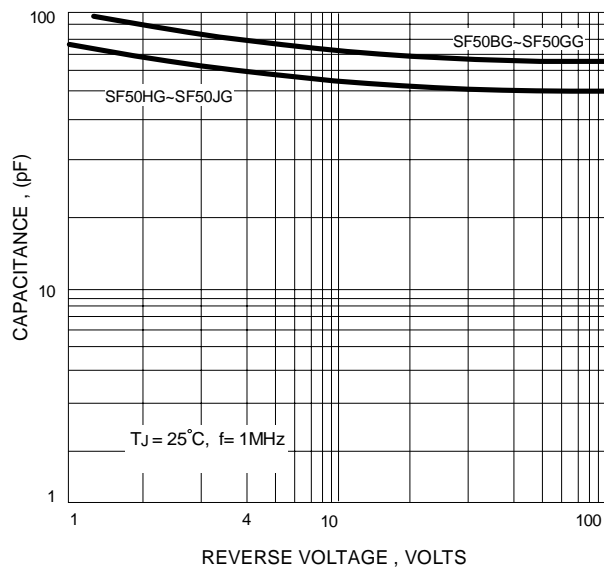

**FIG.4 - TYPICAL FORWARD CHARACTERISTICS**

