

FOR MESSRS : \_\_\_\_\_ DATE : <u>Feb. 01<sup>st</sup> ,2023</u>

# CUSTOMER'S ACCEPTANCE SPECIFICATIONS

# TX13D205VM0BAA

## Contents

No.	ITEM	SHEET No.	PAGE
1	COVER	7B64PS 2701-TX13D205VM0BAA-2	1-1/1
2	RECORD OF REVISION	7B64PS 2702-TX13D205VM0BAA-2	2-1/1
3	GENERAL DATA	7B64PS 2703-TX13D205VM0BAA-2	3-1/1
4	ABSOLUTE MAXIMUM RATINGS	7B64PS 2704-TX13D205VM0BAA-2	4-1/1
5	ELECTRICAL CHARACTERISTICS	7B64PS 2705-TX13D205VM0BAA-2	5-1/1
6	OPTICAL CHARACTERISTICS	7B64PS 2706-TX13D205VM0BAA-2	6-1/2~2/2
7	BLOCK DIAGRAME	7B64PS 2707-TX13D205VM0BAA-2	7-1/1
8	RELIABILITY TESTS	7B64PS 2708-TX13D205VM0BAA-2	8-1/1
9	LCD INTERFACE	7B64PS 2709-TX13D205VM0BAA-2	9-1/6~6/6
10	OUTLINE DIMENSIONS	7B64PS 27010-TX13D205VM0BAA-2	10-1/2~2/2
11	APPEARANCE STANDARD	7B64PS 27011-TX13D205VM0BAA-2	11-1/3~3/3
12	PRECAUTIONS	7B64PS 27012-TX13D205VM0BAA-2	12-1/2~2/2
13	DESIGNATION OF LOT MARK	7B64PS 27013-TX13D205VM0BAA-2	13-1/1

ACCEPTED BY: \_\_\_\_\_ PROPOSED BY: Oblack Tsai

JDI Taiwan Inc. Kaohsiung Branch SHEET NO. 7B64PS 2701-TX13D205VM0BAA-2 PAGE 1-1/1

# 2. RECORD OF REVISION

DATE	SHEET No.	SUMMARY
Feb.01,'23	7B64PS 2701 – TX13D205VM0BAA-2 Page 1-1/1	Company logo changed :
	7B64PS 2713 – TX13D205VM0BAA-2 Page 13-1/1	MOE → LJDI Japan Display Inc.

## 3. GENERAL DATA

#### 3.1 DISPLAY FEATURES

This module is a 5" WVGA of 16:9 format of amorphous silicon TFT. The pixel format is vertical stripe and sub pixels are arranged as R(red), G(green), B(blue) sequentially .This display is RoHS compliant , and COG (chip on glass) technology and LED backlight are applied on this display.

Part Name	TX13D205VM0BAA
Module Dimensions	121.0(W)mm x 80.0(H)mm x 7.1(D)mm (W/O component & FPC)
LCD Active Area	108.0(W)mm x 64.8(H)mm
Pixel Pitch	0.135(W)mm x 0.135(H)mm
Resolution	800x3(R,G,B)(W)x480(H) Dots
Color Pixel Arrangement	R, G, B Vertical stripe
LCD Type	Transmissive Color TFT; Normally Black
Display Type	Active Matrix
Number of Colors	16.7M Colors (8-bit RGB)
Backlight	Light Emitting Diode (LED)
Weight	95 g (typ.)
Interface	45pin CMOS
Power Supply Voltage	3.3V for LCD driving ; 21 V for Backlight
Power Consumption	0.6 W for LCD ; 3.36 W for B/L
Viewing Direction	Super Wide version

SH	EET
N	10.

## 4. ABSOLUTE MAXIMUM RATINGS

Item	Symbol	Min.	Max.	Unit	Remarks
Supply Voltage	$V_{DD}$	0.3	4.0	<b>V</b>	-
Input Voltage of Logic	Vı	0.3	4.0	<b>V</b>	Note 1
Operating Temperature	T <sub>op</sub>	-30	85	°C	Note 2
Storage Temperature	T <sub>st</sub>	-40	90	°C	Note 2
Backlight Input Voltage	VLED	-	28.0	V	-

- Note 1: The rating is defined for the signal voltages of the interface such as DE, CLK and RGB data bus.
- Note 2: The maximum rating is defined as above based on the chamber temperature, which might be different from ambient temperature after assembling the panel into the application. Moreover, some temperature-related phenomenon as below needed to be noticed:
  - Background color, contrast and response time would be different in temperatures other than  $25\,^{\circ}\mathrm{C}\,.$
  - -Operating under high temperature will shorten LED lifetime.

## 5. ELECTRICAL CHARACTERISTICS

#### 5.1 LCD CHARACTERISTICS

Item	Symbol	Condition	Min.	Тур.	Max.	$T_a = 25$ Unit	<i>C</i> , <del>Vss</del> − 0V Remarks
Power Supply Voltage	$V_{DD}$	-	3.0	3.3	3.6	V	-
Input Voltage of Lagio	Vı	"H" level	0.7V <sub>DD</sub>	-	$V_{DD}$	.,,	Note 1
Input Voltage of Logic		"L" level	0	-	0.3V <sub>DD</sub>	V	
Power Supply Current	I <sub>DD</sub>	V <sub>DD</sub> =3.3V	-	-	180	mA	Note 2
Frame Frequency	$f_{\it Frame}$	-	55	60	65	Hz	-
CLK Frequency	$f_{\mathit{CLK}}$	-	23.2	27.7	33.5	MHz	-


- Note 1: The rating is defined for the signal voltages of the interface such as DE, CLK and RGB data bus.
- Note 2: An all white check pattern is used when measuring  $I_{DD}$ .  $f_{Frame}$  is set to 60 Hz. Moreover, 1.0A fuse is applied in the module for IDD. For display activation and protection purpose, power supply is recommended larger than 2.5A to start the display and break fuse once any short circuit occurred.

#### 5.2 BACKLIGHT CHARACTERISTICS

 $T_a = 25 \,^{\circ} C$ 

Item	Symbol	Condition	Min.	Тур.	Max.	Unit	Remarks
LED Input Voltage	$V_{LED}$	-	19	-	23.8	V	Note 1
LED Forward Current	I <sub>LED</sub>	per LED	-	80	-	mA	
LED lifetime	-	I <sub>LED</sub> =80 mA/per LED	-	70K	-	hrs	Note 2

- Note 1: Fig. 5.1 shows the LED backlight circuit. V<sub>LED</sub> and I<sub>LED</sub> is many-to-one relationship, the above V<sub>LED</sub> range is defined to obtain 80mA per LED chain.
- Note 2: The estimated lifetime is specified as the time to reduce 50% brightness by applying 80 mA at 25°C.

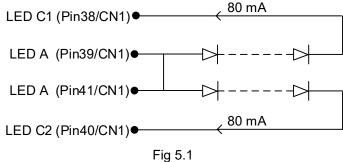

## 6. OPTICAL CHARACTERISTICS

The optical characteristics are measured based on the conditions as below:

- Supplying the signals and voltages defined in the section of electrical characteristics.
- The backlight unit needs to be turned on at least 15 minutes.
- The ambient temperature is 25  $^{\circ}\mathrm{C}$  .
- In the dark room, the equipment has been set for the measurements as shown in Fig 6.1.

Item		Symbol	Condition	Min.	Typ. $T_a$	= <b>25</b> ° <i>C</i> , <i>f</i> Max.	F <sub>rame</sub> = 60 Hz Unit	, <del>V</del> DD = 3.3∀ Remarks
Brightness of White		-	$\phi = 0^{\circ}, \theta = 0^{\circ},$	1000	1300	-	cd/m²	Note 1
Brightness U	niformity	-	I <sub>LED</sub> =80 mA	-	70	-	%	Note 2
Contrast F	Ratio	CR	(per LED)	800	1300	-	-	Note 3
Response (Rising + Fa		$T_r + T_f$	$\phi = 0^{\circ}, \theta = 0^{\circ}$	-	-	25	ms	Note 4
NTSC R	atio	-	$\phi = 0^{\circ}, \theta = 0^{\circ}$	-	70	-	%	-
		$\theta$ x	$\phi = 0^{\circ}, CR \ge 10$	-	80	-		Note 5
\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \		$\theta x'$	$\phi = 180^\circ$ , CR $\geq 10$	-	80	-	_	
Viewing A	ıngıe	$\theta$ y	$\phi = 90^{\circ}$ , CR $\geq 10$	-	80	-	Degree	
		$\theta$ y'	$\phi = 270^{\circ}, CR \ge 10$	-	80	-		
	Red	X		0.60	0.64	0.68	-	
		Υ		0.29	0.33	0.37		
	C == = ==	X		0.28	0.32	0.36		
Color	Green	Υ		0.58	0.62	0.66		
Chromaticity	Blue	X	$\phi = 0^{\circ}, \theta = 0^{\circ}$	0.11	0.15	0.18	-	Note 6
	Diue	Υ		0.02	0.06	0.10		
	\//hito	Х		0.27	0.31	0.35		
	White	Υ		0.28	0.32	0.36		

Note 1: The brightness is measured from the panel center point, P5 in Fig. 6.2, for the typical value.

Note 2: The brightness uniformity is calculated by the equation as below:

$$Brightness\ uniformity = \frac{Min.\ Brightness}{Max.\ Brightness} \times 100\%$$

which is based on the brightness values of the 9 points in active area measured by BM-5 as

shown in Fig. 6.2.

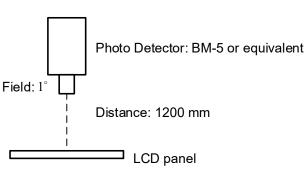


Fig 6.1

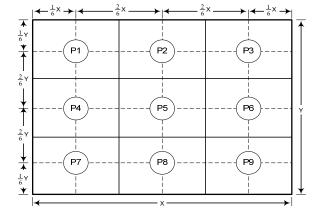


Fig 6.2

JDI Taiwan Inc. Kaohsiung Branch

SHEET NO.


7B64PS 2706-TX13D205VM0BAA-2

**PAGE** 

Note 3: The Contrast Ratio is measured from the center point of the panel, P5, and defined as the following equation:


$$CR = \frac{Brightness of White}{Brightness of Black}$$

Note 4: The definition of response time is shown in Fig. 6.3. The rising time is the period from 10% brightness to 90% brightness when the data is from black to white. Oppositely, Falling time is the period from 90% brightness rising to 10% brightness.

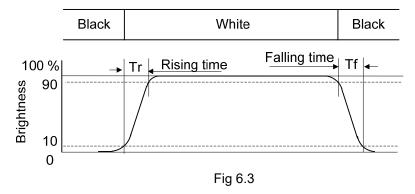


Note 5: The definition of viewing angle is shown in Fig. 6.4. Angle  $\phi$  is used to represent viewing directions, for instance,  $\phi = 270^{\circ}$  means 6 o'clock, and  $\phi = 0^{\circ}$  means 3 o'clock. Moreover, angle  $\theta$  is used to represent viewing angles from axis Z toward plane XY.

The display is super wide viewing angle version, so that the best optical performance can be obtained from every viewing direction.

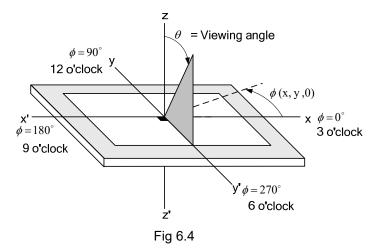

Note 6: The color chromaticity is measured from the center point of the panel, P5, as shown in Fig. 6.2.

# 7. BLOCK DIAGRAM

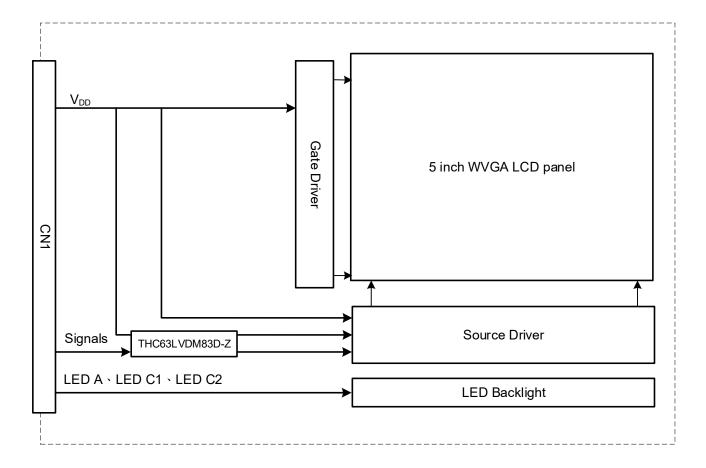

Note 1: Signals are DE, CLK and RGB data bus.

## 8. RELIABILITY TESTS

Test Item	Condition				
High Temperature	1) Operating 2) 85 °C	240 hrs			
Low Temperature	1) Operating 2) -30 °C	240 hrs			
High Temperature	1) Storage 2) 90 °C	240 hrs			
Low Temperature	1) Storage 2) -40 °C	240 hrs			
Thermal Shock	1) Non-Operating 2) -40 °C ↔85 °C 3) 0.5 hr ↔0.5 hr	30 cycles			
High Temperature & Humidity	12) 60 C& 90%RH				
Vibration	1) Non-Operating 2) 20~200 Hz 3) 2G 4) X, Y, and Z directions	1 hr for each direction			
Mechanical Shock	1) Non-Operating 2) 10 ms 3) 50G 4) ±X,±Y and ±Z directions	Once for each direction			
ESD 1) Operating 2) Tip: 150 pF, $330\Omega$ 3) Air discharge for glass: $\pm$ 8KV 4) Contact discharge for metal frame: $\pm$ 8KV		1) Glass: 9 points 2) Metal frame: 8 points (Note3)			

- Note 1: Display functionalities are inspected under the conditions defined in the specification after the reliability tests.
- Note 2: The display is not guaranteed for use in corrosive gas environments.
- Note 3: All pins of LCD interface (CN1) have been tested by  $\pm$  100V contact discharge of ESD under non-operating condition.

## 9. LCD INTERFACE

#### 9.1 INTERFACE PIN CONNECTIONS

The display interface connector CN1 is FH28K-45S-0.5SH made by Hirose and pin assignment is as below:

Pin No.	Symbol	Signal	Pin No.	Symbol	Signal	
1	Vss	Ground	24	В3	Blue Data	
2	VSS	Ground	25	B4	Blue Data	
3	\ <i>\</i> /	Supply Voltage	26	B5	Blue Data	
4	$V_{DD}$	Supply Voltage	27	В6	Blue Data	
5	R0	Red Data (LSB)	28	B7	Blue Data (MSB)	
6	R1	Red Data	29	Vss	Ground	
7	R2	Red Data	30	CLK	Dot Clock	
8	R3	Red Data	31	DISP	Display ON/OFF	
9	R4	Red Data	31	DISP	("L" Display OFF ; "H" Display ON)	
10	R5	Red Data	32	NC	No Connection	
11	R6	Red Data	33	INC	No Connection	
12	R7	Red Data (MSB)	34	DE	Data Enable Signal	
13	G0	Green Data (LSB)	35	NC	No Connection	
14	G1	Green Data	36	SD	Scan Direction Control (Note1)	
15	G2	Green Data	37	Vss	Ground	
16	G3	Green Data	38	LED C1	LED Cathode 1	
17	G4	Green Data	39	LED A	LED Anode	
18	G5	Green Data	40	LED C2	LED Cathode 2	
19	G6	Green Data	41	LED A	LED Anode	
20	G7	Green Data (MSB)	42			
21	В0	Blue Data (LSB)	43	NC	No Connection	
22	B1	Blue Data	44	NC	No Connection	
23	B2	Blue Data	45			

Note 1: Please refer to <u>8.3 SCAN DIRECTION</u> for the setting methods of SD function.

## 9.2 TIMING CHART th = 884 CLK (1H) DE CLK 27.7M Hz (typ thp+thb thd = 800 CLK (fixed) thf Invalid data Invalid data Display data R [0:7] G [0:7] B [0:7] Fig. 8.1 Horizontal Timing tv = 523 H (60 Hz)DE tvd = 480 H (fixed)tvp+tvb tvf Display lines Invalid lines Invalid lines RGB Fig. 8.2 Vertical Timing Tcph CLK 30% 30% Tdsu Tdhd Tcwl 1st RGB 2nd RGB 800 RGB Data 30% Tehd Tesu 70% DE Fig. 8.3 Setup & Hold Time SHEET NO. 7B64PS 2709-TX13D205VM0BAA-2 **PAGE** JDI Taiwan Inc. Kaohsiung Branch 9-2/6

## A. The timings except mentioned above are referred to the specifications of your transmitter.

	Symbol	Min.	Тур.	Max.	Unit	remarks	
DCLK	Cycle time	Tc	29.9	36.1	43.1	ns	
11	Horizontal period	T <sub>H</sub>	862	884	920	Tc	
Horizontal	Horizontal width-Active	T <sub>HD</sub>	800			Tc	
	Vertical period	Tv	490	523	560	T <sub>H</sub>	
Vertical	Vertical width-Active	$T_VD$	480		T <sub>H</sub>		
	Frame frequency	f∨	55	60	65	Hz	

## B. Setup and Hold Time

	Item	Symbol	Min.	Тур.	Max.	Unit
CLIK	Duty	Tcwh	40	50	60	%
CLK	Cycle Time	Tcph	-	36.1	-	
D-4-	Setup Time	Tdsu	5	-	-	
Data	Hold Time	Tdhd	5	-	-	ns
DE	Setup Time	Tesu	5	-	-	
DE	Hold Time	Tehd	5	-	-	

SHEET NO.

#### 9.3 SCAN DIRECTION

Scan direction is available to be switched as below:




SD: L (Default)



SD:H

9-4/6

#### 9.4 POWER SEQUENCE

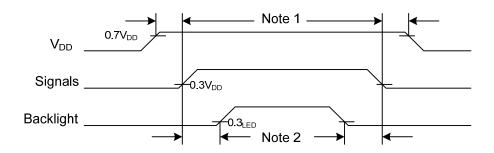


- Note 1: In order to avoid any damages,  $V_{DD}$  has to be applied before all other signals. The opposite is true for power off where  $V_{DD}$  has to be remained on until all other signals have been switch off. The recommended time period is 1 second.
- Note 2: In order to avoid showing uncompleted patterns in transient state. It is recommended that switching the backlight on is delayed for 1 second after the signals have been applied. The opposite is true for power off where the backlight has to be switched off 1 second before the signals are removed.


## 9.5 DATA INPUT for DISPLAY COLOR

`Input color		Red Data						Green Data						Blue Data											
		R7	R6	R5	R4	R3	R2	R1	R0	G7	G6	G5	G4	G3	G2	G1	G0	В7	В6	B5	В4	В3	B2	В1	В0
		MSB							LSB	MSB							LSB	MSB							LSB
	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(255)	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Green(255)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
Basic	Blue(255)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
Color	Cyan	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	Magenta	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(1)	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(2)	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Red	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Red(253)	1	1	1	1	1	1	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(254)	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(255)	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Green(1)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0
	Green(2)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0
Green	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		:	:	:	:	:	:	:
	Green(253)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	0	1	0	0	0	0	0	0	0	0
	Green(254)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0
	Green(255)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue(1)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
	Blue(2)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0
Blue	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Blue(253)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	0	1
	Blue(254)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0
	Blue(255)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1

SHEET
NO.

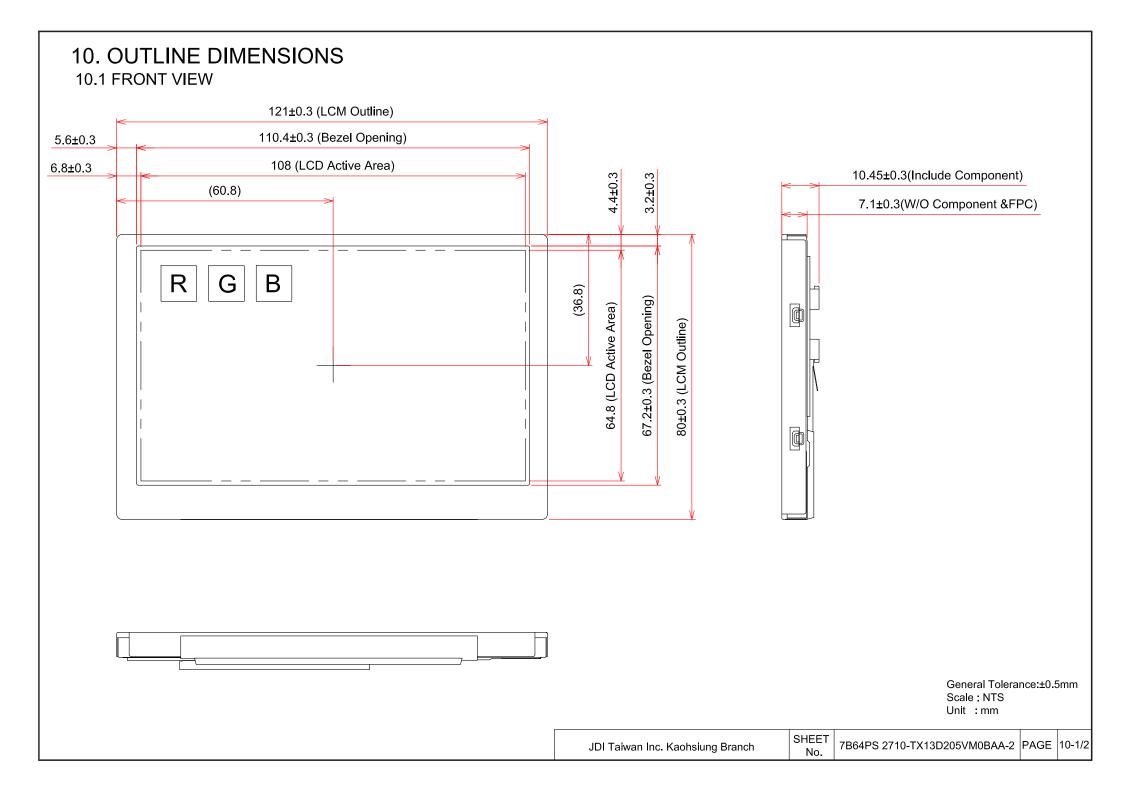

#### 10.2 RAER VIEW

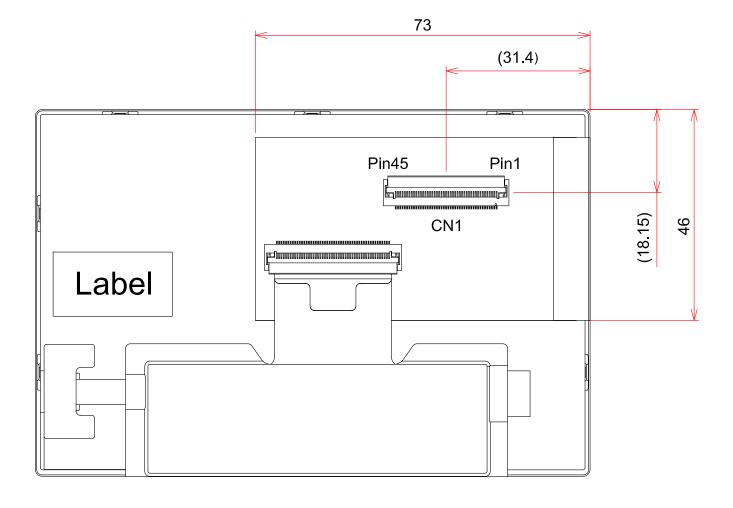

General Tolerance:±0.5mm Scale: NTS

Unit : mm

JDI Taiwan Inc. Kaohsiung Branch

SHEET No. 7B64PS 2710-TX13D205VM0BAA-2 PAGE 10-2/2

### 11. APPEARANCE STANDARD

The appearance inspection is performed in a dark room around 500~1000 lx based on the conditions as below:

- The distance between inspector's eyes and display is 30 cm. ambient temperature is 25 °C±5 °C.
- The viewing zone is defined with angle  $\theta$  shown in Fig. 11.1 The inspection should be performed within 45° when display is shut down. The inspection should be performed within 5° when display is power on.

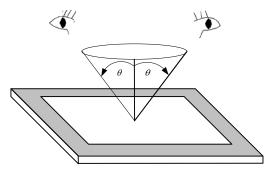


Fig. 11.1

#### 11.1 THE DEFINITION OF LCD ZONE

LCD panel is divided into 3 areas as shown in Fig.11.2 for appearance specification in next section. A zone is the LCD active area (dot area); B zone is the area, which extended 1 mm out from LCD active area; C zone is the area between B zone and metal frame.

In terms of housing design, B zone is the recommended window area customers' housing should be located in.

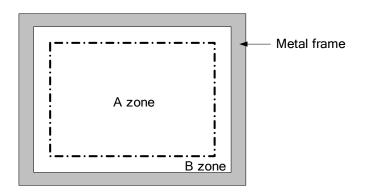



Fig. 11.2

## 11.2 LCD APPEARANCE SPECIFICATION

The specification as below is defined as the amount of unexpected phenomenon or material in different zones of LCD panel. The definitions of length, width and average diameter using in the table are shown in Fig. 11.3 and Fig. 11.4.


Item		teria		Applied zone						
	Length (mm)	Widt	h (mm)	Maximum nui	mber	Minimum space				
Caratabaa	Ignored		W≦0.05	Ignored		-	^			
Scratches	1≦L≦5.0	0.05<	5 <w≦0.2< td=""><td></td><td>-</td><td>Α</td></w≦0.2<>			-	Α			
	5.0 <l< td=""><td>&lt;W</td><td colspan="2">Not allowed</td><td>-</td><td></td></l<>		<W	Not allowed		-				
Dent		Se	erious one	is not allowed			Α			
Wrinkles in polarizer		Se	erious one	is not allowed			Α			
	Average diam	neter (m	nm)	Maxi	mum n	umber				
Dubbles on malerines	D≦	≦0.2			Ignore	d	•			
Bubbles on polarizer	0.2 < D	≦0.5			3		Α			
	0.5 <d< td=""><td>1</td><td></td><td>N</td><td>ot allov</td><td>ved</td><td></td></d<>	1		N	ot allov	ved				
		F	ilamentous	(Line shape)						
	Length (mm)		Width	n (mm)	Max	imum number				
	Ignored			W≦0.05	Ignored		A, B			
	0.3≦L≦0.7		0.05<	<w≦0.1< td=""><td></td><td>4</td><td></td></w≦0.1<>		4				
	0.7 < L		0.1 < W			lot allowed				
1) Stains	Round (Dot shape)									
2) Foreign Materials	Average diameter (r	mm)								
3) Bright / Dark Spot	D≦0.2		Brigh	nt Spot		3				
	D≦0.2		Darl	Spot		Ignored	A, B			
	0.2 < D ≤ 0.4			А, Б						
	0.4 <d< td=""><td></td><td></td><td colspan="3" rowspan="2"></td></d<>									
	In total									
			T	уре	Maximum number					
Dat Dafaat	Bright dot-defect	t	1	dot		0				
Dot-Defect (Note 1)	Dark dot-defect	,	1	dot		4	Α			
(Note 1)	Dank dot doloot		2 adja	cent dot	lot allowed					
	Mini									
Mura	Invisible through 2% ND filter						A (Note 2)			

JDI Taiwan Inc. Kaohsiung Branch	SHEET NO.	7B64PS 2711-TX13D205VM0BAA-2	PAGE	11-2/3	
----------------------------------	--------------	------------------------------	------	--------	--

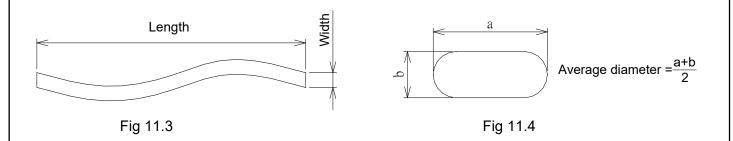


Note 1: The definitions of dot defect are as below:

- For bright dot-defect, showing black pattern, defect size over 1/2 dot area is defined.
- For dark dot-defect, showing white pattern, defect size over 1/2 dot area is defined.
- The definition of 1-dot-defect is the defect-dot, which is isolated and no adjacent defect-dot.
- The definition of adjacent dot is shown as Fig. 11.5.

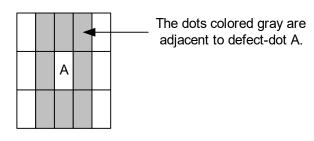

Higg.11155

Note 2: The inspection method with ND Filter is to hold it in front of the panel around 1 cm and inspect the panel with 35±5 cm distance for 1 second.

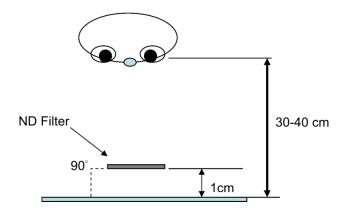

#### 12. PRECAUTIONS

#### 12.1 PRECAUTIONS of ESD

- 1) Before handling the display, please ensure your body has been connected to ground to avoid any damages by ESD. Also, do not touch display's interface directly when assembling.
- 2) Please remove the protection film very slowly before turning on the display to avoid generating ESD.

#### 12.2 PRECAUTIONS of HANDLING

- 1) In order to keep the appearance of display in good condition, please do not rub any surfaces of the displays by sharp tools harder than 3H, especially touch panel, metal frame and polarizer.
- 2) Please do not pile the displays in order to avoid any scars leaving on the display. In order to avoid any injuries, please pay more attention for the edges of glasses and metal frame, and wear finger cots to protect yourself and the display before working on it.
- 3) Touching the display area or the terminal pins with bare hand is prohibited. This is because it will stain the display area and cause poor insulation between terminal pins, and might affect display's electrical characteristics furthermore.
- 4) Do not use any harmful chemicals such as acetone, toluene, and isopropyl alcohol to clean display's surfaces.
- 5) Please use soft cloth or absorbent cotton with ethanol to clean the display by gently wiping. Moreover, when wiping the display, please wipe it by horizontal or vertical direction instead of circling to prevent leaving scars on the display's surface, especially polarizer.
- 6) Please wipe any unknown liquids immediately such as saliva, water or dew on the display to avoid color fading or any permanently damages.
- 7) Maximum pressure to the surface of the display must be less than  $1.96 \times 10^4$  Pa. If the area of adding pressure is less than  $1 \text{ cm}^2$ , the maximum pressure must be less than  $1.96 \times 10^4$  Pa. If the area of adding pressure is less than  $1.96 \times 10^4$  Pa. If the area of adding pressure is less than  $1.96 \times 10^4$  Pa. If the area of adding pressure is less than  $1.96 \times 10^4$  Pa. If the area of adding pressure is less than  $1.96 \times 10^4$  Pa. If the area of adding pressure is less than  $1.96 \times 10^4$  Pa. If the area of adding pressure is less than  $1.96 \times 10^4$  Pa. If the area of adding pressure is less than  $1.96 \times 10^4$  Pa. If the area of adding pressure is less than  $1.96 \times 10^4$  Pa. If the area of adding pressure is less than  $1.96 \times 10^4$  Pa. If the area of adding pressure is less than  $1.96 \times 10^4$  Pa. If the area of adding pressure is less than  $1.96 \times 10^4$  Pa. If the area of adding pressure is less than  $1.96 \times 10^4$  Pa. If the area of adding pressure is less than  $1.96 \times 10^4$  Pa. If the area of adding pressure is less than  $1.96 \times 10^4$  Pa. If the area of adding pressure is less than  $1.96 \times 10^4$  Pa. If the area of adding pressure is less than  $1.96 \times 10^4$  Pa. If the area of adding pressure is less than  $1.96 \times 10^4$  Pa. If the area of adding pressure is less than  $1.96 \times 10^4$  Pa. If the area of adding pressure is less than  $1.96 \times 10^4$  Pa. If the area of adding pressure is less than  $1.96 \times 10^4$  Pa. If the area of adding pressure is less than  $1.96 \times 10^4$  Pa. If the area of adding pressure is less than  $1.96 \times 10^4$  Pa. If the area of adding pressure is less than  $1.96 \times 10^4$  Pa. If the area of adding pressure is less than  $1.96 \times 10^4$  Pa. If the area of adding pressure is less than  $1.96 \times 10^4$  Pa. If the area of adding pressure is less than  $1.96 \times 10^4$  Pa. If the area of adding pressure is less than  $1.96 \times 10^4$  Pa. If the area of adding pressure is less than  $1.96 \times 10^4$  Pa. If the area of adding pressure is less than  $1.96 \times 10^4$  Pa. If the area of adding pressure is less than 1

#### 12.3 PRECAUTIONS OF OPERATING

- 1) Please input signals and voltages to the displays according to the values defined in the section of electrical characteristics to obtain the best performance. Any voltages over than absolute maximum rating will cause permanent damages to this display. Also, any timing of the signals out of this specification would cause unexpected performance.
- 2) When the display is operating at significant low temperature, the response time will be slower than it at 25 °C . In high temperature, the color will be slightly dark and blue compared to original pattern. However, these are temperature-related phenomenon of LCD and it will not cause permanent damages to the display when used within the operating temperature.
- 3) The use of screen saver or sleep mode is recommended when static images are likely for long periods of time. This is to avoid the possibility of image sticking.
- 4) Spike noise can cause malfunction of the circuit. The recommended limitation of spike noise is no bigger than  $\pm 100$  mV.

#### 12.4 PRECAUTIONS of STORAGE

If the displays are going to be stored for years, please be aware the following notices.

- 1) Please store the displays in a dark room to avoid any damages from sunlight and other sources of UV light.
- 2) The recommended long term storage temperature is between 10 °C ~35 °C and 55%~75% humidity to avoid causing bubbles between polarizer and LCD glasses, and polarizer peeling from LCD glasses.
- 3) It would be better to keep the displays in the container, which is shipped from JDI, and do not unpack it.
- 4) Please do not stick any labels on the display surface for a long time, especially on the polarizer.

#### 13. DESIGNATION of LOT MARK

1) The lot mark is showing in Fig.13.1. First 4 digits are used to represent production lot, T represented made in Taiwan, and the last 6 digits are the serial number.

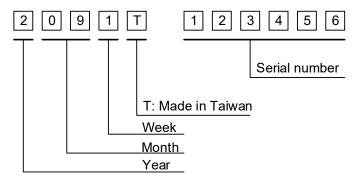


Fig. 13.1

2) The tables as below are showing what the first 4 digits of lot mark are shorted for.

Year	Lot Mark
2022	2
2023	3
2024	4
2025	5
2026	6

Month	Lot Mark	Month	Lot Mark
Jan.	01	Jul.	07
Feb.	02	Aug.	08
Mar.	03	Sep.	09
Apr.	04	Oct.	10
May	05	Nov.	11
Jun.	06	Dec.	12

Week	Lot Mark
1~7 days	1
8~14 days	2
15~21 days	3
22~28 days	4
29~31 days	5

3) Except letters I and O, revision number will be shown on lot mark and following letters A to Z.

REV No.	ITEM	REMARKS
Α	-	-

4) The location of the lot mark is on the back of the display shown in Fig. 13.2.

Label example:



Fig. 13.2

JDI Taiwan Inc. Kaohsiung Branch	SHEET NO.	7B64PS 2713-TX13D205VM0BAA-2	PAGE	13-1/1	
----------------------------------	--------------	------------------------------	------	--------	--