



## DESCRIPTION

The A7523 is a compact, high efficiency, and low voltage step-up DC/DC converter with an Adaptive Current Mode PWM control loop, includes an error amplifier, ramp generator, comparator, switch pass element and driver in which providing a stable and high efficient operation over a wide range of load currents. It operates in stable waveforms without external compensation.

The low start-up input voltage below 1V makes A7523 suitable for 1 to 4 battery cells applications of providing up to 600mA output current. Besides, the 14µA low quiescent current together with high efficiency maintains long battery lifetime. The output voltage is set with two external resistors. Both internal 2A switch and driver for driving external power devices (NMOS or NPN) are provided.

The A7523 is available in SOT-26 package.

## ORDERING INFORMATION

Package Type	Part Number	
SOT-26	E6	A7523E6R-XX
		A7523E6VR-XX
Note	XX: Output Voltage ADJ=Adjustable R: Tape & Reel V: Halogen free Package	
AiT provides all RoHS products Suffix " V " means Halogen free Package		

## FEATURES


- 0.8V ( Iout=1mA ) Low Start-up Input Voltage
- 500kHz Fixed Switching Frequency
- 90% Efficiency
- High Supply Capability to Deliver 3.3V 300mA with 1 Alkaline Cell or Deliver 5V 800mA with 1 Li-ion Cell
- 14µA Quiescent (Switch-off) Supply Current
- 0.01µA Shutdown Mode Supply Current
- Providing Flexibility for Using Internal and External Power Switches
- Output voltage: Settable to between 2.0V to 6.0V ,accuracy of 2%
- Available in SOT-26 package.

## APPLICATION

- MP3
- PDA
- DSC
- LCD Panel
- RF-Tags
- Portable Instrument
- Wireless Equipment



## PIN DESCRIPTION

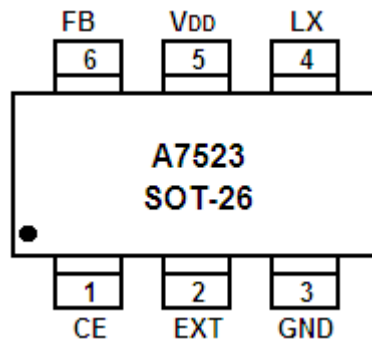

TOP VIEW

Pin #	Symbol	Functions
1	CE	Chip enable
2	EXT	Output pin for driving external NMOS
3	GND	Ground
4	LX	Pin for switching
5	V <sub>DD</sub>	Input positive power pin of A7523
6	FB	Feedback input pin



## ABSOLUTE MAXIMUM RATINGS

V <sub>DD</sub> , Input voltage	V <sub>SS</sub> -0.3V ~ V <sub>SS</sub> +7V
V <sub>OUT</sub> , Output voltage	V <sub>SS</sub> -0.3V ~ V <sub>SS</sub> +7V
V <sub>LX</sub> , Output voltage	V <sub>SS</sub> -0.3V ~ V <sub>SS</sub> +7V
I <sub>EXT</sub> , EXT pin Driver Current	200mA
I <sub>LX</sub> , LX pin Switch Current	2.5A
P <sub>D</sub> , Power dissipation	150mW
T <sub>OPR</sub> , Operating ambient temperature	-40°C ~ + 80°C
T <sub>STG</sub> , Storage ambient temperature	-40°C ~ + 125°C

Stress beyond above listed "Absolute Maximum Ratings" may lead permanent damage to the device. These are stress ratings only and operations of the device at these or any other conditions beyond those indicated in the operational sections of the specifications are not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.



## ELECTRICAL CHARACTERISTICS

T<sub>A</sub>=25°C unless otherwise specified

Parameter	Symbol	Conditions	Min	Typ.	Max	Unit
Operation start voltage	V <sub>ST</sub>	I <sub>OUT</sub> =1mA		0.8	1.05	V
V <sub>DD</sub> supply voltage	V <sub>DD</sub>	V <sub>DD</sub> pin voltage	2		6	V
Shut down current	I <sub>OFF</sub>	CE=0, V <sub>IN</sub> =4.5V		0.01	1	μA
Switch-off Current	I <sub>switch-off</sub>	V <sub>IN</sub> =6V		14	25	μA
Continuous Switching Current	I <sub>switch</sub>	V <sub>IN</sub> =CE=3.3V, V <sub>FB</sub> =GND	180	250	450	mA
No load Current	I <sub>no-load</sub>	V <sub>IN</sub> =1.5V, V <sub>OUT</sub> =3.3V		56		μA
Feedback Reference Voltage	V <sub>ref</sub>	Close Loop V <sub>DD</sub> =3.3V	1.225	1.25	1.275	V
Switching Frequency	F <sub>s</sub>	V <sub>DD</sub> =3.3V	425	500	575	KHz
Maximum Duty	D <sub>max</sub>	V <sub>DD</sub> =3.3V	85	95		%
LX on resistance		V <sub>DD</sub> =3.3V		0.2	1.0	Ω
Current Limit Setting	I <sub>limit</sub>	V <sub>DD</sub> =3.3V	1.0	1.5	2.0	A
EXT on resistance to V <sub>DD</sub>		V <sub>DD</sub> =3.3V		4	8.0	Ω
EXT on resistance to GND		V <sub>DD</sub> =3.3V		2.15	8.0	Ω
Line Regulation	ΔV <sub>line</sub>	V <sub>IN</sub> =3.5~6V, I <sub>L</sub> =1mA		0.25	5	mV/V
Load Regulation	ΔV <sub>load</sub>	V <sub>IN</sub> =2.5V, I <sub>L</sub> =1~100mA		0.5		mV/mA
CE pin Trip level		V <sub>DD</sub> =3.3V	0.4	0.8	1.2	V
Temperature Stability for V <sub>OUT</sub>	T <sub>s</sub>			50		Ppm/°C
Thermal Shut down Hysterises	ΔT <sub>sd</sub>			10		°C



## TYPICAL PERFORMANCE CHARACTERISTICS

Figure 1. Efficiency vs. Output Current

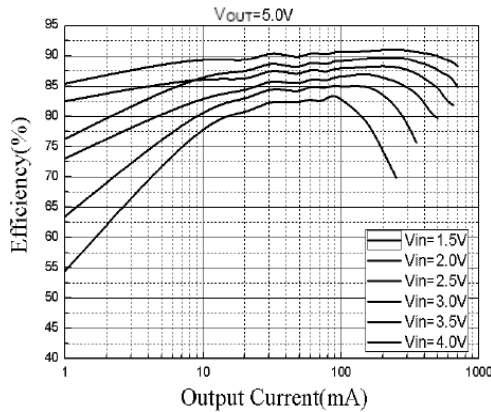


Figure 2. Input current vs. Output current

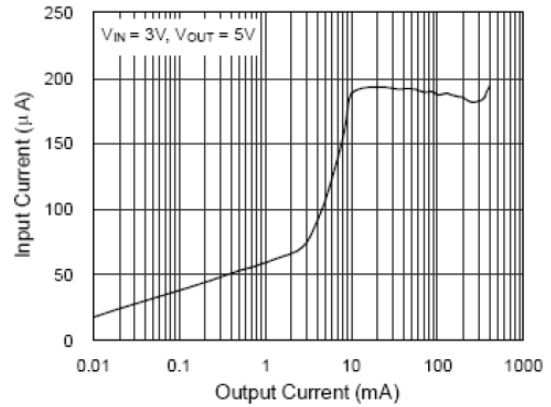


Figure 3. Input Current vs. Input Voltage

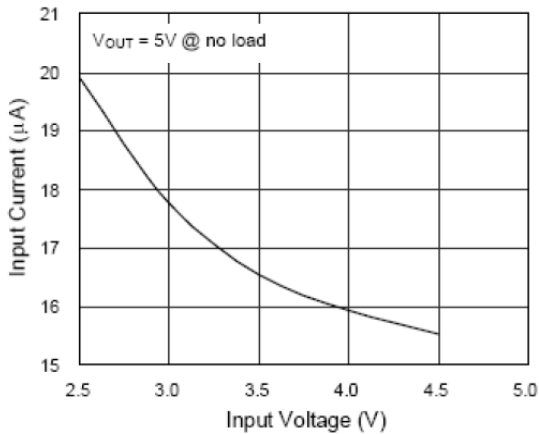


Figure 4. Supply Current I(VIN) vs. Input Voltage

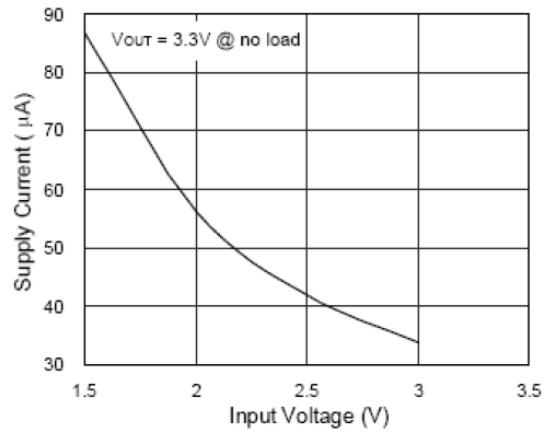


Figure 5. Switching Frequency vs. VDD pin Voltage

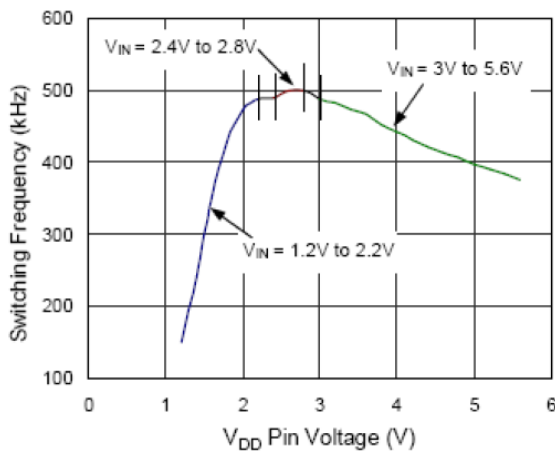


Figure 6. Start up voltage vs. Output Current

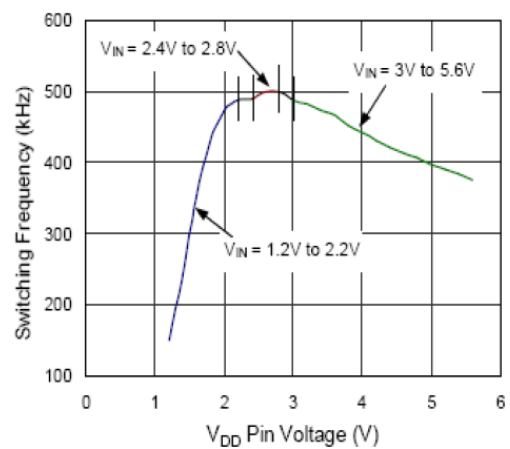




Figure 7. LX pin wave form & Output Ripple

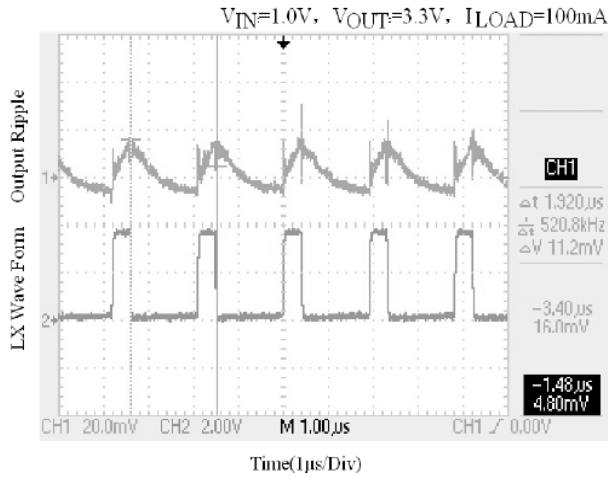


Figure 8. Transient Response


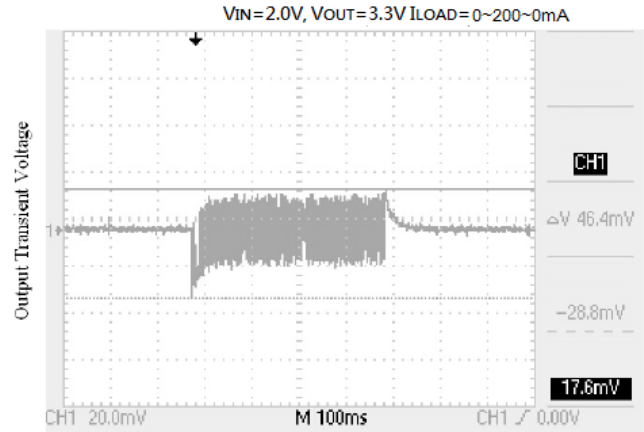


Figure 9 . Output Voltage vs. Temperature



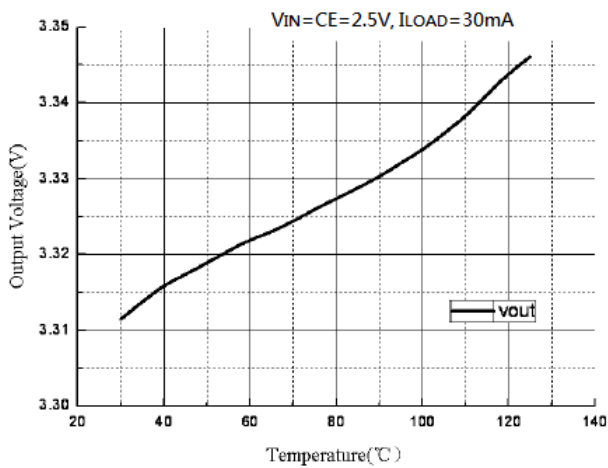

**TEST CIRCUITS**

Figure 10.

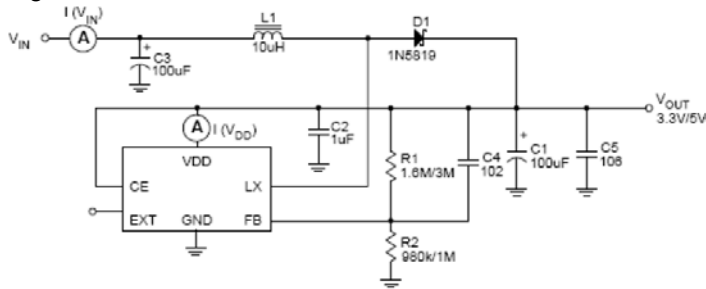


Figure 11. Typical Application for Portable Instruments

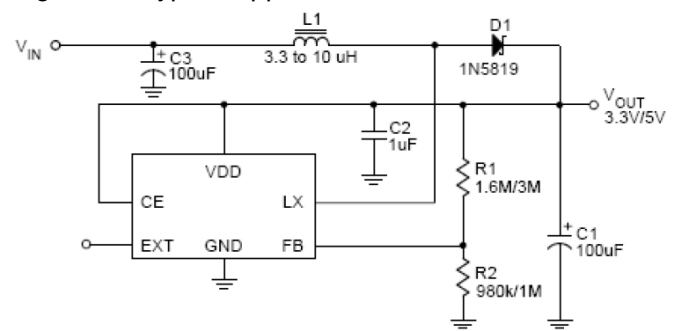


Figure 12. High Voltage Application

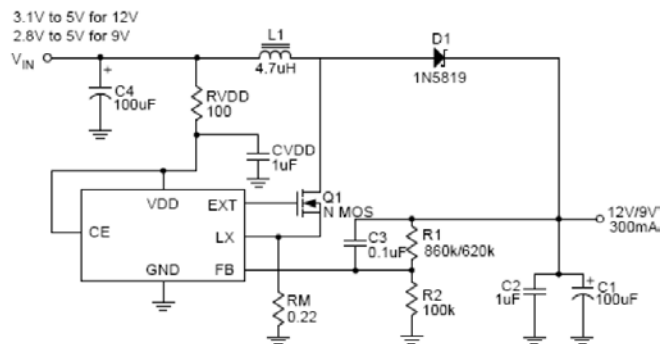


Figure 13. Higher Current Application



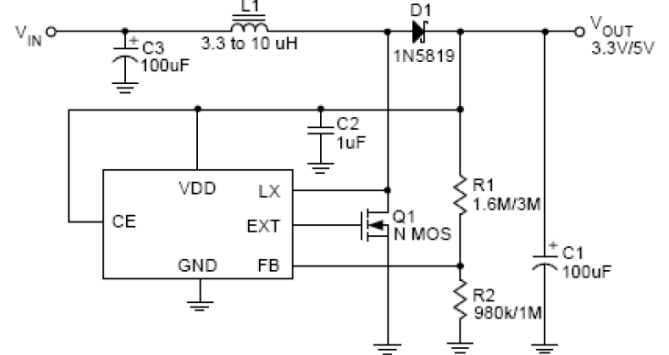


Figure 14. Multi-Output Application



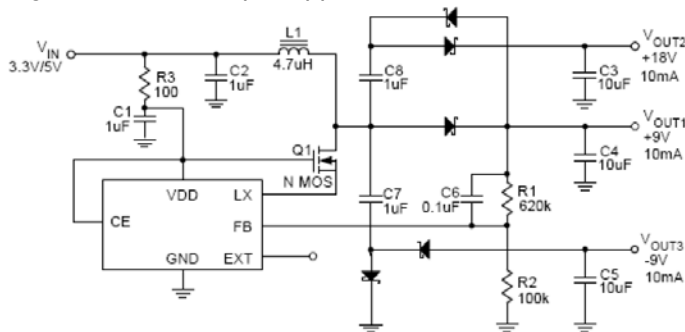

**BLOCK DIAGRAM**

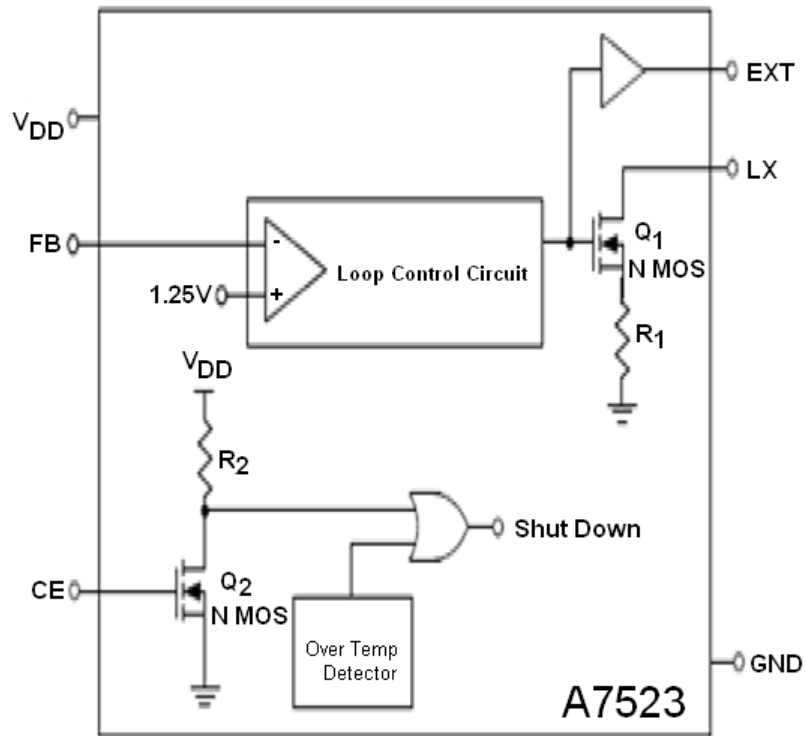






**PACKAGE INFORMATION**

Dimension in SOT-26 Package (Unit: mm)

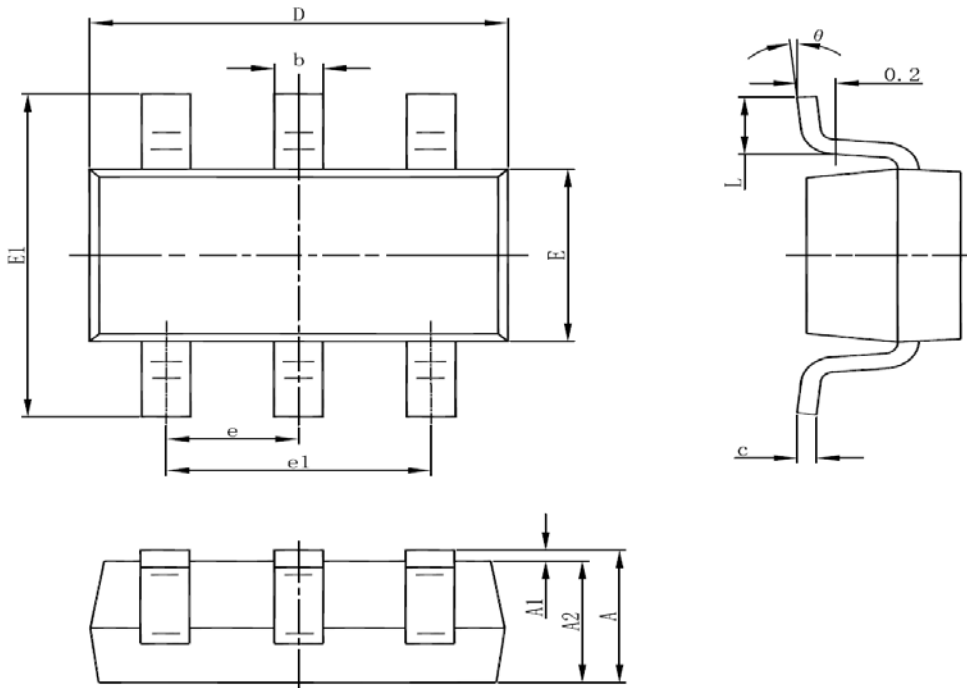

SYMBOL	MIN	MAX
A	1.050	1.250
A1	0.000	0.100
A2	1.050	1.150
b	0.300	0.500
c	0.100	0.200
D	2.820	3.020
E	1.500	1.700
E1	2.650	2.950
e	0.950(BSC)	
e1	1.800	2.000
L	0.300	0.600
θ	0°	8°



## IMPORTANT NOTICE

AiT Semiconductor Inc. (AiT) reserves the right to make changes to any its product, specifications, to discontinue any integrated circuit product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

AiT Semiconductor Inc.'s integrated circuit products are not designed, intended, authorized, or warranted to be suitable for use in life support applications, devices or systems or other critical applications. Use of AiT products in such applications is understood to be fully at the risk of the customer. As used herein may involve potential risks of death, personal injury, or severe property, or environmental damage. In order to minimize risks associated with the customer's applications, the customer should provide adequate design and operating safeguards.

AiT Semiconductor Inc. assumes no liability to customer product design or application support. AiT warrants the performance of its products of the specifications applicable at the time of sale.