



Micro Commercial Components

Micro Commercial Components
20736 Marilla Street Chatsworth
CA 91311

Phone: (818) 701-4933

Fax: (818) 701-4939

SK32BG THRU SK310BG

Features

- For Surface Mount Applications
- Extremely Low Thermal Resistance
- Easy Pick And Place
- High Temp Soldering: 250°C for 10 Seconds At Terminals\
- High Current Capability With Low Forward Voltage

Maximum Ratings

- Operating Temperature: -55°C to +125°C
- Storage Temperature: -55°C to +150°C
- Maximum Thermal Resistance; 10°C/W Junction To Lead

MCC Catalog Number	Device Marking	Maximum Recurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
SK32BG	SK32B	20V	14V	20V
SK33BG	SK33B	30V	21V	30V
SK34BG	SK34B	40V	28V	40V
SK35BG	SK35B	50V	35V	50V
SK36BG	SK36B	60V	42V	60V
SK38BG	SK38B	80V	56V	80V
SK310BG	SK310B	100V	70V	100V


Electrical Characteristics @ 25°C Unless Otherwise Specified

Average Forward Current	$I_{F(AV)}$	3.0A	$T_J = 120^\circ\text{C}$
Peak Forward Surge Current	I_{FSM}	100A	8.3ms, half sine
Maximum Instantaneous Forward Voltage SK32BG-34BG SK35BG-36BG SK38BG-310BG	V_F	.50V .75V .85V	$I_{FM} = 3.0\text{A};$ $T_J = 25^\circ\text{C}^*$
Maximum DC Reverse Current At Rated DC Blocking Voltage	I_R	.5mA 20mA	$T_J = 25^\circ\text{C}$ $T_J = 100^\circ\text{C}$
Typical Junction Capacitance	C_J	45pF	Measured at 1.0MHz, $V_R=4.0\text{V}$

*Pulse test: Pulse width 200 μsec , Duty cycle 2%


3 Amp Schottky Rectifier 20 to 100 Volts

DO-215AA (HSMBG) (Round Lead)

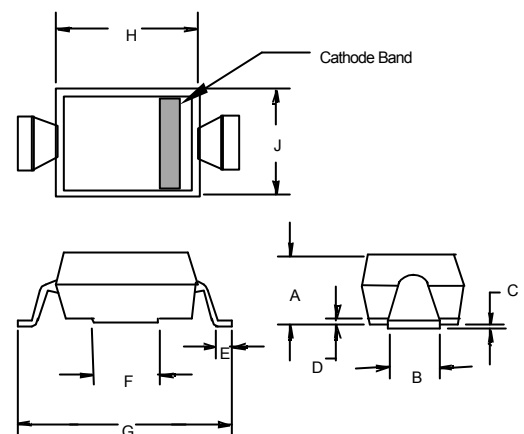


DIMENSIONS					
DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.075	.116	1.90	2.95	
B	.078	.087	1.98	2.21	
C	.002	.008	.05	.20	
D	—	.02	—	.51	
E	.015	.03	.38	.76	
F	.065	.084	1.65	2.13	
G	.245	.276	6.22	7.00	
H	.160	.180	4.06	4.57	
J	.130	.151	3.30	3.83	

SUGGESTED SOLDER PAD LAYOUT

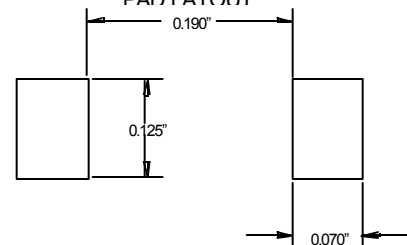


SK32BG thru SK310BG

Figure 1
Typical Forward Characteristics

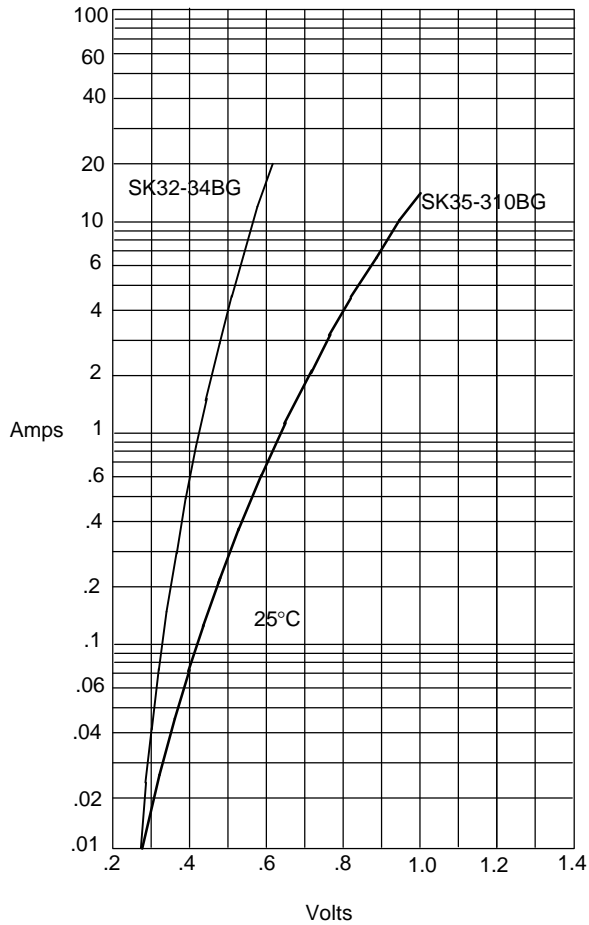


Instantaneous Forward Current - Amperes versus
Instantaneous Forward Voltage - Volts

Figure 2
Forward Derating Curve

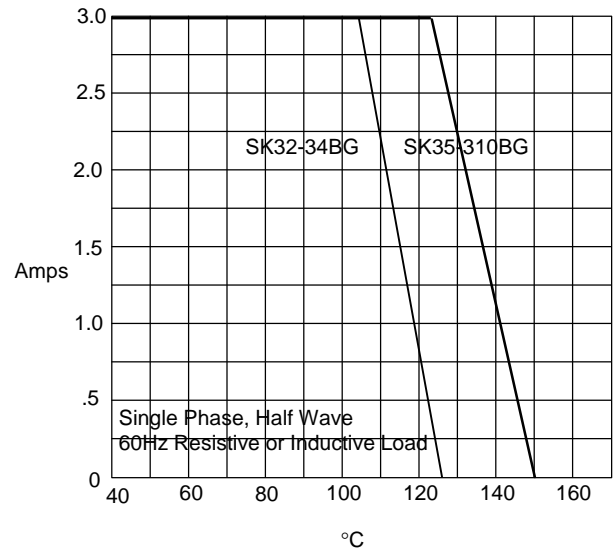

Average Forward Rectified Current - Amperes versus
Ambient Temperature - °C

Figure 3
Junction Capacitance

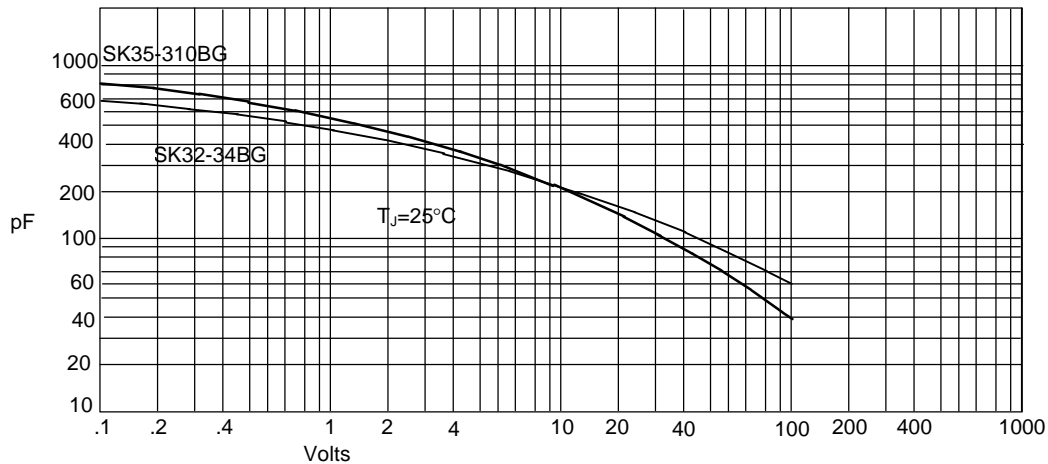

Junction Capacitance - pF versus
Reverse Voltage - Volts


SK32BG thru SK310BG



TM


Micro Commercial Components

Figure 4
Typical Reverse Characteristics

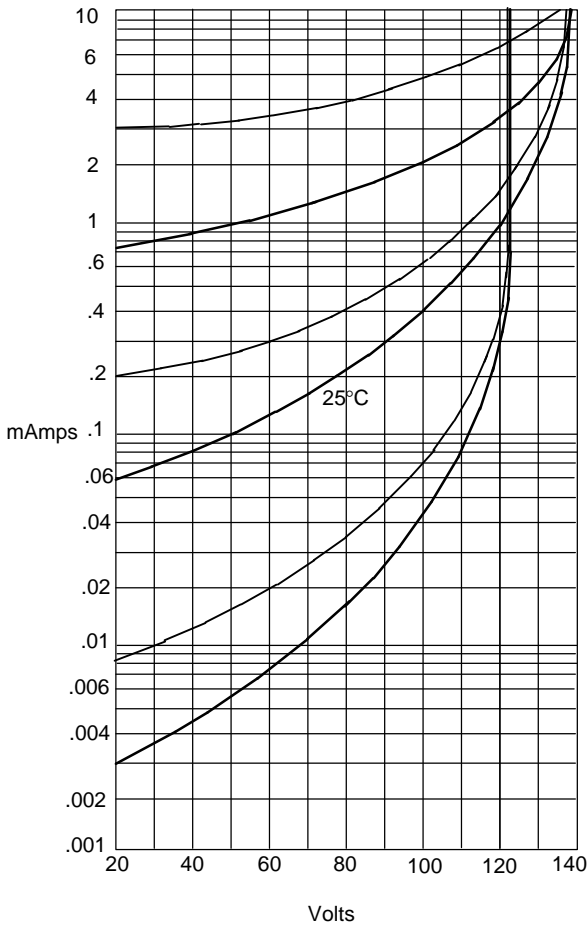

Instantaneous Reverse Leakage Current - MicroAmperes versus
Percent Of Rated Peak Reverse Voltage - Volts

Figure 5
Peak Forward Surge Current

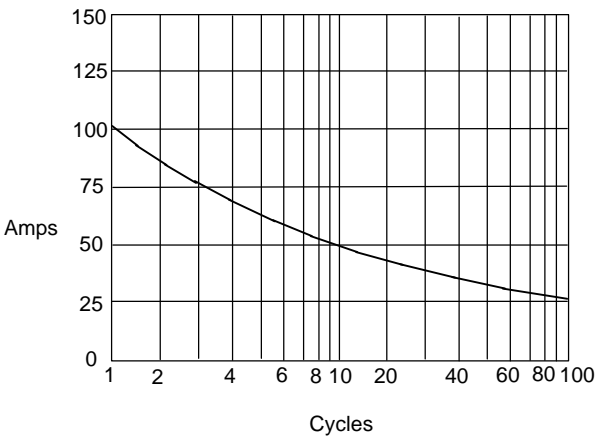

Peak Forward Surge Current - Amperes versus
Number Of Cycles At 60Hz - Cycles

SK32-34BG ———
SK35-310BG ———