

GBAV152


SURFACE MOUNT, SWITCHING DIODE

VOLTAGE 80V, CURRENT 0.1A

Description

The GBAV152 is designed for ultra high speed switching application.

Package Dimensions

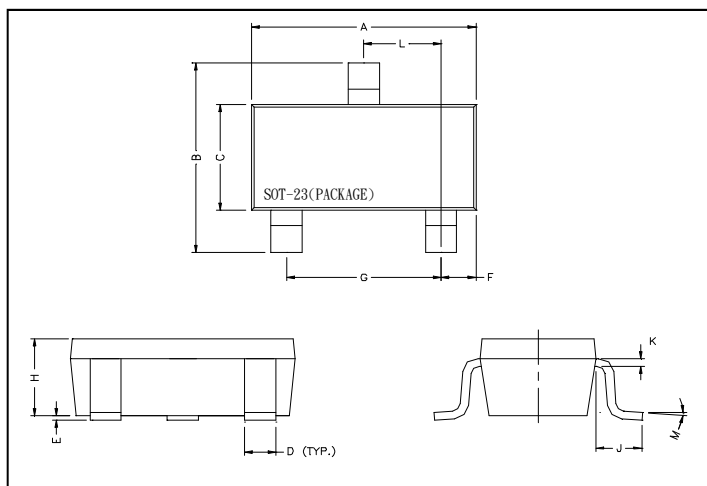

Marking:





Diagram:



REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	2.70	3.10	G	1.90	REF.
B	2.40	2.80	H	1.00	1.30
C	1.40	1.60	K	0.10	0.20
D	0.35	0.50	J	0.40	-
E	0	0.10	L	0.85	1.15
F	0.45	0.55	M	0°	10°


Absolute Maximum Ratings (At TA = 25°C unless otherwise specified)

Parameter	Symbol	Ratings	Unit
Max. Peak Reverse Voltage	V_{RM}	80	V
Max. Reverse Voltage	V_R	80	V
Max. Average Forward Rectified Current	I_o	100	mA
Non-Repetitive Peak Forward surge Current @Tp = 1.0us @Tp = 1.0s	I_{FSM}	225	mA
		500	
Power Dissipation	PD	225	mW
Junction Temperature	T_J	150	°C
Storage Temperature	T_{STG}	-55 ~ +150	°C


Electrical Characteristics (At TA = 25°C unless otherwise noted)

Characteristics	Symbol	Min.	Max.	Unit	Test Conditions
Reverse Breakdown Voltage	$V_{(BR)R}$	80	-	V	$I_R=100\mu A$
Forward Voltage	V_F	-	1.2	V	$I_F=100mA$
Reverse Voltage Leakage Current	I_R	-	100	nA	$V_R=75V$
Diode Capacitance	C_D	-	2.0	pF	$V_R=0V, f=1.0MHz$
Reverse Recovery Time (Figure 1)	t_{rr}	-	3.0	ns	$I_F=10mA, V_R=6V, R_L=100\Omega, I_{rr}=0.1I_R$

RECOVERY TIME EQUIVALENT TEST CIRCUIT

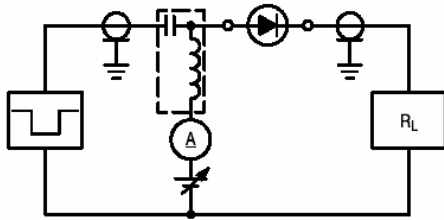

INPUT PULSE

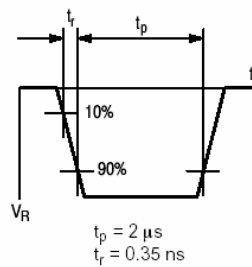

OUTPUT PULSE







Figure 1. Reverse Recovery Time Equivalent Test Circuit

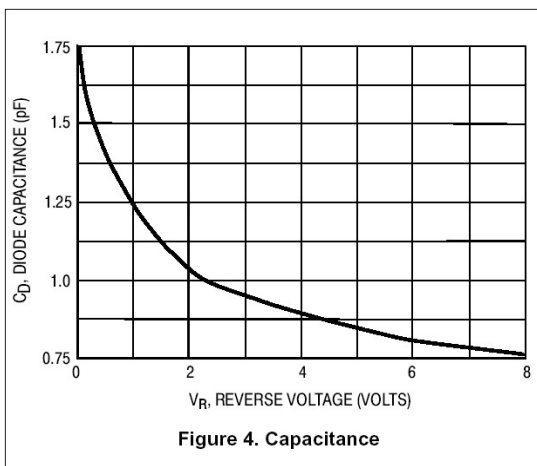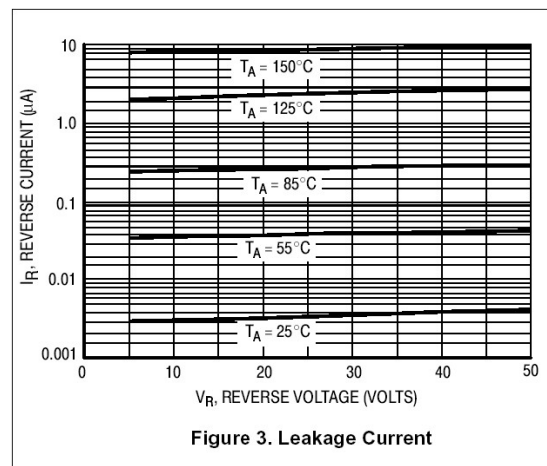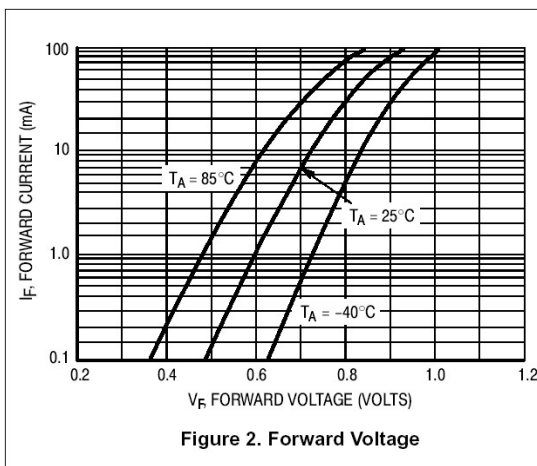

Important Notice:

- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of GTM.
- GTM reserves the right to make changes to its products without notice.
- GTM semiconductor products are not warranted to be suitable for use in life-support Applications, or systems.
- GTM assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.

Head Office And Factory:

- **Taiwan:** No. 17-1 Tatung Rd. Fu Kou Hsin-Chu Industrial Park, Hsin-Chu, Taiwan, R. O. C.
TEL : 886-3-597-7061 FAX : 886-3-597-9220, 597-0785
- **China:** (201203) No.255, Jang-Jiang Tsai-Lueng RD. , Pu-Dung-Hsin District, Shang-Hai City, China
TEL : 86-21-5895-7671 ~ 4 FAX : 86-21-38950165