

FEATURES

- SNR = 60.1 dBFS @ f_{IN} up to 70 MHz @ 300 MSPS**
- ENOB of 9.7 @ f_{IN} up to 70 MHz @ 300 MSPS (-1.0 dBFS)**
- SFDR = -80 dBc @ f_{IN} up to 70 MHz @ 300 MSPS (-1.0 dBFS)**
- Excellent linearity**
 - DNL = ± 0.1 LSB typical**
 - INL = ± 0.2 LSB typical**
- LVDS at 300 MSPS (ANSI-644 levels)**
- 700 MHz full power analog bandwidth**
- On-chip reference, no external decoupling required**
- Integrated input buffer and track-and-hold**
- Low power dissipation**
 - 437 mW @ 300 MSPS—LVDS SDR mode**
 - 410 mW @ 300 MSPS—LVDS DDR mode**
- Programmable input voltage range**
 - 1.0 V to 1.5 V, 1.25 V nominal**
- 1.8 V analog and digital supply operation**
- Selectable output data format (offset binary, twos complement, Gray code)**
- Clock duty cycle stabilizer**
- Integrated data capture clock**

APPLICATIONS

- Wireless and wired broadband communications**
- Cable reverse path**
- Communications test equipment**
- Radar and satellite subsystems**
- Power amplifier linearization**

GENERAL DESCRIPTION

The AD9211 is a 10-bit monolithic sampling analog-to-digital converter optimized for high performance, low power, and ease of use. The product operates at up to a 300 MSPS conversion rate and is optimized for outstanding dynamic performance in wideband carrier and broadband systems. All necessary functions, including a track-and-hold (T/H) and voltage reference, are included on the chip to provide a complete signal conversion solution.

The ADC requires a 1.8 V analog voltage supply and a differential clock for full performance operation. The digital outputs are LVDS (ANSI-644) compatible and support either twos complement, offset binary format, or Gray code. A data clock output is available for proper output data timing.

Fabricated on an advanced CMOS process, the AD9211 is available in a 56-lead LFCSP, specified over the industrial temperature range (-40°C to $+85^{\circ}\text{C}$).

Rev. 0

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

FUNCTIONAL BLOCK DIAGRAM

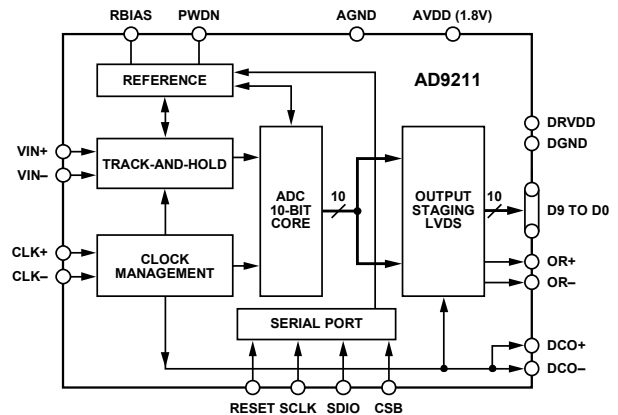


Figure 1.

PRODUCT HIGHLIGHTS

1. High Performance—Maintains 60.1 dBFS SNR @ 300 MSPS with a 70 MHz input.
2. Low Power—Consumes only 410 mW @ 300 MSPS.
3. Ease of Use—LVDS output data and output clock signal allow interface to current FPGA technology. The on-chip reference and sample-and-hold provide flexibility in system design. Use of a single 1.8 V supply simplifies system power supply design.
4. Serial Port Control—Standard serial port interface supports various product functions, such as data formatting, disabling the clock duty cycle stabilizer, power-down, gain adjust, and output test pattern generation.
5. Pin-Compatible Family—12-bit pin-compatible family offered as AD9230.

AD9211* Product Page Quick Links

Last Content Update: 11/01/2016

Comparable Parts

View a parametric search of comparable parts

Evaluation Kits

- AD9211 Evaluation Board

Documentation

Application Notes

- AN-1142: Techniques for High Speed ADC PCB Layout
- AN-282: Fundamentals of Sampled Data Systems
- AN-345: Grounding for Low-and-High-Frequency Circuits
- AN-501: Aperture Uncertainty and ADC System Performance
- AN-586: LVDS Outputs for High Speed A/D Converters
- AN-715: A First Approach to IBIS Models: What They Are and How They Are Generated
- AN-737: How ADIsimADC Models an ADC
- AN-741: Little Known Characteristics of Phase Noise
- AN-742: Frequency Domain Response of Switched-Capacitor ADCs
- AN-756: Sampled Systems and the Effects of Clock Phase Noise and Jitter
- AN-807: Multicarrier WCDMA Feasibility
- AN-808: Multicarrier CDMA2000 Feasibility
- AN-812: MicroController-Based Serial Port Interface (SPI) Boot Circuit
- AN-827: A Resonant Approach to Interfacing Amplifiers to Switched-Capacitor ADCs
- AN-835: Understanding High Speed ADC Testing and Evaluation
- AN-878: High Speed ADC SPI Control Software
- AN-905: Visual Analog Converter Evaluation Tool Version 1.0 User Manual
- AN-935: Designing an ADC Transformer-Coupled Front End

Data Sheet

- AD9211: 10-Bit, 200 MSPS/250 MSPS/300 MSPS, 1.8 V Analog-to-Digital Converter Data Sheet

Tools and Simulations

- Visual Analog
- AD9211 IBIS Models

Reference Materials

Technical Articles

- MS-2210: Designing Power Supplies for High Speed ADC

Design Resources

- AD9211 Material Declaration
- PCN-PDN Information
- Quality And Reliability
- Symbols and Footprints

Discussions

View all AD9211 EngineerZone Discussions

Sample and Buy

Visit the product page to see pricing options

Technical Support

Submit a technical question or find your regional support number

TABLE OF CONTENTS

| | | | |
|--|----|---|----|
| Features | 1 | Theory of Operation | 19 |
| Applications | 1 | Analog Input and Voltage Reference | 19 |
| Functional Block Diagram | 1 | Clock Input Considerations | 20 |
| General Description | 1 | Power Dissipation and Power-Down Mode | 21 |
| Product Highlights | 1 | Digital Outputs | 21 |
| Revision History | 2 | Timing | 22 |
| Specifications | 3 | RBIAS | 22 |
| DC Specifications | 3 | AD9211 Configuration Using the SPI | 22 |
| AC Specifications | 4 | Hardware Interface | 23 |
| Digital Specifications | 5 | Configuration Without the SPI | 23 |
| Switching Specifications | 6 | Memory Map | 25 |
| Timing Diagrams | 7 | Reading the Memory Map Table | 25 |
| Absolute Maximum Ratings | 8 | Reserved Locations | 25 |
| Thermal Resistance | 8 | Default Values | 25 |
| ESD Caution | 8 | Logic Levels | 25 |
| Pin Configurations and Function Descriptions | 9 | Outline Dimensions | 28 |
| Typical Performance Characteristics | 13 | Ordering Guide | 28 |
| Equivalent Circuits | 18 | | |

REVISION HISTORY

5/07—Revision 0: Initial Version

SPECIFICATIONS

DC SPECIFICATIONS

AVDD = 1.8 V, DRVDD = 1.8 V, T_{MIN} = -40°C, T_{MAX} = +85°C, f_{IN} = -1.0 dBFS, full scale = 1.25 V, DCS enabled, unless otherwise noted.

Table 1.

| Parameter ¹ | Temp | AD9211-200 | | | AD9211-250 | | | AD9211-300 | | | Unit |
|--|------|------------|------|------|------------|------|------|------------|------|------|-------|
| | | Min | Typ | Max | Min | Typ | Max | Min | Typ | Max | |
| RESOLUTION | | 10 | | | 10 | | | 10 | | | Bits |
| ACCURACY | | Guaranteed | | | Guaranteed | | | Guaranteed | | | |
| No Missing Codes | Full | Guaranteed | | | Guaranteed | | | Guaranteed | | | |
| Offset Error | 25°C | 4.3 | | | 4.6 | | | 4.4 | | | mV |
| | Full | -12 | | +12 | -13 | | +13 | -13 | | +13 | mV |
| Gain Error | 25°C | 1.0 | | | 1.3 | | | 1.1 | | | % FS |
| | Full | -2.2 | | +4.3 | -2.2 | | +4.3 | -2.2 | | +4.3 | % FS |
| Differential Nonlinearity (DNL) | 25°C | ±0.1 | | | ±0.1 | | | ±0.1 | | | LSB |
| | Full | -0.5 | | +0.5 | -0.5 | | +0.5 | -0.5 | | +0.5 | LSB |
| Integral Nonlinearity (INL) | 25°C | ±0.2 | | | ±0.2 | | | ±0.2 | | | LSB |
| | Full | -0.35 | | 0.35 | -0.45 | | 0.45 | -0.7 | | +0.7 | LSB |
| TEMPERATURE DRIFT | | | | | | | | | | | |
| Offset Error | Full | ±8 | | | ±7 | | | ±6 | | | μV/°C |
| Gain Error | Full | 0.018 | | | 0.018 | | | 0.018 | | | %/°C |
| ANALOG INPUTS (VIN+, VIN-) | | | | | | | | | | | |
| Differential Input Voltage Range ² | Full | 0.98 | 1.25 | 1.5 | 0.98 | 1.25 | 1.5 | 0.98 | 1.25 | 1.5 | V p-p |
| Input Common-Mode Voltage | Full | 1.4 | | | 1.4 | | | 1.4 | | | V |
| Input Resistance (Differential) | Full | 4.3 | | | 4.3 | | | 4.3 | | | kΩ |
| Input Capacitance | 25°C | 2 | | | 2 | | | 2 | | | pF |
| POWER SUPPLY | | | | | | | | | | | |
| AVDD | Full | 1.7 | 1.8 | 1.9 | 1.7 | 1.8 | 1.9 | 1.7 | 1.8 | 1.9 | V |
| DRVDD | Full | 1.7 | 1.8 | 1.9 | 1.7 | 1.8 | 1.9 | 1.7 | 1.8 | 1.9 | V |
| Supply Currents | | | | | | | | | | | |
| I _{AVDD} ³ | Full | | 134 | 144 | | 158 | 169 | | 189 | 203 | mA |
| I _{DRVDD} ³ /SDR Mode ⁴ | Full | | 51 | 54 | | 53 | 55 | | 54 | 57 | mA |
| I _{DRVDD} ³ /DDR Mode ⁵ | Full | | 35 | | | 38 | | | 39 | | mA |
| Power Dissipation ³ | Full | | | | | | | | | | mW |
| SDR Mode ⁴ | Full | | 333 | 356 | | 380 | 403 | | 437 | 468 | mW |
| DDR Mode ⁵ | Full | | 304 | | | 353 | | | 410 | | mW |

¹ See the AN-835 application note, *Understanding High Speed ADC Testing and Evaluation*, for a complete set of definitions and how these tests were completed.

² The input range is programmable through the SPI, and the range specified reflects the nominal values of each setting. See the Memory Map section.

³ I_{AVDD} and I_{DRVDD} are measured with a -1 dBFS, 10.3 MHz sine input at rated sample rate.

⁴ Single data rate mode; this is the default mode of the AD9211.

⁵ Double data rate mode; user-programmable feature. See the Memory Map section.

AD9211

AC SPECIFICATIONS¹

AVDD = 1.8 V, DRVDD = 1.8 V, T_{MIN} = -40°C, T_{MAX} = +85°C, f_{IN} = -1.0 dBFS, full scale = 1.25 V, DCS enabled, unless otherwise noted.

Table 2.

| Parameter ² | Temp | AD9211-200 | | | AD9211-250 | | | AD9211-300 | | | Unit |
|--|------|------------|------|-----|------------|------|-----|------------|------|-----|------|
| | | Min | Typ | Max | Min | Typ | Max | Min | Typ | Max | |
| SNR | | | | | | | | | | | |
| f _{IN} = 10 MHz | 25°C | 59.0 | 59.5 | | 58.9 | 59.4 | | 58.6 | 59.2 | | dB |
| | Full | 58.9 | | | 58.7 | | | 57.5 | | | dB |
| f _{IN} = 70 MHz | 25°C | 58.9 | 59.3 | | 58.8 | 59.3 | | 58.5 | 59.1 | | dB |
| | Full | 58.8 | | | 58.7 | | | 57.0 | | | dB |
| f _{IN} = 170 MHz | 25°C | 58.5 | 59.0 | | 58.5 | 59.0 | | 58.3 | 58.7 | | dB |
| | Full | 58.4 | | | 58.4 | | | 57.0 | | | dB |
| SINAD | | | | | | | | | | | |
| f _{IN} = 10 MHz | 25°C | 59.0 | 59.5 | | 58.9 | 59.4 | | 58.6 | 59.1 | | dB |
| | Full | 58.9 | | | 58.7 | | | 57.3 | | | dB |
| f _{IN} = 70 MHz | 25°C | 58.8 | 59.2 | | 58.8 | 59.2 | | 58.4 | 59.0 | | dB |
| | Full | 58.7 | | | 58.6 | | | 57.0 | | | dB |
| f _{IN} = 170 MHz | 25°C | 58.2 | 58.8 | | 58.2 | 59.0 | | 58.2 | 58.8 | | dB |
| | Full | 58.1 | | | 58.1 | | | 56.7 | | | dB |
| EFFECTIVE NUMBER OF BITS (ENOB) | | | | | | | | | | | |
| f _{IN} = 10 MHz | 25°C | | 9.8 | | | 9.7 | | | 9.7 | | Bits |
| f _{IN} = 70 MHz | 25°C | | 9.7 | | | 9.7 | | | 9.7 | | Bits |
| f _{IN} = 170 MHz | 25°C | | 9.6 | | | 9.7 | | | 9.6 | | Bits |
| WORST HARMONIC (Second or Third) | | | | | | | | | | | |
| f _{IN} = 10 MHz | 25°C | | -85 | -78 | | -86 | -79 | | -80 | -75 | dBc |
| | Full | | | -78 | | | -77 | | | -70 | dBc |
| f _{IN} = 70 MHz | 25°C | | -77 | -75 | | -80 | -76 | | -80 | -74 | dBc |
| | Full | | | -75 | | | -74 | | | -67 | dBc |
| f _{IN} = 170 MHz | 25°C | | -77 | -72 | | -79 | -70 | | -80 | -73 | dBc |
| | Full | | | -72 | | | -70 | | | -67 | dBc |
| WORST OTHER (SFDR Excluding Second and Third) | | | | | | | | | | | |
| f _{IN} = 10 MHz | 25°C | | -86 | -82 | | -82 | -80 | | -82 | -75 | dBc |
| | Full | | | -82 | | | -77 | | | -70 | dBc |
| f _{IN} = 70 MHz | 25°C | | -83 | -81 | | -82 | -79 | | -80 | -75 | dBc |
| | Full | | | -81 | | | -77 | | | -71 | dBc |
| f _{IN} = 170 MHz | 25°C | | -81 | -74 | | -79 | -77 | | -80 | -75 | dBc |
| | Full | | | -74 | | | -75 | | | -70 | dBc |
| TWO-TONE IMD | | | | | | | | | | | |
| 140.2 MHz/141.3 MHz @ -7 dBFS | 25°C | | -78 | | | -87 | | | -81 | | dBc |
| 170.2 MHz/171.3 MHz @ -7 dBFS | 25°C | | -86 | | | -82 | | | -82 | | dBc |
| ANALOG INPUT BANDWIDTH | 25°C | | 700 | | | 700 | | | 700 | | MHz |

¹ All ac specifications tested by driving CLK+ and CLK- differentially.

² See the AN-835 application note, *Understanding High Speed ADC Testing and Evaluation*, for a complete set of definitions and how these tests were completed.

DIGITAL SPECIFICATIONS

AVDD = 1.8 V, DRVDD = 1.8 V, T_{MIN} = -40°C, T_{MAX} = +85°C, f_{IN} = -1.0 dBFS, full scale = 1.25 V, DCS enabled, unless otherwise noted.

Table 3.

| Parameter ¹ | Temp | AD9211-200 | | | AD9211-250 | | | AD9211-300 | | | Unit |
|--|------|--|-----|------------|------------------|-----|------------|------------------|-----|------------|-------|
| | | Min | Typ | Max | Min | Typ | Max | Min | Typ | Max | |
| CLOCK INPUTS | | | | | | | | | | | |
| Logic Compliance | Full | CMOS/LVDS/LVPECL | | | CMOS/LVDS/LVPECL | | | CMOS/LVDS/LVPECL | | | |
| Internal Common-Mode Bias | Full | 1.2 | | | 1.2 | | | 1.2 | | | V |
| Differential Input Voltage | Full | 0.2 | | 6 | 0.2 | | 6 | 0.2 | | 6 | V p-p |
| Input Voltage Range | Full | AVDD - 0.3 | | AVDD + 1.6 | AVDD - 0.3 | | AVDD + 1.6 | AVDD - 0.3 | | AVDD + 1.6 | V |
| Input Common-Mode Range | Full | 1.1 | | AVDD | 1.1 | | AVDD | 1.1 | | AVDD | V |
| High Level Input Voltage (V _{IH}) | Full | 1.2 | | 3.6 | 1.2 | | 3.6 | 1.2 | | 3.6 | V |
| Low Level Input Voltage (V _{IL}) | Full | 0 | | 0.8 | 0 | | 0.8 | 0 | | 0.8 | V |
| High Level Input Current (I _{IH}) | Full | -10 | | +10 | -10 | | +10 | -10 | | +10 | μA |
| Low Level Input Current (I _{IL}) | Full | -10 | | +10 | -10 | | +10 | -10 | | +10 | μA |
| Input Resistance (Differential) | Full | 16 | 20 | 24 | 16 | 20 | 24 | 16 | 20 | 24 | kΩ |
| Input Capacitance | Full | 4 | | | 4 | | | 4 | | | pF |
| LOGIC INPUTS | | | | | | | | | | | |
| Logic 1 Voltage | Full | 0.8 × VDD | | | 0.8 × VDD | | | 0.8 × VDD | | | V |
| Logic 0 Voltage | Full | 0.2 × AVDD | | | 0.2 × AVDD | | | 0.2 × AVDD | | | V |
| Logic 1 Input Current (SDIO) | Full | 0 | | | 0 | | | 0 | | | μA |
| Logic 0 Input Current (SDIO) | Full | -60 | | | -60 | | | -60 | | | μA |
| Logic 1 Input Current (SCLK, PWDN, CSB, RESET) | Full | 55 | | | 55 | | | 50 | | | μA |
| Logic 0 Input Current (SCLK, PWDN, CSB, RESET) | Full | 0 | | | 0 | | | 0 | | | μA |
| Input Capacitance | 25°C | 4 | | | 4 | | | 4 | | | pF |
| LOGIC OUTPUTS ² | | | | | | | | | | | |
| V _{OD} Differential Output Voltage | Full | 247 | | 454 | 247 | | 454 | 247 | | 454 | mV |
| V _{OS} Output Offset Voltage | Full | 1.125 | | 1.375 | 1.125 | | 1.375 | 1.125 | | 1.375 | V |
| Output Coding | | Twos complement, Gray code, or offset binary (default) | | | | | | | | | |

¹ See the AN-835 application note, *Understanding High Speed ADC Testing and Evaluation*, for a complete set of definitions and how these tests were completed.

² LVDS R_{TERMINATION} = 100 Ω.

AD9211

SWITCHING SPECIFICATIONS

AVDD = 1.8 V, DRVDD = 1.8 V, T_{MIN} = -40°C, T_{MAX} = +85°C, f_{IN} = -1.0 dBFS, full scale = 1.25 V, DCS enabled, unless otherwise noted.

Table 4.

| Parameter (Conditions) | Temp | AD9211-200 | | | AD9211-250 | | | AD921-300 | | | Unit |
|--|------|------------|------|------|------------|------|------|-----------|------|------|--------|
| | | Min | Typ | Max | Min | Typ | Max | Min | Typ | Max | |
| Maximum Conversion Rate | Full | 200 | | | 250 | | | 300 | | | MSPS |
| Minimum Conversion Rate | Full | | | 40 | | | 40 | | | 40 | MSPS |
| CLK+ Pulse Width High (t _{CH}) | Full | 2.25 | 2.5 | | 1.8 | 2.0 | | 1.5 | 1.7 | | ns |
| CLK+ Pulse Width Low (t _{CL}) | Full | 2.25 | 2.5 | | 1.8 | 2.0 | | 1.5 | 1.7 | | ns |
| Output (LVDS – SDR Mode) ¹ | | | | | | | | | | | |
| Data Propagation Delay (t _{PD}) | Full | | 3.0 | | | 3.0 | | | 3.0 | | ns |
| Rise Time (t _R) (20% to 80%) | 25°C | | 0.2 | | | 0.2 | | | 0.2 | | ns |
| Fall Time (t _F) (20% to 80%) | 25°C | | 0.2 | | | 0.2 | | | 0.2 | | ns |
| DCO Propagation Delay (t _{CPD}) | Full | | 3.9 | | | 3.9 | | | 3.9 | | ns |
| Data to DCO Skew (t _{SKEW}) | Full | -0.3 | +0.1 | +0.5 | -0.3 | +0.1 | +0.5 | -0.3 | +0.1 | +0.5 | ns |
| Latency | Full | | 7 | | | 7 | | | 7 | | Cycles |
| Output (LVDS – DDR Mode) ² | | | | | | | | | | | |
| Data Propagation Delay (t _{PD}) | Full | | 3.8 | | | 3.8 | | | 3.8 | | ns |
| Rise Time (t _R) (20% to 80%) | 25°C | | 0.2 | | | 0.2 | | | 0.2 | | ns |
| Fall Time (t _F) (20% to 80%) | 25°C | | 0.2 | | | 0.2 | | | 0.2 | | ns |
| DCO Propagation Delay (t _{CPD}) | Full | | 3.9 | | | 3.9 | | | 3.9 | | ns |
| Data to DCO Skew (t _{SKEW}) | Full | -0.5 | +0.1 | +0.3 | -0.5 | +0.1 | +0.3 | -0.5 | +0.1 | +0.3 | ns |
| Latency | Full | | 7 | | | 7 | | | 7 | | Cycles |
| Aperture Uncertainty (Jitter, t _J) | 25°C | | 0.2 | | | 0.2 | | | | | ps rms |

¹ See Figure 2.

² See Figure 3.

TIMING DIAGRAMS

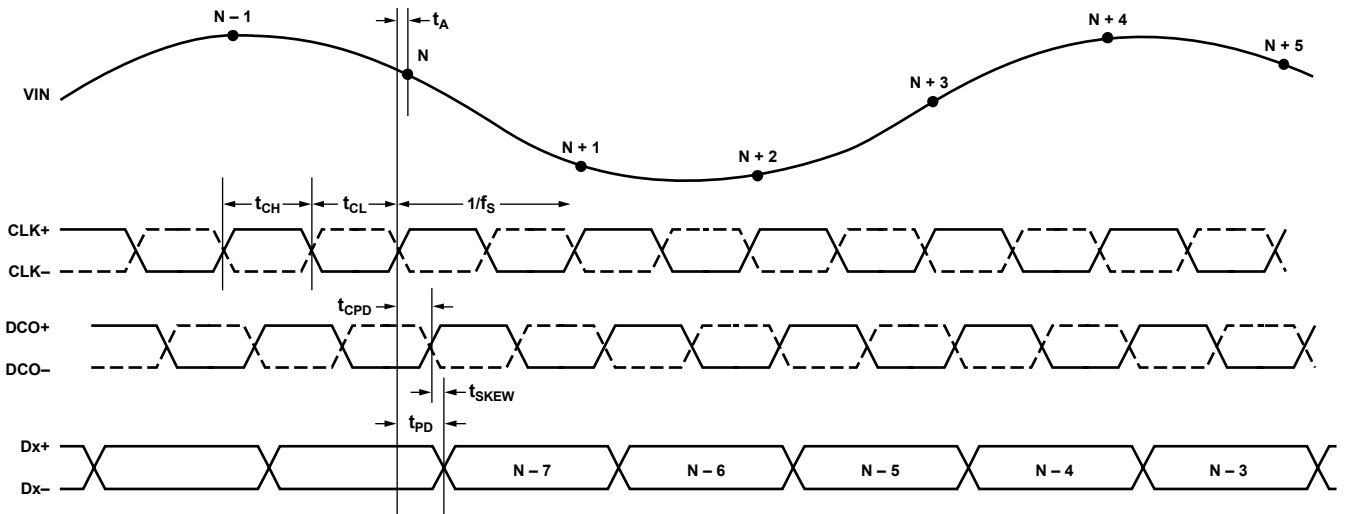


Figure 2. Single Data Rate Mode

06041-002

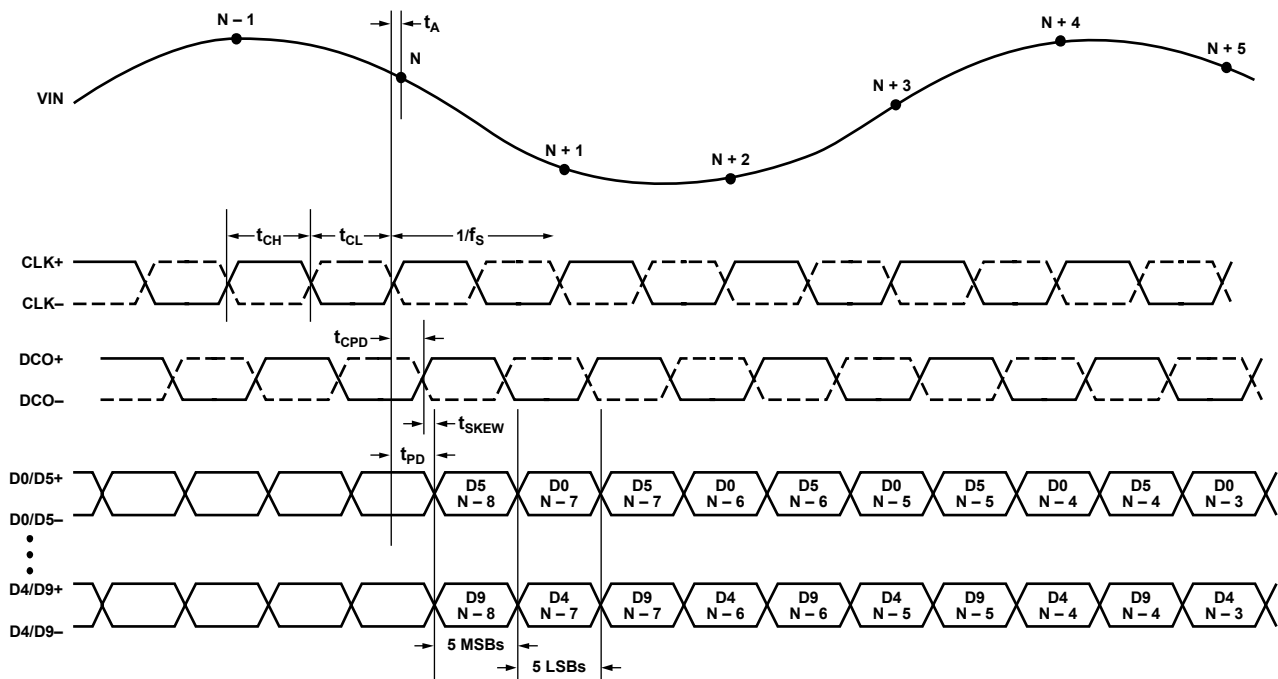


Figure 3. Double Data Rate Mode

06041-003

ABSOLUTE MAXIMUM RATINGS

Table 5.

| Parameter | Rating |
|--|-------------------------|
| ELECTRICAL | |
| AVDD to AGND | −0.3 V to +2.0 V |
| DRVDD to DRGND | −0.3 V to +2.0 V |
| AGND to DRGND | −0.3 V to +0.3 V |
| AVDD to DRVDD | −2.0 V to +2.0 V |
| D0+/D0− through D9+/D9− to DRGND | −0.3 V to DRVDD + 0.3 V |
| DCO to DRGND | −0.3 V to DRVDD + 0.3 V |
| OR to DGND | −0.3 V to DRVDD + 0.3 V |
| CLK+ to AGND | −0.3 V to +3.9 V |
| CLK− to AGND | −0.3 V to +3.9 V |
| VIN+ to AGND | −0.3 V to AVDD + 0.2 V |
| VIN− to AGND | −0.3 V to AVDD + 0.2 V |
| SDIO/DCS to DGND | −0.3 V to DRVDD + 0.3 V |
| PWDN to AGND | −0.3 V to +3.9 V |
| CSB to AGND | −0.3 V to +3.9 V |
| SCLK/DFS to AGND | −0.3 V to +3.9 V |
| ENVIRONMENTAL | |
| Storage Temperature Range | −65°C to +125°C |
| Operating Temperature Range | −40°C to +85°C |
| Lead Temperature (Soldering 10 sec) | 300°C |
| Junction Temperature | 150°C |

Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those indicated in the operational section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

THERMAL RESISTANCE

The exposed paddle must be soldered to the ground plane for the LFCSP package. Soldering the exposed paddle to the customer board increases the reliability of the solder joints, maximizing the thermal capability of the package.

Table 6.

| Package Type | θ_{JA} | θ_{JC} | Unit |
|-------------------------|---------------|---------------|------|
| 56-Lead LFCSP (CP-56-2) | 30.4 | 2.9 | °C/W |

Typical θ_{JA} and θ_{JC} are specified for a 4-layer board in still air. Airflow increases heat dissipation, effectively reducing θ_{JA} . In addition, metal in direct contact with the package leads from metal traces, and through holes, ground, and power planes reduces the θ_{JA} .

ESD CAUTION



ESD (electrostatic discharge) sensitive device. Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

PIN CONFIGURATIONS AND FUNCTION DESCRIPTIONS

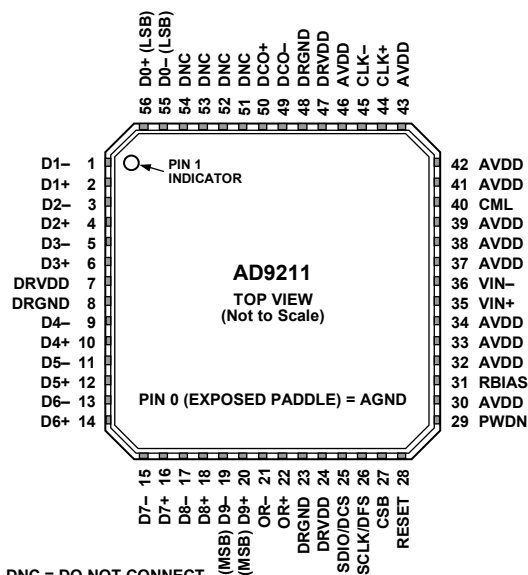


Figure 4. AD9211 Single Data Rate Mode Pin Configuration

Table 7. Single Data Rate Mode Pin Function Descriptions

| Pin No. | Mnemonic | Description |
|--------------------------------------|--------------------|---|
| 30, 32 to 34, 37 to 39, 41 to 43, 46 | AVDD | 1.8 V Analog Supply. |
| 7, 24, 47 | DRVDD | 1.8 V Digital Output Supply. |
| 0 | AGND ¹ | Analog Ground. |
| 8, 23, 48 | DRGND ¹ | Digital Output Ground. |
| 35 | VIN+ | Analog Input—True. |
| 36 | VIN– | Analog Input—Complement. |
| 40 | CML | Common-Mode Output Pin. Enabled through the SPI, this pin provides a reference for the optimized internal bias voltage for VIN+/VIN–. |
| 44 | CLK+ | Clock Input—True. |
| 45 | CLK– | Clock Input—Complement. |
| 31 | RBIAS | Set Pin for Chip Bias Current. (Place 1% 10 kΩ resistor terminated to ground.) Nominally 0.5 V. |
| 28 | RESET | CMOS-Compatible Chip Reset (Active Low). |
| 25 | SDIO/DCS | Serial Port Interface (SPI) Data Input/Output (Serial Port Mode); Duty Cycle Stabilizer Select (External Pin Mode). |
| 26 | SCLK/DFS | Serial Port Interface Clock (Serial Port Mode); Data Format Select Pin (External Pin Mode). |
| 27 | CSB | Serial Port Chip Select (Active Low). |
| 29 | PWDN | Chip Power-Down. |
| 49 | DCO– | Data Clock Output—Complement. |
| 50 | DCO+ | Data Clock Output—True. |
| 51 to 54 | DNC | Do Not Connect. |
| 55 | D0– | D0 Complement Output Bit (LSB). |
| 56 | D0+ | D0 True Output Bit (LSB). |
| 1 | D1– | D1 Complement Output Bit. |
| 2 | D1+ | D1 True Output Bit. |
| 3 | D2– | D2 Complement Output Bit. |
| 4 | D2+ | D2 True Output Bit. |
| 5 | D3– | D3 Complement Output Bit. |
| 6 | D3+ | D3 True Output Bit. |
| 9 | D4– | D4 Complement Output Bit. |
| 10 | D4+ | D4 True Output Bit. |

AD9211

| Pin No. | Mnemonic | Description |
|---------|----------|----------------------------------|
| 11 | D5- | D5 Complement Output Bit. |
| 12 | D5+ | D5 True Output Bit. |
| 13 | D6- | D6 Complement Output Bit. |
| 14 | D6+ | D6 True Output Bit. |
| 15 | D7- | D7 Complement Output Bit. |
| 16 | D7+ | D7 True Output Bit. |
| 17 | D8- | D8 Complement Output Bit. |
| 18 | D8+ | D8 True Output Bit. |
| 19 | D9- | D9 Complement Output Bit (MSB). |
| 20 | D9+ | D9 True Output Bit (MSB). |
| 21 | OR- | Overrange Complement Output Bit. |
| 22 | OR+ | Overrange True Output Bit. |

¹ AGND and DRGND should be tied to a common quiet ground plane.

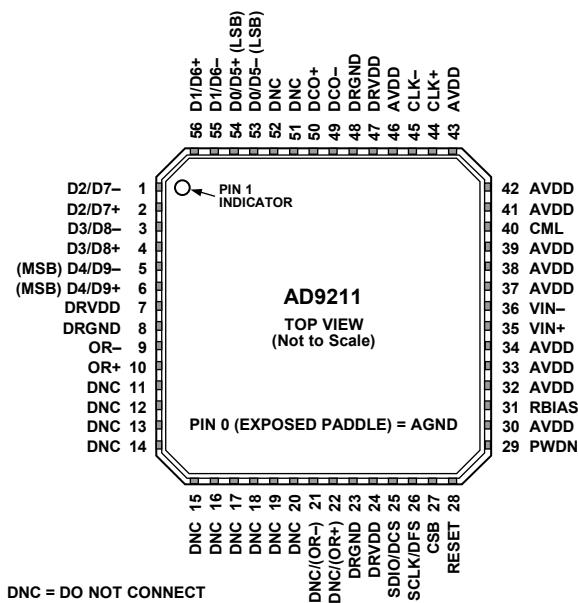


Figure 5. AD9211 Double Data Rate Pin Configuration

Table 8. Double Data Rate Mode Pin Function Descriptions

| Pin No. | Mnemonic | Description |
|---|--------------------|---|
| 30, 32 to 34, 37 to 39, 41 to 43, 46 | AVDD | 1.8 V Analog Supply. |
| 7, 24, 47 | DRVDD | 1.8 V Digital Output Supply. |
| 0 | AGND ¹ | Analog Ground. |
| 8, 23, 48 | DRGND ¹ | Digital Output Ground. |
| 35 | VIN+ | Analog Input—True. |
| 36 | VIN- | Analog Input—Complement. |
| 40 | CML | Common-Mode Output Pin. Enabled through the SPI, this pin provides a reference for the optimized internal bias voltage for VIN+/VIN-. |
| 44 | CLK+ | Clock Input—True. |
| 45 | CLK- | Clock Input—Complement. |
| 31 | RBIAS | Set Pin for Chip Bias Current. (Place 1% 10 k Ω resistor terminated to ground.) Nominally 0.5 V. |
| 28 | RESET | CMOS-Compatible Chip Reset (Active Low). |
| 25 | SDIO/DCS | Serial Port Interface (SPI) Data Input/Output (Serial Port Mode); Duty Cycle Stabilizer Select (External Pin Mode). |
| 26 | SCLK/DFS | Serial Port Interface Clock (Serial Port Mode); Data Format Select Pin (External Pin Mode). |
| 27 | CSB | Serial Port Chip Select (Active Low). |
| 29 | PWDN | Chip Power-Down. |
| 49 | DCO- | Data Clock Output—Complement. |
| 50 | DCO+ | Data Clock Output—True. |
| 53 | D0/D5- | D1/D7 Complement Output Bit (LSB). |
| 54 | D0/D5+ | D1/D7 True Output Bit (LSB). |
| 55 | D1/D6- | D2/D8 Complement Output Bit. |
| 56 | D1/D6+ | D2/D8 True Output Bit. |
| 1 | D2/D7- | D3/D9 Complement Output Bit. |
| 2 | D2/D7+ | D3/D9 True Output Bit. |
| 3 | D3/D8- | D4/D10 Complement Output Bit. |
| 4 | D3/D8+ | D4/D10 True Output Bit. |
| 5 | D4/D9- | D5/D11 Complement Output Bit (MSB). |
| 6 | D4/D9+ | D5/D11 True Output Bit (MSB). |

AD9211

| Pin No. | Mnemonic | Description |
|------------------|-----------|---|
| 9 | OR- | D6 Complement Output Bit. (This pin is disabled if Pin 21 is reconfigured through the SPI to be OR-.) |
| 10 | OR+ | D6 True Output Bit. (This pin is disabled if Pin 22 is reconfigured through the SPI to be OR+.) |
| 11 to 20, 51, 52 | DNC | Do Not Connect. |
| 21 | DNC/(OR-) | Do Not Connect. (This pin can be reconfigured as the Overrange Complement Output Bit through the serial port register.) |
| 22 | DNC/(OR+) | Do Not Connect. (This pin can be reconfigured as the Overrange True Output Bit through the serial port register.) |

¹ AGND and DRGND should be tied to a common quiet ground plane.

TYPICAL PERFORMANCE CHARACTERISTICS

AVDD = 1.8 V, DRVDD = 1.8 V, rated sample rate, DCS enabled, $T_A = 25^\circ\text{C}$, 1.25 V p-p differential input, AIN = -1 dBFS, unless otherwise noted.

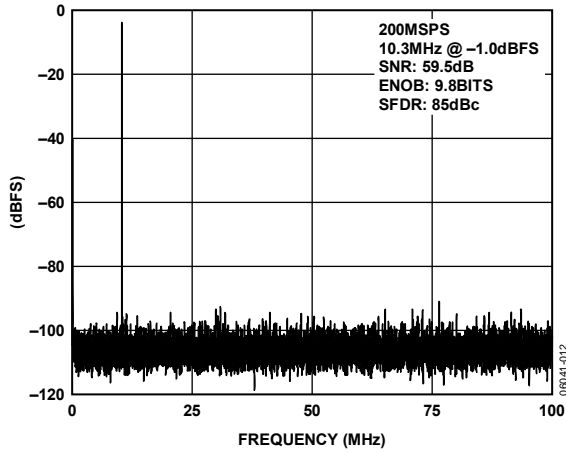


Figure 6. AD9211-200 64k Point Single-Tone FFT; 200 MSPS, 10.3 MHz

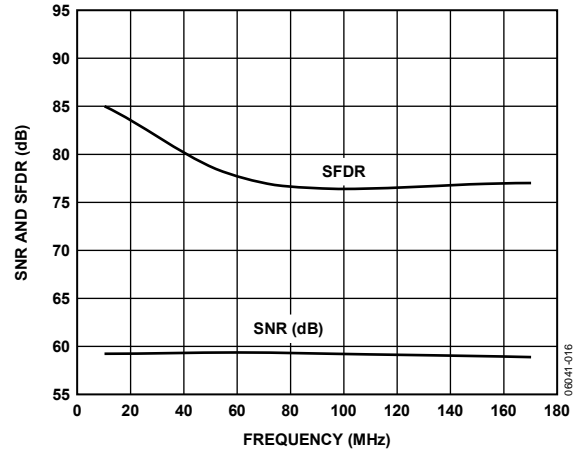


Figure 9. AD9211-200 Single-Tone SNR/SFDR vs. Input Frequency (f_{IN}) with 1.25 V p-p Full Scale; 200 MSPS

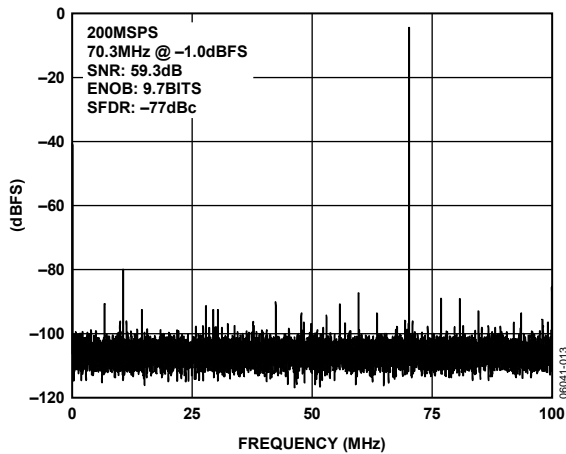


Figure 7. AD9211-200 64k Point Single-Tone FFT; 200 MSPS, 70.3 MHz

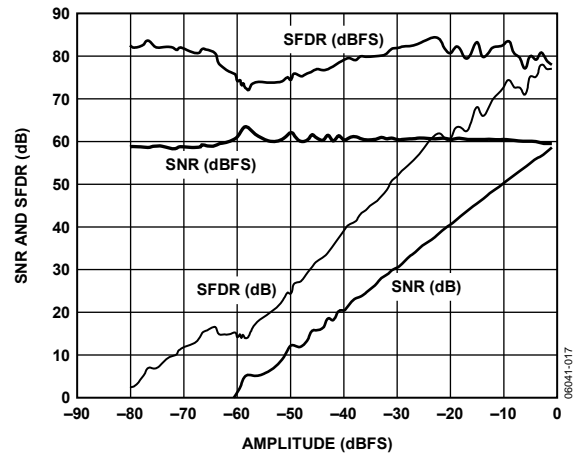


Figure 10. AD9211-200 SNR/SFDR vs. Input Amplitude; 170.3 MHz

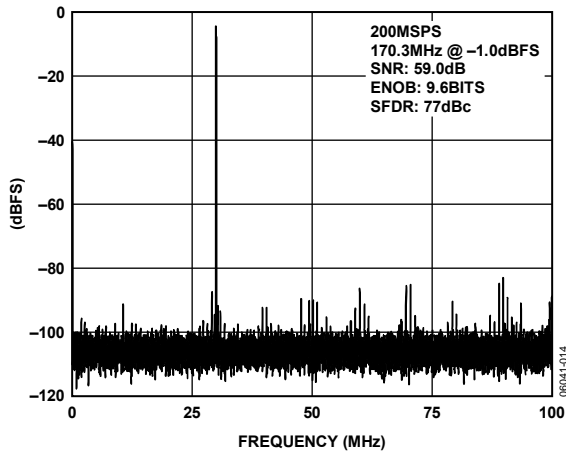


Figure 8. AD9211-200 64k Point Single-Tone FFT; 200 MSPS, 170.3 MHz

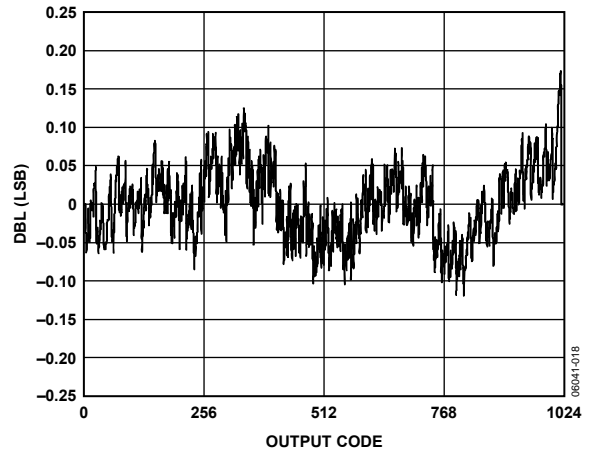


Figure 11. AD9211-200 INL; 200 MSPS

AD9211

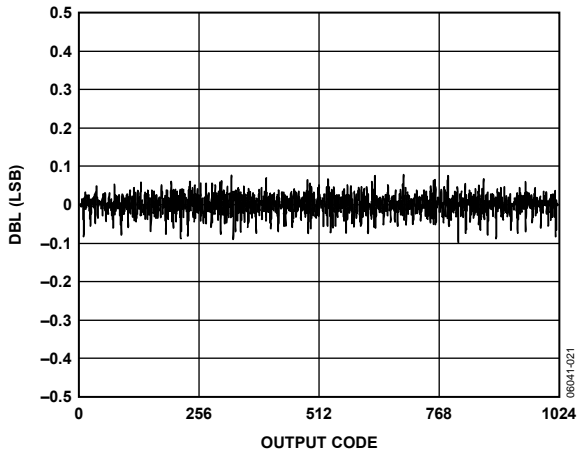


Figure 12. AD9211-200 DNL; 200 MSPS

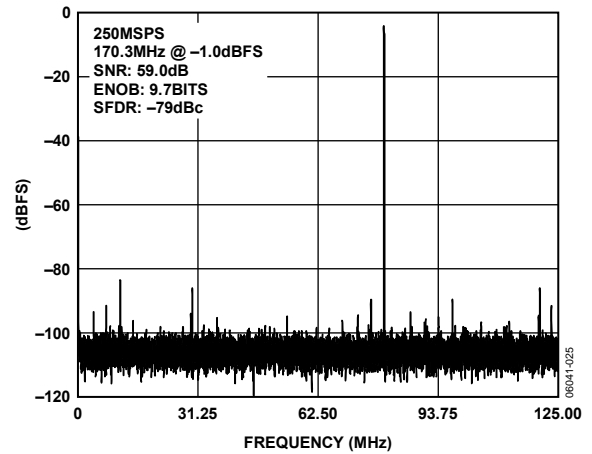


Figure 15. AD9211-250 64k Point Single-Tone FFT; 250 MSPS, 170.3 MHz

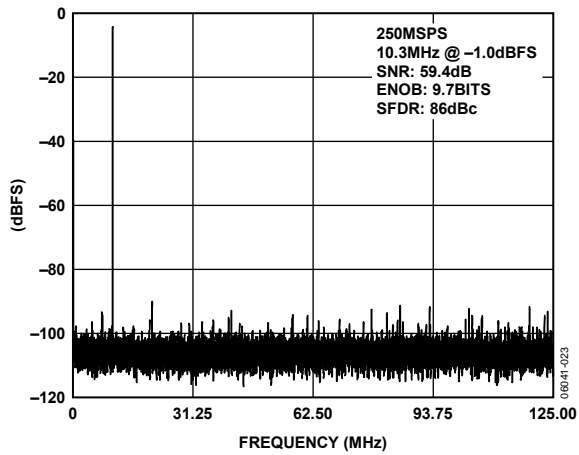


Figure 13. AD9211-250 64k Point Single-Tone FFT; 250 MSPS, 10.3 MHz

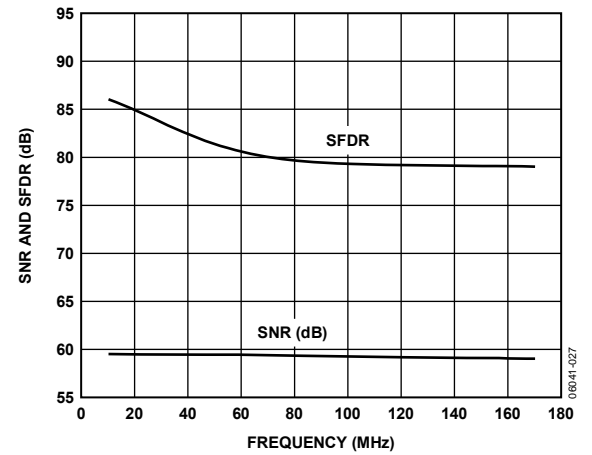


Figure 16. AD9211-250 Single-Tone SNR/SFDR vs. Input Frequency (f_{IN}) with 1.25 V_{p-p} Full Scale; 250 MSPS

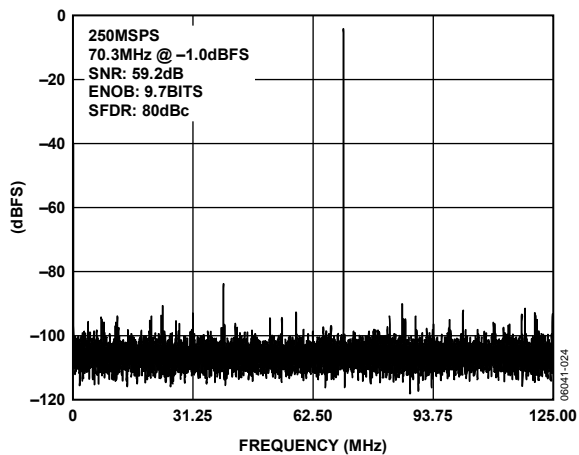


Figure 14. AD9211-250 64k Point Single-Tone FFT; 250 MSPS, 70.3 MHz

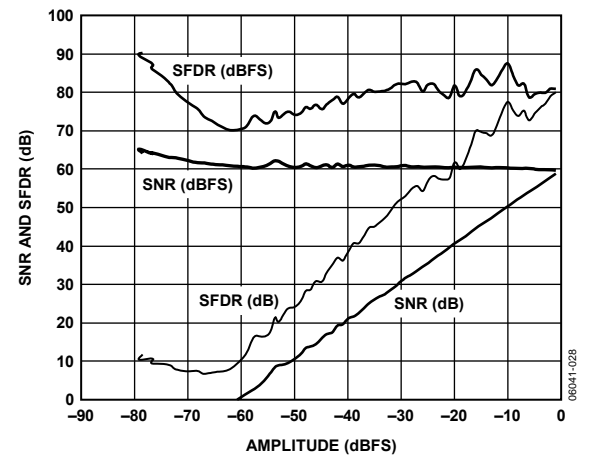


Figure 17. AD9211-250 SNR/SFDR vs. Input Amplitude; 250 MSPS, 170.3 MHz

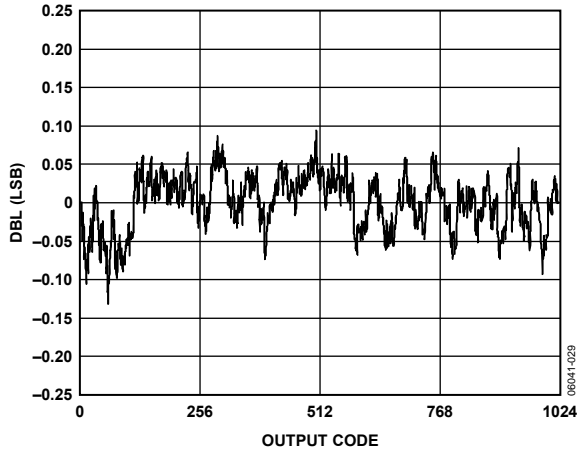


Figure 18. AD9211-250 INL; 250 MSPS

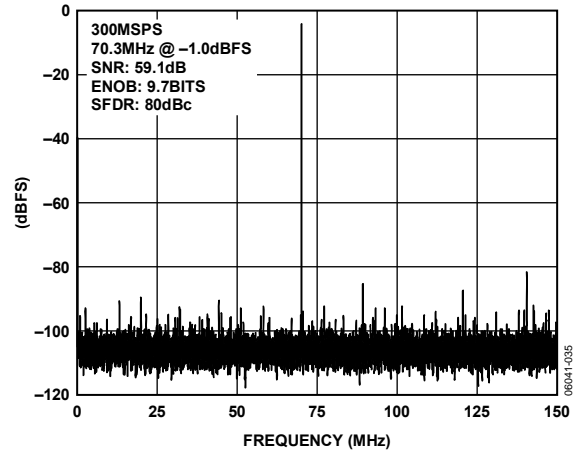


Figure 21. AD9211-300 64k Point Single-Tone FFT; 300 MSPS, 70.3 MHz

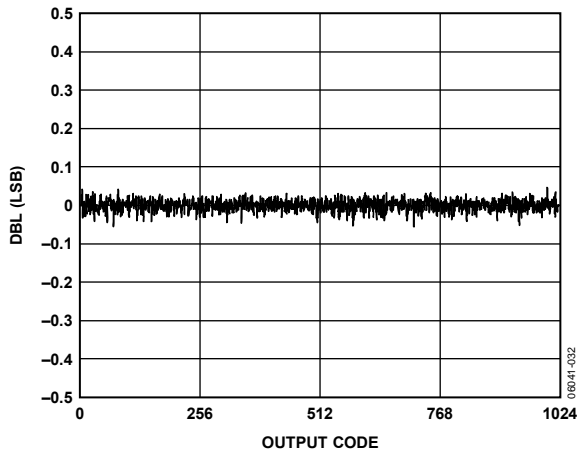


Figure 19. AD9211-250 DNL; 250 MSPS

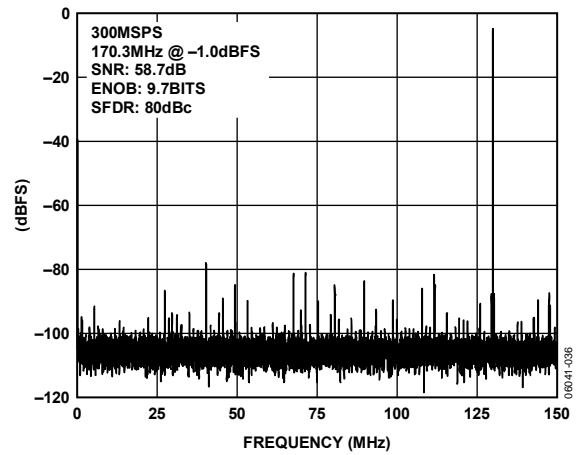


Figure 22. AD9211-300 64k Point Single-Tone FFT; 300 MSPS, 170.3 MHz

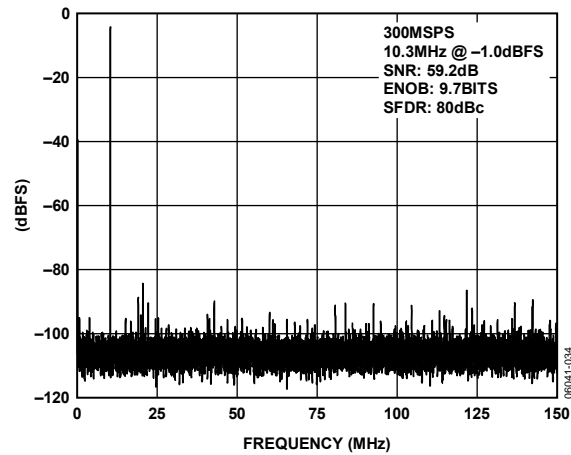


Figure 20. AD9211-300 64k Point Single-Tone FFT; 300 MSPS, 10.3 MHz

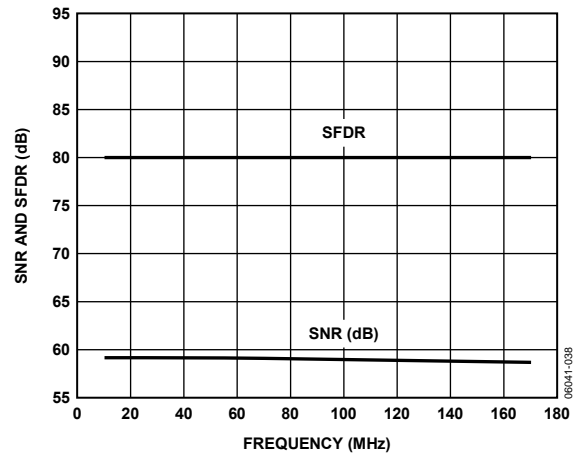


Figure 23. AD9211-300 Single-Tone SNR/SFDR vs. Input Frequency (f_{IN}) with 1.25 V p-p Full Scale; 300 MSPS

AD9211

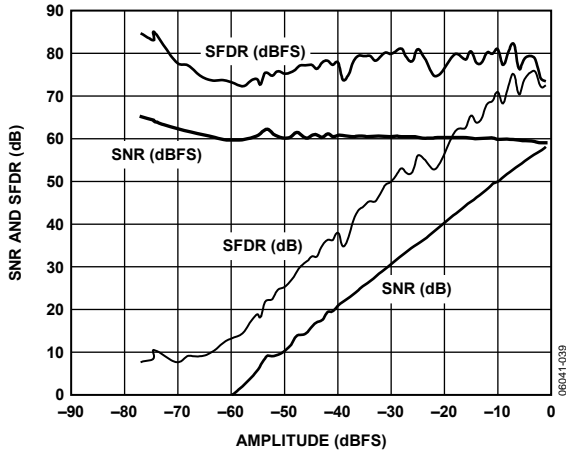


Figure 24. AD9211-300 SNR/SFDR vs. Input Amplitude; 300 MSPS, 170.3 MHz

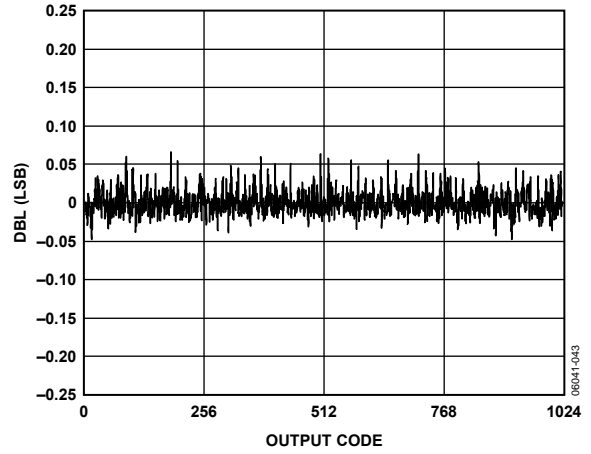


Figure 27. AD9211-300 DNL; 300 MSPS

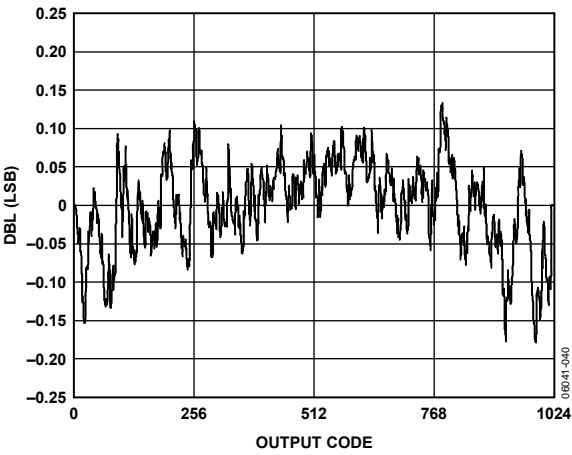


Figure 25. AD9211-300 INL; 300 MSPS

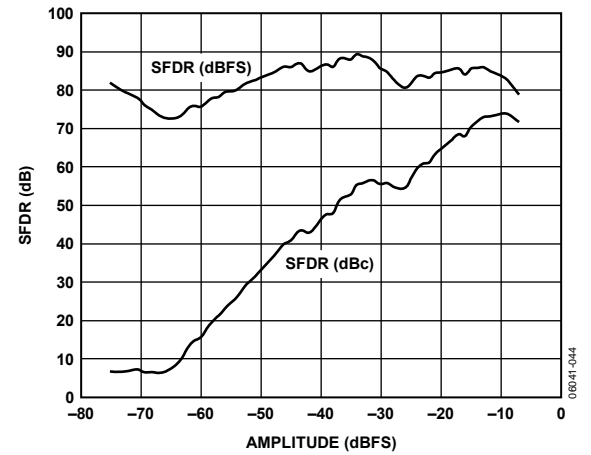


Figure 28. AD9211-300 Two-Tone SFDR vs. Input Amplitude; 300 MSPS, 170.1 MHz, 171.1 MHz

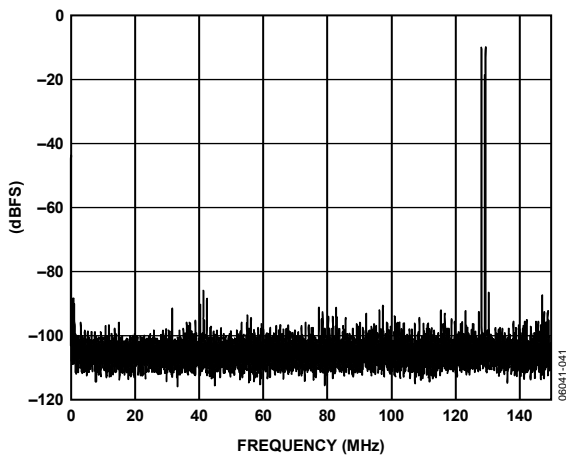


Figure 26. AD9211-300 64k Point, Two-Tone FFT; 300 MSPS, 170.1 MHz, 171.1 MHz

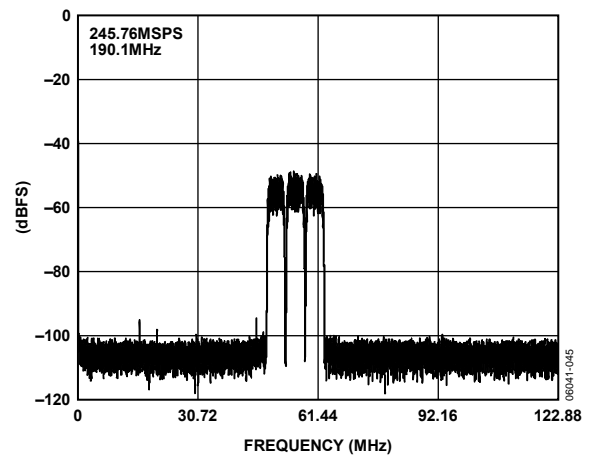


Figure 29. AD9211-300 64k Point FFT; Three W-CDMA Carriers, IF = 190.1 MHz, 245.6 MSPS

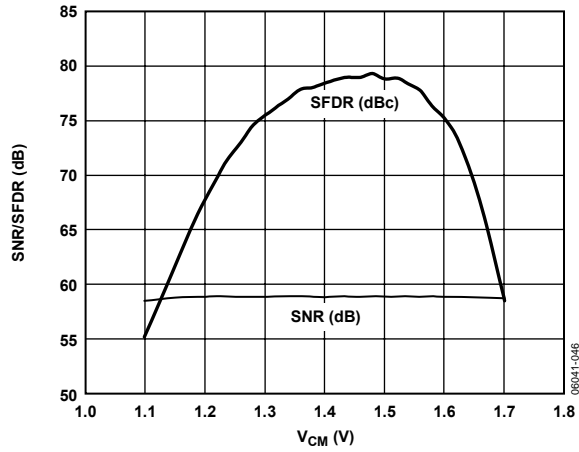


Figure 30. SNR/SFDR vs. Common-Mode Voltage; 300 MSPS, 70.3 MHz @ -1 dBFS

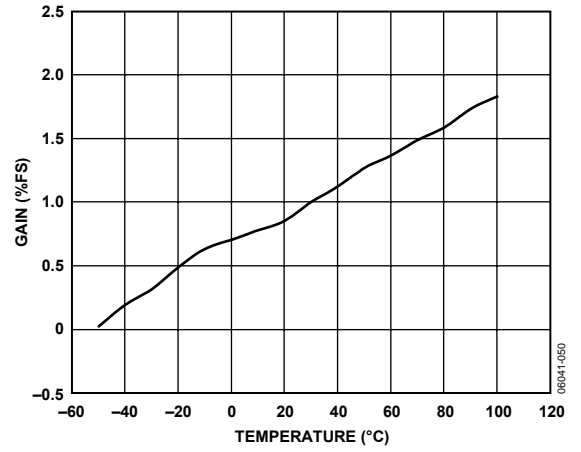


Figure 31. Gain vs. Temperature


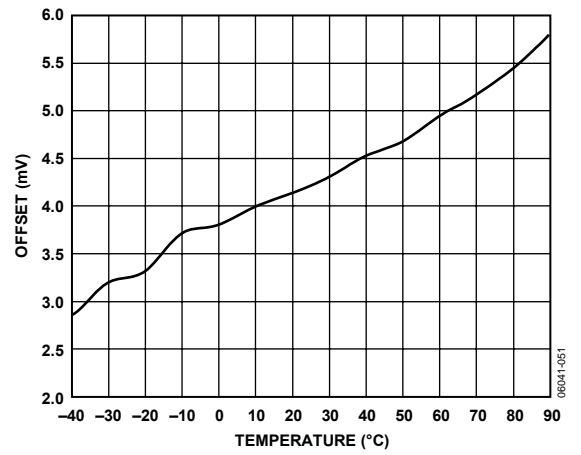



Figure 32. Offset vs. Temperature

EQUIVALENT CIRCUITS

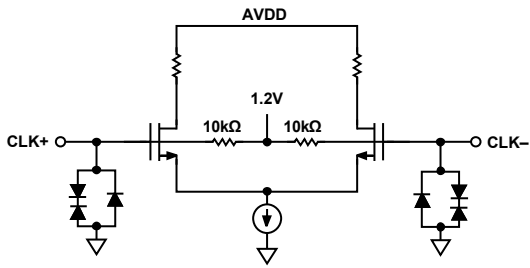


06041-006

Figure 33. Clock Inputs




06041-064

Figure 36. Equivalent CSB Input Circuit

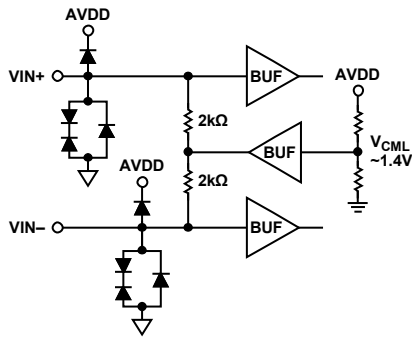


06041-007

Figure 34. Analog Inputs ($V_{CML} \approx 1.4 V$)




06041-009

Figure 37. LVDS Outputs ($Dx+$, $Dx-$, $OR+$, $OR-$, $DCO+$, $DCO-$)

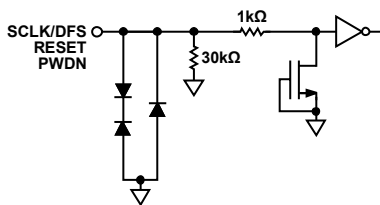

06041-008

Figure 35. Equivalent SCLK/DFS, RESET, PWDN Input Circuit

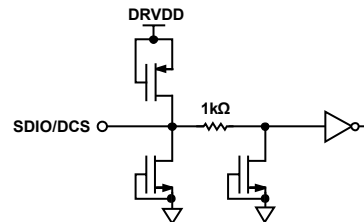

06041-065

Figure 38. Equivalent SDIO/DCS Input Circuit

THEORY OF OPERATION

The AD9211 architecture consists of a front-end sample and hold amplifier (SHA) followed by a pipelined switched capacitor ADC. The quantized outputs from each stage are combined into a final 10-bit result in the digital correction logic. The pipelined architecture permits the first stage to operate on a new input sample, while the remaining stages operate on preceding samples. Sampling occurs on the rising edge of the clock.

Each stage of the pipeline, excluding the last, consists of a low resolution flash ADC connected to a switched capacitor DAC and interstage residue amplifier (MDAC). The residue amplifier magnifies the difference between the reconstructed DAC output and the flash input for the next stage in the pipeline. One bit of redundancy is used in each stage to facilitate digital correction of flash errors. The last stage simply consists of a flash ADC.

The input stage contains a differential SHA that can be ac- or dc-coupled in differential or single-ended mode. The output-staging block aligns the data, carries out the error correction, and passes the data to the output buffers. The output buffers are powered from a separate supply, allowing adjustment of the output voltage swing. During power-down, the output buffers go into a high impedance state.

ANALOG INPUT AND VOLTAGE REFERENCE

The analog input to the AD9211 is a differential buffer. For best dynamic performance, the source impedances driving VIN+ and VIN- should be matched such that common-mode settling errors are symmetrical. The analog input is optimized to provide superior wideband performance and requires that the analog inputs be driven differentially. SNR and SINAD performance degrades significantly if the analog input is driven with a single-ended signal.

A wideband transformer, such as Mini-Circuits® ADT1-1WT, can provide the differential analog inputs for applications that require a single-ended-to-differential conversion. Both analog inputs are self-biased by an on-chip resistor divider to a nominal 1.3 V.

An internal differential voltage reference creates positive and negative reference voltages that define the 1.25 V p-p fixed span of the ADC core. This internal voltage reference can be adjusted by means of SPI control. See the AD9211 Configuration Using the SPI section for more details.

Differential Input Configurations

Optimum performance is achieved while driving the AD9211 in a differential input configuration. For baseband applications, the AD8138 differential driver provides excellent performance and a flexible interface to the ADC. The output common-mode

voltage of the AD8138 is easily set to $AVDD/2 + 0.5$ V, and the driver can be configured in a Sallen-Key filter topology to provide band limiting of the input signal.

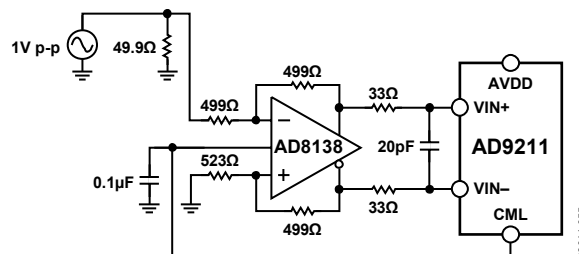


Figure 39. Differential Input Configuration Using the AD8138

At input frequencies in the second Nyquist zone and above, the performance of most amplifiers may not be adequate to achieve the true performance of the AD9211. This is especially true in IF undersampling applications where frequencies in the 70 MHz to 100 MHz range are being sampled. For these applications, differential transformer coupling is the recommended input configuration. The signal characteristics must be considered when selecting a transformer. Most RF transformers saturate at frequencies below a few MHz, and excessive signal power can also cause core saturation, which leads to distortion.

In any configuration, the value of the shunt capacitor, C, is dependent on the input frequency and may need to be reduced or removed.

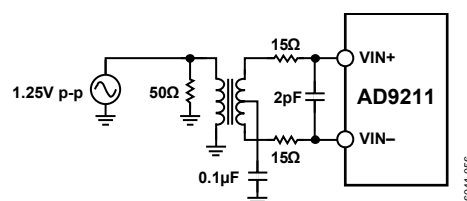


Figure 40. Differential Transformer—Coupled Configuration

As an alternative to using a transformer-coupled input at frequencies in the second Nyquist zone, the AD8352 differential driver can be used (see Figure 41).

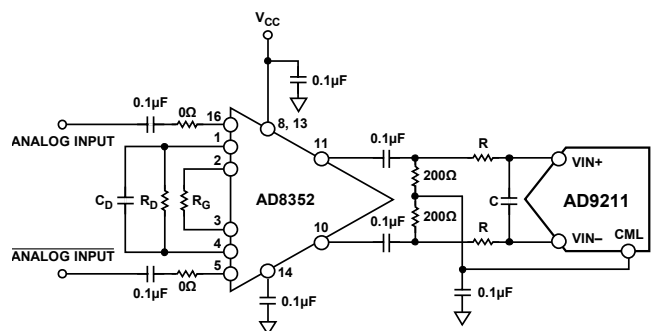


Figure 41. Differential Input Configuration Using the AD8352

AD9211

CLOCK INPUT CONSIDERATIONS

For optimum performance, the AD9211 sample clock inputs (CLK+ and CLK-) should be clocked with a differential signal. This signal is typically ac-coupled into the CLK+ pin and CLK- pin via a transformer or capacitors. These pins are biased internally and require no additional bias.

Figure 42 shows one preferred method for clocking the AD9211. The low jitter clock source is converted from single-ended to differential using an RF transformer. The back-to-back Schottky diodes across the secondary transformer limit clock excursions into the AD9211 to approximately 0.8 V p-p differential. This helps prevent the large voltage swings of the clock from feeding through to other portions of the AD9211 and preserves the fast rise and fall times of the signal, which are critical to low jitter performance.


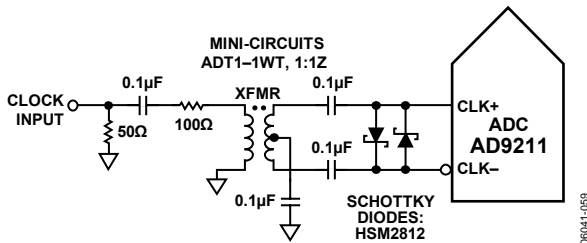



Figure 42. Transformer-Coupled Differential Clock

If a low jitter clock is available, another option is to ac couple a differential PECL signal to the sample clock input pins, as shown in Figure 43. The AD9510/AD9511/AD9512/AD9513/AD9514/AD9515 family of clock drivers offers excellent jitter performance.

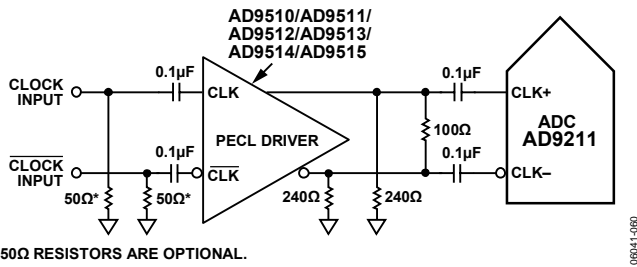

*50Ω RESISTORS ARE OPTIONAL.


Figure 43. Differential PECL Sample Clock

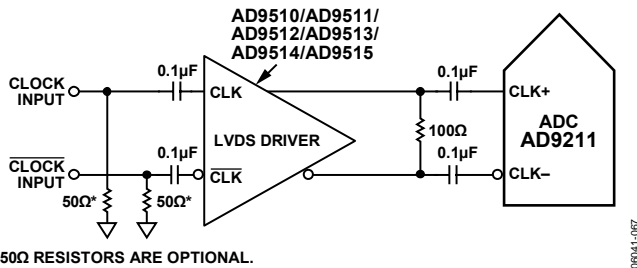

*50Ω RESISTORS ARE OPTIONAL.


Figure 44. Differential LVDS Sample Clock

In some applications, it is acceptable to drive the sample clock inputs with a single-ended CMOS signal. In such applications, CLK+ should be directly driven from a CMOS gate, and the CLK- pin should be bypassed to ground with a 0.1 µF capacitor in parallel with a 39 kΩ resistor (see Figure 45). Although the CLK+ input circuit supply is AVDD (1.8 V), this input is designed to withstand input voltages up to 3.3 V, making the selection of the drive logic voltage very flexible.

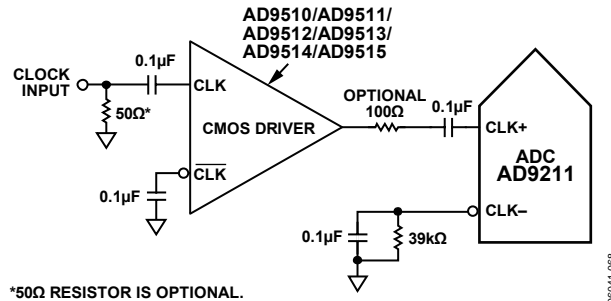

*50Ω RESISTOR IS OPTIONAL.

Figure 45. Single-Ended 1.8 V CMOS Sample Clock

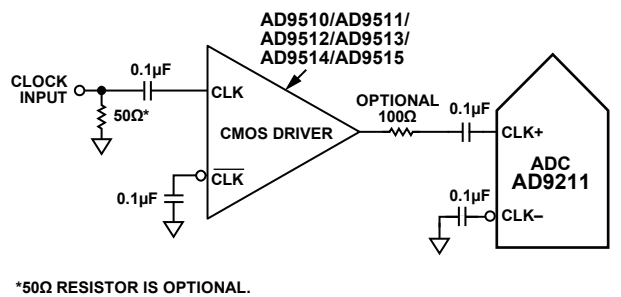

*50Ω RESISTOR IS OPTIONAL.

Figure 46. Single-Ended 3.3 V CMOS Sample Clock

Clock Duty Cycle Considerations

Typical high speed ADCs use both clock edges to generate a variety of internal timing signals. As a result, these ADCs may be sensitive to clock duty cycle. Commonly, a 5% tolerance is required on the clock duty cycle to maintain dynamic performance characteristics. The AD9211 contains a duty cycle stabilizer (DCS) that retimes the nonsampling edge, providing an internal clock signal with a nominal 50% duty cycle. This allows a wide range of clock input duty cycles without affecting the performance of the AD9211. When the DCS is on, noise and distortion performance are nearly flat for a wide range of duty cycles. However, some applications may require the DCS function to be off. If so, keep in mind that the dynamic range performance can be affected when operated in this mode. See the AD9211 Configuration Using the SPI section for more details on using this feature.

The duty cycle stabilizer uses a delay-locked loop (DLL) to create the nonsampling edge. As a result, any changes to the sampling frequency require approximately eight clock cycles to allow the DLL to acquire and lock to the new rate.

Clock Jitter Considerations

High speed, high resolution ADCs are sensitive to the quality of the clock input. The degradation in SNR at a given input frequency (f_A) due only to aperture jitter (t_j) can be calculated by

$$\text{SNR Degradation} = 20 \times \log_{10}[\frac{1}{2} \times \pi \times f_A \times t_j]$$

In this equation, the rms aperture jitter represents the root mean square of all jitter sources, including the clock input, analog input signal, and ADC aperture jitter specifications. IF undersampling applications are particularly sensitive to jitter (see Figure 47).

The clock input should be treated as an analog signal in cases where aperture jitter may affect the dynamic range of the AD9211. Power supplies for clock drivers should be separated from the ADC output driver supplies to avoid modulating the clock signal with digital noise. Low jitter, crystal-controlled oscillators make the best clock sources. If the clock is generated from another type of source (by gating, dividing, or other methods), it should be retimed by the original clock at the last step.

Refer to the [AN-501](#) application note and the [AN-756](#) application note for more in-depth information about jitter performance as it relates to ADCs (visit www.analog.com).

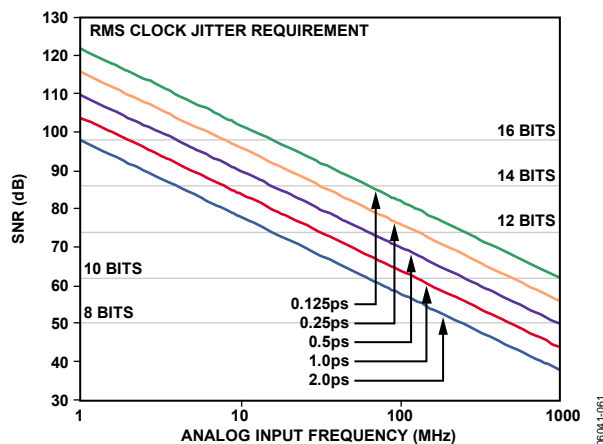


Figure 47. Ideal SNR vs. Input Frequency and Jitter

POWER DISSIPATION AND POWER-DOWN MODE

The power dissipated by the AD9211 is proportional to its sample rate. The digital power dissipation does not vary much because it is determined primarily by the DRVDD supply and bias current of the LVDS output drivers.

By asserting PWDN (Pin 29) high, the AD9211 is placed in standby mode or full power-down mode, as determined by the contents of Serial Port Register 08. Reasserting the PWDN pin low returns the AD9211 to its normal operational mode.

An additional standby mode is supported by means of varying the clock input. When the clock rate falls below 20 MHz, the AD9211 assumes a standby state. In this case, the biasing network and internal reference remain on, but digital circuitry is powered down. Upon reactivating the clock, the AD9211 resumes normal operation after allowing for the pipeline latency.

DIGITAL OUTPUTS

Digital Outputs and Timing

The AD9211 differential outputs conform to the ANSI-644 LVDS standard on default power-up. This can be changed to a low power, reduced signal option similar to the IEEE 1596.3 standard using the SPI. This LVDS standard can further reduce the overall power dissipation of the device, which reduces the power by ~39 mW. See the Memory Map section for more information. The LVDS driver current is derived on-chip and sets the output current at each output equal to a nominal 3.5 mA. A 100 Ω differential termination resistor placed at the LVDS receiver inputs results in a nominal 350 mV swing at the receiver.

The AD9211 LVDS outputs facilitate interfacing with LVDS receivers in custom ASICs and FPGAs that have LVDS capability for superior switching performance in noisy environments. Single point-to-point net topologies are recommended with a 100 Ω termination resistor placed as close to the receiver as possible. No far-end receiver termination and poor differential trace routing may result in timing errors. It is recommended that the trace length is no longer than 24 inches and that the differential output traces are kept close together and at equal lengths.

An example of the LVDS output using the ANSI standard (default) data eye and a time interval error (TIE) jitter histogram with trace lengths less than 24 inches on regular FR-4 material is shown in Figure 48. Figure 49 shows an example of when the trace lengths exceed 24 inches on regular FR-4 material. Notice that the TIE jitter histogram reflects the decrease of the data eye opening as the edge deviates from the ideal position. It is up to the user to determine if the waveforms meet the timing budget of the design when the trace lengths exceed 24 inches.

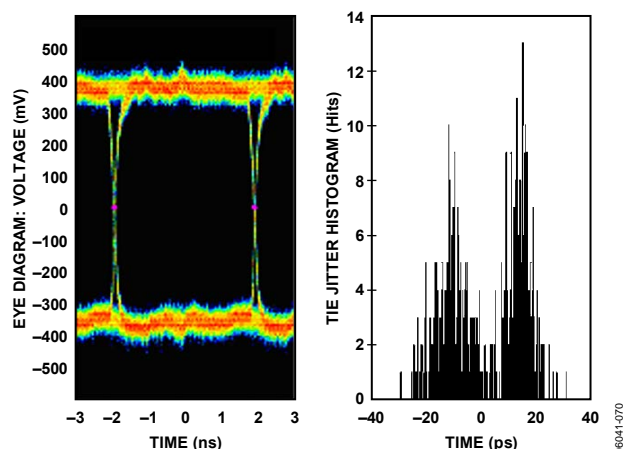


Figure 48. Data Eye for LVDS Outputs in ANSI Mode with Trace Lengths Less than 24 Inches on Standard FR-4, AD9211-250

AD9211

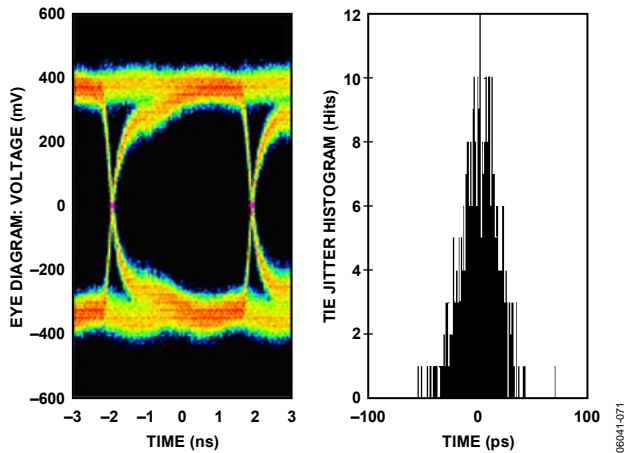


Figure 49. Data Eye for LVDS Outputs in ANSI Mode with Trace Lengths Greater than 24 Inches on Standard FR-4, AD9211-250

The format of the output data is offset binary by default. An example of the output coding format can be found in Table 12. If it is desired to change the output data format to twos complement, see the AD9211 Configuration Using the SPI section.

An output clock signal is provided to assist in capturing data from the AD9211. The DCO is used to clock the output data and is equal to the sampling clock (CLK) rate. In single data rate mode (SDR), data is clocked out of the AD9211 and must be captured on the rising edge of the DCO. In double data rate mode (DDR), data is clocked out of the AD9211 and must be captured on the rising and falling edges of the DCO. See the timing diagrams shown in Figure 2 and Figure 3 for more information.

Output Data Rate and Pinout Configuration

The output data of the AD9211 can be configured to drive 10 pairs of LVDS outputs at the same rate as the input clock signal (single data rate, or SDR, mode), or five pairs of LVDS outputs at 2× the rate of the input clock signal (double data rate, or DDR, mode). SDR is the default mode; the device may be reconfigured for DDR by setting Bit 3 in Register 14 (see Table 13).

Out-of-Range (OR)

An out-of-range condition exists when the analog input voltage is beyond the input range of the ADC. OR is a digital output that is updated along with the data output corresponding to the particular sampled input voltage. Thus, OR has the same pipeline latency as the digital data. OR is low when the analog input voltage is within the analog input range and high when the analog input voltage exceeds the input range, as shown in Figure 50. OR remains high until the analog input returns to within the input range and another conversion is completed. By logically ANDing OR with the MSB and its complement, over-range high or underrange low conditions can be detected.

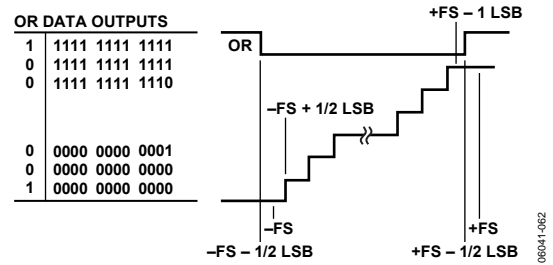


Figure 50. OR Relation to Input Voltage and Output Data

TIMING

The AD9211 provides latched data outputs with a pipeline delay of seven clock cycles. Data outputs are available one propagation delay (t_{PD}) after the rising edge of the clock signal.

The length of the output data lines and loads placed on them should be minimized to reduce transients within the AD9211. These transients can degrade the converter's dynamic performance. The AD9211 also provides data clock output (DCO) intended for capturing the data in an external register. The data outputs are valid on the rising edge of DCO.

The lowest typical conversion rate of the AD9211 is 40 MSPS. At clock rates below 1 MSPS, the AD9211 assumes the standby mode.

RBIAS

The AD9211 requires the user to place a 10 kΩ resistor between the RBIAS pin and ground. This resistor should have a 1% tolerance and is used to set the master current reference of the ADC core.

AD9211 CONFIGURATION USING THE SPI

The AD9211 SPI allows the user to configure the converter for specific functions or operations through a structured register space inside the ADC. This gives the user added flexibility to customize device operation depending on the application. Addresses are accessed (programmed or readback) serially in one-byte words. Each byte may be further divided down into fields, which are documented in the Memory Map section.

There are three pins that define the serial port interface or SPI to this particular ADC. They are the SPI SCLK/DFS, SPI SDIO/DCS, and CSB pins. The SCLK/DFS (serial clock) is used to synchronize the read and write data presented the ADC. The SDIO/DCS (serial data input/output) is a dual-purpose pin that allows data to be sent and read from the internal ADC memory map registers. The CSB is an active low control that enables or disables the read and write cycles (see Table 9).

Table 9. Serial Port Pins

| Mnemonic | Function |
|----------|--|
| SCLK | SCLK (Serial Clock) is the serial shift clock in. SCLK is used to synchronize serial interface reads and writes. |
| SDIO | SDIO (Serial Data Input/Output) is a dual-purpose pin. The typical role for this pin is an input and output depending on the instruction being sent and the relative position in the timing frame. |
| CSB | CSB (Chip Select Bar) is an active low control that gates the read and write cycles. |
| RESET | Master Device Reset. When asserted, device assumes default settings. Active low. |

The falling edge of the CSB, in conjunction with the rising edge of the SCLK, determines the start of the framing. An example of the serial timing and its definitions can be found in Figure 51 and Table 11.

During an instruction phase, a 16-bit instruction is transmitted. Data then follows the instruction phase and is determined by the W0 and W1 bits, which is 1 or more bytes of data. All data is composed of 8-bit words. The first bit of each individual byte of serial data indicates whether this is a read or write command. This allows the serial data input/output (SDIO) pin to change direction from an input to an output.

Data may be sent in MSB or in LSB first mode. MSB first is default on power-up and can be changed by changing the configuration register. For more information about this feature and others, see the [AN-877](#), *Interfacing to High Speed ADCs via SPI*.

HARDWARE INTERFACE

The pins described in Table 9 comprise the physical interface between the user's programming device and the serial port of the AD9211. All serial pins are inputs with an open-drain configuration and should be tied to an external pull-up or pull-down resistor (suggested value of 10 k Ω).

This interface is flexible enough to be controlled by either PROMS or PIC microcontrollers as well. This provides the user with an alternate method to program the ADC other than a SPI controller.

If the user chooses not to use the SPI interface, some pins serve a dual function and are associated with a specific function when strapped externally to AVDD or ground during device power on. The Configuration Without the SPI section describes the strappable functions supported on the AD9230.

CONFIGURATION WITHOUT THE SPI

In applications that do not interface to the SPI control registers, the SPI SDIO/DCS and SPI SCLK/DFS pins can alternately serve as standalone CMOS-compatible control pins. When the device is powered up, it is assumed that the user intends to use the pins as static control lines for the duty cycle stabilizer. In this mode, the SPI CSB chip select should be connected to ground, which disables the serial port interface.

Table 10. Mode Selection

| Mnemonic | External Voltage | Configuration |
|--------------|------------------|--------------------------------|
| SPI SDIO/DCS | AVDD | Duty cycle stabilizer enabled |
| | AGND | Duty cycle stabilizer disabled |
| SPI SCLK/DFS | AVDD | Twos complement enabled |
| | AGND | Offset binary enabled |

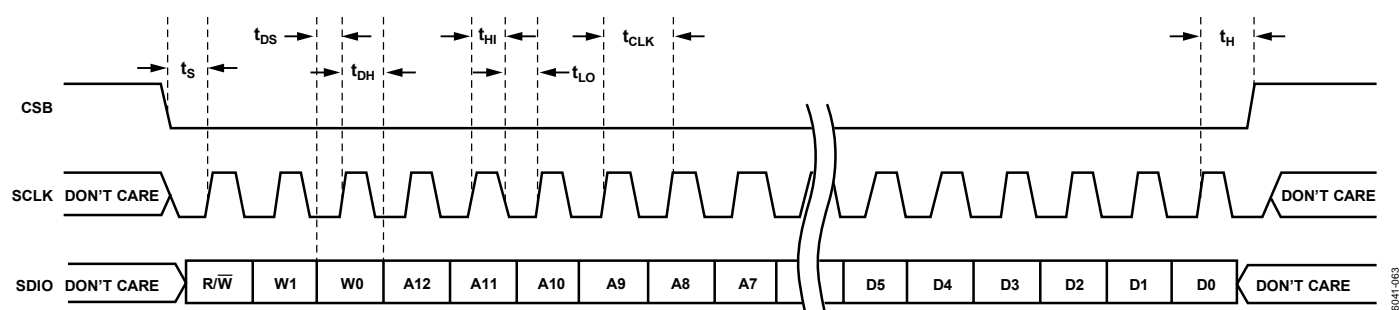


Figure 51. Serial Port Interface Timing Diagram

AD9211

Table 11. Serial Timing Definitions

| Parameter | Timing (minimum, ns) | Description |
|-----------------------|----------------------|---|
| t _{DS} | 5 | Setup time between the data and the rising edge of SCLK |
| t _{DH} | 2 | Hold time between the data and the rising edge of SCLK |
| t _{CLK} | 40 | Period of the clock |
| t _S | 5 | Setup time between CSB and SCLK |
| t _H | 2 | Hold time between CSB and SCLK |
| t _{HI} | 16 | Minimum period that SCLK should be in a logic high state |
| t _{LO} | 16 | Minimum period that SCLK should be in a logic low state |
| t _{EN_SDIO} | 1 | Minimum time for the SDIO pin to switch from an input to an output relative to the SCLK falling edge (not shown in Figure 51) |
| t _{DIS_SDIO} | 5 | Minimum time for the SDIO pin to switch from an output to an input relative to the SCLK rising edge (not shown in Figure 51) |

Table 12. Output Data Format

| Input (V) | Condition (V) | Offset Binary Output Mode D11 to D0 | Twos Complement Mode D11 to D0 | Gray Code Mode (SPI Accessible) D11 to D0 | OR |
|-------------|------------------|-------------------------------------|--------------------------------|---|----|
| VIN+ – VIN– | < 0.62 | 0000 0000 00 | 0000 0000 00 | 0000 0000 00 | 1 |
| VIN+ – VIN– | = 0.62 | 0000 0000 00 | 0000 0000 00 | 0000 0000 00 | 0 |
| VIN+ – VIN– | = 0 | 0000 0000 00 | 0000 0000 00 | 0000 0000 00 | 0 |
| VIN+ – VIN– | = 0.62 | 1111 1111 11 | 1111 1111 11 | 0000 0000 00 | 0 |
| VIN+ – VIN– | > 0.62 + 0.5 LSB | 1111 1111 11 | 1111 1111 11 | 0000 0000 00 | 1 |

MEMORY MAP

READING THE MEMORY MAP TABLE

Each row in the memory map table has eight address locations. The memory map is roughly divided into three sections: chip configuration register map (Address 0x00 to Address 0x02), transfer register map (Address 0xFF), and program register map (Address 0x08 to Address 0x2A).

The Addr. (Hex) column of the memory map indicates the register address in hexadecimal, and the Default Value (Hex) column shows the default hexadecimal value that is already written into the register. The Bit 7 (MSB) column is the start of the default hexadecimal value given. For example, Hexadecimal Address 0x09, clock, has a hexadecimal default value of 0x01. This means Bit 7 = 0, Bit 6 = 0, Bit 5 = 0, Bit 4 = 0, Bit 3 = 0, Bit 2 = 0, Bit 1 = 0, and Bit 0 = 1, or 0000 0001 in binary. The default value enables the duty cycle stabilizer. Overwriting this default so that Bit 0 = 0 disables the duty cycle stabilizer. For more information on this and other functions, consult the [AN-877](#) application note, *Interfacing to High Speed ADCs via SPI*.

RESERVED LOCATIONS

Undefined memory locations should not be written to other than their default values suggested in this data sheet. Addresses that have values marked as 0 should be considered reserved and have a 0 written into their registers during power-up.

DEFAULT VALUES

Coming out of reset, critical registers are preloaded with default values. These values are indicated in Table 13. Other registers do not have default values and retain the previous value when exiting reset.

LOGIC LEVELS

An explanation of various registers follows: “Bit is set” is synonymous with “bit is set to Logic 1” or “writing Logic 1 for the bit.” Similarly, “clear a bit” is synonymous with “bit is set to Logic 0” or “writing Logic 0 for the bit.”

Table 13. Memory Map Register


| Addr. (Hex) | Parameter Name | Bit 7 (MSB) | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 (LSB) | Default Value (Hex) | Default Notes/Comments |
|-------------------------------------|------------------|---|-----------|------------|---|-------|------------|-----------|-------------|--|---|
| Chip Configuration Registers | | | | | | | | | | | |
| 00 | chip_port_config | 0 | LSB first | Soft reset | 1 | 1 | Soft reset | LSB first | 0 | 0x18 | The nibbles should be mirrored by the user so that LSB or MSB first mode registers correctly, regardless of shift mode. |
| 01 | chip_id | 8-bit chip ID, Bits[7:0] AD9211 = 0x06 | | | | | | | | Read-only | Default is unique chip ID, different for each device. This is a read-only register. |
| 02 | chip_grade | 0 | 0 | 0 | Speed grade: 00 = 300 MSPS 01 = 250 MSPS 10 = 200 MSPS | X | X | X | Read-only | Child ID used to differentiate graded devices. | |
| Transfer Register | | | | | | | | | | | |
| FF | device_update | 0 | 0 | 0 | 0 | 0 | 0 | 0 | SW transfer | 0x00 | Synchronously transfers data from the master shift register to the slave. |

AD9211

| Addr. (Hex) | Parameter Name | Bit 7 (MSB) | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 (LSB) | Default Value (Hex) | Default Notes/ Comments |
|----------------------|----------------|---|-------|--|---|---|---|---|---|---------------------|---|
| ADC Functions | | | | | | | | | | | |
| 08 | modes | 0 | 0 | PWDN: 0 = full (default) 1 = standby | 0 | 0 | Internal power-down mode: 000 = normal (power-up, default) 001 = full power-down 010 = standby 011 = normal (power-up) Note: External PWDN pin overrides this setting. | | | 0x00 | Determines various generic modes of chip operation. |
| 09 | clock | 0 | 0 | 0 | 0 | 0 | 0 | 0 | Duty cycle stabilizer: 0 = disabled 1 = enabled (default) | 0x01 | |
| OD | test_io | | | Reset PN23 gen: 1 = on 0 = off (default) | Reset PN9 gen: 1 = on 0 = off (default) | Output test mode: 0000 = off (default) 0001 = midscale short 0010 = +FS short 0011 = -FS short 0100 = checker board output 0101 = PN 23 sequence 0110 = PN 9 0111 = one/zero word toggle 1000 = unused 1001 = unused 1010 = unused 1011 = unused 1100 = unused (Format determined by output_mode) | | | | 0x00 | When set, the test data is placed on the output pins in place of normal data. |
| OF | ain_config | 0 | 0 | 0 | 0 | 0 | Analog input disable: 1 = on 0 = off (default) | CML enable: 1 = on 0 = off (default) | 0 | 0x00 | |
| 14 | output_mode | 0 | | 0 | Output enable: 0 = enable (default) 1 = disable | DDR: 1 = enabled 0 = disabled (default) | Output invert: 1 = on 0 = off (default) | Data format select: 00 = offset binary (default) 01 = twos complement 10 = Gray code | | 0x00 | 0 |
| 15 | output_adjust | 0 | 0 | | | LVDS course adjust: 0 = 3.5 mA (default) 1 = 2.0 mA | LVDS fine adjust: 001 = 3.50 mA 010 = 3.25 mA 011 = 3.00 mA 100 = 2.75 mA 101 = 2.50 mA 110 = 2.25 mA 111 = 2.00 mA | | | 0x00 | 0 |
| 16 | output_phase | Output clock polarity 1 = inverted 0 = normal (default) | 0 | 0 | 0 | | | | | 0x03 | |

| Addr. (Hex) | Parameter Name | Bit 7 (MSB) | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 (LSB) | Default Value (Hex) | Default Notes/Comments |
|-------------|-------------------|---|-------|--|--|-------|-------|---|---|---------------------|------------------------|
| 17 | flex_output_delay | Output delay enable: 0 = enable 1 = disable | | | Output clock delay: 00000 = 0.1 ns 00001 = 0.2 ns 00010 = 0.3 ns ... 11101 = 3.0 ns 11110 = 3.1 ns 11111 = 3.2 ns | | | | | 0 | |
| 18 | flex_vref | | | Input voltage range setting: 10000 = 0.98 V 10001 = 1.00 V 10010 = 1.02 V 10011 = 1.04 V ... 11111 = 1.23 V 00000 = 1.25 V 00001 = 1.27 V ... 01110 = 1.48 V 01111 = 1.50 V | | | | | 0 | | |
| 2A | ovr_config | | | | | | | OR position (DDR mode only): 0 = Pin 9, Pin 10 1 = Pin 21, Pin 22 | OR enable: 1 = on (default) 0 = off | | 00000001 |

OUTLINE DIMENSIONS

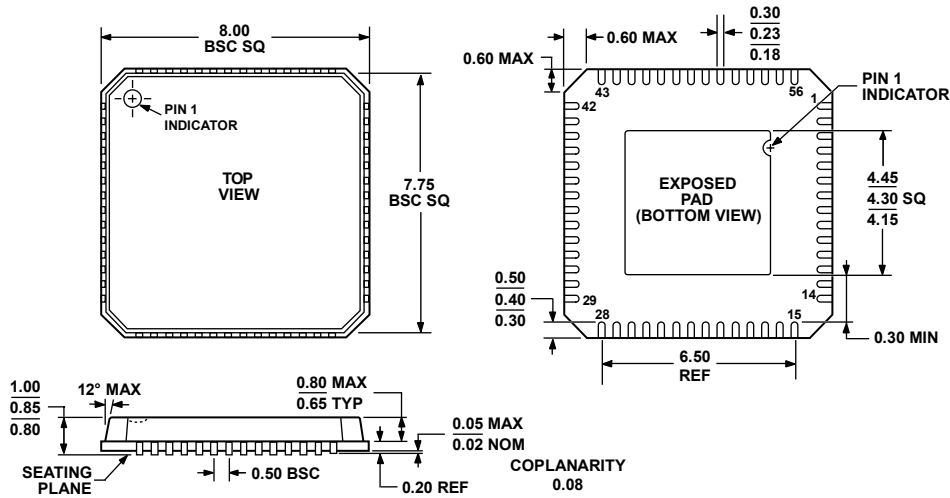

COMPLIANT TO JEDEC STANDARDS MO-220-VLLD-2

Figure 52. 56-Lead Lead Frame Chip Scale Package [LFCSP_VQ]
 8 mm × 8 mm Body, Very Thin Quad
 (CP-56-2)
 Dimensions shown in millimeters

112805-0

ORDERING GUIDE

| Model | Temperature Range | Package Description | Package Option |
|-----------------------------|-------------------|--|----------------|
| AD9211BCPZ-200 ¹ | -40°C to +85°C | 56-Lead Lead Frame Chip Scale Package [LFCSP_VQ] | CP-56-2 |
| AD9211BCPZ-250 ¹ | -40°C to +85°C | 56-Lead Lead Frame Chip Scale Package [LFCSP_VQ] | CP-56-2 |
| AD9211BCPZ-300 ¹ | -40°C to +85°C | 56-Lead Lead Frame Chip Scale Package [LFCSP_VQ] | CP-56-2 |
| AD9211-200EBZ ¹ | | LVDS Evaluation Board with AD9211BCPZ-200 | |
| AD9211-250EBZ ¹ | | LVDS Evaluation Board with AD9211BCPZ-250 | |
| AD9211-300EBZ ¹ | | LVDS Evaluation Board with AD9211BCPZ-300 | |

¹ Z = RoHS Compliant Part.