


**PLENUM CABLE – MULTIPLE PAIR**

**UL Type CMP, CL3P, 60°C**  
**Individually Shielded Pairs**  
**LSPVC Insulation**  
**LSPVC Jacket**  
**Copper Conductors**

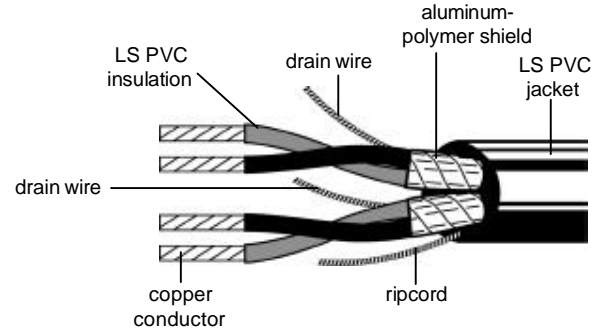

Catalog No.	Size AWG	No. of Pairs	No. of Strands	Insulation Thickness Mils	Jacket Thickness Mils	Overall Diameter Inch	Net Weight Lbs/Mft
HW408 02202	22	2	7	9	15	.22	26
HW408 02203	22	3	7	9	15	.23	37
HW408 02204	22	4	7	9	15	.26	46
HW408 02206	22	6	7	9	15	.31	58

**Application:**

For use in plenum areas in remote control signaling and power-limited circuit applications where superior protection from electrostatic interference is required, for security, intercom, public address, sound and audio systems.

**Conductors:**

Stranded soft bare annealed copper per ASTM B-3.

**Insulation:**

Low smoke PVC (LSPVC)

**Individual Shield:**

Aluminum-polymer tape providing 100% coverage with a flexible 7-strand tinned copper drain wire.

**Jacket:**

Beige low smoke PVC (LSPVC) with a ripcord applied longitudinally under the jacket to facilitate stripping.

**Flame Tests:**

UL 910 Steiner tunnel flame test

**Color Code:**

See appendix, Chart 2

**Additional Standards:**

- UL Standard 13, NEC Article 725 Type CL3P
- UL Standard 444, NEC Article 800 Type CMP

**Voice, Data, and Premise Wire**