


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE	(6K)
Sn96%, Ag4%	Yes	No	

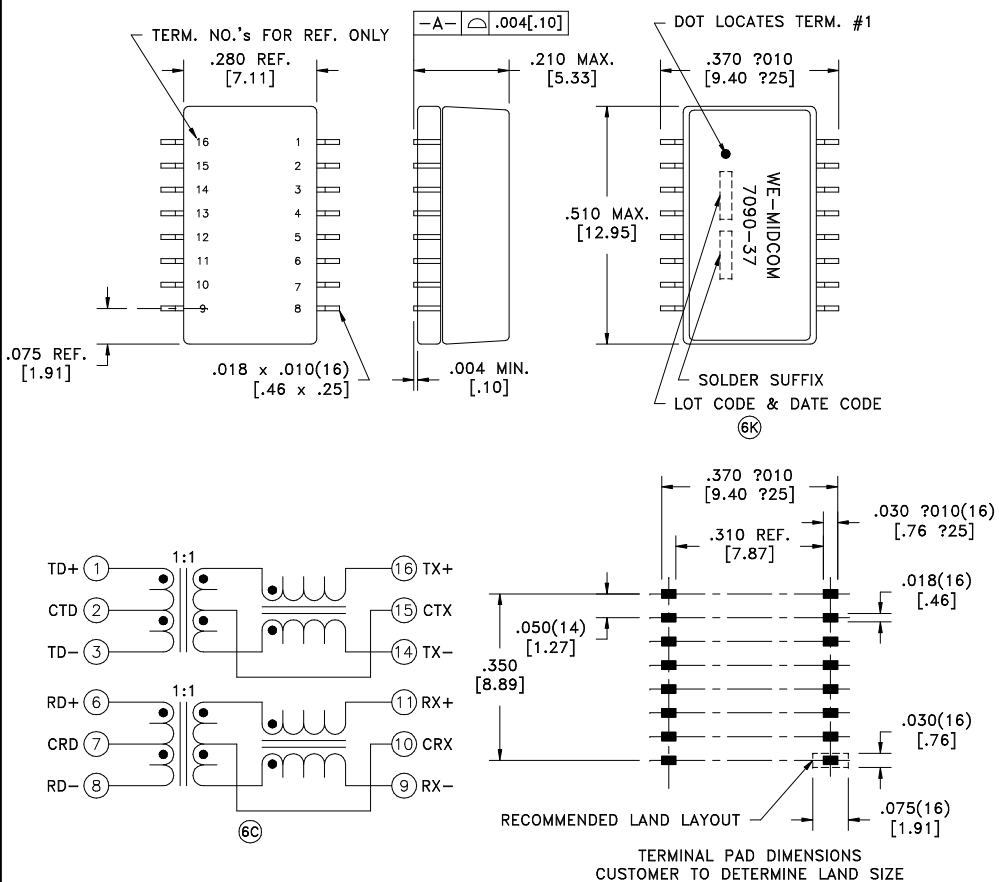

# ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

- (6C) INSERTION LOSS: -1.1dB max., 500k - 100MHz.
- (6P)(6C) DIELECTRIC RATING: 1500Vrms, 1 minute tested by applying 1800Vrms for 1 second between 1-16(tie 1+2+3+6+7+8, 9+10+11+14+15+16).
- (6C) INDUCTANCE: 350uH min., 100kHz, 100mV, 8mADC, 16-14; 11-9 Lp.
- RETURN LOSS: -18dB min., 500k - 30MHz.  
-16dB min., 30M - 45MHz.  
-14dB min., 45M - 60MHz.  
-12dB min., 60M - 80MHz.
- URNS RATIO & POLARITY: (1-3):(16-14) = 1:1, ?%.  
(6-8):(11-9) = 1:1, ?%.
- CROSSTALK: -35dB min., 1M - 100MHz.
- (6C) DCMR: -30dB min., 500k - 100MHz.
- (6P)(6C) CMRR: -60dB typ., 500k - 30MHz.  
-30dB min., 30M - 100MHz.

OPERATING TEMPERATURE RANGE: -40°C to +85°C.

COPLANARITY: All 16 terminals must lie on a plane within .004 [.10] of Surface A after lead tinning.

REV.	DATE
6P	8/09
6N	8/08
6M	8/07
6L	8/05
6K	4/05

DETAILS SUBJECT TO CHANGE

Packaging Specifications  
Method: Tape & Reel  
PKG-0339  
www.midcom-inc.com

Unless otherwise specified:  
Tolerances: Fractions:  $\pm 1/64$   
Angles:  $\pm 1^\circ$  Decimals:  $\pm .005$  [.127]

This drawing is dual dimensioned. Dimensions in brackets are in millimeters.

DRAWING TITLE

**TRANSFORMER**  
PDSO-G16

eiSos p/n: 749010013

Midcom  
www.midcom-inc.com

REVISIONS: SEE SHEET 1

DRAWING NO.

**000-7090-37R-LF1**

SCALE ---

AGENCY NUMBER	
UL60950	E205930
CSA60950 (Via CUL)	E205930

(6K)

SHEET 2 OF 8