



SAW Components

Data Sheet B3886





SAW Components

B3886

Low-Loss Filter

121,00 MHz

Data Sheet


Ceramic package QCC12C

Features

- Low-loss IF filter
- Temperature stable
- Ceramic SMD package
- Balanced and unbalanced operation possible

Terminals


- Gold plated

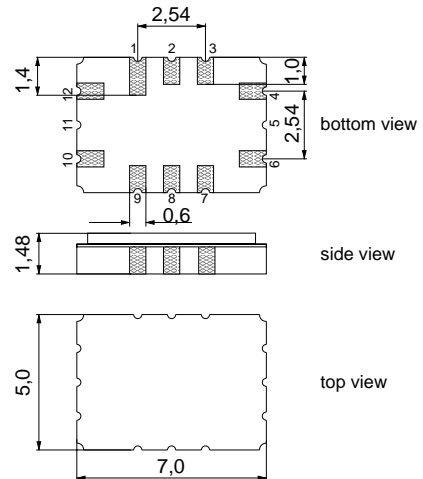

Dimensions in mm, approx. weight 0,2 g

Pin configuration

- | | |
|------------|----------------|
| 10 | Input |
| 12 | Input ground |
| 4 | Output |
| 6 | Output ground |
| 3, 9 | Case ground |
| 1, 2, 7, 8 | To be grounded |

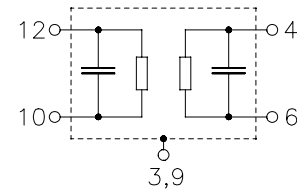

Type	Ordering code	Marking and Package according to	Packing according to
B3886	B39121-B3886-H310	C61157-A7-A95	F61074-V8170-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	-25 / +105	°C
Storage temperature range	T_{stg}	-25 / +105	°C
DC voltage	V_{DC}	0	V
Source power	P_s	10	dBm


SAW Components
B3886
Low-Loss Filter
121,00 MHz
Data Sheet
Characteristics

Operating temperature range: $T = -25^{\circ}\text{C}$ to $+85^{\circ}\text{C}$
 Terminating source impedance: $Z_S = 75\ \Omega$ and matching network
 Terminating load impedance: $Z_L = 75\ \Omega$ and matching network


		min.	typ.	max.	
Center frequency	f_C	120,50	121,00	121,5	MHz
Minimum insertion attenuation (including loss in matching elements)	α_{\min}	—	10,2	11,0	dB
Amplitude ripple (p-p) $f_C - 750\ \text{kHz}$... $f_C + 750\ \text{kHz}$	$\Delta\alpha$	—	0,5	1,2	dB
Passband width					
	$\alpha_{\text{rel}} \leq 1,0\ \text{dB}$	$B_{1,0\text{dB}}$	—	2,6	— MHz
	$\alpha_{\text{rel}} \leq 3,0\ \text{dB}$	$B_{3,0\text{dB}}$	2,6	3,5	— MHz
	$\alpha_{\text{rel}} \leq 35,0\ \text{dB}$	$B_{35\text{dB}}$	—	7,0	8,0 MHz
Relative attenuation (relative to α_{\min})	α_{rel}				
5,0 MHz ... 81,0 MHz		45	60	—	dB
81,0 MHz ... 117,0 MHz		35	45	—	dB
125,0 MHz ... 151,0 MHz		35	45	—	dB
151,0 MHz ... 862,0 MHz		45	60	—	dB
Impedance at f_C					
Input: $Z_{\text{IN}} = R_{\text{IN}} \parallel C_{\text{IN}}$		—	263 28	—	$\Omega \parallel \text{pF}$
Output: $Z_{\text{OUT}} = R_{\text{OUT}} \parallel C_{\text{OUT}}$		—	263 23	—	$\Omega \parallel \text{pF}$
VSWR (Input and Output)	$f_C \pm 750\ \text{kHz}$	—	1,8	—	
Temperature coefficient of frequency	TC_f	—	-18	—	ppm/K



Data Sheet

Matching network to 75 Ω

(Element values depend upon PCB layout)

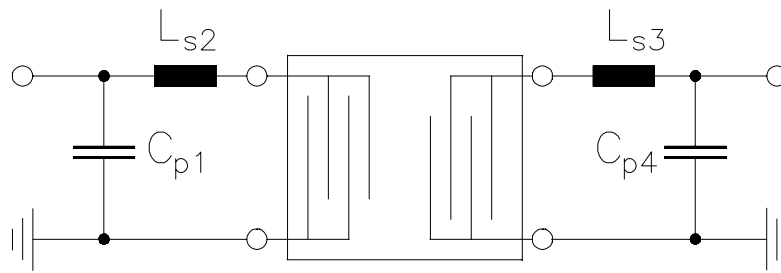


$C_{p1} = 47 \text{ pF}$
 $L_{s2} = 82 \text{ nH}$

$L_{s3} = 100 \text{ nH}$
 $C_{p4} = 33 \text{ pF}$




Data Sheet

Transfer function:

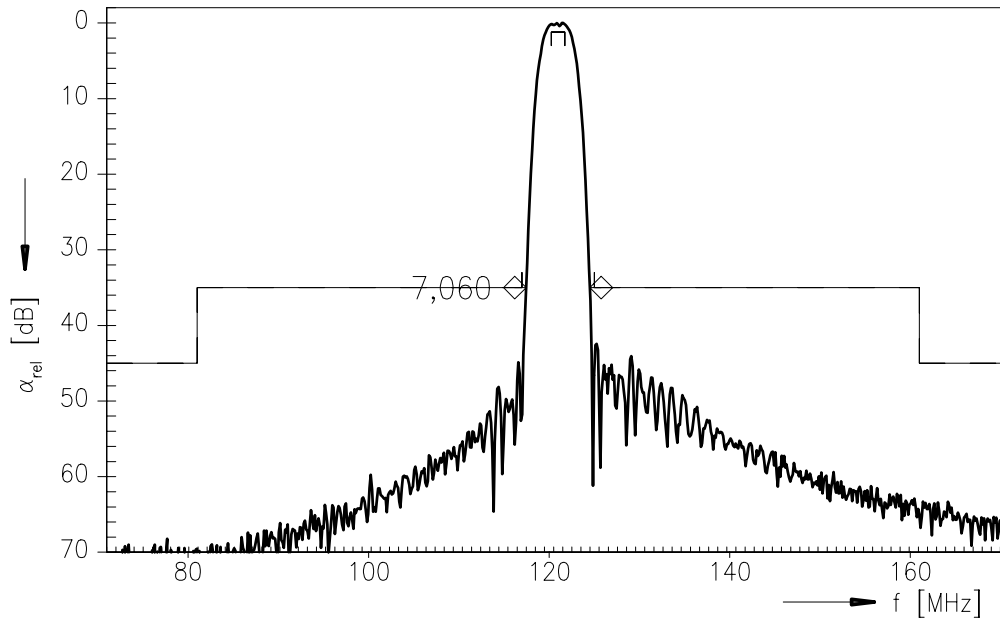

Transfer function (pass band):

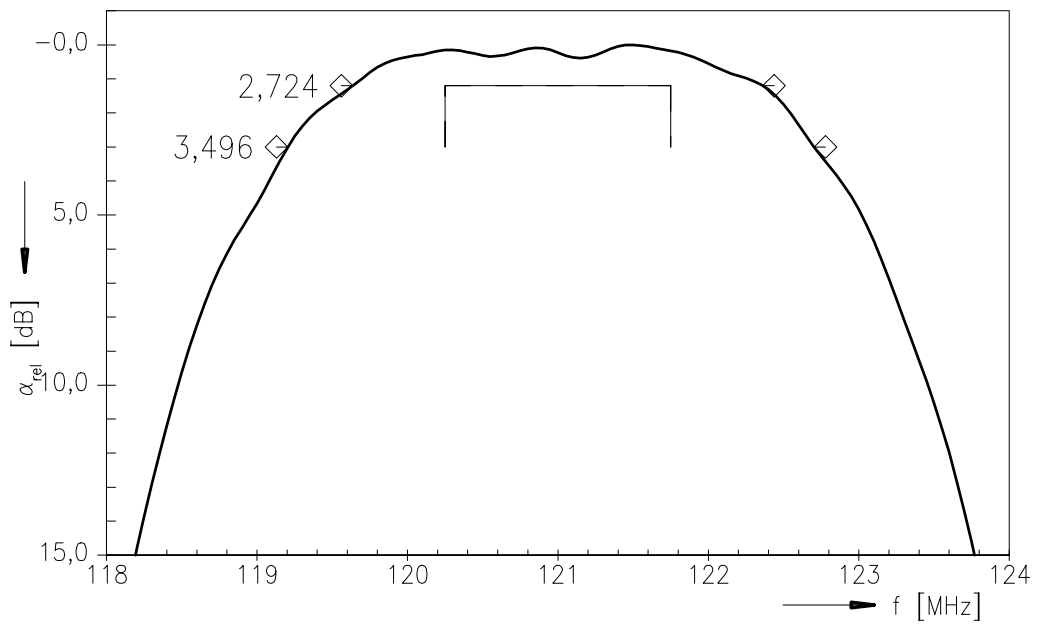



SAW Components

B3886

Low-Loss Filter

121,00 MHz

Data Sheet

Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW MC IS

P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2003. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.