



# SAW Components

Data Sheet B5034





**SAW Components**

**B5034**

**Low-Loss Filter**

**456,00 MHz**

**Data Sheet**


**Features**

- Low-loss filter for WiMAX
- Usable bandwidth 4,2 MHz
- Low insertion attenuation
- Package for Surface Mounted Technology (SMT)

**Terminals**

- Gold plated


Ceramic SMD package QCC12E

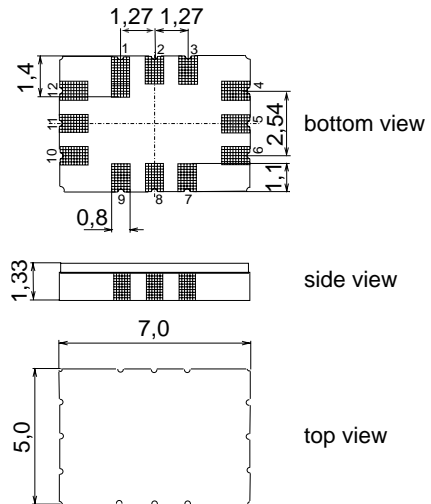

Dimensions in mm, approx. weight 0,2 g

**Pin configuration**

- |             |               |
|-------------|---------------|
| 10          | Input         |
| 12          | Input Ground  |
| 4           | Output        |
| 6           | Output Ground |
| 2, 3, 8, 9  | Ground        |
| 1, 5, 7, 11 | Case ground   |

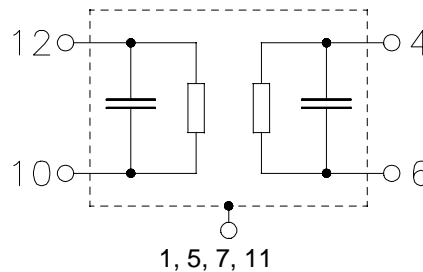

Type	Ordering code	Marking and Package according to	Packing according to
B5034	B39461-B5034-H810	C61157-A7-A103	F61074-V8170-Z000

**Electrostatic Sensitive Device (ESD)**

**Maximum ratings**

Operable temperature range	$T$	-40/ +85	°C	
Storage temperature range	$T_{stg}$	-40/ +85	°C	
DC voltage	$V_{DC}$	3	V	between input, output and ground
DC voltage	$V_{DC}$	0	V	between 10, 12 and between 4,6



**SAW Components**

**B5034**

**Low-Loss Filter**

**456,00 MHz**

**Data Sheet**


**Characteristics**

Operating temperature:  $T = -30 \dots +85 \text{ }^\circ\text{C}$   
 Terminating source impedance:  $50 \text{ } \Omega$  single ended and matching network  
 Terminating load impedance:  $50 \text{ } \Omega$  single ended and matching network

		min.	typ.	max.	
<b>Nominal frequency</b>	$f_N$	—	456,00	—	MHz
<b>Minimum insertion attenuation</b> (including matching network)	$\alpha_{\min}$	—	6,8	9,0	dB
<b>Amplitude ripple (p-p)</b>	$\Delta\alpha$ $f_N \pm 2,1 \text{ MHz}$	—	0,4	1,3	dB
<b>Group delay ripple (p-p)</b>	$\Delta\tau$ $f_N \pm 2,1 \text{ MHz}$	—	75	250	ns
<b>Impulse response attenuation</b> (Time/Height values are relative to the main time response lobe) > 3 $\mu\text{s}$		30	55	—	dB
<b>Relative attenuation</b> (relative to $\alpha_{\min}$ )	$\alpha_{\text{rel}}$				
365 MHz ... 371 MHz		40	48	—	dB
412 MHz		45	57	—	dB
412 MHz ... 450,0 MHz		40	48	—	dB
$f_N \pm 5,3 \text{ MHz} \dots f_N \pm 6,0 \text{ MHz}$		35	45	—	dB
462,0 MHz ... 600 MHz <sup>1)</sup>		40	50	—	dB
<b>Temperature coefficient of frequency</b>	$TC_f$	—	-18	—	ppm/K

1) A narrow response around 550 MHz of up to 37 dB is possible

**Matching network to 50  $\Omega$  (Element values depend on PCB layout)**

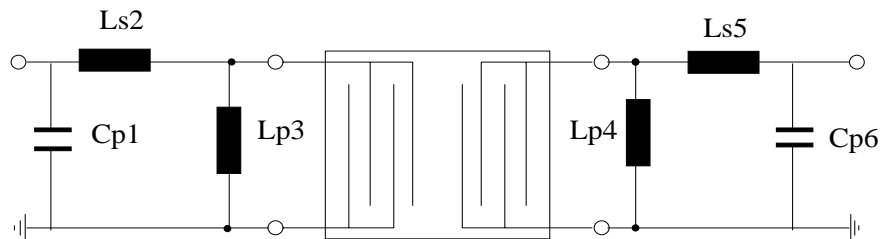


$C_{p1} = 12 \text{ pF}$      $L_{s2} = 8,2 \text{ nH}$      $L_{p3}$  not used     $L_{p4} = 12 \text{ nH}$      $L_{s5} = 15 \text{ nH}$      $C_{p6}$  not used




Data Sheet

Normalized transfer function

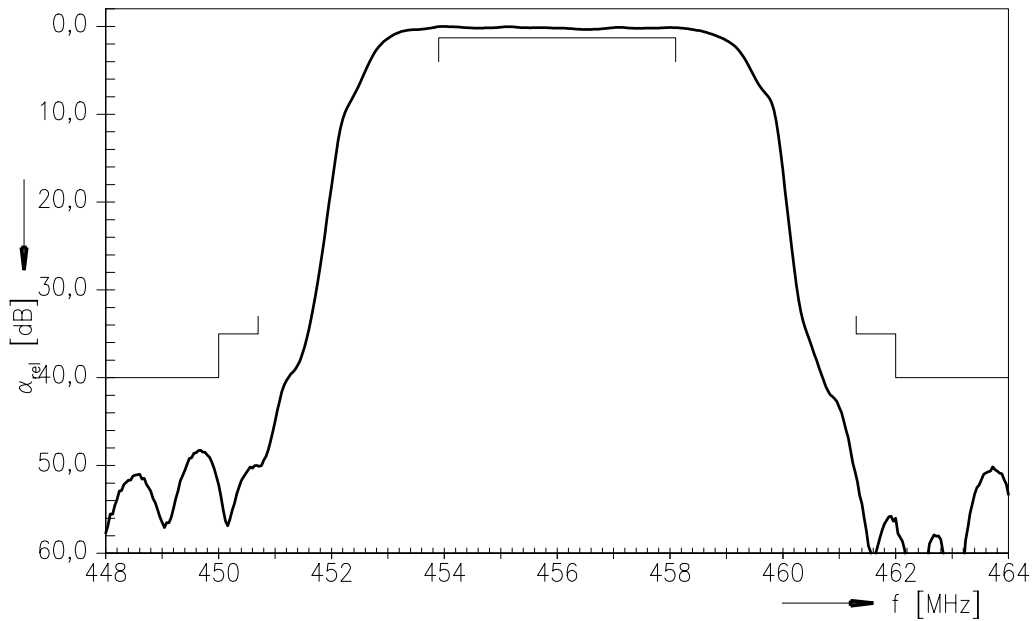


Normalized transfer function (pass band)

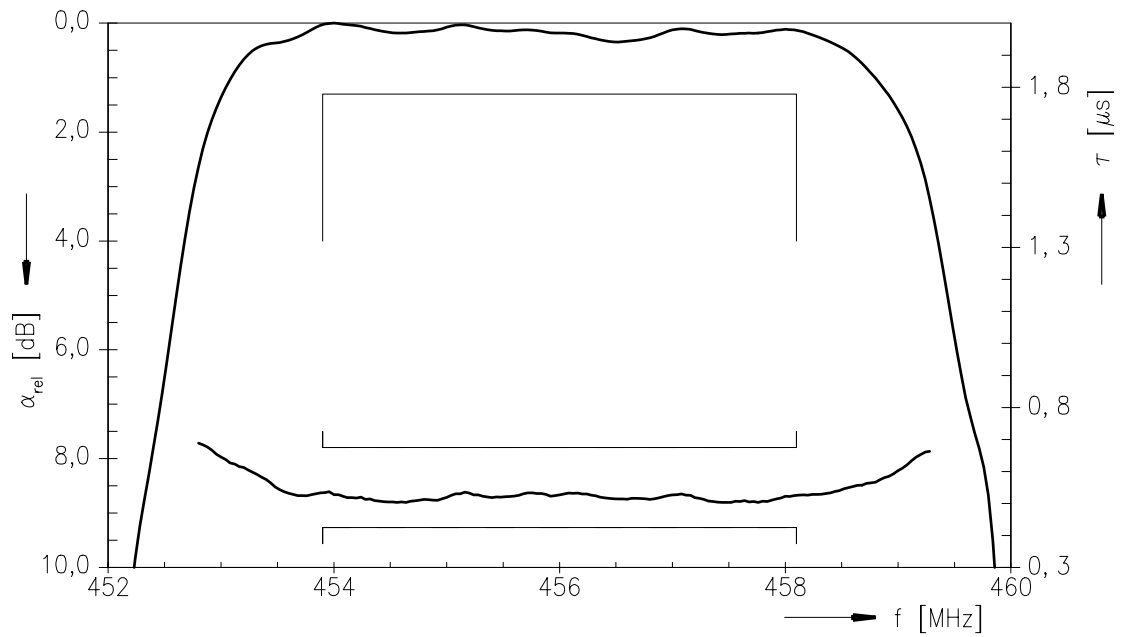



## Data Sheet

## Transfer function (Impulse response)

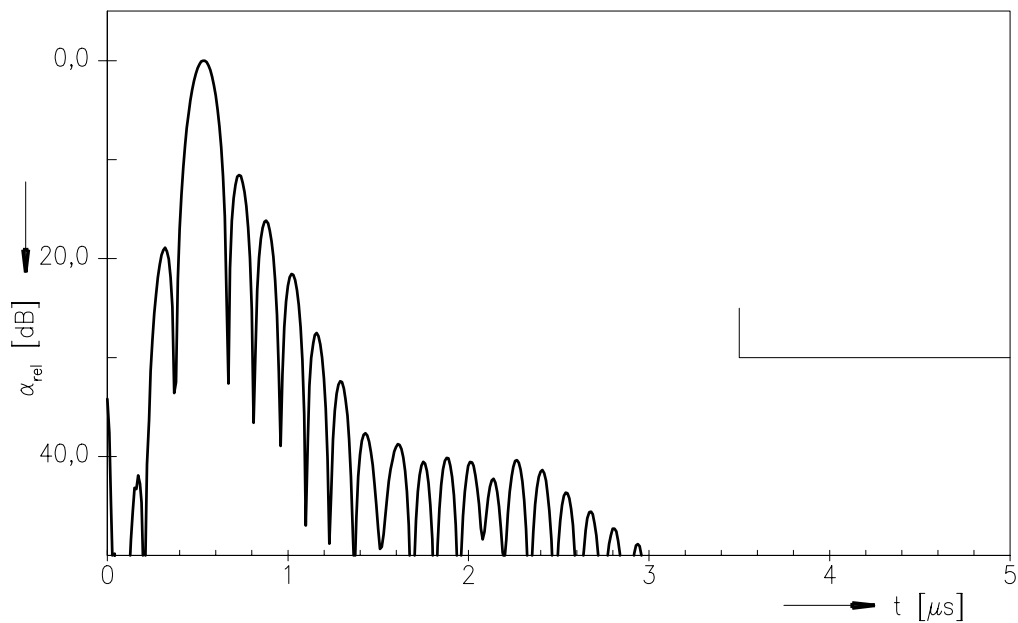**Published by EPCOS AG****Surface Acoustic Wave Components Division, SAW COM****P.O. Box 80 17 09, 81617 Munich, GERMANY**

© EPCOS AG 2005. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.