



### Thermistor Configuration

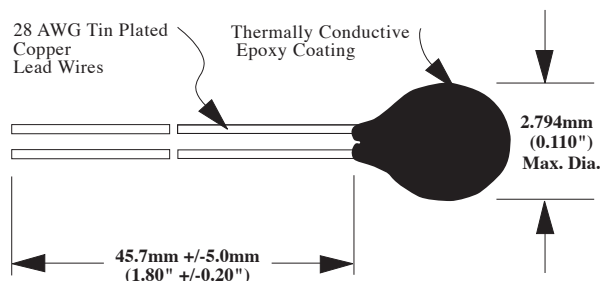

### Example: BetaCURVE Series IV Part Number

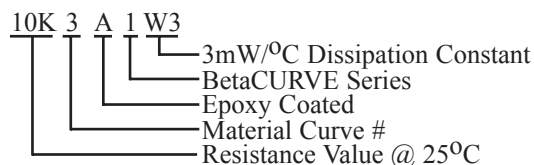

### BetaCURVE Interchangeable Series IV

#### Applications:

- Temperature sensing, control and compensation.
- Applications where a Dissipation Constant of 3.0 mW/°C is required.

#### Features:

- Rapid Time Response (1.5 second, typical in liquids).
- DC (Dissipation Constant) = 3.0mW/°C typical in still air at 25°C.
- Min./Max. Temperature Exposure = -80°C to 150°C.
- Available in custom probe assemblies.
- Proven Stability and Reliability

BetaTherm Thermistor Series IV provides a higher Dissipation Constant (3.0mW/°C) allowing design engineers greater flexibility on sensor design projects. The higher D.C. is achieved using 28 AWG tin plated copper lead wires and also larger chip thermistor elements. These chip elements are manufactured using the same high quality materials and manufacturing process as *Series I*. Custom resistance values and tolerances are available upon request.

### BetaCURVE Series IV Part Numbers and Specifications:

Part Number	Color Code	Resistance ohms @ 25°C	Resistance Tolerance @ 25°C	Temperature Tolerance and Range	Alpha @ 25°C	0/50 °C Beta Value	Curve #
2.2K3A1W3	Brown	2252	+/- 0.50%	+/- 0.2 °C (0 to 70 °C)	-4.39 %/°C	3892	3
3K3A1W3	Red	3000	+/- 0.50%	+/- 0.2 °C (0 to 70 °C)	-4.39 %/°C	3892	3
5K3A1W3	Orange	5000	+/- 0.50%	+/- 0.2 °C (0 to 70 °C)	-4.39 %/°C	3892	3
10K3A1W3	Yellow	10000	+/- 0.50%	+/- 0.2 °C (0 to 70 °C)	-4.39 %/°C	3892	3
10K4A1W3	Black	10000	+/- 0.50%	+/- 0.2 °C (0 to 70 °C)	-4.04 %/°C	3575	4
30K5A1W3	White	30000	+/- 0.50%	+/- 0.2 °C (0 to 70 °C)	-4.30 %/°C	3811	5
30K6A1W3	Green	30000	+/- 0.50%	+/- 0.2 °C (0 to 70 °C)	-4.68 %/°C	4143	6
50K6A1W3	Blue	50000	+/- 0.50%	+/- 0.2 °C (0 to 70 °C)	-4.68 %/°C	4143	6
100K6A1W3	Violet	100000	+/- 0.50%	+/- 0.2 °C (0 to 70 °C)	-4.68 %/°C	4143	6

**BETA ApS (DK + NO):** Phone: +45 59 31 11 88, Fax: +45 59 31 12 10, email: [beta@beta.dk](mailto:beta@beta.dk)

**BEATA Komponent AB (SE):** Phone: +46 (0)392 360 40, Fax: +46 (0)392 360 41, e-mail: [beata@beta.dk](mailto:beata@beta.dk)

**BETA Finland OY (FI):** Phone: +358 (0)9 260 9209, Fax: +358 (0)9 260 9208, e-mail: [betafinland@beta.dk](mailto:betafinland@beta.dk)

url: [www.beta.dk](http://www.beta.dk), [www.beata.se](http://www.beata.se), [www.betafinland.fi](http://www.betafinland.fi), [www.betatherm.com](http://www.betatherm.com)