


# 5-Point LED Linear Level Meter Driver BA6125

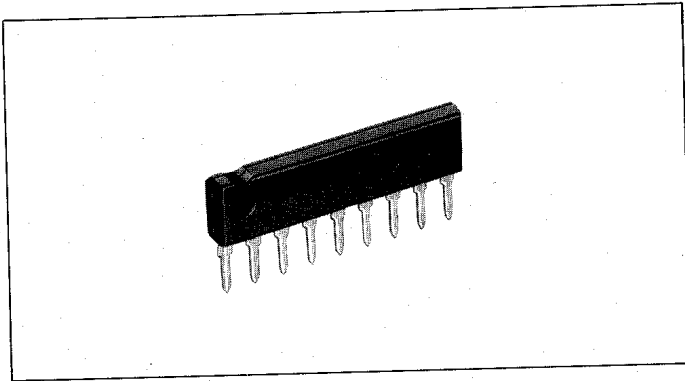

Dimensions (mm)

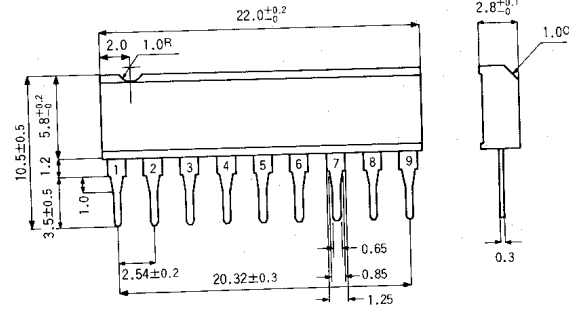


Fig. 1

The BA6125 is a monolithic integrated circuit consisting of an LED level meter driver developed for use in radio cassette tape recorders and other audio products. It is capable of driving 5 LEDs to form a bar-type display of input level in the range 35mVrms~175mVrms in 35mVrms steps.

The internal circuitry makes use of rectifying amplifiers, enabling direct input of AC signals and eliminating variations in LED drive current with respect to supply voltage variations, thus allowing direct LED drive.

Block Diagram

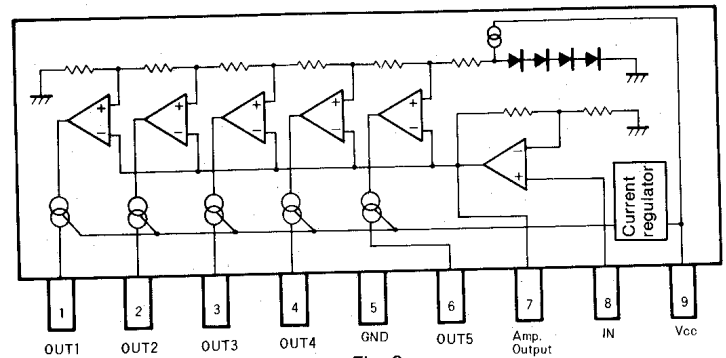


Fig. 2

## Features

1. Rectifying amplifiers are used to allow AC or DC signal inputs.
2. LED drive current is regulated to eliminate variations in LED current with respect to supply voltage variations.
3. The reference voltage is determined internally to eliminate output display variations with variations of supply voltage.
4. Wide supply voltage range (3.5~16V) enables a wide range of applications.
5. Housed in a 9-pin SIP package and requires few externally connected components, thus conserving PC board space.

## Applications

1. Battery checkers
2. Signal meters
3. Other display devices

## Absolute Maximum Ratings (T<sub>a</sub> = 25°C)

Parameter	Symbol	Limits	Unit
Supply voltage	V <sub>CC</sub>	18	V
Power dissipation	P <sub>d</sub>	1100*	mW
Operating temperature	T <sub>opr</sub>	-25~+60	°C
Storage temperature	T <sub>stg</sub>	-55~+125	°C
Junction temperature	T <sub>j</sub>	+150	°C

\* Derating is done at 11mW/°C for operation above T<sub>a</sub> = 25°C.

## Electrical Characteristics (T<sub>a</sub> = 25°C, V<sub>CC</sub> = 6V, f = 1kHz)

Parameter	Symbol	Min	Typ	Max	Unit	Conditions	Test ciru
Supply voltage	V <sub>CC</sub>	3.5	6	16	VDC		Fig. 3
Supply current	I <sub>CC</sub>	—	5	8	mA	V <sub>IN</sub> = 0	Fig. 3
Sensitivity	V <sub>IN</sub>	—	105	—	mVrms	V <sub>c3</sub> on-state level	Fig. 3
Comparator level 1 (pin 1)	V <sub>c1</sub>	—	1/3V <sub>c3</sub>	—	mVrms		Fig. 3
Comparator level 2 (pin 2)	V <sub>c2</sub>	—	2/3V <sub>c3</sub>	—	mVrms		Fig. 3
Comparator level 3 (pin 3)	V <sub>c3</sub>	—	1	—	—	Adjustment point	Fig. 3
Comparator level 4 (pin 4)	V <sub>c4</sub>	—	4/3V <sub>c3</sub>	—	mVrms		Fig. 3
Comparator level 5 (pin 6)	V <sub>c5</sub>	—	5/3V <sub>c3</sub>	—	mVrms		Fig. 3
LED Current	I <sub>LED</sub>	11	15	18.5	mA		Fig. 3
Input bias current	I <sub>INO</sub>	—	0.3	1.0	μA		Fig. 3