

# 75Ω driver IC with 3 internal circuits

## BA7622F

The BA7622F is a 75Ω driver-IC developed for use in video equipment. It includes three 75Ω driver circuits, two of which have sync-tip clamp inputs. The other driver has a biased input terminated with a 20kΩ resistor. Each output can drive two loads ( $75\Omega \times 2$ ).

### ●Applications

Video cassette recorders, televisions and camcorders

### ●Features


- 1) Two built-in clamp circuits.
- 2) Simultaneous drive of Y, C and composite video signals possible.
- 3) Each output can drive two loads.

### ●Absolute maximum ratings (Ta = 25°C)

| Parameter             | Symbol           | Limits       | Unit |
|-----------------------|------------------|--------------|------|
| Power supply voltage  | V <sub>cc</sub>  | 8.0          | V    |
| Power dissipation     | P <sub>d</sub>   | 550*         | mW   |
| Operating temperature | T <sub>opr</sub> | - 25 ~ + 75  | °C   |
| Storage temperature   | T <sub>stg</sub> | - 55 ~ + 125 | °C   |

\* Reduced by 5.5mW for each increase in Ta of 1°C over 25°C.

## ●Block diagram

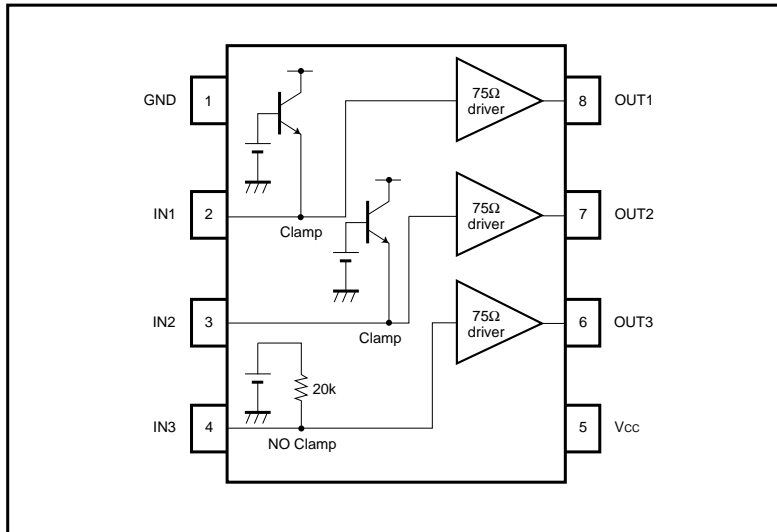

## ●Pin descriptions


| Pin No. | Pin name | Function  |
|---------|----------|---|
| 1       | GND      | Ground connection   |
| 2       | IN1      | Clamp input<br>Input composite video or the Y signal separated from Y / C.  |
| 3       | IN2      | Clamp input<br>Input composite video or the Y signal separated from Y / C.  |
| 4       | IN3      | Biased input<br>Input the chroma signal. Terminated with a 20k $\Omega$ resistor.   |
| 5       | Vcc      | Power supply  |
| 6       | OUT3     | Biased output<br>Output for the signal input to IN3. When connected to earth a protection circuit operates, and the IC enters power-save mode.  |
| 7       | OUT2     | Clamped output<br>Output for the signal input to IN2. When connected to earth a protection circuit operates, and the IC enters power-save mode. |
| 8       | OUT1     | Clamped output<br>Output for the signal input to IN1. When connected to earth a protection circuit operates, and the IC enters power-save mode. |

●Electrical characteristics (unless otherwise noted,  $T_a = 25^\circ\text{C}$  and  $V_{CC} = 5\text{V}$ , and load is two system drive)


| Parameter                               | Symbol     | Min. | Typ. | Max. | Unit      | Conditions  |
|---|------------|------|------|------|-----------|---|
| Operating voltage                       | $V_{CC}$   | 4.5  | 5.0  | 5.5  | V         | —   |
| Circuit current                         | $I_{CC}$   | —    | 23.6 | 35.4 | mA        | No signal   |
| Maximum output level                    | $V_{om}$   | 2.8  | 3.3  | —    | $V_{P-P}$ | $f = 1\text{kHz}$ , THD = 1.0%                    |
| Voltage gain                            | $G_v$      | -1.2 | -0.6 | 0    | dB        | $f = 1\text{MHz}$ , $V_{IN} = 2.0V_{P-P}$         |
| Frequency characteristics               | $G_f$      | -3   | 0    | 1.3  | dB        | 10MHz / 1MHz, $V_{IN} = 1.0V_{P-P}$               |
| Differential gain 75Ω drive 1           | DG1        | —    | 0.4  | 1.0  | %         | $V_{IN} = 2.0V_{P-P}$ , standard staircase signal |
| Differential phase 75Ω drive 1          | DP1        | —    | 0.4  | 1.0  | deg       | $V_{IN} = 2.0V_{P-P}$ , standard staircase signal |
| Differential gain 75Ω drive 2           | DG2        | —    | 0.7  | 2.0  | %         | $V_{IN} = 2.0V_{P-P}$ , standard staircase signal |
| Differential phase 75Ω drive 2          | DP2        | —    | 0.7  | 2.0  | deg       | $V_{IN} = 2.0V_{P-P}$ , standard staircase signal |
| Interchannel crosstalk                  | $C_T$      | —    | -60  | —    | dB        | $f = 4.43\text{MHz}$ , $V_{IN} = 2.0V_{P-P}$      |
| Input impedance ( $V_{IN3}$ )           | $Z_{IN3}$  | 17   | 20   | 23   | $k\Omega$ | —   |
| Total-harmonic distortion ( $V_{IN3}$ ) | $T_{HD32}$ | —    | 0.1  | 0.5  | %         | $f = 1\text{kHz}$ , $V_{IN} = 1.0V_{P-P}$         |

●Input / output circuits


OUT1, 2, 3



IN1, 2

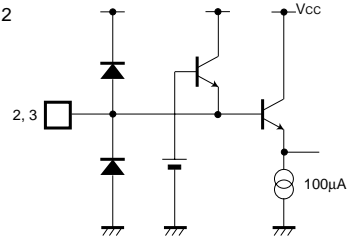

IN3

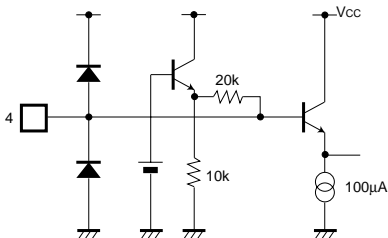

●Measurement circuit

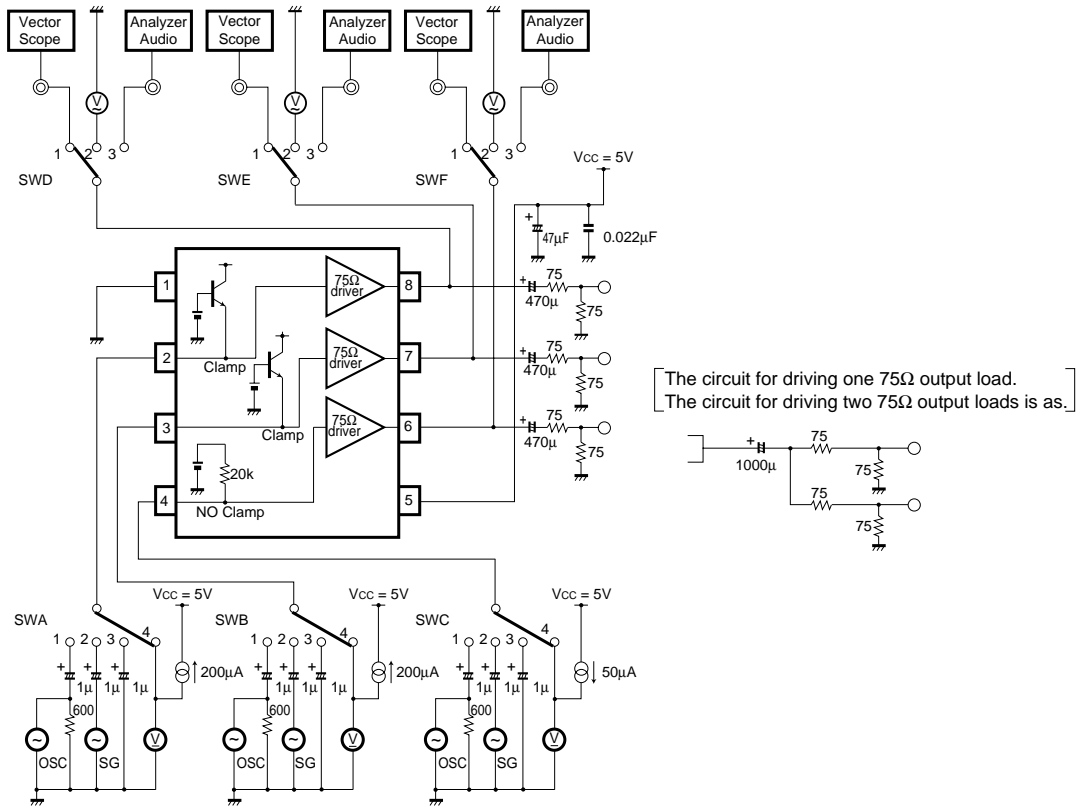


Fig.1

## ● Measurement conditions

| Parameter                 | Symbol            | IN1 | IN2 | IN3 | OUT1 | OUT2 | OUT3 | Conditions |
|---------------------------|-------------------|-----|-----|-----|------|------|------|------------|
|                           |                   | SWA | SWB | SWC | SWD  | SWE  | SWF  |            |
| Current dissipation       | I <sub>CC</sub>   | 3   | 3   | 3   | ×    | ×    | ×    | —          |
| Maximum output level      | V <sub>om12</sub> | 1   | 3   | 3   | 3    | ×    | ×    | *1         |
|                           | V <sub>om22</sub> | 3   | 1   | 3   | ×    | 3    | ×    |            |
|                           | V <sub>om32</sub> | 3   | 3   | 1   | ×    | ×    | 3    |            |
| Voltage gain              | G <sub>v12</sub>  | 1   | 3   | 3   | 3    | ×    | ×    | *2         |
|                           | G <sub>v22</sub>  | 3   | 1   | 3   | ×    | 3    | ×    |            |
|                           | G <sub>v32</sub>  | 3   | 3   | 1   | ×    | ×    | 3    |            |
| Frequency characteristic  | f <sub>12</sub>   | 1   | 3   | 3   | 3    | ×    | ×    | —          |
|                           | f <sub>22</sub>   | 3   | 1   | 3   | ×    | 3    | ×    |            |
|                           | f <sub>32</sub>   | 3   | 3   | 1   | ×    | ×    | 3    |            |
| Interchannel crosstalk    | C <sub>T112</sub> | 1   | 3   | 3   | ×    | 3    | ×    | —          |
|                           | C <sub>T113</sub> | 1   | 3   | 3   | ×    | ×    | 3    |            |
|                           | C <sub>T211</sub> | 3   | 1   | 3   | 3    | ×    | ×    |            |
|                           | C <sub>T213</sub> | 3   | 1   | 3   | ×    | ×    | 3    |            |
|                           | C <sub>T311</sub> | 3   | 3   | 1   | 3    | ×    | ×    |            |
|                           | C <sub>T312</sub> | 3   | 3   | 1   | ×    | 3    | ×    |            |
| Input resistance          | Z <sub>IN3</sub>  | 3   | 3   | 4   | ×    | ×    | ×    | *3         |
| Total-harmonic distortion | T <sub>HD12</sub> | 1   | 3   | 3   | 3    | ×    | ×    | *4         |
|                           | T <sub>HD22</sub> | 3   | 1   | 3   | ×    | 3    | ×    |            |
|                           | T <sub>HD32</sub> | 3   | 3   | 1   | ×    | ×    | 3    |            |

×: Any of switches 1, 2, or 3 possible.

\*1: Connect a distortion meter to the output, and input a  $f = 1\text{kHz}$  sine wave. Adjust the input level until the output distortion is 0.5%. This output voltage at this time is the maximum output level  $V_{om}$  (V<sub>P-P</sub>).

\*2: Input a 2.0V<sub>P-P</sub>, 1MHz sine wave. The voltage gain is given by  $G_v = 20 \log (V_{OUT} / V_{IN})$ .

\*3: Measure the input pin voltage  $V_{IN50}$  when a current of DC50 $\mu\text{A}$  is flowing into the input pin. Measure the input pin open-circuit voltage  $V_{IN0}$ . The input impedance is given by  $Z = (V_{IN50} - V_{IN0}) / 50 \times 10^{-6} [\Omega]$ .

\*4: Input a 1.0V<sub>P-P</sub>, 1kHz sine wave. Connect a distortion meter to the output and measure the total-harmonic distortion.

●Application example

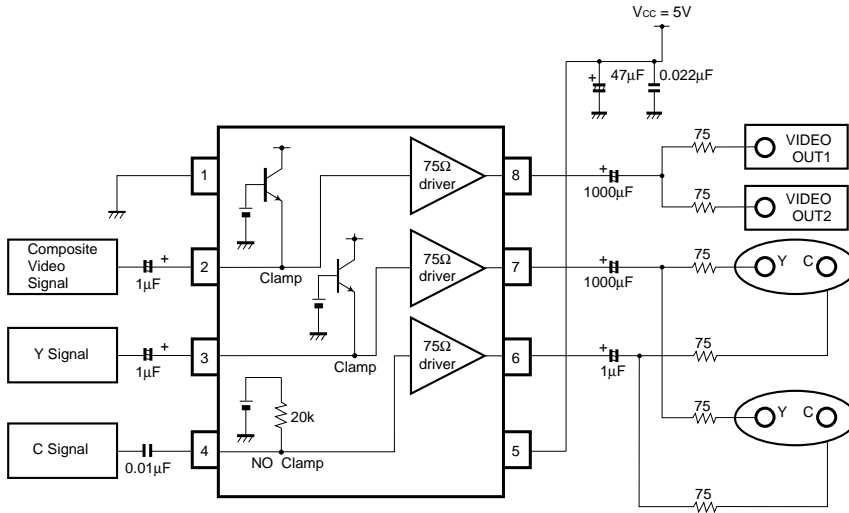


Fig.2

●Electrical characteristic curves

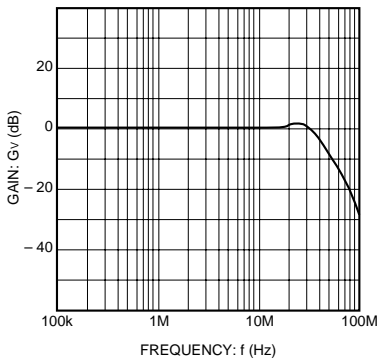


Fig. 3 Frequency characteristic

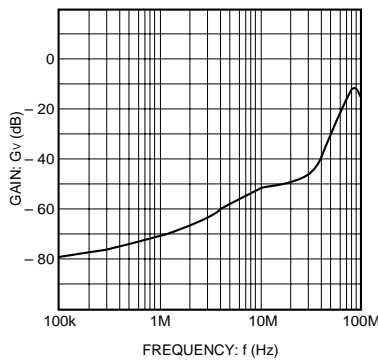


Fig. 4 Crosstalk

● External dimensions (Units: mm)

