





# SBL1060CTSH

## SCHOTTKY BARRIER RECTIFIER

Reverse Voltage - 60 Volts

Forward Current - 10 Amperes

### TO-220AB

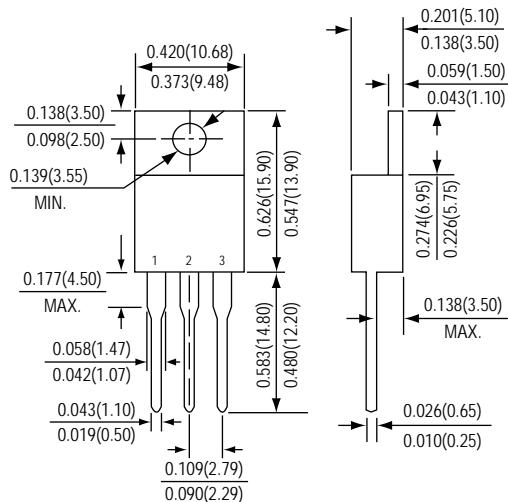

\*Dimensions in inches and (millimeters)



### FEATURES

- \* Halogen-free type
- \* Compliance to RoHS produc
- \* Low forward voltage drop
- \* High current capacity
- \* High reliability
- \* High surge current capability
- \* 10 Amperes total (5 Amperes per diode leg)
- \* Plastic Material-UL Recognition Flammability Classification 94V-0

### MECHANICAL DATA

**Case :** JEDEC TO-220AB molded plastic body

**Terminals :** Plated Leads, solderable per MIL-STD-750, Method 2026

**Polarity :** Molded on body

**Mounting Position :** Any

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.	SYMBOLS	SBL1060CTSH		UNITS
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	60		Volts
Maximum RMS voltage	V <sub>RMS</sub>			
Maximum DC blocking voltage	V <sub>DC</sub>	60		
Maximum average forward rectified current	I <sub>(AV)</sub>	10		Amps
Peak repetitive forward current (rated V <sub>R</sub> , square wave, 20KHz)	I <sub>FM</sub>	10		Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>	150		Amps
Maximum instantaneous forward voltage T <sub>j</sub> =25°C @ I <sub>F</sub> = 5 A T <sub>j</sub> =125°C	V <sub>F</sub>	0.70 0.60		Volts
Maximum DC reverse current @ T <sub>j</sub> =25°C at rated DC blocking voltage @ T <sub>j</sub> =125°C	I <sub>R</sub>	0.20 50		mA
Typical junction capacitance (Note)	C <sub>J</sub>	200		pF
Typical thermal resistance	R <sub>JA</sub>	15		/ W
Operating junction temperature	T <sub>J</sub>	125		
Storage temperature range	T <sub>STG</sub>	-55 to +150		

Note : Measured at 1.0MHz and applied reverse voltage of 4.0V.

# RATINGS AND CHARACTERISTIC CURVES SBL1060CTSH

FIG.1 - FORWARD CURRENT DERATING CURVE

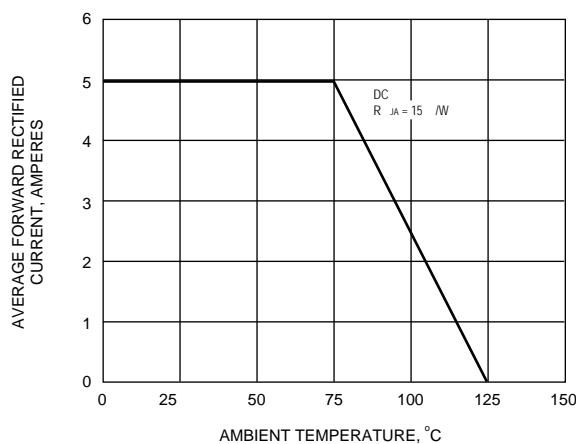


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

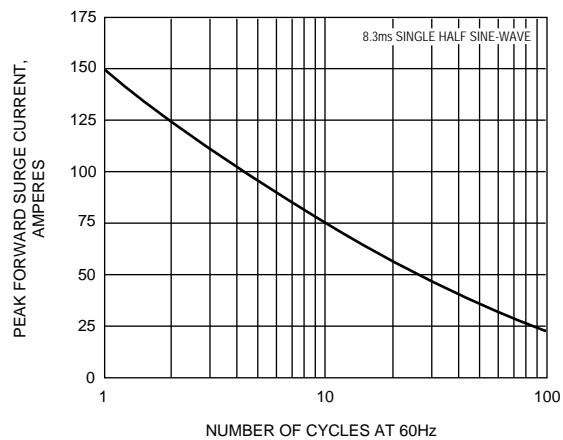


FIG.3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

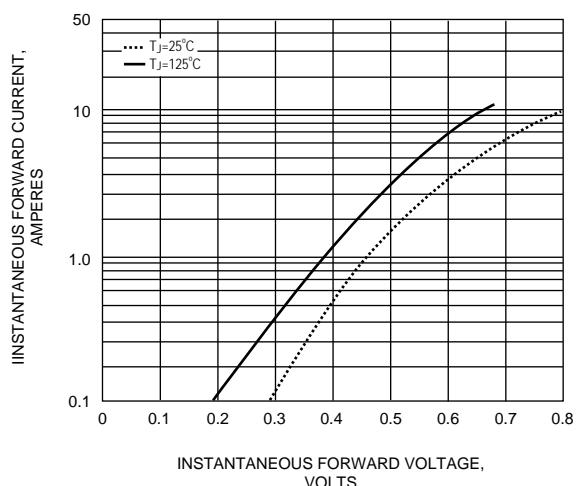


FIG.4 - TYPICAL REVERSE CHARACTERISTICS


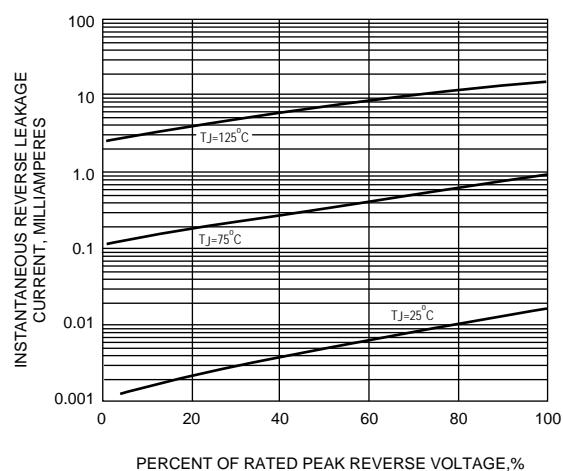


FIG.5 - TYPICAL JUNCTION CAPACITANCE

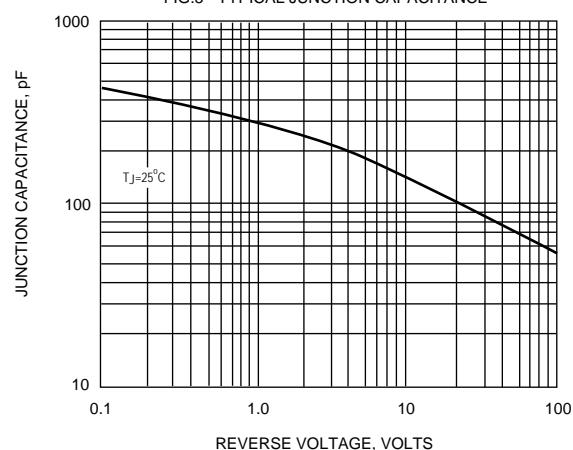

## PACKING INFORMATION

Package	Packing Qty.			Inner Box Size (mm)	Carton Size (mm)
	Tube (pcs)	Inner box (kpcs)	Carton (kpcs)		
TO-220AB	50	4	8	570 x 147 x 150	585 x 316 x 164