



2nd Generation Proximity Sensing Module

BM32S2031-1

Revision: V1.00 Date: June 17, 2022

www.holtek.com

Features

- Wide distance detection application
- Operating voltage: 3.3V/5.0V
- Low current consumption:
 - ♦ Standby current: Typ. 14 μ A (3.3V/default at 85cm/scanning time=0.5s)
- Wide operating range:
 - ♦ Distance: 1~100cm
- Factory-calibrated
- Detection distance learning function
- Optional communication interfaces: UART Mode or I/O Mode



BM32S2031-1

General Description

This device is an infrared proximity sensing module, which is designed for object detection applications. When an object enters the detection range, the reflected energy of the infrared will change. Proximity is determined by detecting changes in reflection. Compared with the general infrared sensing modules on the market, this module has a small size, supports detection of objects at a distance of up to 100cm and has a low standby current consumption of 14 μ A at 3.3V, allowing the module to meet the requirements of a large number of product applications with varying power designs.

Having a modular design ensures much reduced product development time. This proximity sensing module is suitable used for all types of smart home electronic products, such as smart door locks, smart makeup mirrors, smart sanitary ware and automatic dryers. The module provides two user selectable output modes, namely I/O and UART types. When used together with a dedicated development platform, the required module characteristics can be rapidly setup and adjusted to implement fast and convenient product development.


Applications

- White goods
- Consumer electronics
- Electrical door locks
- Bath equipments

Selection Table

| Part Number | Distance (25°C/Indoor) | Interface | Description |
|-------------|------------------------|---------------------|--|
| BM32S2031-1 | 1~100cm | UART (9600bps), I/O | Miniaturized size and no LED indicator |


Pin Assignment

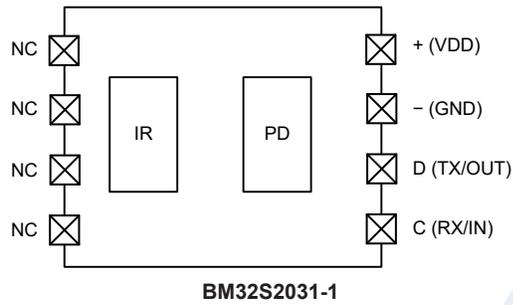

Pin Description

| Pin Symbol | Mode | Function | Description |
|------------|-----------|----------|---|
| C | I/O | IN | Learning key input |
| | UART | RX | UART (9600bps) receiving pin |
| D | I/O | OUT | Level output |
| | UART | TX | UART (9600bps) transmitting pin |
| - | UART, I/O | GND | Connect to ground |
| + | UART, I/O | VDD | Positive power supply ($V_{DD} < 5.5V$) |

Block Diagram

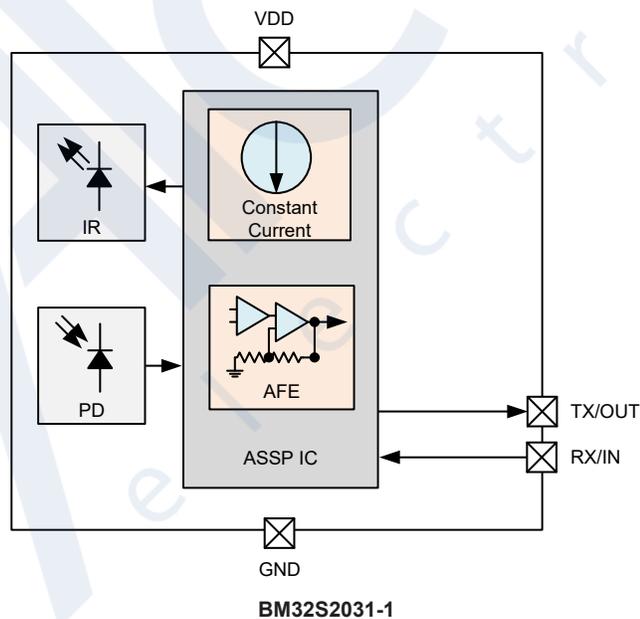

Absolute Maximum Ratings

| | |
|-------------------------------|---------------------------------|
| Supply Voltage | $V_{SS}-0.3V$ to $V_{SS}+5.5V$ |
| Input Voltage | $V_{SS}-0.3V$ to $V_{DD}+0.5V$ |
| Storage Temperature..... | $-40^{\circ}C$ to $85^{\circ}C$ |
| Total Power Dissipation | 500mW |

Note: These are stress ratings only. Stresses exceeding the range specified under “Absolute Maximum Ratings” may cause substantial damage to the device. Functional operation of this device at other conditions beyond those listed in the specification is not implied and prolonged exposure to extreme conditions may affect device reliability.

D.C. Electrical Characteristics

Ta=25°C

| Symbol | Parameter | Test Conditions | | Min. | Typ. | Max. | Unit |
|------------------|---|-----------------|--|------|------|------|------|
| | | V _{DD} | Conditions | | | | |
| V _{DD} | Operating Voltage | — | — | 3.0 | — | 5.5 | V |
| I _{STB} | Standby Current (No Object Detected) | 3.3V | I/O Mode, Default distance at 85cm, Scanning time=8ms | — | 640 | 960 | μA |
| | | 5V | I/O Mode, Default distance at 85cm, Scanning time=8ms | — | 900 | 1350 | |
| | | 3.3V | I/O Mode, Default distance at 85cm, Scanning time=16ms | — | 320 | 480 | |
| | | 5V | I/O Mode, Default distance at 85cm, Scanning time=16ms | — | 500 | 750 | |
| | | 3.3V | I/O Mode, Default distance at 85cm, Scanning time=32ms | — | 160 | 240 | |
| | | 5V | I/O Mode, Default distance at 85cm, Scanning time=32ms | — | 250 | 375 | |
| | | 3.3V | I/O Mode, Default distance at 85cm, Scanning time=64ms | — | 80 | 120 | |
| | | 5V | I/O Mode, Default distance at 85cm, Scanning time=64ms | — | 120 | 180 | |
| | | 3.3V | I/O Mode, Default distance at 85cm, Scanning time=0.125s | — | 45 | 70 | |
| | | 5V | I/O Mode, Default distance at 85cm, Scanning time=0.125s | — | 70 | 105 | |
| | | 3.3V | I/O Mode, Default distance at 85cm, Scanning time=0.25s | — | 25 | 40 | |
| | | 5V | I/O Mode, Default distance at 85cm, Scanning time=0.25s | — | 38 | 60 | |
| | | 3.3V | I/O Mode, Default distance at 85cm, Scanning time=0.5s | — | 14 | 20 | |
| | | 5V | I/O Mode, Default distance at 85cm, Scanning time=0.5s | — | 25 | 35 | |
| | | 3.3V | I/O Mode, Default distance at 85cm, Scanning time=1s | — | 7 | 12 | |
| | | 5V | I/O Mode, Default distance at 85cm, Scanning time=1s | — | 20 | 25 | |
| | | 3.3V | I/O Mode, Default distance at 85cm, Scanning time=Full Speed (no sleep) | — | 1.5 | 3.0 | mA |
| | | 5V | I/O Mode, Default distance at 85cm, Scanning time=Full Speed (no sleep) | — | 2.7 | 5.5 | |


Functional Description

System Description

To achieve stable proximity sensing action, the device only requires a light-shielding mechanism. The module can help users quickly implement proximity sensing function on products and reduce the product development period.

Operating Principle

The device executes initialization after power on. Then it starts periodic detection waiting for objects to approach. When an object reaches the preset detection distance, the output pin level will change (high active or low active output or pulse output). The output pin level status can be used to determine the object proximity status.

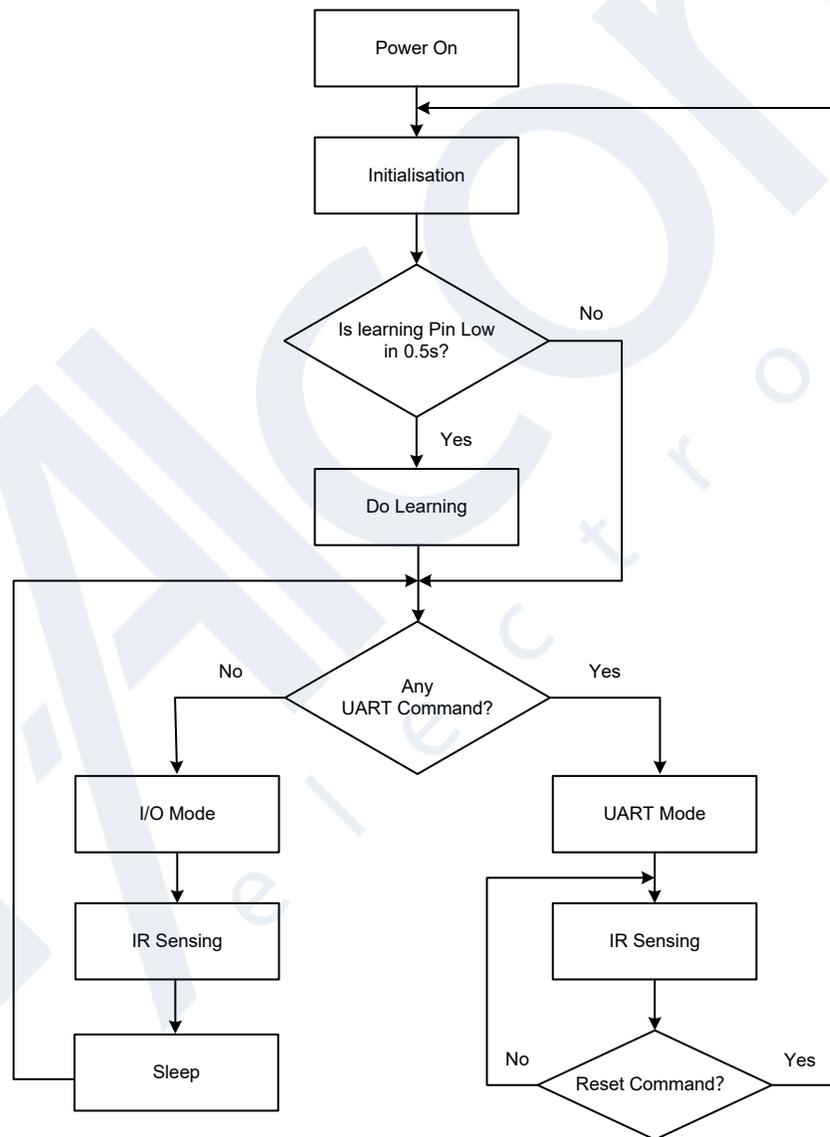

System Folwchart

Reading Object's Proximity Value


The host device can read the value from the device via the corresponding UART command. Continuous reading is allowed.

| Communication Method | Minimum Continuous Interval Time | Unit |
|----------------------|----------------------------------|------|
| UART | 10 | ms |

Reset and Initialization

Power-on Reset

The most fundamental and unavoidable reset is the one that occurs after power is first applied to the microcontroller. As well as ensuring that the Program Memory begins execution from the first memory address, a power-on reset also ensures that certain other registers are preset to known conditions. All the I/O port and port control registers will power up in a high condition ensuring that all pins will be first set to inputs.

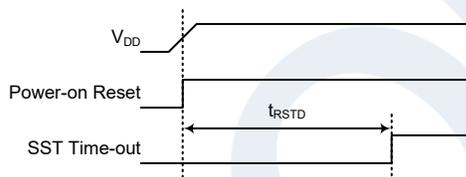

Note: t_{RSTD} is power-on delay with typical time=48ms

Power-on Reset Timing Chart

Detection Distance Learning Function


The default detection distance of this module is 85cm. This function can be used to set other detection distances according to the application requirements.

Place the object to be detected at the desired distance. Pull the IN pin to low level 0.5s. Then release the IN pin. The distance learning is completed when the OUT pin level changes. When distance learning is completed, the module will automatically reply with success or failure.

Note that the longer the distance, the larger the error.


Application Circuits

I/O Mode

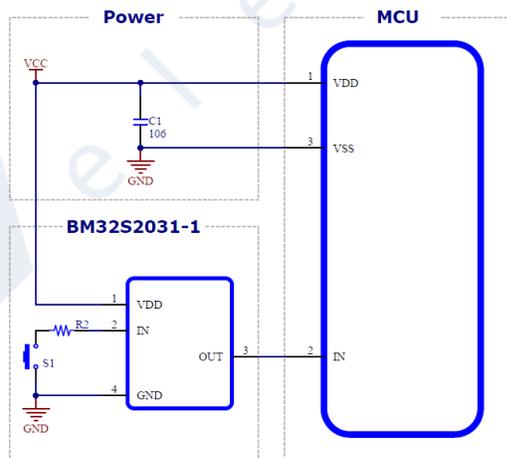

Active Low Application

UART Mode

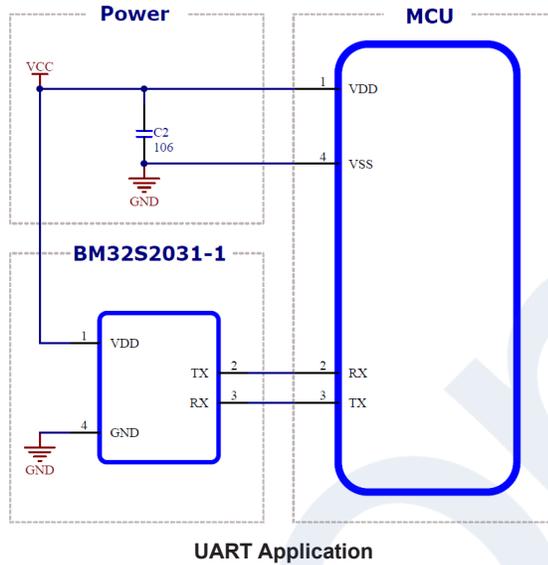

Interface

The device supports the UART communication method. In the UART mode, the host device can read the measurement result and device information from the device, and can also modify the Mode Function of the module. More details about the communication are described in the following UART section.

In the UART mode, IN and OUT pins are used as the communication pins and the IR detection reacts at Fast Mode by default. Switching back to I/O mode is implemented by sending a Module Reset command from the host device.

UART Interface

Send any command to the module through RX after power-on, the module will enter the UART mode. The UART protocol is as follows:

1. Preamble ID(PID): 0x55
2. Command (CMD)
 - 0x80: read parameters from module
 - 0xC0: write parameters to module
3. Register address: An
4. Data length: Len
5. Data: Dn
6. CheckSum (CS): CS=PID+CMD+An+LEN+Dn; (take the lower 8 bits of the checksum)

| PID | Command | Register Address | Data length | Data | CheckSum |
|------|---------|------------------|-------------|------|----------|
| 0x55 | CMD | An | Len | Dn | CS |
| 1 | 2 | 3 | 4 | 5 | 6 |

Special Commands

| No. | PID | CMD | CS | Content |
|-----|------|------|------|--|
| 1 | 0x55 | 0x10 | 0x65 | Module Reset. The module can be switched from UART mode to I/O mode via this command. Module Response: 0x55, Ack, CS. |
| 2 | 0x55 | 0x19 | 0x6E | Module Enters Distance Learning Mode. Place the object to be detected at the desired distance. The distance learning is completed when the OUT pin level changes. When distance learning is completed, the module will automatically reply with success or failure. Module Response: 0x55, Ack, CS. |
| 3 | 0x55 | 0x1A | 0x6F | Write to EEPROM. Write the required parameter first, then send this command, so that the required parameter will be written into the EEPROM. Module Response: 0x55, Ack, CS. |
| 4 | 0x55 | 0x1C | 0x71 | Read from EEPROM. Read parameters from EEPROM. Module Response: 0x55, Ack, CS. |

Read Commands

| No. | PID | CMD | An | Len | CS | Content |
|-----|------|------|------|------|------|--|
| 1 | 0x55 | 0x80 | 0x00 | 0x01 | 0xD6 | Version Information Low Byte. Dn: Version low byte Module Response: 0x55, 0xC0, 0x00, 0x01, Dn, CS. |
| 2 | 0x55 | 0x80 | 0x01 | 0x01 | 0xD7 | Version Information High Byte. Dn: Version high byte Module Response: 0x55, 0xC0, 0x01, 0x01, Dn, CS. |
| 3 | 0x55 | 0x80 | 0x02 | 0x01 | 0xD8 | Proximity Sensing Status. Dn: 0x00: No object approaching 0x01: There is an object approaching Module Response: 0x55, 0xC0, 0x02, 0x01, Dn, CS. |
| 4 | 0x55 | 0x80 | 0x03 | 0x01 | 0xD9 | Proximity Sensing Reference Value (The sensing value when IR LED is not emitting). Dn: Proximity Sensing reference value Module Response: 0x55, 0xC0, 0x03, 0x01, Dn, CS. |
| 5 | 0x55 | 0x80 | 0x04 | 0x01 | 0xDA | Proximity Sensing Ambient Value (The sensing value when IR LED is emitting). Dn: Proximity Sensing ambient value Module Response: 0x55, 0xC0, 0x04, 0x01, Dn, CS. |
| 6 | 0x55 | 0x80 | 0x08 | 0x01 | 0xDE | Proximity Sensing Trigger Threshold Value. When the result of "Ambient value minus Reference value" is greater than the trigger threshold, the module is triggered. Dn: 16~180 (default 16) Module Response: 0x55, 0xC0, 0x08, 0x01, Dn, CS. |
| 7 | 0x55 | 0x80 | 0x09 | 0x01 | 0xDF | IR Trigger Debounce Times (Noise Filter). Dn: 0~15 (default 0) Module Response: 0x55, 0xC0, 0x09, 0x01, Dn, CS. |
| 8 | 0x55 | 0x80 | 0x0A | 0x01 | 0xE0 | Infrared Detection Reaction Speed. Dn: Default 0x06 (0.5s) 0x00: 8 ms, 0x01: 16 ms, 0x02: 32 ms, 0x03: 64 ms, 0x04: 128 ms, 0x05: 256 ms, 0x06: 0.5s, 0x07: 1s, 0x08: Fast Mode. Module Response: 0x55, 0xC0, 0x0A, 0x01, Dn, CS. |

| No. | PID | CMD | An | Len | CS | Content |
|-----|------|------|------|------|------|--|
| 9 | 0x55 | 0x80 | 0x0B | 0x01 | 0xE1 | Delay OFF output when an object is detected. (only valid in normal High/Low output mode) Dn: Default 0x00 0x00: Not activate delay OFF output function 0x01~0xFF: Activate delay OFF output function, delay=1~255s Module Response: 0x55, 0xC0, 0x0B, 0x01, Dn, CS. |
| 10 | 0x55 | 0x80 | 0x0C | 0x01 | 0xE2 | Mode Function Setup Dn: Default 00000000 Bit 4~0: Reversed Bit 5: Output mode selection 0: Normal High/Low output mode 1: Pulse/Toggle switching mode Bit 6: Pulse/Toggle selection (only valid when Bit 5=1) 0: Pulse (After object approaches, ON output for 200μs every 1s) 1: Toggle (ON output when object approaches; OFF Output when object leaves and approaches again) Bit 7: Output level setup 0: Normal high, low active 1: Normal low, high active Module Response: 0x55, 0xC0, 0x0C, 0x01, Dn, CS. |
| 11 | 0x55 | 0x80 | 0x0D | 0x01 | 0xE3 | Current value for infrared tube emission. Dn: 0~63, 5mA/step with one-level amplifier 64~127, 5mA/step with two-level amplifier Calculate the current value as below: Dn>63, I _{Emission} =(Dn-64)×5+5 Dn≤63, I _{Emission} =Dn×5+5 Ext: Dn=95, I _{Emission} =(95-64)×5+5=160 Module Response: 0x55, 0xC0, 0x0D, 0x01, Dn, CS. |

Write Commands


| No. | PID | CMD | An | Len | Dn | CS | Content |
|-----|------|------|------|------|----|----|---|
| 1 | 0x55 | 0xC0 | 0x08 | 0x01 | Dn | CS | Proximity Sensing Trigger Threshold Value. Dn: 16~180 Module Response: 0x55, Ack, CS. |
| 2 | 0x55 | 0xC0 | 0x09 | 0x01 | Dn | CS | IR Trigger Debounce Times (Noise Filter). Dn: 0~15 Module Response: 0x55, Ack, CS. |
| 3 | 0x55 | 0xC0 | 0x0A | 0x01 | Dn | CS | Infrared Detection Reaction Speed. Dn: Detection time 0x00: 8 ms, 0x01: 16 ms, 0x02: 32 ms, 0x03: 64 ms, 0x04: 128 ms, 0x05: 256 ms, 0x06: 0.5s, 0x07: 1s, 0x08: Fast Mode. Module Response: 0x55, Ack, CS. |
| 4 | 0x55 | 0xC0 | 0x0B | 0x01 | Dn | CS | Delay OFF output when an object is detected. (only valid in normal High/Low output mode) Dn: 0: Not activate delay OFF output function (always high/low level output) 1~255: Activate delay OFF output function, delay=1~255s Module Response: 0x55, Ack, CS. |

| No. | PID | CMD | An | Len | Dn | CS | Content |
|-----|------|------|------|------|----|----|---|
| 5 | 0x55 | 0xC0 | 0x0C | 0x01 | Dn | CS | Mode Function Setup Dn: Default 00000000 Bit 4~0: Reversed Bit 5: Output mode selection 0: Normal High/Low output mode 1: Pulse/Toggle switching mode Bit 6: Pulse/Toggle selection (only valid when Bit 5=1) 0: Pulse (After object approaches, ON output for 200μs every 1s) 1: Toogle (ON output when object approaches; OFF Output when object leaves and approaches again) Bit 7: Output level setup 0: Normal high, low active 1: Normal low, high active Module Response: 0x55, Ack, CS. |
| 6 | 0x55 | 0xC0 | 0x0D | 0x01 | Dn | CS | Current value for infrared tube emission. Dn: 0~63, 5mA/step with one-level amplifier 64~127, 5mA/step with two-level amplifier Module Response: 0x55, Ack, CS. |

Module Responses

| No. | PID | Ack | CS | Content |
|-----|------|------|----|------------------|
| 1 | 0x55 | 0x7F | D4 | Completed |
| 2 | 0x55 | 0x7E | D3 | Failed |
| 3 | 0x55 | 0x7D | D2 | Learning success |
| 4 | 0x55 | 0x7C | D1 | Learning failed |

Dimensions

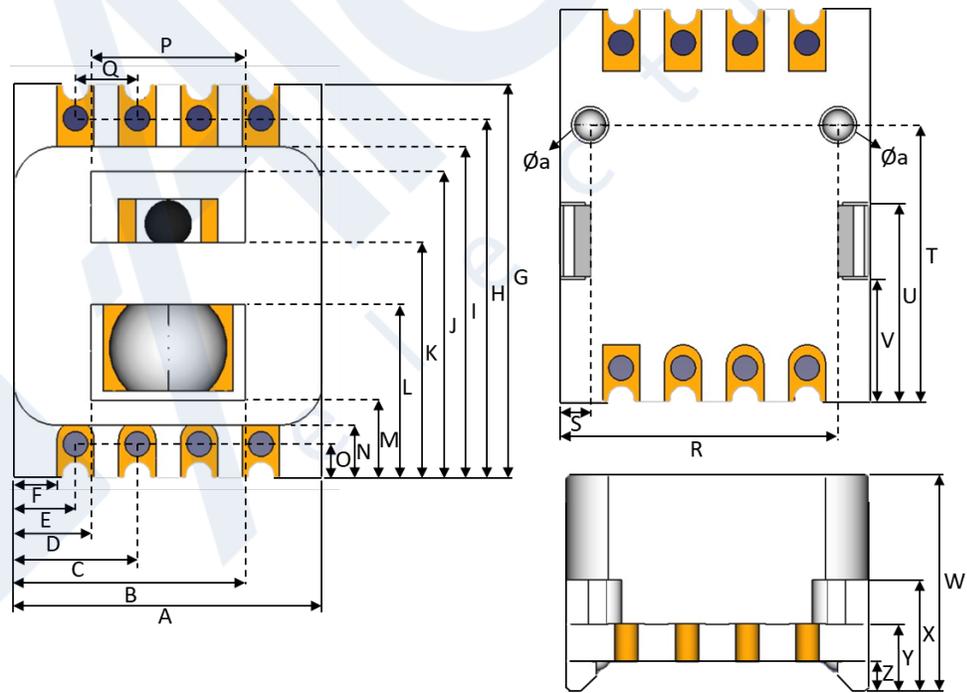

| No. | Unit | |
|-----|------|-------|
| | mm | inch |
| Øa | 1.2 | 0.047 |
| A | 10 | 0.394 |
| B | 7.5 | 0.295 |
| C | 4 | 0.157 |
| D | 2.5 | 0.098 |
| E | 2 | 0.079 |
| F | 1.3 | 0.051 |
| G | 12.7 | 0.5 |
| H | 11.6 | 0.457 |
| I | 10.7 | 0.421 |
| J | 9.9 | 0.39 |
| K | 7.6 | 0.299 |
| L | 5.6 | 0.22 |
| M | 2.5 | 0.098 |
| N | 1.7 | 0.067 |
| O | 1.1 | 0.043 |
| P | 5 | 0.197 |
| Q | 2 | 0.079 |
| R | 9 | 0.354 |
| S | 1 | 0.039 |
| T | 8.95 | 0.352 |
| U | 6.45 | 0.254 |
| V | 3.95 | 0.156 |
| W | 7.2 | 0.283 |
| X | 3.7 | 0.146 |
| Y | 2.2 | 0.087 |
| Z | 1 | 0.039 |

Copyright© 2022 by HOLTEK SEMICONDUCTOR INC.

The information provided in this document has been produced with reasonable care and attention before publication, however, Holtek does not guarantee that the information is completely accurate and that the applications provided in this document are for reference only. Holtek does not guarantee that these explanations are appropriate, nor does it recommend the use of Holtek's products where there is a risk of personal hazard due to malfunction or other reasons. Holtek hereby declares that it does not authorise the use of these products in life-saving, life-sustaining or critical equipment. Holtek accepts no liability for any damages encountered by customers or third parties due to information errors or omissions contained in this document or damages encountered by the use of the product or the datasheet. Holtek reserves the right to revise the products or specifications described in the document without prior notice. For the latest information, please contact us.