

BP2832EB**High Isolation Voltage DC Input Response Type
SSOP Photo Coupler**

RoHS
COMPLIANT




- **Features:**

1. High current transfer ratio (CTR=2000%TYP.@ IF=1 mA, VCE=2V).
2. Small and thin package(4pin SOP, Pin pitch 1.27mm).
3. High isolation voltage between input and output (Viso : 3750Vrms).
4. High collector to emitter voltage (VCEO=300V).

- **Internal Connection Diagram :**


Top View



1. Anode
2. Cathode
3. Emitter
4. Collector

- **Outline Dimensions :** (Unit : mm)

BP2832EB

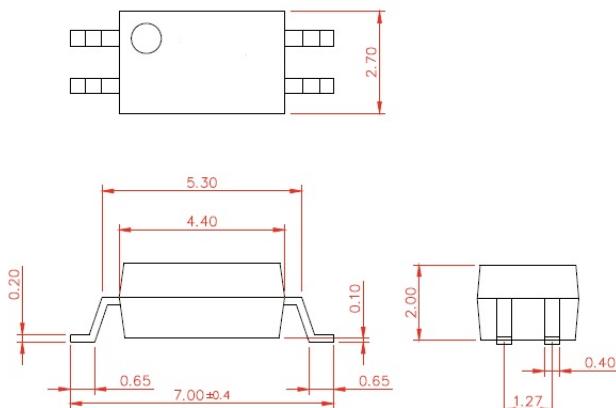


- Classification table of current transfer ratio is shown below.

T_a=25°C

Model No.	CTR Rank	CTR (%)
BP2832EB	E Rank	400~9000

Notes:

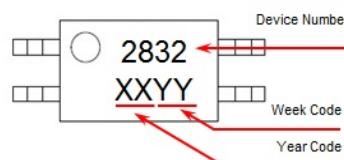

TOLERANCE : ±0.2mm

● Absolute Maximum Ratings

Ta=25°C

Parameter		Symbol	Rating	Unit
Input	Forward current	I _F	50	mA
	Peak forward current(*1)	I _{FP}	1	A
	Reverse voltage	V _R	6	V
	Power dissipation	P _D	60	mW
	Power dissipation derating	P _D /°C	0.6	mW/°C
Output	Collector-emitter voltage	V _{C EO}	300	V
	Emitter-collector voltage	V _{E CO}	0.3	V
	Collector current	I _C	60	mA
	Collector power dissipation	P _C	120	mW
	Collector power dissipation derating	P _C /°C	1.2	mW/°C
Isolation voltage 1 minute(*2)		V _{ISO}	3750	Vrms
Operating temperature		T _{OPR}	-30 to +115	°C
Storage temperature		T _{STG}	-55 to +150	°C
Soldering temperature 10 second		T _{SOL}	260	°C

*1 PW=100μs, Duty Cycle=1%.

*2 AC voltage for 1 minute at T =25°C, RH=60% between input and output.

● Electro-optical Characteristics

Ta=25°C

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input	Forward voltage	V _F	I _F =10mA	—	1.2	1.4	V
	Peak forward voltage	V _{FP}	I _{FP} =0.5A	—	—	3.0	V
	Reverse current	I _R	V _R =5V	—	—	5	μA
	Terminal capacitance	C _T	V=0, f=1MHz	—	30	—	pF
Output	Collector dark current	I _{CEO}	V _{C E} =40V, I _F =0mA	—	—	0.4	μA
Transfer characteristics	Current transfer ratio	CTR	I _F =1mA, V _{C E} =2V	400	2000	9000	%
	Collector-emitter saturation voltage	V _{C E(sat)}	I _F =10mA, I _C =2mA	—	—	1.0	V
	Isolation resistance	R _{ISO}	DC500V	5x10 ¹⁰	10 ¹¹	—	Ω
	Floating capacitance	C _f	V=0, f=1MHz	—	0.4	—	pF
Response time (Rise)(*3)		t _r	V _{C E} =5V, I _C =2mA, R _L =100Ω	—	40	—	μs
Response time (Fall)(*3)		t _f	V _{C E} =5V, I _C =2mA, R _L =100Ω	—	10	—	μs

*3 Test circuit for switching time

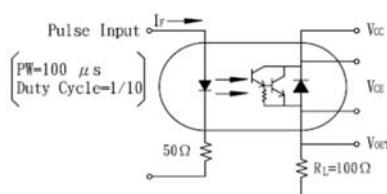


Fig.1 Current Transfer Ratio vs. Forward Current

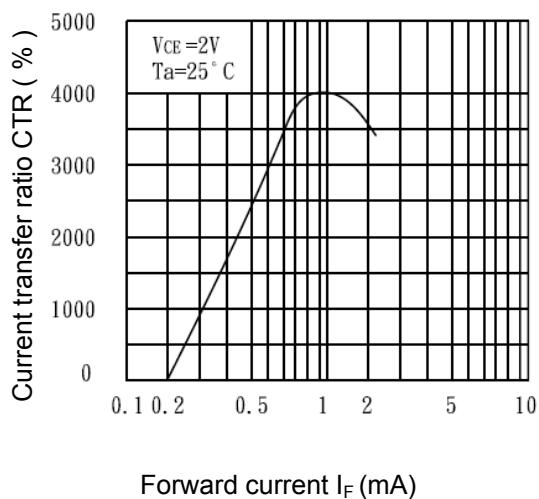


Fig.2 Forward Current vs. Ambient Temperature

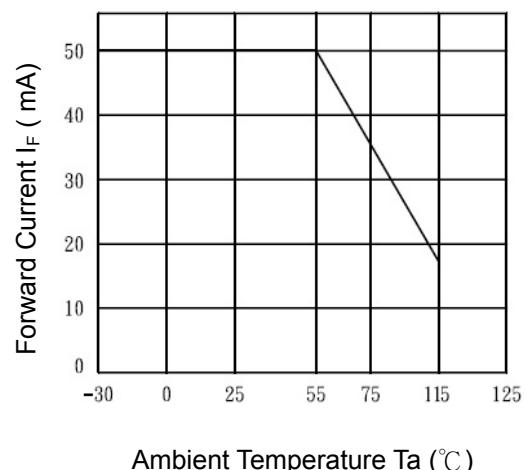


Fig.3 Collector Power Dissipation vs. Ambient Temperature

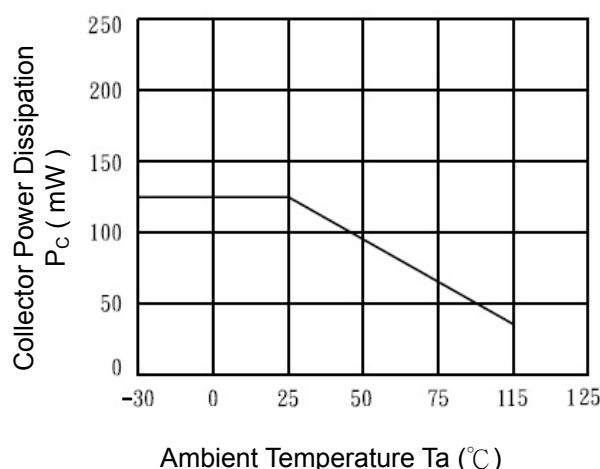


Fig.4 Forward Current vs. Forward Voltage

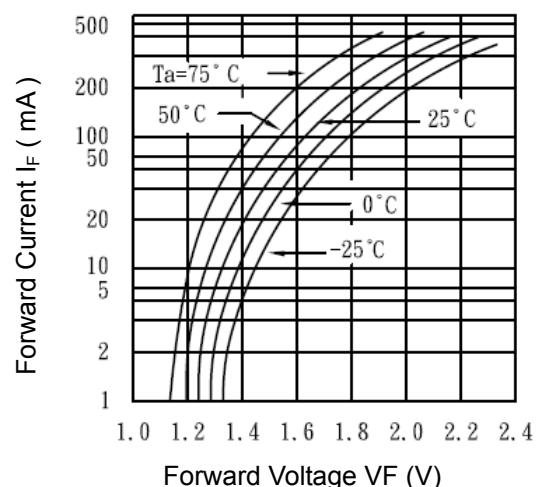


Fig.5 Collector Current vs. Collector-Emitter Voltage



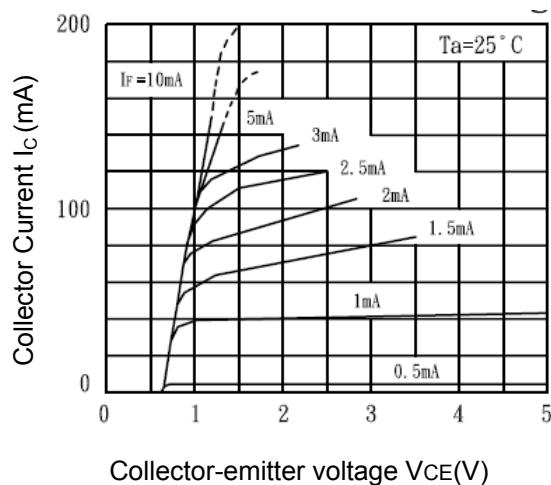



Fig.6 Peak Forward Current vs. Duty Ratio

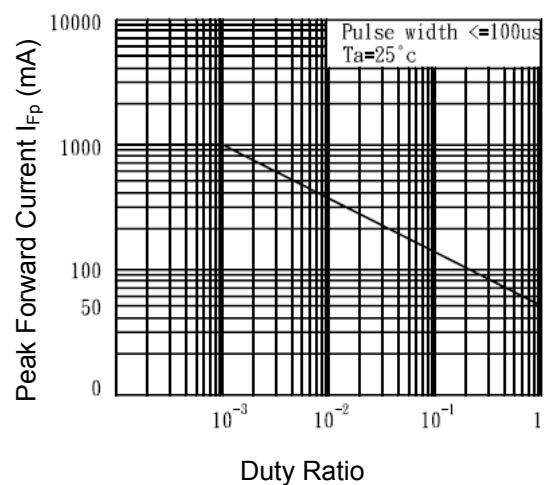


Relative Current Transfer
Ratio vs. Ambient
Temperature

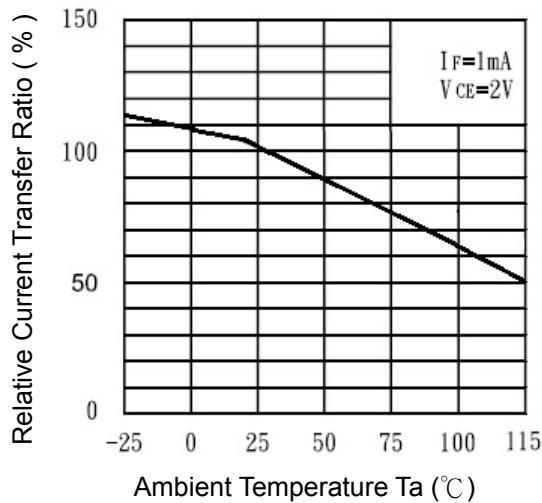


Collector Dark Current
vs. Ambient Temperature

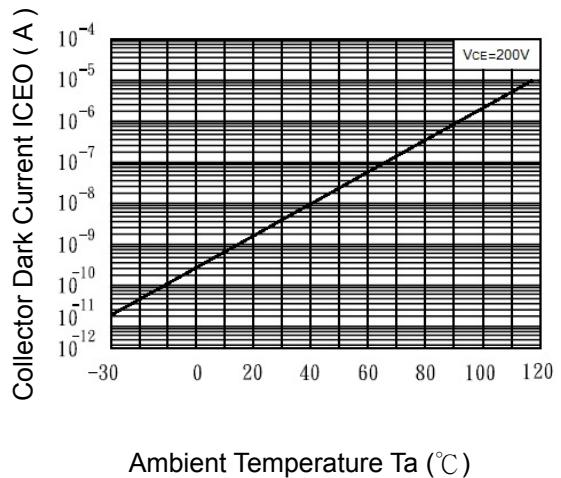


Collector-Emitter Saturation
Voltage vs. Forward Current

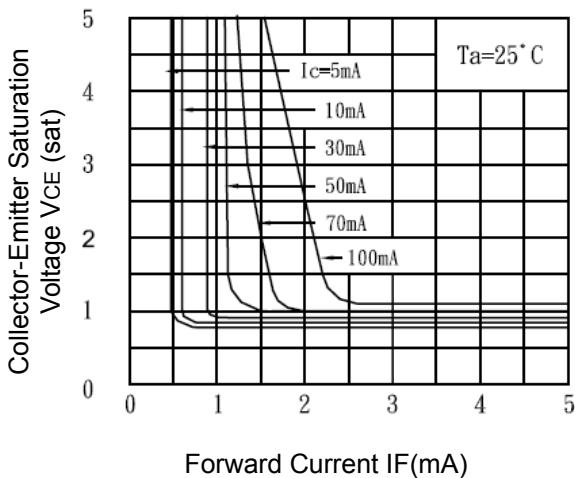

Response Time
vs. Load Resistance

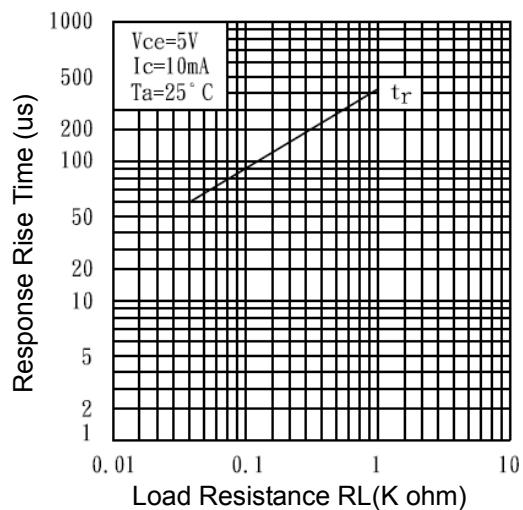

Response Time
vs. Load Resistance

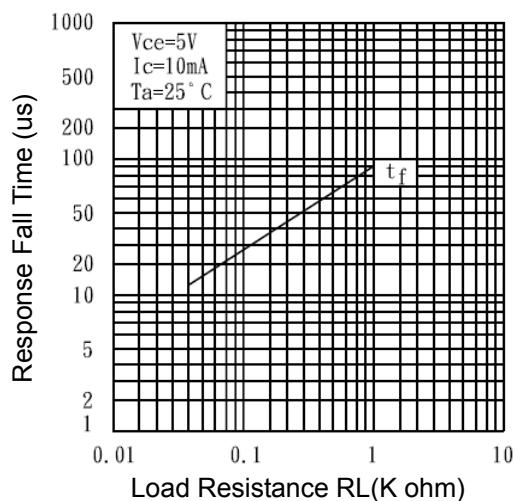

● NOTICE

The information contained in this document is intended to be a general product description and is subject to change without notice. Please contact BETEC in order to obtain the latest device data sheets before using any BETEC device. BETEC does not assume any responsibility for use of any circuitry described. No circuit patent licenses are implied. This publication is the property of BETEC. No part of this publication may be reproduced or copied in any form or by any means, or transferred to any third party without the prior written consent of BETEC Electronics.

The devices listed in this document are designed for general applications only in electronic equipment. No devices shall be deployed which require higher level of reliability such as :

- Medical and other life support equipments.
- Space application.
- Telecommunication equipment (trunk lines).
- Nuclear power control equipment.

Unless it received prior written approval from BETEC.

BETEC takes no responsibility for damages arise form the improper usage of our device. Please contact BETEC for further information regarding the above notices.