

## XtremeSense™ High-Linearity, High-Resolution TMR Current Sensor with FLAG Output in Miniature Form Factor

### FEATURES AND BENEFITS

- Current range:  $\pm 5.0$  A,  $\pm 10.0$  A,  $\pm 15.0$  A
- Resolution: 5 mA
- Total output error:  $< \pm 0.5\%$  (Typical)
- 2 kV isolation per IEC 62368-1
- Sampling frequency: 200 kHz
- Supply current:  $\sim 1.2$  mA
- FLAG pin to detect 90% and 10% of full current range
  - Active low digital output (push-pull)
- Supply voltage: 2.7 to 5.5 V
- Operating temperature ranges:
  - Industrial:  $-40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$
  - Extended Industrial:  $-40^{\circ}\text{C}$  to  $125^{\circ}\text{C}$
- Package: 6-lead DFN, 3.00 mm  $\times$  3.00 mm  $\times$  0.95 mm

### APPLICATIONS

- Shunt resistor plus isolation amplifier replacement
- Smart plugs/IoT devices
- LED lighting products
- Power tools
- Appliances
- Drones
- Battery charger systems
- PCs and servers

### PACKAGE:

Not to scale



6-lead DFN

### DESCRIPTION

The CT110 is a high-linearity and high-resolution contact current sensor with isolation that is designed with its patented state-of-the-art XtremeSense™ TMR technology for high performance. The device measures the current flowing through the DFN package via its integrated current-carrying conductor (CCC) and converts it to an analog ratiometric output voltage that represents the current. The CT110 achieves superior performance with a typical total output error of less than  $\pm 0.5\%$  and is capable of sensing current as low as 5 mA, providing unmatched resolution. The device supports a wide operating voltage range of 2.7 to 5.5 V which allows it to be used in a variety of applications.

The CT110 is an ideal solution to replace a shunt resistor plus isolation amplifier. At the same time, the CT110 simplifies design, PCB layout, and saves PCB area. The device is capable of supporting up to 15.0 A of AC and DC current.

The CT110 has a sampling frequency of 200 kHz but only has minimal current consumption of 1.0 mA to bias it since the measured current does not go through the device. Additionally, the CT110 integrates a FLAG output that is active low and will indicate when the field is above 90% and below 10% the full field range.

The CT110 is available in a low-profile and small form factor 3.00 mm  $\times$  3.00 mm  $\times$  0.95 mm, 6-lead DFN package.

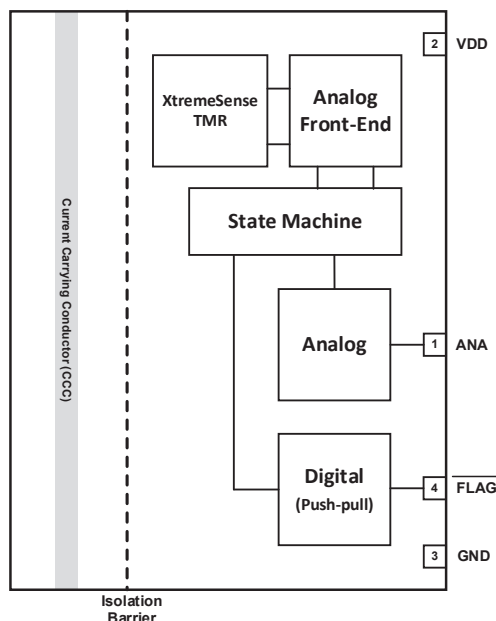


Figure 1: CT110 with Analog and FLAG Outputs in DFN-6 Package Block Diagram

### SELECTION GUIDE

Part Number	Current Range ( $I_{P_{MAX}}$ ) (A)	Sensitivity (mV/A) $V_{DD} = 5\text{ V}$	Sensitivity (mV/A) $V_{DD} = 3.3\text{ V}$	Total Error (%FS)	Operating Temperature Range (°C)
CT110FDV-ID6	±5.0	412.5	272.25	±5.0	-40 to 85
CT110FDV-HD6					-40 to 125
CT110PDV-ID6	±10.0	200	132	±5.0	-40 to 85
CT110PDV-HD6					-40 to 125
CT110RDV-ID6	±15.0	132.5	87.45	±5.0	-40 to 85
CT110RDV-HD6					-40 to 125

### EVALUATION BOARD ORDERING INFORMATION

Part Number	Current Range (A)	Total Error (%FS)	Operating Temperature Range (°C)
EVB111-5.0A	±5.0	±5.0	-40 to 125
EVB111-10A	±10.0		
EVB111-15A	±15.0		

### PINOUT DIAGRAMS AND TERMINAL LIST

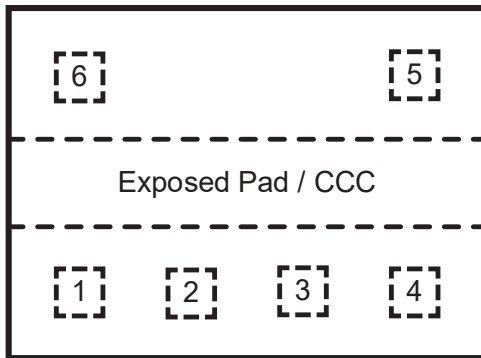


Figure 4: 6-Lead DFN Package, Top View (Through Package)

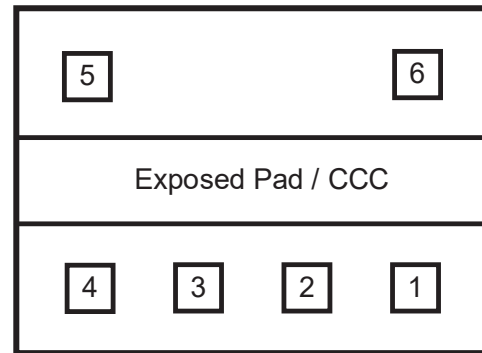


Figure 5: 6-Lead DFN Package, Bottom-up View

#### Terminal List Table

Number	Name	Function
1	ANA	Analog output voltage that represents the measured current.
2	VDD	Supply Voltage
3	GND	Ground
4	FLAG	Outputs an active LOW flag signal to indicate when the current is above 90% or below 10% of the full current range. It is a push-pull output.
5	N/C	No Connect
6	N/C	No Connect

### CT110 DIRECTION OF CURRENT FLOW DIAGRAMS

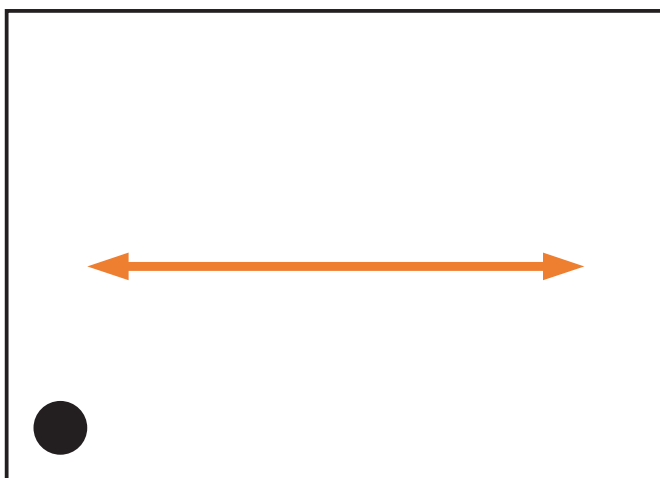


Figure 2: CT110, Direction of Bipolar Current Flow

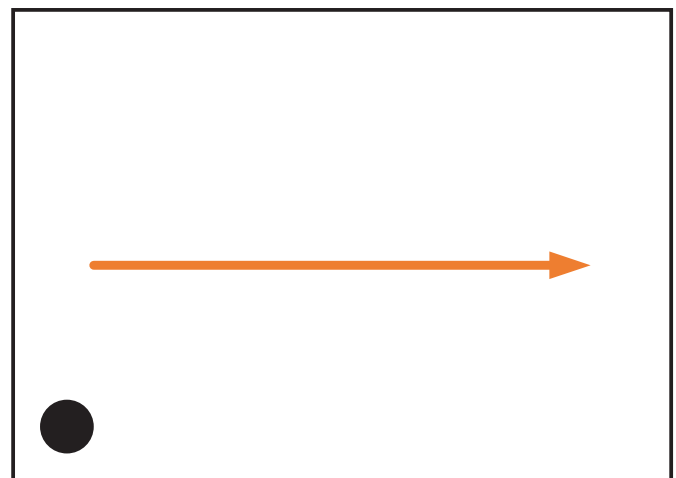


Figure 3: CT110, Recommended Direction for Unipolar Current Flow

### ABSOLUTE MAXIMUM RATINGS [1]

Characteristic	Symbol	Notes	Rating	Unit
Supply Voltage Strength	$V_{DD}$		-0.3 to 6.0	V
Push-Pull Output (Active LOW)	$V_{FLAG\#\_PP}$		-0.3 to $V_{DD} + 0.3$ [2]	V
Input/Output Pins Maximum Voltage	$V_{I/O}$		-0.3 to $V_{DD} + 0.3$ [2]	V
Electrostatic Discharge Protection Level	ESD	Human Body Model (HBM) per JESD22-A114	$\pm 2.0$ (min)	kV
Junction Temperature	$T_J$		-40 to 150	°C
Storage Temperature	$T_{STG}$		-65 to 150	°C
Lead Soldering Temperature	$T_L$	10 seconds	260	°C

[1] Stresses exceeding the absolute maximum ratings may damage the CT110 and may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.

[2] The lower of  $V_{DD} + 0.3$  V or 6.0 V.

### RECOMMENDED OPERATING CONDITIONS [1]

Characteristic	Symbol	Notes	Min.	Typ.	Max.	Unit
Supply Voltage Range	$V_{DD}$		2.7	5.0	5.5	V
Output Voltage Range	$V_{OUT}$		0	-	$V_{DD}$	V
Output Current	$I_{OUT}$		-	-	$\pm 10.0$	$\mu A$
Operating Ambient Temperature	$T_A$	Industrial	-40	25	85	°C
		Extended Industrial	-40	25	125	°C

[1] The Recommended Operating Conditions table defines the conditions for actual operation of the CT110. Recommended operating conditions are specified to ensure optimal performance to the specifications. Allegro does not recommend exceeding them or designing to absolute maximum ratings.

### ISOLATION RATING

Characteristic	Symbol	Notes	Rating	Unit
Dielectric Strength Test (Rated Isolation) Voltage	$V_{ISO}$	Tested for 60 seconds per IEC 60950-1:2005 +Am1:2009 + Am2:2013 and UL1577	2 (typ.)	$kV_{RMS}$

### THERMAL CHARACTERISTICS

Characteristic	Symbol	Test Conditions	Value	Unit
Junction-to-Ambient Thermal Resistance	$R_{\theta JA}$	Junction-to-ambient thermal resistance is a function of application and board layout and is determined in accordance to JEDEC standard JESD51 for a four (4) layer 2s2p FR-4 printed circuit board (PCB) with 2 oz. of copper (Cu). Special attention must be paid not to exceed junction temperature $T_{J(MAX)}$ at a given ambient temperature $T_A$ .	162 (typ.) 187 (max)	°C/W

**ELECTRICAL CHARACTERISTICS:** Valid for  $V_{DD} = 2.7$  to  $5.5$  V,  $C_{BYP} = 1.0$   $\mu$ F and  $T_A = -40^\circ$ C to  $125^\circ$ C, typical values are  $V_{DD} = 5.0$  V and  $T_A = 25^\circ$ C, unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Average Supply Current	$I_{DD(AVG)}$	$t \geq 10$ seconds	–	1.2	2.5	mA
Sampling Frequency	$f_S$		150	200	250	kHz
Idle Mode Time	$t_{IDLE}$	$f_S = 200$ kHz	4.0	5.0	6.7	$\mu$ s
Resistance of CCC in DFN Package [1]	$R_{CCC\_DFN}$		–	0.9	–	m $\Omega$
<b>ANALOG OUTPUT (ANA)</b>						
Maximum Drive Capability	$I_{DRV(MAX)}$	$\Delta V_{OUT} \leq 150$ mV, $V_{DD} \geq 3.3$ V	–10	–	10	$\mu$ A
Analog Output Voltage Range	$V_{ANA}$		$0.05 \times V_{DD}$	–	$0.95 \times V_{DD}$	V
Voltage Output Quiescent	$V_{OQ}$		48.5	50.0	51.5	% $V_{DD}$
Rise Time [1]	$t_{RISE}$	$I_{CCC} = I_{CCC(MAX)}$ , $t_{VANA\_90\%} - t_{VANA\_10\%}$	–	15.5	–	$\mu$ s
Propagation Delay [1]	$t_{DELAY}$	$I_{CCC} = I_{CCC(MAX)}$ , $t_{ICCC} - t_{VANA}$ @ 20% of output value	–	4.6	–	$\mu$ s
Response Time [1]	$t_{RESP}$	$I_{CCC} = I_{CCC(MAX)}$ , $t_{ICCC} - t_{VANA}$ @ 90% of output value	–	20.0	–	$\mu$ s
Input Referred Noise Density [1]	$e_{ND}$	$f_{BW} = 10$ Hz	–	250	–	$\mu$ A <sub>RMS</sub> / $\sqrt{Hz}$
Output Capacitive Load	$C_L$		–	–	10	pF
<b>FLAG PUSH-PULL OUTPUT (FLAG)</b>						
$\overline{FLAG}$ Voltage Low	$V_{FLAG\#\_OL}$	AC and DC current	–	$0.9 \times V_{DD}$	–	V
		AC current	–	$0.1 \times V_{DD}$	–	V
FLAG Voltage High	$V_{FLAG\#\_OH}$	AC and DC current	–	$0.86 \times V_{DD}$	–	V
		AC current	–	$0.14 \times V_{DD}$	–	V
$\overline{FLAG}$ Current	$I_{FLAG\#}$		–	$\pm 2$	–	mA
<b>TIMINGS</b>						
Power-On Time [1]	$t_{ON}$	$V_{DD} \geq 2.7$ V	–	50	75	$\mu$ s
Active Mode Time	$t_{ACTIVE}$		–	2.5	–	$\mu$ s
<b>PROTECTION</b>						
Undervoltage Lockout	$V_{UVLO}$	Rising $V_{DD}$	–	2.3	2.5	V
		Falling $V_{DD}$	2.0	2.2	–	V
UVLO Hysteresis	$V_{UV\_HYS}$		–	100	–	mV

[1] Guaranteed by design and characterization; not tested in production.

### TYPICAL TIMING AND ELECTRICAL CHARACTERISTICS

$V_{DD} = 5.0\text{ V}$ ,  $T_A = 25^\circ\text{C}$ , and  $C_{BYP} = 1.0\ \mu\text{F}$  (unless otherwise specified)

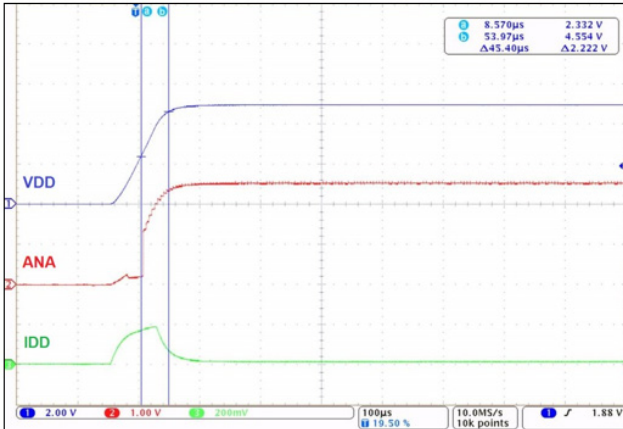


Figure 6: Power-On Time for CT110

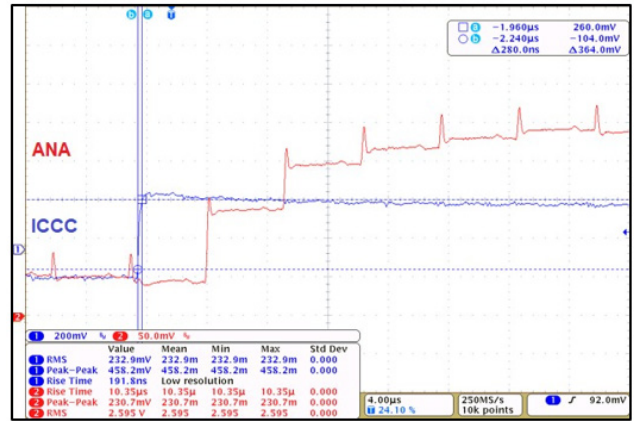


Figure 7: Rise Time for CT110

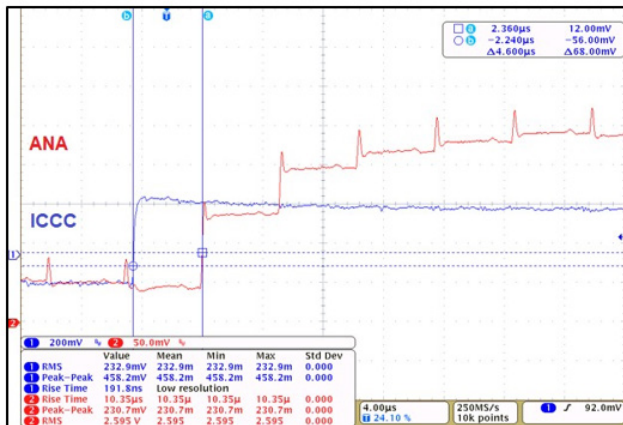


Figure 8: Propagation Delay Time for CT110

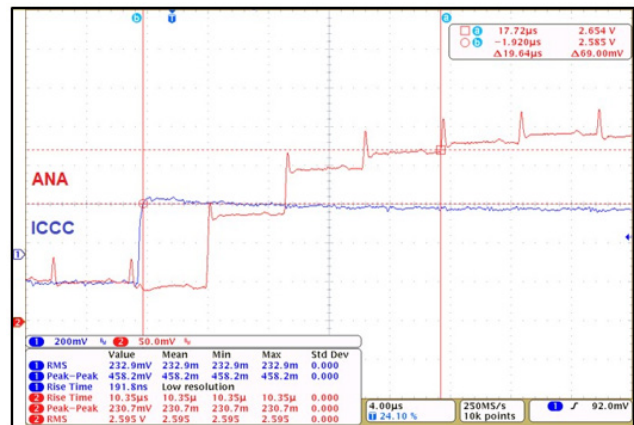


Figure 9: Response Time for CT110

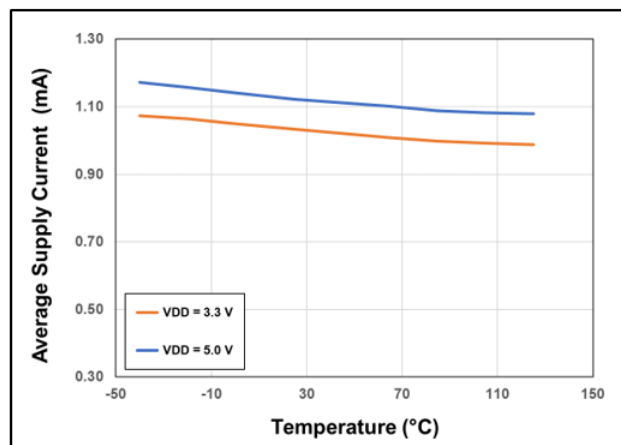


Figure 10: CT110 Average Supply Current vs. Temperature vs. Supply Voltage

**CT110FDx (±5.0 A) ELECTRICAL CHARACTERISTICS:** Valid for  $V_{DD} = 2.7$  to  $5.5$  V,  $C_{BYP} = 1.0$   $\mu$ F and  $T_A = -40^\circ\text{C}$  to  $125^\circ\text{C}$ , typical values are  $V_{DD} = 5.0$  V and  $T_A = 25^\circ\text{C}$ , unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
<b>ANALOG OUTPUT</b>						
Gain	G	$V_{DD} = 5.0$ V, $T_A = 25^\circ\text{C}$	392.5	412.5	432.5	mV/A
		$V_{DD} = 3.3$ V, $T_A = 25^\circ\text{C}$	259.0	272.25	285.45	mV/A
Current Sensing Range [1]	$I_{CCC}$		-5	-	+5	A <sub>DC</sub>
<b>RESOLUTION</b>						
Resolution	RES	$I_{CCC} = \pm 5$ A	-	5	-	mA
<b>TOTAL OUTPUT ERROR PERFORMANCE</b>						
Total Output Error	$E_{TOT\_FDV}$	$T_A = 0^\circ\text{C}$ to $125^\circ\text{C}$	-	$\pm 0.5$	$\pm 1.5$	% FS
		$T_A = -40^\circ\text{C}$ to $125^\circ\text{C}$	-	$\pm 0.5$	$\pm 5.0$	% FS
<b>TOTAL OUTPUT ERROR COMPONENTS</b>						
Non-Linearity Error	$e_{LIN}$	$I_{CCC} = 5$ A	-	$\pm 0.15$	-	% FS
Temperature Coefficient of Sensitivity [1]	$TCS_{FDV}$	$T_A = 0^\circ\text{C}$ to $125^\circ\text{C}$	-	-100	-	ppm/ $^\circ\text{C}$
		$T_A = -40^\circ\text{C}$ to $125^\circ\text{C}$	-	-200	-400	ppm/ $^\circ\text{C}$
Temperature Coefficient of Offset Voltage [1]	TCO	$T_A = -40^\circ\text{C}$ to $125^\circ\text{C}$ , $V_{DD} = 5.0$ V	-	100	-	ppm/ $^\circ\text{C}$
<b>NOISE</b>						
Input Referred Noise [1]	$e_N$	$f_{BW} = 1$ Hz to 30 kHz, $V_{DD} = 5.0$ V	-	10	-	mA <sub>RMS</sub>

[1] Guaranteed by design and characterization; not tested in production.

### TYPICAL ELECTRICAL CHARACTERISTICS FOR CT110FDx

$V_{DD} = 5.0\text{ V}$ ,  $T_A = 25^\circ\text{C}$ , and  $C_{BYP} = 1.0\ \mu\text{F}$  (unless otherwise specified)

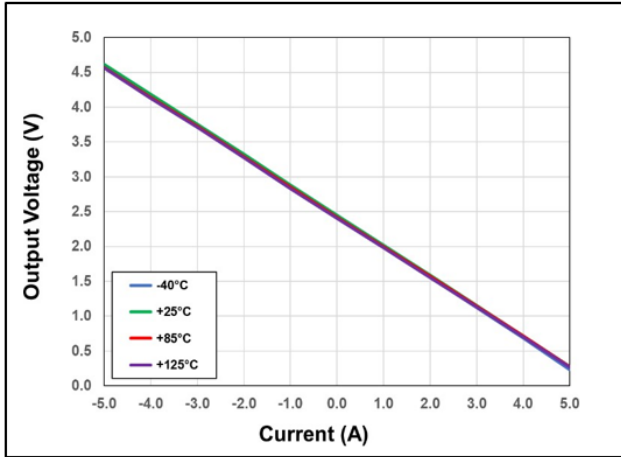


Figure 11: CT110FDx Output Voltage vs. Current vs. Temperature

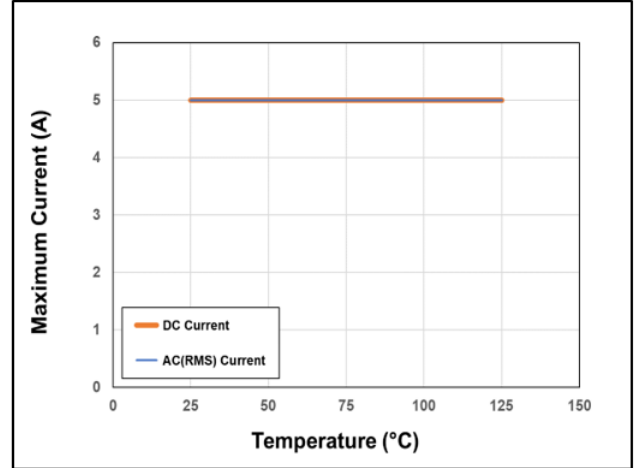


Figure 12: CT110FDx Maximum Current Derating Curve



**CT110PDx (±10.0 A) ELECTRICAL CHARACTERISTICS:** Valid for  $V_{DD} = 2.7$  to  $5.5$  V,  $C_{BYP} = 1.0$   $\mu$ F and  $T_A = -40^\circ\text{C}$  to  $125^\circ\text{C}$ , typical values are  $V_{DD} = 5.0$  V and  $T_A = 25^\circ\text{C}$ , unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
<b>ANALOG OUTPUT</b>						
Gain	G	$V_{DD} = 5.0$ V, $T_A = 25^\circ\text{C}$	190	200	210	mV/A
		$V_{DD} = 3.3$ V, $T_A = 25^\circ\text{C}$	125.4	132	138.6	mV/A
Current Sensing Range [1]	$I_{CCC}$		-10	-	+10	A <sub>DC</sub>
<b>RESOLUTION</b>						
Resolution	RES	$I_{CCC} = \pm 10$ A	-	5.0	-	mA
<b>TOTAL OUTPUT ERROR PERFORMANCE</b>						
Total Output Error	$E_{TOT\_PDV}$	$T_A = 0^\circ\text{C}$ to $125^\circ\text{C}$	-	±0.5	±1.5	% FS
		$T_A = -40^\circ\text{C}$ to $125^\circ\text{C}$	-	±0.5	±5.0	% FS
<b>TOTAL OUTPUT ERROR COMPONENTS</b>						
Non-Linearity Error	$e_{LIN}$	$I_{CCC} = 10$ A	-	±0.15	-	% FS
Temperature Coefficient of Sensitivity [1]	$TCS_{FDV}$	$T_A = 0^\circ\text{C}$ to $125^\circ\text{C}$	-	-100	-	ppm/°C
		$T_A = -40^\circ\text{C}$ to $125^\circ\text{C}$	-	-200	-400	ppm/°C
Temperature Coefficient of Offset Voltage [1]	TCO	$T_A = -40^\circ\text{C}$ to $125^\circ\text{C}$ , $V_{DD} = 5.0$ V	-	100	-	ppm/°C
<b>NOISE</b>						
Input Referred Noise [1]	$e_N$	$f_{BW} = 1$ Hz to 30 kHz, $V_{DD} = 5.0$ V	-	8	-	mA <sub>RMS</sub>

[1] Guaranteed by design and characterization; not tested in production.

### TYPICAL ELECTRICAL CHARACTERISTICS FOR CT110PDx

$V_{DD} = 5.0\text{ V}$ ,  $T_A = 25^\circ\text{C}$ , and  $C_{BYP} = 1.0\ \mu\text{F}$  (unless otherwise specified)

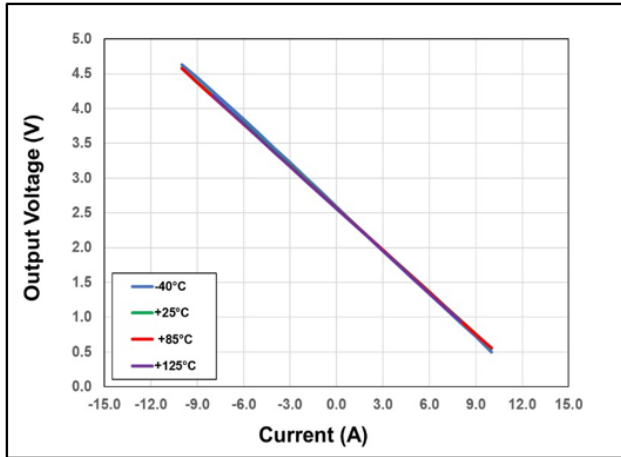


Figure 13: CT110PDx Output Voltage vs. Current vs. Temperature

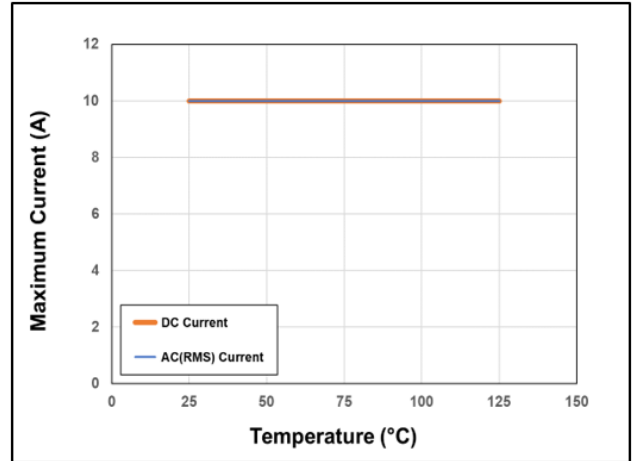


Figure 14: CT110PDx Maximum Current Derating Curve

**CT110RDx (±15.0 A) ELECTRICAL CHARACTERISTICS:** Valid for  $V_{DD} = 2.7$  to  $5.5$  V,  $C_{BYP} = 1.0$   $\mu$ F and  $T_A = -40^\circ\text{C}$  to  $125^\circ\text{C}$ , typical values are  $V_{DD} = 5.0$  V and  $T_A = 25^\circ\text{C}$ , unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
<b>ANALOG OUTPUT</b>						
Gain	G	$V_{DD} = 5.0$ V, $T_A = 25^\circ\text{C}$	122.5	132.5	142.5	mV/A
		$V_{DD} = 3.3$ V, $T_A = 25^\circ\text{C}$	80.85	87.45	94.0	mV/A
Current Sensing Range [1]	$I_{CCC}$		-10	-	+10	$A_{DC}$
<b>RESOLUTION</b>						
Resolution	RES	$I_{CCC} = \pm 15 A_{PK}$	-	5	-	mA
<b>TOTAL OUTPUT ERROR PERFORMANCE</b>						
Total Output Error	$E_{TOT\_RMV}$	$T_A = 0^\circ\text{C}$ to $125^\circ\text{C}$	-	$\pm 0.5$	$\pm 1.5$	% FS
		$T_A = -40^\circ\text{C}$ to $125^\circ\text{C}$	-	$\pm 0.5$	$\pm 5.0$	% FS
<b>TOTAL OUTPUT ERROR COMPONENTS</b>						
Temperature Coefficient of Sensitivity [1]	$TCS_{FDV}$	$T_A = 0^\circ\text{C}$ to $125^\circ\text{C}$	-	-100	-	ppm/ $^\circ\text{C}$
		$T_A = -40^\circ\text{C}$ to $125^\circ\text{C}$	-	-200	-400	ppm/ $^\circ\text{C}$
Temperature Coefficient of Offset Voltage [1]	TCO	$T_A = -40^\circ\text{C}$ to $125^\circ\text{C}$ , $V_{DD} = 5.0$ V	-	100	-	ppm/ $^\circ\text{C}$
<b>NOISE</b>						
Input Referred Noise [1]	$e_N$	$f_{BW} = 1$ Hz to 30 kHz, $V_{DD} = 5.0$ V	-	8	-	$mA_{RMS}$

[1] Guaranteed by design and characterization; not tested in production.

### TYPICAL ELECTRICAL CHARACTERISTICS FOR CT110RDx

$V_{DD} = 5.0\text{ V}$ ,  $T_A = 25^\circ\text{C}$ , and  $C_{BYP} = 1.0\ \mu\text{F}$  (unless otherwise specified)

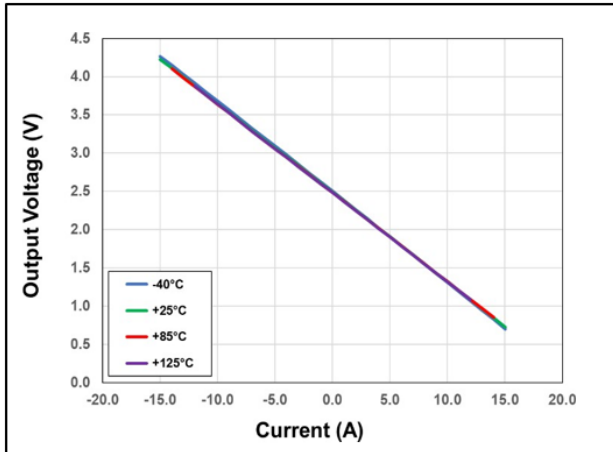


Figure 15: CT110RDx Output Voltage vs. Current vs. Temperature

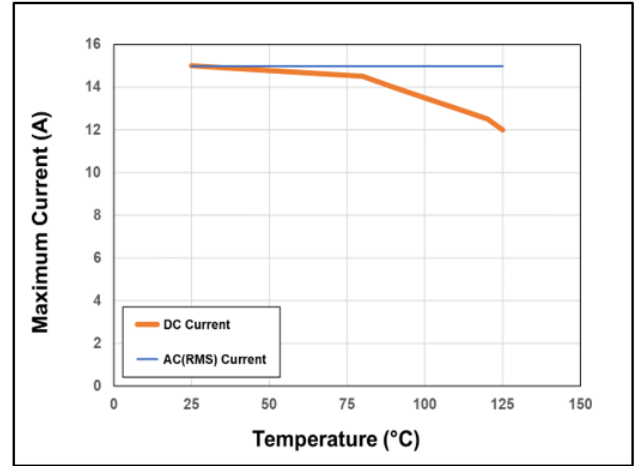


Figure 16: CT110RDx Maximum Current Derating Curve

### FUNCTIONAL DESCRIPTION

#### Overview

The CT110 is a high resolution and low noise contact current sensor with isolation and a FLAG output that operates from 2.7 to 5.5 V assembled in a custom DFN package. The chip measures the magnetic field of the current through the package and converts it to an analog signal that is equivalent to the current flowing through the printed circuit board (PCB) trace. The FLAG output indicates whether there is an overcurrent condition seen by CT110 during operation and will alert the host system.

#### Analog Output Measurement

The CT110 provides a continuous (sample and hold) linear analog output voltage which represents the measured magnetic field of the current. The output voltage range of ANA is 5.0% of  $V_{DD}$  to 95.0% of  $V_{DD}$  which represents the current from the typical low-end values (-5.0 A to -15.0 A<sub>PK</sub>) to the maximum current values (+5.0 A to +15.0 A<sub>PK</sub>) respectively. The output sample frequency is 200 kHz. A resistor-capacitor (R-C) filter may be implemented on the ANA pin to further lower the noise. Figure 17 illustrates the output voltage range of the ANA pin as a function of the measured current for ±5.0 A.

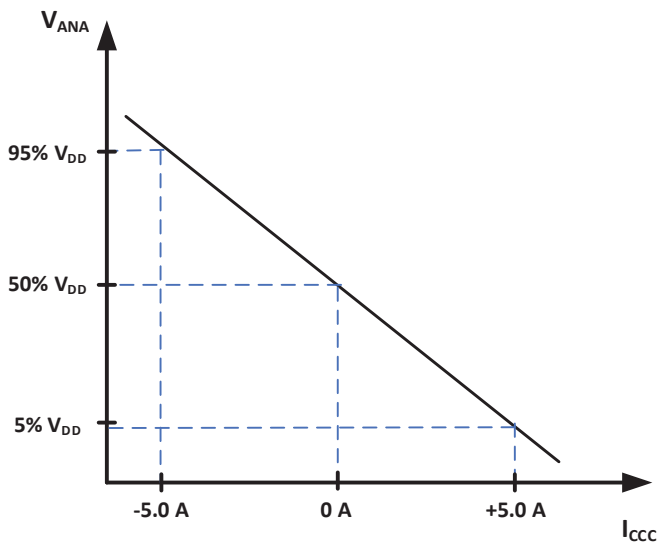


Figure 17: Linear Output Voltage Range vs. Measured Current for  $G = -88.2 \text{ mV/V/A}$  and current range of  $\pm 5.0 \text{ A}$ .

#### Current Detection Flag

The Current Detection circuitry detects when the current measured through the current carrying conductor is above 90% or below 10% of the full current range. As a result, it translates to greater than 90% of  $V_{DD}$  and 10% of  $V_{DD}$  on the ANA pin. This will generate a flag signal via the FLAG pin to the host system microcontroller as an active LOW signal. Once  $V_{ANA}$  falls below 86% or rises above 14% of  $V_{DD}$ , then the FLAG signal will go HIGH.

#### Rise Time ( $t_{RISE}$ )

The CT110 rise time,  $t_{RISE}$ , is the time interval of when it reaches 10% and 90% of the full-scale output voltage. The  $t_{RISE}$  of the CT110 is 15.5  $\mu\text{s}$ .

#### Propagation Delay ( $t_{DELAY}$ )

The propagation delay,  $t_{DELAY}$ , is the time measured between  $I_{CCC}$  reaching 20% of its final value and the CT110 attaining 20% of its full-scale output voltage. Its propagation delay is 4.6  $\mu\text{s}$ .

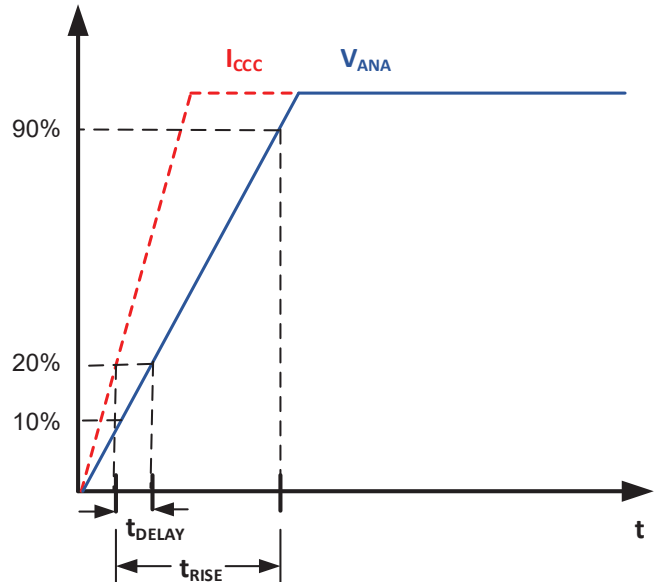


Figure 18: CT110 Propagation Delay and Rise Time Curve

### Response Time ( $t_{RESP}$ )

The response time,  $t_{RESP}$ , is the difference in time from when  $I_{CCC}$  reaches 90% of its final value and  $V_{ANA}$  attains 90% of its final value. The CT110 response time is typically 20.0  $\mu$ s.

### Power-On Time ( $t_{ON}$ )

The Power-On Time ( $t_{ON}$ ) of 50  $\mu$ s is the amount of time required by the CT110 to start up, power-on, and acquire the first sample. The chip is fully powered up and operational from the moment the supply voltage passes the rising UVLO point (2.3 V). This time includes ramp-up time and settling time (within 10% of steady-state voltage when current is flowing through the package) after the power supply has reached the minimum  $V_{DD}$ .

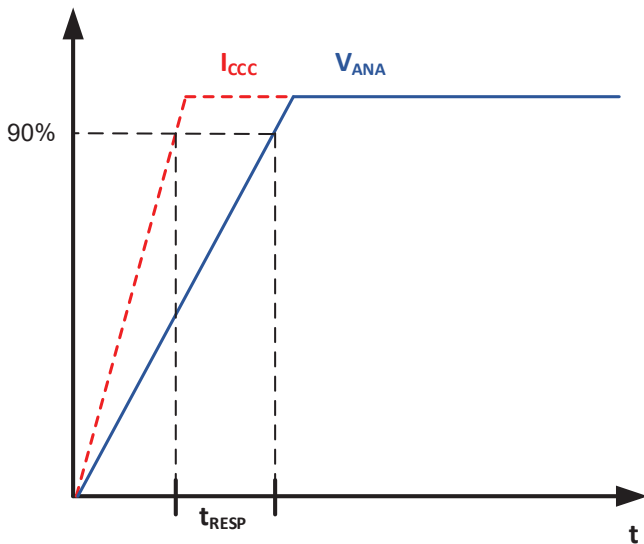


Figure 19: Linear Output Voltage Range vs. Measured Current for  $G = -88.2$  mV/V/A and current range of  $\pm 5.0$  A.

### Undervoltage Lockout (UVLO)

The Undervoltage Lockout protection circuitry of the CT110 is activated when the supply voltage ( $V_{DD}$ ) falls below 2.1 V. The CT110 remains in a low quiescent state and the ANA output is not valid until  $V_{DD}$  rises above the UVLO threshold (2.3 V).

### High Resolution and Low Noise

For DC current, the resolution is 5 mA while the input referred noise is 8 mA<sub>RMS</sub> (up to 10 mA<sub>RMS</sub>); however, there is no contradiction in the CT110 capability to sense this level of current because the 5 mA was measured with a digital multimeter (DMM) with limited bandwidth, whereas the noise is over a wider bandwidth (up to 30 kHz).

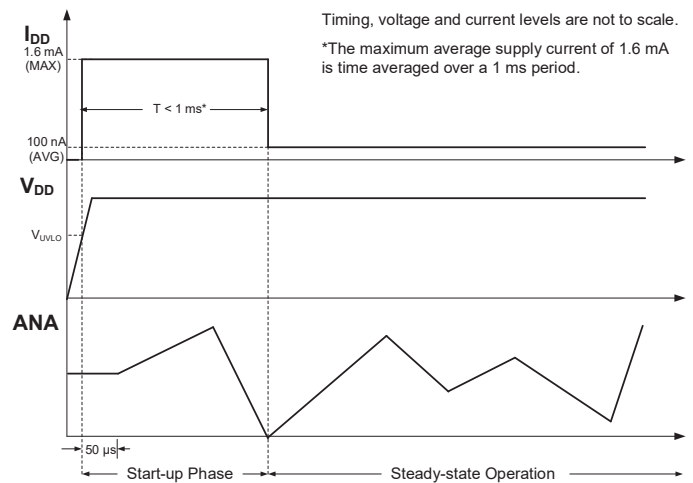


Figure 20: CT110 Propagation Delay and Rise Time Curve

CALIBRATION GUIDE

Introduction

All current sensors, no matter how expensive they are, or what materials they use, or even if they were factory-calibrated, are susceptible to deviations from their Ideal Transfer Line.

To extract the absolute best performance from any current sensing system, calibration is required.

Ideal Transfer Line

Ideally, the sensor output follows a straight line, has a fixed slope, and crosses a fix offset point. This allows the user to apply a straightforward linear equation to extract the physical value being measured. In the case of a current sensor:

$$Current = \frac{Voltage - b}{a}$$

where a is the slope and b is the offset of the ideal curve. In a perfect sensor, both a and b coefficients can be simply looked up on the datasheet.

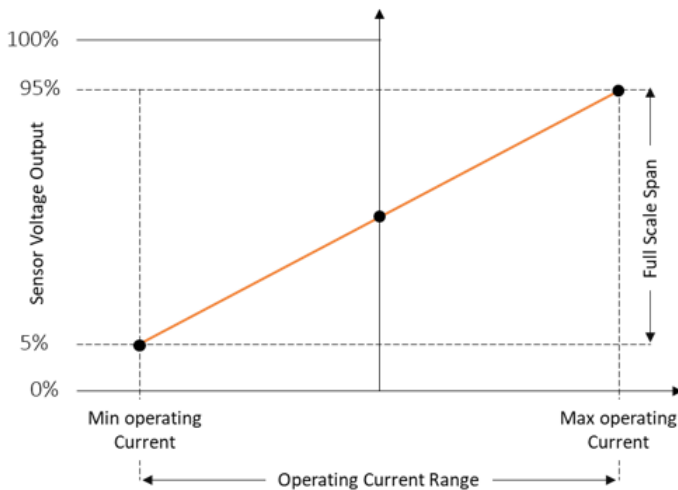


Figure 21: Ideal Transfer Line

Any deviations from this Ideal Line are considered sensor errors—more specifically, Accuracy Errors as they related in the case of Allegro sensors to Gain and Offset errors.

Offset Error

Based on the Ideal Transfer Line, when no current is applied, the voltage output of the sensor should be equal to 50% of V<sub>DD</sub>.

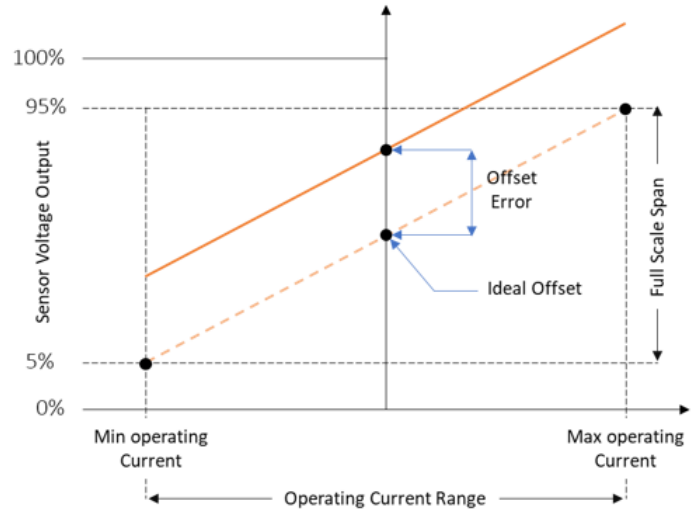


Figure 22: Exaggerated Offset Error

Gain Error

The Ideal Transfer Line shows a line that reaches 95% of V<sub>DD</sub> at the maximum operating current and 5% of V<sub>DD</sub> at the minimum.

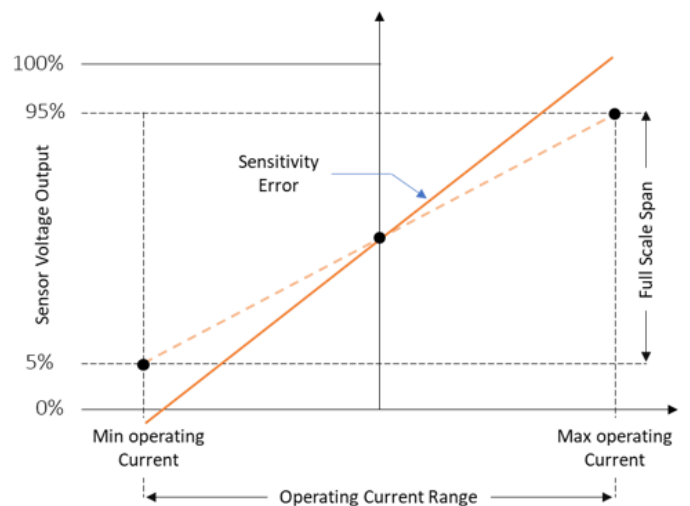



Figure 23: Exaggerated Gain Error

Calibration

Different methods can be applied for offset and/or gain correction. The complexity of these methods lead to different calibration results. The higher the complexity the better the error correction.

**Simple Offset Correction**

Offset calibration is achieved simply by storing the voltage output of the sensor at zero flowing current.

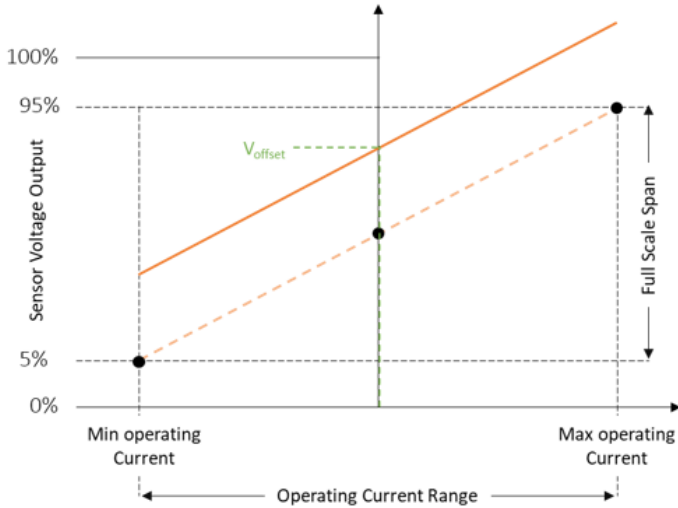


**Figure 24: Simple Offset Calibration**

This stored value  $V_{OFFSET}$  becomes the coefficient  $b$  in the linear transfer function:

$$Current = \frac{Voltage - b}{a}$$

**Simple Gain Correction**

Basic Gain calibration can be achieved by applying a known current value ( $A_1$ ) and measuring the sensor output voltage value ( $V_1$ ).

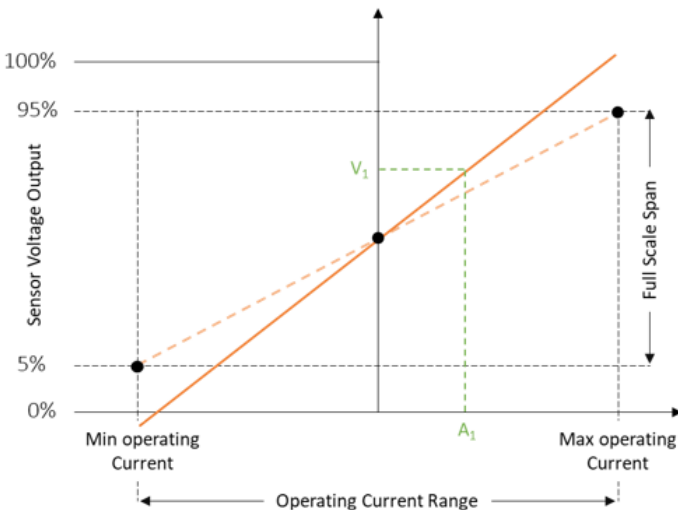

**Figure 25: Simple Gain Calibration**

The following equation is used to calculate the slope coefficient  $a$ :

$$a = \frac{V_1 - V_{OFFSET}}{A_1}$$

**Recommended Offset and Gain Correction**


For bidirectional current applications, the steps below are recommended for users trying to perform the best error correction of gain and offset.

1. Apply a known current value ( $A_1$ ) and measure voltage output ( $V_1$ )
2. Apply a second current value ( $A_2$ ) and measure the voltage output ( $V_2$ )
3. Calculate the slope using the following equation

It is recommended that the applied currents  $A_1$  and  $A_2$  are the absolute maximum and minimum operating current the sensor will see during its normal operations.

Also,  $A_1 = -A_2$  for bidirectional current sensing.

$$a = \frac{V_1 - V_2}{A_1 - A_2} \quad b = \frac{V_1 + V_2}{2}$$

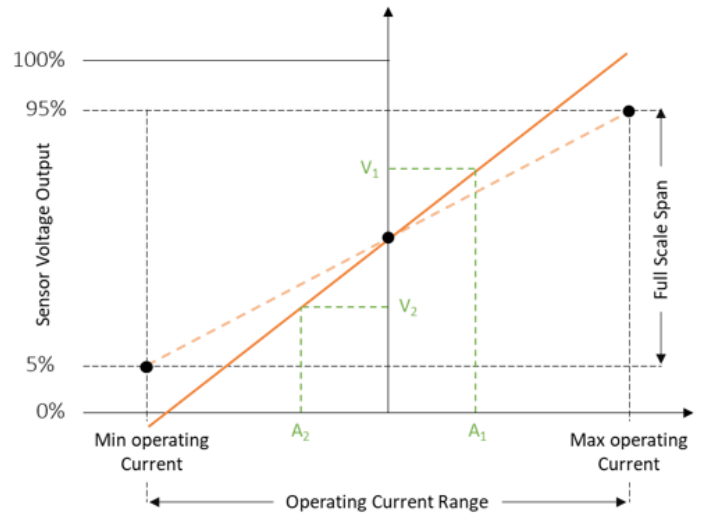

**Figure 26: Gain Calibration**


Both calculated coefficients  $a$  and  $b$  are then used to calculate the current:

$$Current = \frac{Voltage - b}{a}$$



### APPLICATIONS INFORMATION

The CT110 is able to replace a shunt resistor plus isolation amplifier circuit to measure the current in various applications. It has an embedded exposed pad that can support up to  $+10 A_{DC}$  or  $\pm 15.0 A_{PK}$  of current flow through the package. Figure 27 illustrates the CT110 where the PCB trace is connected to the current-carrying conductor (CCC) to allow the current flow through it. The current that flows through the exposed pad generates a magnetic field and is sensed by the XtremeSense TMR sensor in the CT110 and converts it into a ratiometric linear analog output voltage that is representative of the measured current. The C110 has at least 2 kV of isolation to protect low voltage circuits from high voltage circuits. The CT110 only needs a 1.0  $\mu F$  bypass capacitor. A resistor-capacitor filter on the ANA pin is recommended to minimize the output noise as shown in Figure 27. Refer to Table 2 for recommended cutoff frequencies.

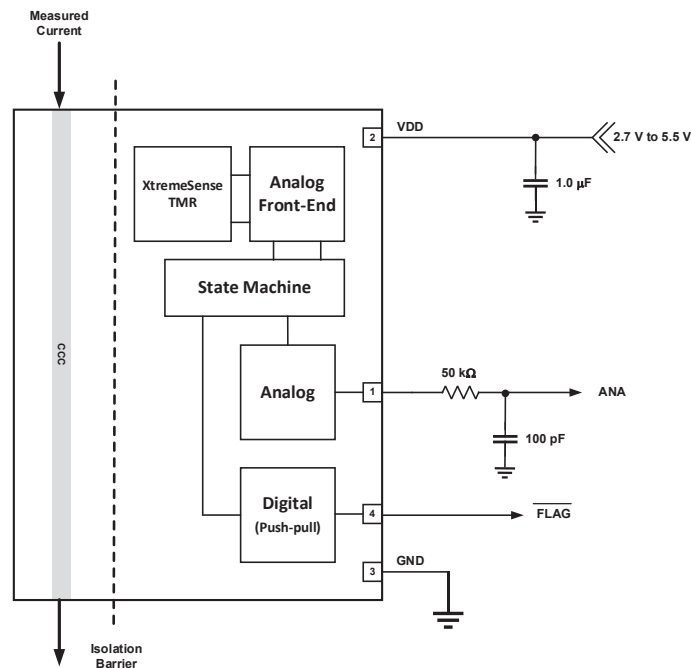

**Figure 27: CT110 with Analog and FLAG Outputs Application Block Diagram**


**Table 1: Recommended External Components for CT110**

Component	Description	Vendor and Part Number	Parameter	Min.	Typ.	Max.	Unit
$C_{BYP}$	1.0 $\mu F$ , X5R or Better	Murata RM155C81A105KA12	C	–	1.0	–	$\mu F$
$R_{FILTER}$	50 k $\Omega$ , $\pm 5\%$	Various	R	–	47	–	k $\Omega$
$C_{FILTER}$	10 pF, X5R or Better	Various	C	–	10	–	pF

**Table 2: Recommended Cut-off Frequencies for CT110 and its Resistor-Capacitor Values**

Cut-off Frequency (kHz)	Resistor Value (k $\Omega$ )	Capacitor Value (pF)
1	105	1,500
10	105	150
30	50	100

### PACKAGE OUTLINE DRAWING

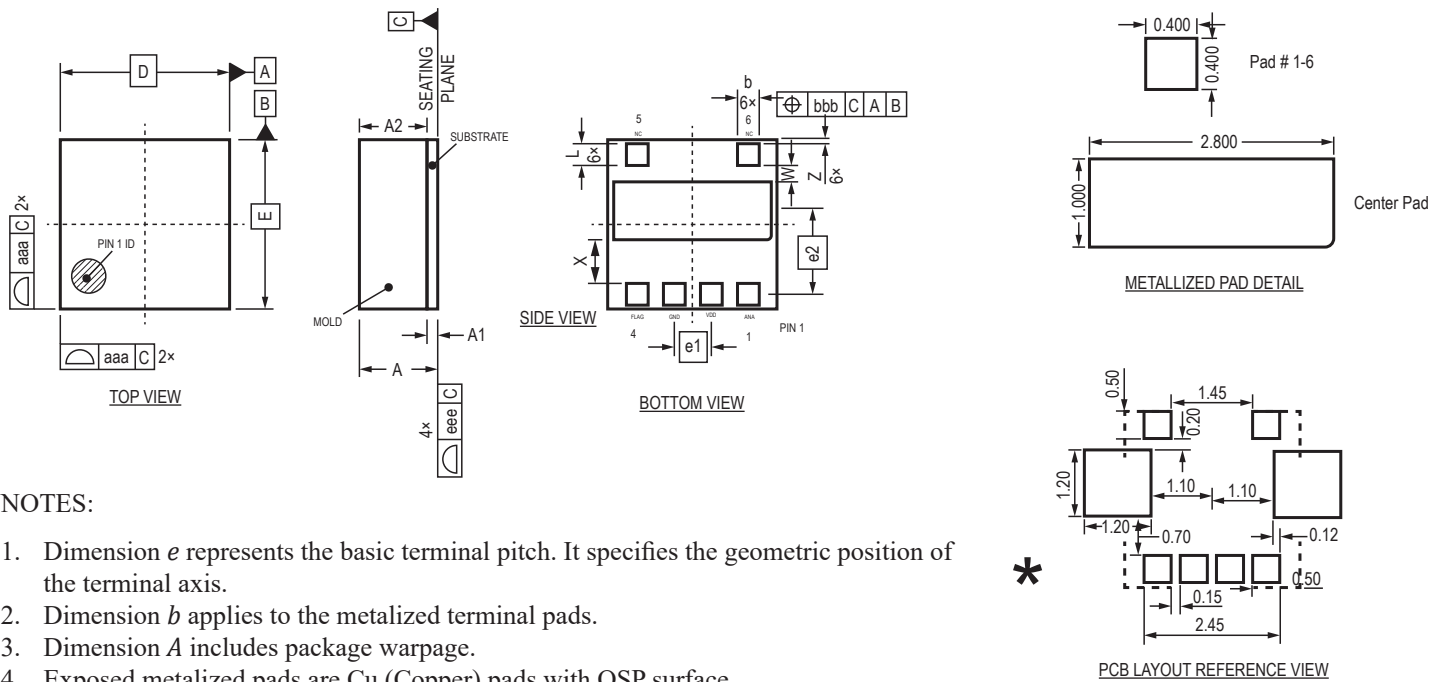

#### NOTES:

1. Dimension  $e$  represents the basic terminal pitch. It specifies the geometric position of the terminal axis.
2. Dimension  $b$  applies to the metallized terminal pads.
3. Dimension  $A$  includes package warpage.
4. Exposed metallized pads are Cu (Copper) pads with OSP surface.
5. All dimensions are in millimeters (mm).

Figure 28: DFN-6 Package Drawing and Dimensions

Table 3: CT110 DFN-6 Package Dimensions

Symbol	Dimensions in Millimeters (mm)		
	Min.	Typ.	Max.
A	0.880	0.950	1.020
A1	0.225	0.250	0.255
A2	0.650	0.700	0.750
b	0.375	0.400	0.425
D	3.00 BSC		
E	3.00 BSC		
L	0.375	0.400	0.425
X	0.775	0.800	0.825
W	0.275	0.300	0.325
Z	0.025	0.050	0.075
e1	0.65 BSC		
e2	1.50 BSC		
aaa	0.050		
bbb	0.050		
eee	0.050		

### PACKAGE INFORMATION

Table 4: CT110 Package Information

Part Number	Package Type	# of Leads	Package Quantity	Lead Finish	MSL Rating [2]	Operating Temperature [3]	Device Marking [4]
CT110FDV-ID6	DFN	6	3000	Sn	3	-40°C to 85°C	10FDV YYWWS
CT110FDV-HD6	DFN	6	3000	Sn	3	-40°C to 125°C	10FDV YYWWS
CT110PDV-ID6	DFN	6	3000	Sn	3	-40°C to 85°C	10PDV YYWWS
CT110PDV-HD6	DFN	6	3000	Sn	3	-40°C to 125°C	10PDV YYWWS
CT110RDV-ID6	DFN	6	3000	Sn	3	-40°C to 85°C	10RDV YYWWS
CT110RDV-HD6	DFN	6	3000	Sn	3	-40°C to 125°C	10RDV YYWWS

[1] RoHS is defined as semiconductor products that are compliant to the current EU RoHS requirements. It also will meet the requirement that RoHS substances do not exceed 0.1% by weight in homogeneous materials. Green is defined as the content of chlorine (Cl), bromine (Br), and antimony trioxide based flame retardants satisfy JS709B low halogen requirements of  $\leq 1,000$  ppm.

[2] MSL Rating = Moisture Sensitivity Level Rating as defined by JEDEC standard classifications.

[3] Package will withstand ambient temperature range of -40°C to +150°C and storage temperature range of -65°C to 160°C.

[4] Device Marking for DFN is defined as 10xDy where x = current rating of CT110 and y = total output error; and YYWWZ = date code information where YY = year, WW = work week and Z = sequential number.

**Revision History**

<b>Number</b>	<b>Date</b>	<b>Description</b>
3	November 2, 2023	Document rebranded and minor editorial updates.
4	April 3, 2024	Corrected Isolation Rating table (page 4); updated Selection Guide (page 2), Total Output Error Performance (pages 7, 9, and 11) and Package Information (page 19); added PCB Layout Reference View to Package Outline Drawing (page 18).

Copyright 2024, Allegro MicroSystems.

Allegro MicroSystems reserves the right to make, from time to time, such departures from the detail specifications as may be required to permit improvements in the performance, reliability, or manufacturability of its products. Before placing an order, the user is cautioned to verify that the information being relied upon is current.

Allegro's products are not to be used in any devices or systems, including but not limited to life support devices or systems, in which a failure of Allegro's product can reasonably be expected to cause bodily harm.

The information included herein is believed to be accurate and reliable. However, Allegro MicroSystems assumes no responsibility for its use; nor for any infringement of patents or other rights of third parties which may result from its use.

Copies of this document are considered uncontrolled documents.

For the latest version of this document, visit our website:

[www.allegromicro.com](http://www.allegromicro.com)