
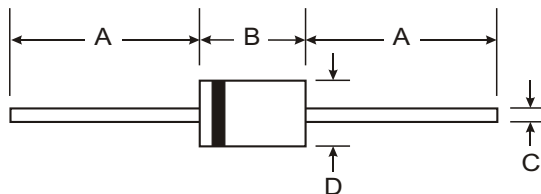


**VOLTAGE RANGE: 400V**  
**CURRENT: 1.0 A**

### Features

- Miniature Size
- Low Forward Voltage drop
- Low Reverse Leakage Current
- High Surge Capability



DO-41		
Dim	Min	Max
A	25.40	—
B	4.06	5.21
C	0.71	0.864
D	2.00	2.72
All Dimensions in mm		

### Mechanical Data

- Case: DO - 41 Molded Plastic
- Terminals: Plated Leads Solderable per MIL-STD-202, Method 208
- Polarity: Cathode Band
- Weight: 0.34 grams (approx.)
- Mounting Position: Any
- Marking: Type Number



### Maximum Ratings and Electrical Characteristics T<sub>A</sub> = 25°C unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.


Characteristic	Symbol	10EDA40	Unit
Repetitive Peak Reverse Voltage	V <sub>RRM</sub>	400	V
Average Rectified Output Current 50Hz Half Sine Wave Resistive Load	I <sub>O</sub>	1.0 0.9	A
RMS Forward Current Surge Forward Current 50Hz Half Sine Wave, 1 cycle, Non-repetitive	I <sub>F(RMS)</sub>	1.57	A
Surge Forward Current	I <sub>FSM</sub>	45	A
Operating Junction Temperature Range	T <sub>jw</sub>	- 40 to + 150	°C
Storage Temperature Range	T <sub>stg</sub>	- 40 to + 150	°C

Characteristics	Symbol	Conditions	Min.	Typ.	Max.	Unit
Peak Reverse Current	I <sub>RM</sub>	T <sub>j</sub> = 25 °C, V <sub>RM</sub> = V <sub>RRM</sub>	-	-	10	μA
Peak Forward Voltage	V <sub>FM</sub>	T <sub>j</sub> = 25 °C, I <sub>FM</sub> = 1.0A	-	-	1.0	V
Thermal Resistance	R <sub>th(j-a)</sub>	Junction to Ambient				
		P.C. Board mounted*1	-	-	110	°C/W
Without Fin * 2	-	-	140			


\*1: P.C. Board mounted (L=3mm, Print Land=5 x 5mm, Both Sides)

\*2: Without Fin or P.C. Board mounted

FORWARD CURRENT VS. VOLTAGE

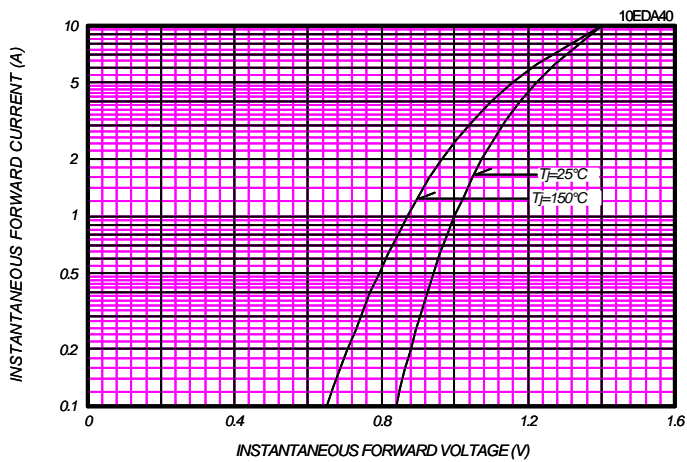


AVERAGE FORWARD POWER DISSIPATION

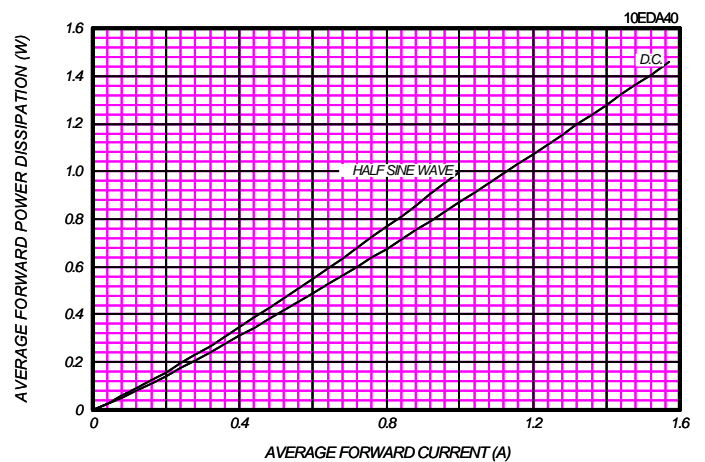


AVERAGE FORWARD CURRENT VS. AMBIENT TEMPERATURE

Without Fin or P.C. Board

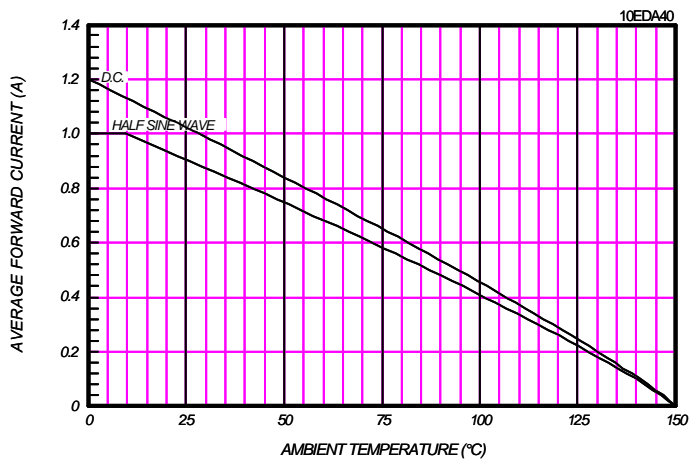

AVERAGE FORWARD CURRENT VS. AMBIENT TEMPERATURE

P.C. Board mounted (L=3mm, Print Land=5x5mm, Both Sides)

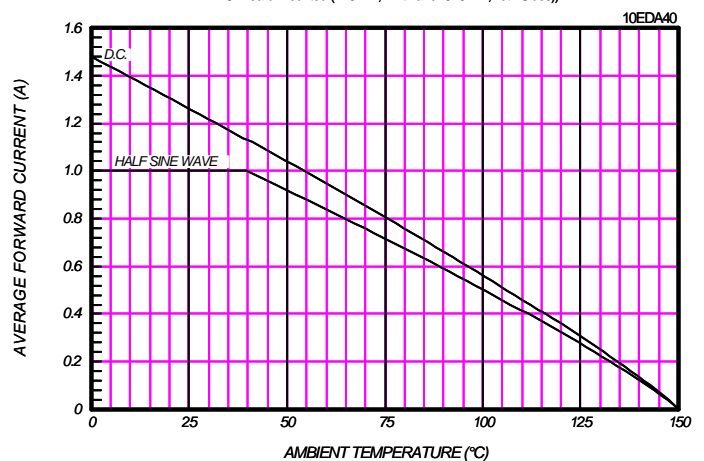

SURGE CURRENT RATINGS

f=50Hz, Half Sine Wave, Non-Repetitive, No Load

