
Auto Grade Multi-Phase 5A/Phase Buck Converter

General Description

DA9213-A and DA9214-A are PMICs optimized for the supply of CPUs, GPUs, and DDR memory rails in automotive in-vehicle infotainment systems, Advanced Driver Assistance Systems (ADAS), navigation and telematics applications. The fast transient response (10 A/ μ s) and load regulation are optimized for the latest generation of multi core application processors.

DA9213-A operates as a single four-phase buck converter delivering up to 20 A output current.

DA9214-A integrates two dual-phase buck converters, capable of delivering 2x10 A output current.

Each buck regulates a programmable output voltage in the range 0.3 - 1.57 V. With an external resistor divider the output voltage can be set to any voltage between 1.57 V and 4.3 V. The input voltage range of 2.8 – 5.5 V makes it suited for a wide variety of low voltage systems, including all Li-Ion battery powered applications.

To guarantee the highest accuracy and to support multiple PCB routing scenarios without loss of performance, a remote sensing capability is implemented in both the DA9213-A and DA9214-A.

The power devices are fully integrated, so no external FETs or Schottky diodes are needed.

A programmable soft start-up can be enabled, which limits the inrush current from the input node and secures a slope controlled activation of the rail.

The Dynamic Voltage Control (DVC) supports adaptive adjustment of the supply voltage depending on the processor load, either via direct register writes through the communication interface (I²C or SPI compatible) or via an input pin.

DA9213-A and DA9214-A feature integrated over-temperature and over-current protection for increased system reliability without the need for external sensing components. The safety feature set is completed by a VDDIO under voltage lockout.

The configurable I²C address selection via GPI allows multiple instances of DA9213-A and DA9214-A to be placed in an application sharing the same communication interface with different addresses.

Key Features

- 2.8 V to 5.5 V input voltage
- 1x 20 A DA9213-A
- 2x 10 A DA9214-A
- 3MHz nominal switching frequency (allows use of low profile [1mm] inductors)
- ± 1 % accuracy (static)
- ± 3 % accuracy (dynamic)
- 0.3 V to 1.57 V output voltage
1.57 to 4.3 V with resistor divider
- Dynamic Voltage Control (DVC)
- Automatic phase shedding
- Integrated power switches
- Remote sensing at point of load
- I²C/SPI compatible interface
- Adjustable soft start
- -40 to +105 °C temperature range
- AEC-Q100 grade 2 qualified
- Package 66 VFBGA 0.5 mm pitch

Applications

- In-car infotainment
- Automotive display clusters
- Advanced Driver Assistance Systems (ADAS)
- Navigation and telematics
- Mobile computing
- Industrial embedded systems

DA9213-A and DA9214-A

Auto Grade Multi-Phase 5A/Phase Buck Converter

System Diagrams

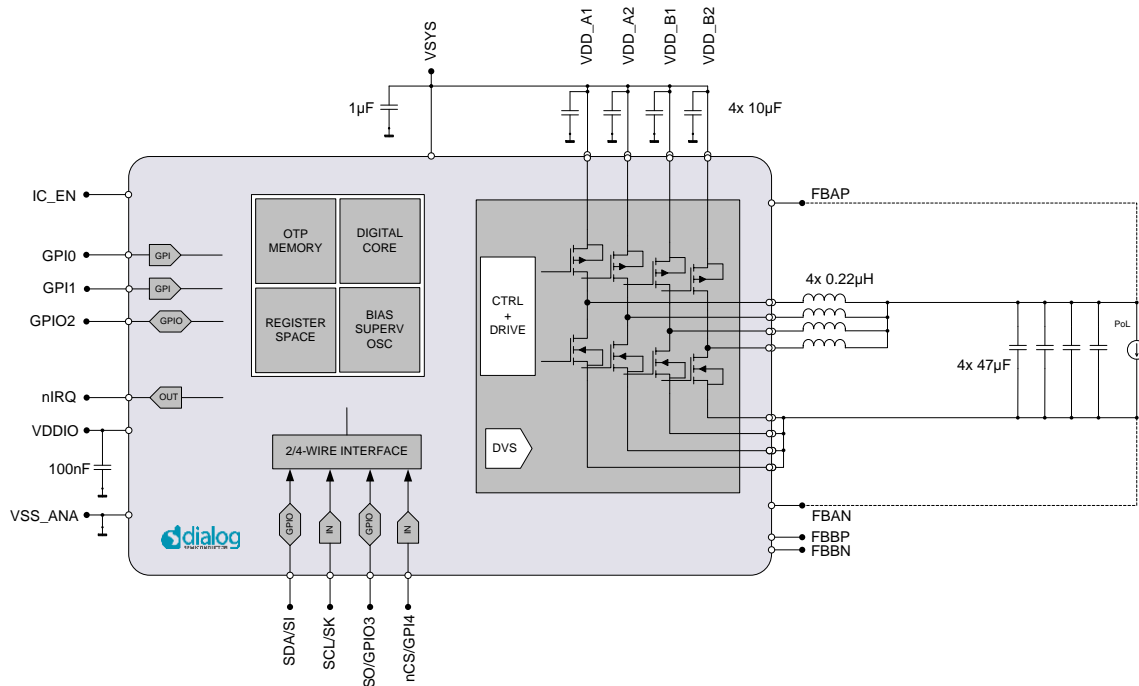


Figure 1: DA9213-A System Diagram

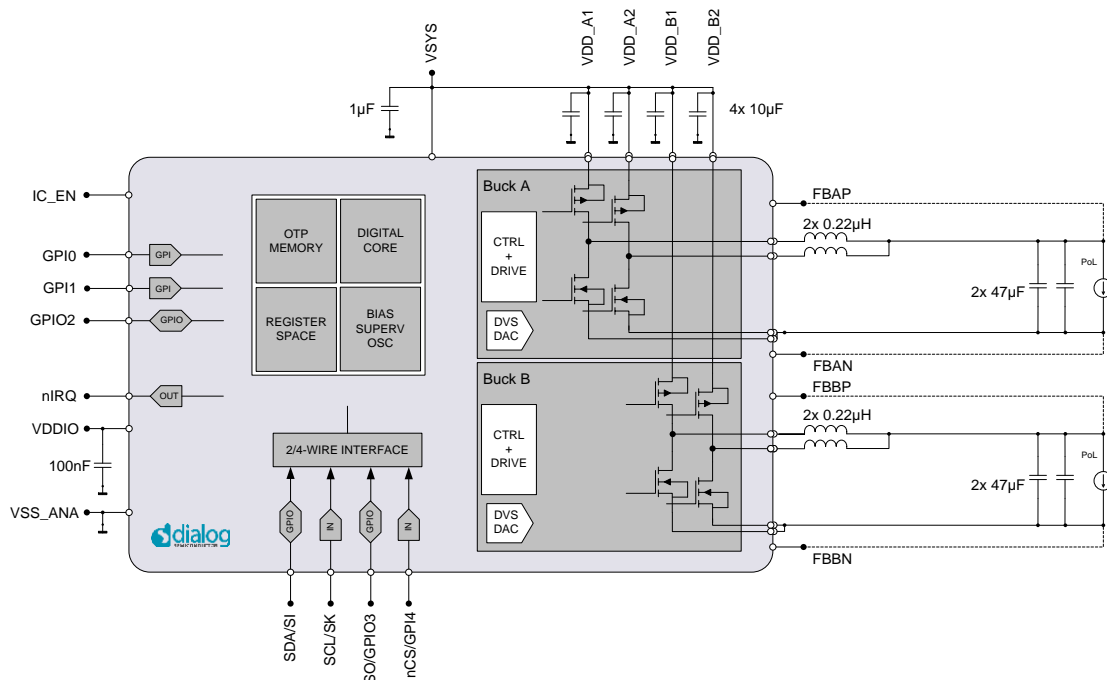


Figure 2: DA9214-A System Diagram

Contents

General Description	1
Key Features	1
Applications	1
System Diagrams	2
Contents	3
Figures	5
Tables	5
1 Terms and Definitions	6
2 Pinout	7
3 Absolute Maximum Ratings	10
4 Recommended Operating Conditions	10
5 Electrical Characteristics	11
6 Efficiency Measurements	18
7 Functional Description	20
7.1 DC-DC Buck Converter.....	23
7.1.1 Switching Frequency	24
7.1.2 Operation Modes and Phase Selection	24
7.1.3 Output Voltage Selection	24
7.1.4 Soft Start Up	25
7.1.5 Current Limit	25
7.1.6 Variable VOUT above 1.57 V	25
7.2 Ports Description	27
7.2.1 VDDIO.....	27
7.2.2 IC_EN	27
7.2.3 nIRQ.....	27
7.2.4 GPIO Extender	27
7.3 Operating Modes.....	30
7.3.1 ON Mode	30
7.3.2 OFF Mode.....	30
7.4 Control Interfaces.....	30
7.4.1 4-WIRE Communication	30
7.4.2 2-WIRE Communication	35
7.4.3 Details of the 2-WIRE Control Bus Protocol	36
7.5 Internal Temperature Supervision.....	39
8 Register Definitions	40
8.1 Register Map	40
8.2 Register Definitions	42
8.2.1 Register Page Control	42
8.2.2 Register Page 0	42

Auto Grade Multi-Phase 5A/Phase Buck Converter

8.2.2.1	System Control and Event.....	42
8.2.2.2	GPIO Control	44
8.2.2.3	Regulators Control.....	46
8.2.3	Register Page 1	47
8.2.3.1	Regulators Settings	47
8.2.4	Register Page 2	52
8.2.4.1	Interface and OTP Settings (shared with DA9063)	52
8.2.4.2	OTP Fusing Registers	53
8.2.4.3	Application Configuration Settings.....	54
9	Application Information	57
9.1	Capacitor Selection	57
9.2	Inductor Selection	58
10	Package Information	59
10.1	Package Outlines	59
11	Ordering Information	60

Auto Grade Multi-Phase 5A/Phase Buck Converter

Figures

Figure 1: DA9213-A System Diagram	2
Figure 2: DA9214-A System Diagram	2
Figure 3: Connection Diagram	7
Figure 4: 66 VFBGA Power Derating Curve.....	11
Figure 5: 2-WIRE Bus Timing.....	16
Figure 6: 4-WIRE Bus Timing.....	17
Figure 7: DA9213-A Efficiency vs Load, VOUT = 1.0 V, 0-20 A	18
Figure 8: DA9213-A Efficiency vs Load, VIN = 3.6 V, 0-20 A	18
Figure 9: DA9214-A Efficiency vs Load, VOUT = 1.0 V, 0-10 A	19
Figure 10: DA9214-A Efficiency vs Load, VIN = 3.6 V, 0-10 A	19
Figure 11: Interface of DA9213-A/14-A with DA9063 and the Host Processor.....	20
Figure 12: Typical Application of DA9213-A.....	21
Figure 13: Typical Application of DA9214-A.....	22
Figure 14: Concept of Control of the Buck's Output Voltage	25
Figure 15: Resistive Divider from VOUT to FBAN	26
Figure 16: GPIO Principle of Operation (example paths).....	29
Figure 17: Schematic of 4-WIRE and 2-WIRE Power Manager Bus	31
Figure 18: 4-WIRE Host Write and Read Timing (nCS_POL = '0', CPOL = '0', CPHA = '0')	32
Figure 19: 4-WIRE Host Write and Read Timing (nCS_POL = '0', CPOL = '0', CPHA = '1')	33
Figure 20: 4-WIRE Host Write and Read Timing (nCS_POL = '0', CPOL = '1', CPHA = '0')	33
Figure 21: 4-WIRE Host Write and Read Timing (nCS_POL = '0', CPOL = '1', CPHA = '1')	34
Figure 22: Timing of 2-WIRE START and STOP Condition.....	36
Figure 23: 2-WIRE Byte Write (SDA Line)	37
Figure 24: Examples of 2-WIRE Byte Read (SDA Line)	37
Figure 25: Examples of 2-WIRE Page Read (SDA Line)	37
Figure 26: 2-WIRE Page Write (SDA Line)	38
Figure 27: 2-WIRE Repeated Write (SDA Line)	38
Figure 28: DA9213-A/14-A VFBGA Package Outline Drawing	59

Tables

Table 1: Pin Description	8
Table 2: Pin Type Definition	9
Table 3: Absolute Maximum Ratings.....	10
Table 4: Recommended Operating Conditions	10
Table 5: Buck Converters Characteristics	11
Table 6: IC Performance and Supervision	14
Table 7: Digital I/O Characteristics.....	14
Table 8: 2-WIRE Control Bus Characteristics	15
Table 9: 4-WIRE Control Bus Characteristics	17
Table 10: 4-WIRE Clock Configurations.....	31
Table 11: 4-WIRE Interface Summary	35
Table 12: Over-Temperature Thresholds	39
Table 13: Register Map	41
Table 14: Recommended Capacitor Types.....	57
Table 15: Recommended Inductor Types	58
Table 16: Ordering Information	60

1 Terms and Definitions

AP	Application Processor
CPU	Central Processing Unit
DDR	Dual Data Rate
DVC	Dynamic Voltage Control
FET	Field Effect Transistor
GPI	General Purpose Input
GPU	Graphic Processing Unit
IC	Integrated Circuit
OTP	One Time Programmable memory
PCB	Printed Circuit Board
PMIC	Power Management Integrated Circuit
POL	Point Of Load
PWM	Pulse Width Modulation

Auto Grade Multi-Phase 5A/Phase Buck Converter

2 Pinout

DA9213-A/14-A											
											 see balls through package
	11										
		10									
			9								
				8							
					7						
						6					
							5				
								4			
									3		
										2	
											1
	A										
		B									
			C								
				D							
					E						
						F					
											66 balls

Figure 3: Connection Diagram

Auto Grade Multi-Phase 5A/Phase Buck Converter

Table 1: Pin Description

Pin Name	Signal Name	Second Function	Type (See Table 2)	Description
B1, B2, B3, B4	LX_A1		AO	Switching node for Buck A phase 1
E1, E2, E3, E4	LX_A2		AO	Switching node for Buck A phase 2
B8, B9, B10, B11	LX_B1		AO	Switching node for Buck B phase 1
E8, E9, E10, E11	LX_B2		AO	Switching node for Buck B phase 2
A1, A2, A3, A4	VDD_A1		PS	Supply voltage for Buck A phase 1 To be connected to VSYS
F1, F2, F3, F4	VDD_A2		PS	Supply voltage for Buck A phase 2 To be connected to VSYS
A8, A9, A10, A11	VDD_B1		PS	Supply voltage for Buck B phase 1 To be connected to VSYS
F8, F9, F10, F11	VDD_B2		PS	Supply voltage for Buck B phase 2 To be connected to VSYS
F7	IC_EN		DI	Integrated Circuit (IC) Enable Signal
F5	nIRQ		DO	Interrupt line towards the host
E7	VDDIO		PS	I/O Voltage Rail
C5	FBAP		AI	Positive sense node for the Buck A
D5	FBAN		AI	Negative sense node for the Buck A
C7	FBBP		AI	Positive sense node for the Buck B for DA9214-A
	NC		AO	Do not connect for DA9213-A
D7	FBBN		AI	Negative sense node for the Buck B for DA9214-A
	NC		AO	Do not connect for DA9213-A
A7	GPI0	TRK	DI/AI	General purpose input, input track
B7	GPI1		DI	General purpose input
B6	GPI02		DIO	General purpose input/output
A5	SDA	SI	DIO	2-WIRE data, 4-WIRE data input/output
A6	SCL	SK	DI	2-WIRE clock, 4-WIRE clock
D6	nCS	GPI4	DI	4-WIRE chip select, general purpose input
C6	SO	GPI03	DIO	4-WIRE data output, general purpose input/output
B5	VDDCORE		AO	Regulated supply for internal circuitry. Decouple with 150 nF (or 220 nF)
F6	VSYS		PS	Supply for IC and input for voltage supervision
E5	VSS		VSS	
E6	VSS_ANA		VSS	

Auto Grade Multi-Phase 5A/Phase Buck Converter

Pin Name	Signal Name	Second Function	Type (See Table 2)	Description
C1, C2, C3, C4, D1, D2, D3, D4, C8, C9, C10, C11, D8, D9, D10, D11	VSS_A1, VSS_A2 VSS_B1 VSS_B2		VSS	Connect together

Table 2: Pin Type Definition

Pin Type	Description	Pin Type	Description
DI	Digital Input	AI	Analogue Input
DO	Digital Output	AO	Analogue Output
DIO	Digital Input/Output	AIO	Analogue Input/Output
PS	Power Supply		
VSS	Ground		

Auto Grade Multi-Phase 5A/Phase Buck Converter

3 Absolute Maximum Ratings

Table 3: Absolute Maximum Ratings

Parameter	Description	Conditions (Note 1)	Min	Typ	Max	Unit
T _{STG}	Storage temperature		-65		+150	°C
T _J	Junction temperature		-40		+150	°C
V _{DD_LIM}	Limiting supply voltage		-0.3		5.5	V
V _{PIN}	Limiting voltage at all pins except above		-0.3		V _{DD} + 0.3 (max 5.5)	V
V _{ESD_HBM}	Electrostatic discharge voltage	Human Body Model			2	kV

Note 1 Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only, so functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specification are not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

4 Recommended Operating Conditions

Table 4: Recommended Operating Conditions

Parameter	Description	Conditions (Note 1)	Min	Typ	Max	Unit
V _{DD}	Supply voltage		2.8		5.5	V
T _{J_LOP}	Operating junction Temperature				125	°C
T _A	Ambient temperature		-40		105	°C
V _{DDIO}	Input/output supply voltage		1.2		3.6 (Note 2)	V
P _{TOT}	Total power dissipation (Note 3)	Derating factor above T _A = 70 °C: 34.8 mW/°C		1920		mW
θ _{JA}	Thermal resistance junction to ambient (Note 3)			28.7		°C/W

Note 1 Within the specified limits, a life time of 10 years is guaranteed

Note 2 V_{DDIO} is not allowed to be higher than V_{DD}

Note 3 Obtained from simulation on a 2S2P 4L JEDEC Board (EIA/JESD51-2). Influenced by PCB technology and layout.

Auto Grade Multi-Phase 5A/Phase Buck Converter

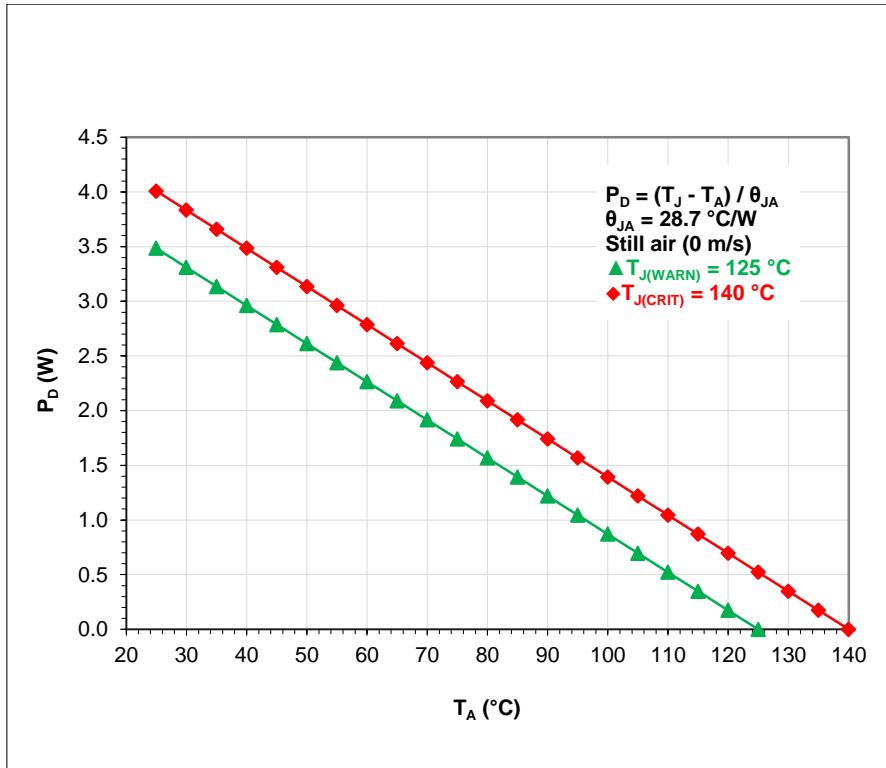


Figure 4: 66 VFBGA Power Derating Curve

5 Electrical Characteristics

Unless otherwise noted, the following is valid for T_J = -40 to +125 °C, V_{DD} = 2.8 V to 5.5 V, C_{OUT} = 47 µF per phase, local sensing.

Table 5: Buck Converters Characteristics

Parameter	Description	Conditions	Min	Typ	Max	Unit
External Component Electrical Conditions						
C _{OUT}	Output capacitance (per phase)	Including voltage and temperature coefficient	23	47	62	µF
ESR _{COUT}	Equivalent series resistance (per phase)	f > 100 kHz			10	mΩ
L _{PHASE}	Inductance (per phase)	Including current and temperature dependence	0.11	0.22	0.29	µH
DCR _{LPHASE}	Inductor resistance				100	mΩ
Electrical Characteristics						
V _{DD}	Supply voltage	V _{DD_x} = V _{SYST}	2.8		5.5	V
V _{BUCK}	Buck output voltage (Note 1)	I _O = 0 to I _{O_MAX}	0.3		1.57	V
V _{OACC}	Output voltage accuracy PWM mode	Incl. static line/load reg and voltage ripple V _{BUCK} ≥ 1 V	-2.0		+2.0	%

Auto Grade Multi-Phase 5A/Phase Buck Converter

Parameter	Description	Conditions	Min	Typ	Max	Unit
		Incl. static line/load reg and voltage ripple $V_{BUCK} < 1\text{ V}$		± 20		mV
		$V_{BUCK} = 1\text{ V}$ $V_{DD} = 3.8\text{ V}$ no load	-1.0		+1.0	%
		$V_{BUCK} = 1\text{ V}$ $V_{DD} = 3.8\text{ V}$ no load $T_A = 27\text{ }^\circ\text{C}$	-0.5		+0.5	%
V_{TR_LOAD}	Load regulation transient voltage (Note 2)	DA9213-A $I_O = 0\text{ to }5\text{ A}$, $t_r = 500\text{ ns}$ PWM 4-phase $V_{BUCK} \geq 1\text{ V}$ $V_{BUCK} < 1\text{ V}$		$\pm 2\%$ $\pm 20\text{ mV}$		%
		DA9213-A $I_O = 0\text{ to }5\text{ A}$, $t_r = 500\text{ ns}$ auto mode, ph shedding $V_{BUCK} = 1\text{ V}$		± 3.5		%
	Load regulation transient voltage (Note 2)	DA9214-A $I_O = 0\text{ to }5\text{ A}$, $t_r = 500\text{ ns}$ PWM 2-phase $V_{BUCK} = 1\text{ V}$		± 3.5		%
V_{TR_LINE}	Line regulation transient voltage	$V_{DD} = 3\text{ to }3.6\text{ V}$ $dt = 10\text{ }\mu\text{s}$ $I_O = I_O(\text{MAX})/2$		15		mV
I_{O_MAX}	Maximum output current	Per phase	5000			mA
I_{LIM_MIN}	Minimum current limit per phase (programmable) (Note 3)	BUCKA_ILIM BUCKB_ILIM = 0000	-20%	4000	20%	mA
I_{LIM_MAX}	Maximum current limit per phase (programmable) (Note 3)	BUCKA_ILIM BUCKB_ILIM = 1111	-20%	7000	20%	mA
I_{Q_PWM}	Quiescent current @ synchronous rectification mode	Per phase No load $V_{DD} = 3.7\text{ V}$		17		mA
f_{SW}	Switching frequency			3		MHz
t_{STUP}	Start up time	BUCKA_UP_CTRL BUCKB_UP_CTRL = 011		50 (Note 4)		μs

Auto Grade Multi-Phase 5A/Phase Buck Converter

Parameter	Description	Conditions	Min	Typ	Max	Unit
R _{O_PD}	Output pull-down resistance	For each phase at the LX node @0.5 V, (see BUCKx_PD_DIS)		150	200	Ω
R _{ON_P MOS}	PMOS on-resistance	incl. pin and routing V _{DD} = 3.7 V per phase		27		mΩ
R _{ON_N MOS}	NMOS on-resistance	incl. pin and routing V _{DD} = 3.7 V per phase		19		mΩ
PFM Mode						
V _{BUCK_PFM}	Buck output voltage in PFM	I _O = 0 mA to I _{O_MAX}	0.3		1.57	V
I _{MIN_PFM}	Minimum output current in PFM	Static output voltage, no DVC	2			mA
I _{Q_PFM_A2}	DA9214-A quiescent current Buck A enabled	No switching V _{DD} = 3.7 V (Note 5)		58		μA
I _{Q_PFM_A4}	DA9213-A quiescent current Buck enabled	No switching V _{DD} = 3.7 V (Note 5)		72		μA
I _{Q_PFM_A2B2}	DA9214-A quiescent current Buck A enabled Buck B enabled	No switching V _{DD} = 3.7 V (Note 5)		106		μA

Note 1 Programmable in 10 mV increments.

Note 2 Additional to the dc accuracy. Inductor value 0.22 μH. The value is measured directly at C_{OUT(EXT)}. In case of remote sensing, parasitics of PCB and external components may affect this value.

Note 3 On-time > 50 ns.

Note 4 Time from beginning to end of the voltage ramp. Additional 10 μs typical delay, plus internal sync to the enable port.

Note 5 For the total quiescent current of the IC, the I_{DD_ON} should be added.

Auto Grade Multi-Phase 5A/Phase Buck Converter

Table 6: IC Performance and Supervision

Parameter	Description	Conditions	Min	Typ	Max	Unit
I _{DD_OFF}	Off state supply current	IC_EN = 0 T _A = 27 °C		0.1	1	μA
I _{DD_ON}	On state supply current	IC_EN = 1 Buck A/B off T _A = 27 °C		14		μA
V _{TH_PG}	Power good threshold voltage	referred to VBUCK		-50		mV
V _{HYS_PG}	Power good hysteresis voltage			50		mV
V _{TH_UVLO_VDD}	Under voltage lockout threshold @ VDD			2.0		V
V _{TH_UVLO_IO}	Under voltage lockout threshold @ VDDIO		1.315	1.45	1.55	V
V _{HYS_UVLO_IO}	Under voltage lockout hysteresis @ VDDIO			70		mV
T _{TH_WARN}	Thermal warning threshold temperature		110	125	140	°C
T _{TH_CRIT}	Thermal critical threshold temperature		125	140	155	°C
T _{TH_POR}	Thermal power on reset threshold temperature		135	150	165	°C
f _{OSC}	Internal oscillator frequency		-7%	6.0	+7%	MHz

Table 7: Digital I/O Characteristics

Parameter	Description	Conditions	Min	Typ	Max	Unit
V _{IH_EN}	HIGH level input voltage @ pin IC_EN		1.1			V
V _{IL_EN}	LOW level input voltage @ pin IC_EN				0.35	V
t _{EN}	Enable time	I/F operating		750		μs
R _{O_PU_GPO}	Pull up resistor @ GPO	V _{DDIO} = 1.8 V V _{GPO} = 0 V		100		kΩ
R _{I_PD_GPI}	Pull down resistor @ GPI	V _{DDIO} = 1.8 V V _{GPI} = VDDIO		150		kΩ
V _{IH}	GPI0-4, SCL, SDA, (2-WIRE mode) HIGH level input voltage	VLDOCORE mode VDDIO mode	1.75 0.7*V _{DDIO}			V
V _{IL}	GPI0-4, SCL, SDA, (2-WIRE mode) LOW level input voltage	VLDOCORE mode VDDIO mode			0.75 0.3*V _{DDIO}	V

Auto Grade Multi-Phase 5A/Phase Buck Converter

Parameter	Description	Conditions	Min	Typ	Max	Unit
V _{IH_4WIRE}	SK, nCS, SI (4-WIRE Mode) HIGH level input voltage		0.7*V _{DDIO}			V
V _{IL_4WIRE}	SK, nCS, SI (4-WIRE Mode) LOW level input voltage				0.3*V _{DDIO}	V
V _{OH}	GPO2-3, SO (4-WIRE mode) HIGH level output voltage	push-pull mode @1mA V _{DDIO} ≥ 1.5 V	0.8*V _{DDIO}			V
V _{OL1}	GPO2-3, SDA (2-WIRE mode) SO (4-WIRE mode) LOW level output voltage @I _{OL} = 1 mA				0.3	V
V _{OL3}	SDA (2-WIRE Mode) LOW level output voltage @I _{OL} = 3 mA				0.24	V
V _{OL20}	SDA (2-WIRE Mode) LOW level output voltage @I _{OL} = 20 mA				0.4	V
C _{IN}	CLK, SDA (2-WIRE Mode) input capacitance			2.5	10	pF
t _{SP}	CLK, SDA (2-WIRE Mode) spike suppression pulse width	Fast/Fast+ mode High Speed mode	0 0		50 10	ns
t _{rDA}	Fall time of SDA signal (2-WIRE Mode)	Fast @ C _b <550pF HS @ 10<C _b <100pF HS @ C _b <400pF	20+0.1C _b 10 20		120 80 160	ns

Table 8: 2-WIRE Control Bus Characteristics

Parameter	Description	Conditions	Min	Typ	Max	Unit
t _{BUF}	Bus free time from STOP to START condition		0.5			μs
C _B	Bus line capacitive load				150	pF
Standard/Fast/Fast+ Mode						
f _{SCL}	Clock frequency @ pin SCL		0 (Note 1)		1000	kHz
t _{SU_STA}	START condition set-up time		0.26			μs
t _{H_STA}	START condition hold time		0.26			μs

Auto Grade Multi-Phase 5A/Phase Buck Converter

Parameter	Description	Conditions	Min	Typ	Max	Unit
t _{W_CL}	Clock LOW duration		0.5			μs
t _{W_CH}	Clock HIGH duration		0.26			μs
t _R	Rise time @ pin CLK and DATA	Input requirement			1000	ns
t _F	Fall time @ pin CLK and DATA	Input requirement			300	ns
t _{SU_D}	Data set-up time		50			ns
t _{H_D}	Data hold time		0			ns
High Speed Mode						
f _{SCL_HS}	Clock frequency @ pin SCL		0 (Note 1)		3400	kHz
t _{SU_STA_HS}	START condition set-up time		160			ns
t _{H_STA_HS}	START condition hold time		160			ns
t _{W_CL_HS}	Clock LOW duration		160			ns
t _{W_CH_HS}	Clock HIGH duration		60			ns
t _{R_HS}	Rise time @ pin CLK and DATA	Input requirement			160	ns
t _{F_HS}	Fall time @ pin CLK and DATA	Input requirement			160	ns
t _{SU_D_HS}	Data set-up time		10			ns
t _{H_D_HS}	Data hold time		0			ns
t _{SU_STO_HS}	STOP condition set-up time		160			ns

Note 1 Minimum clock frequency is 10 kHz if 2WIRE_TO is enabled

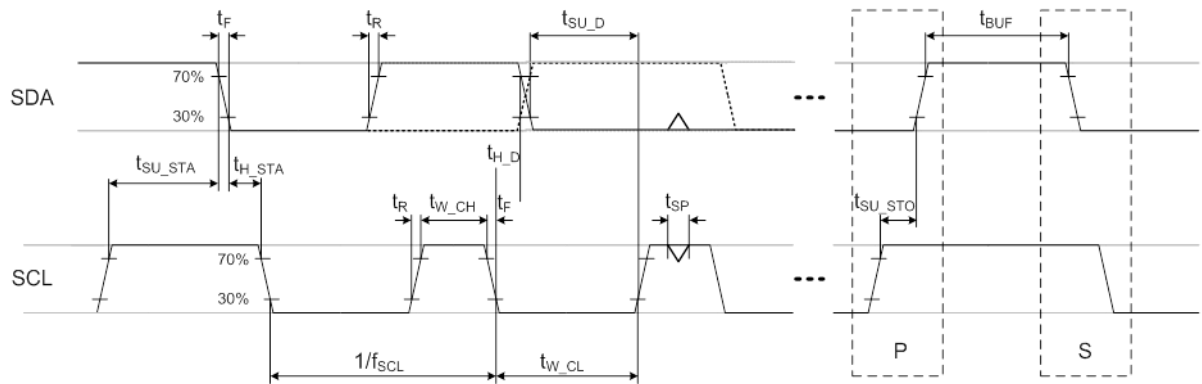


Figure 5: 2-WIRE Bus Timing

Auto Grade Multi-Phase 5A/Phase Buck Converter

Table 9: 4-WIRE Control Bus Characteristics

Parameter	Description	Label in Plot	Min	Typ	Max	Unit
C_B	Bus line capacitive load				100	pF
t_C	Cycle time	1	70			ns
t_{SU_CS}	Chip select setup time	2, from CS active to first SK edge	20			ns
t_{H_CS}	Chip select hold time	3, from last SK edge to CS idle	20			ns
t_{W_CL}	Clock LOW duration	4	$0.4 \times t_C$			ns
t_{W_CH}	Clock HIGH duration	5	$0.4 \times t_C$			ns
t_{SU_SI}	Data input setup time	6	10			ns
t_{H_SI}	Data input hold time	7	10			ns
t_{V_SO}	Data output valid time	8			22	ns
t_{H_SO}	Data output hold time	9	6			ns
t_{W_CS}	Chip select HIGH duration	10	20			ns

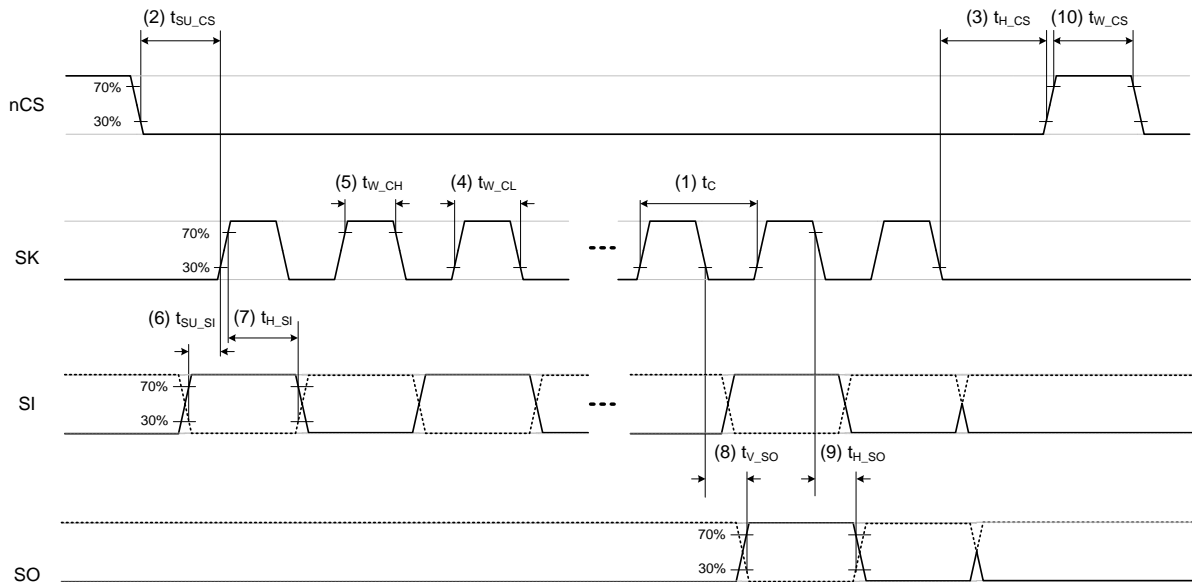


Figure 6: 4-WIRE Bus Timing

Auto Grade Multi-Phase 5A/Phase Buck Converter

6 Efficiency Measurements

The efficiency measurements for DA9213-A and DA9214-A are shown with phase shedding enabled in each plot and were measured using 2520 size inductor with Typ. 8 mOhm DCR.

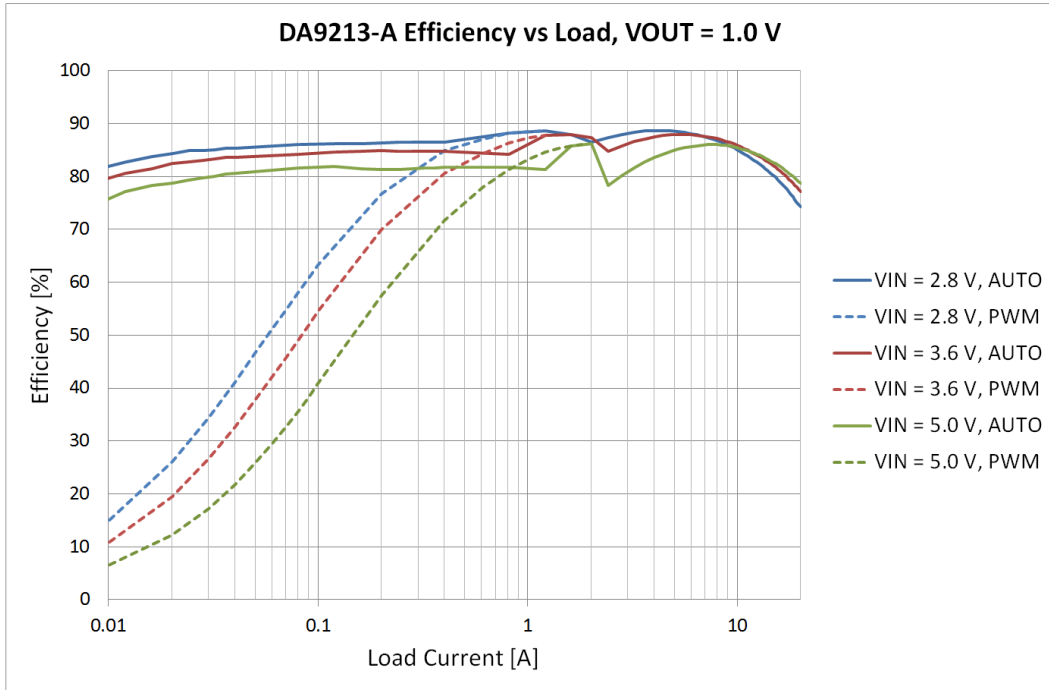


Figure 7: DA9213-A Efficiency vs Load, VOUT = 1.0 V, 0-20 A

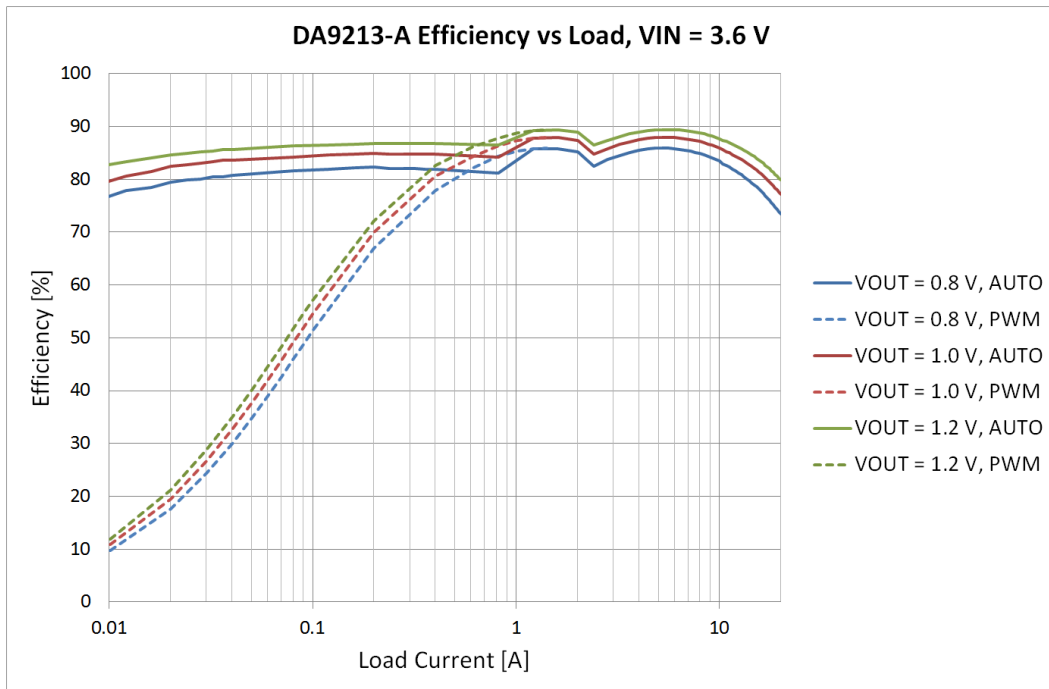


Figure 8: DA9213-A Efficiency vs Load, VIN = 3.6 V, 0-20 A

Auto Grade Multi-Phase 5A/Phase Buck Converter

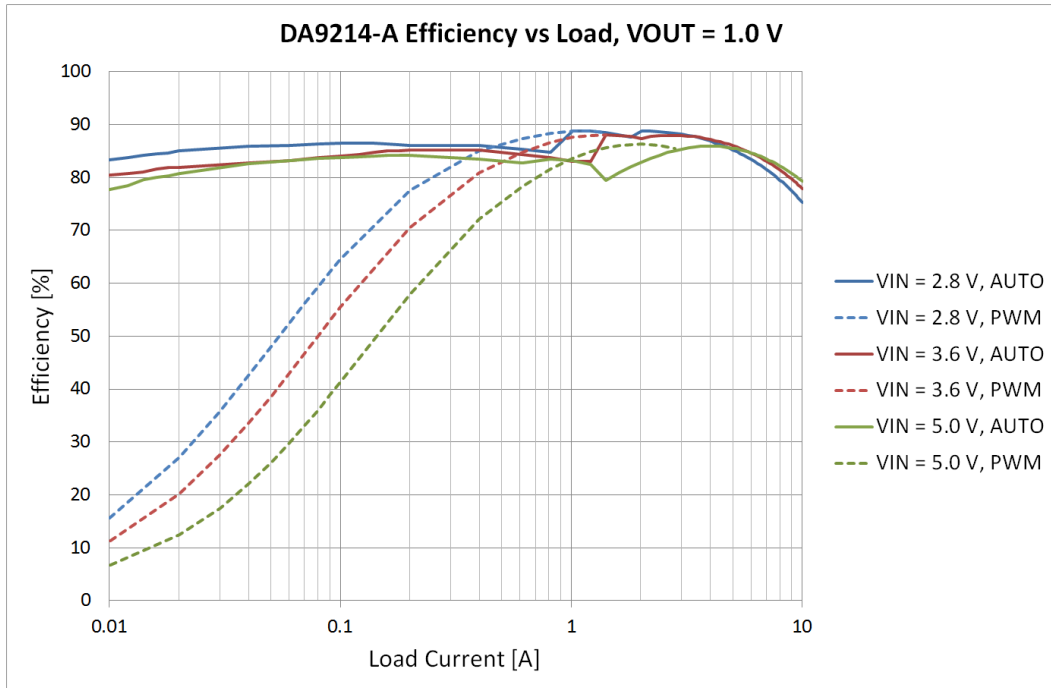


Figure 9: DA9214-A Efficiency vs Load, VOUT = 1.0 V, 0-10 A

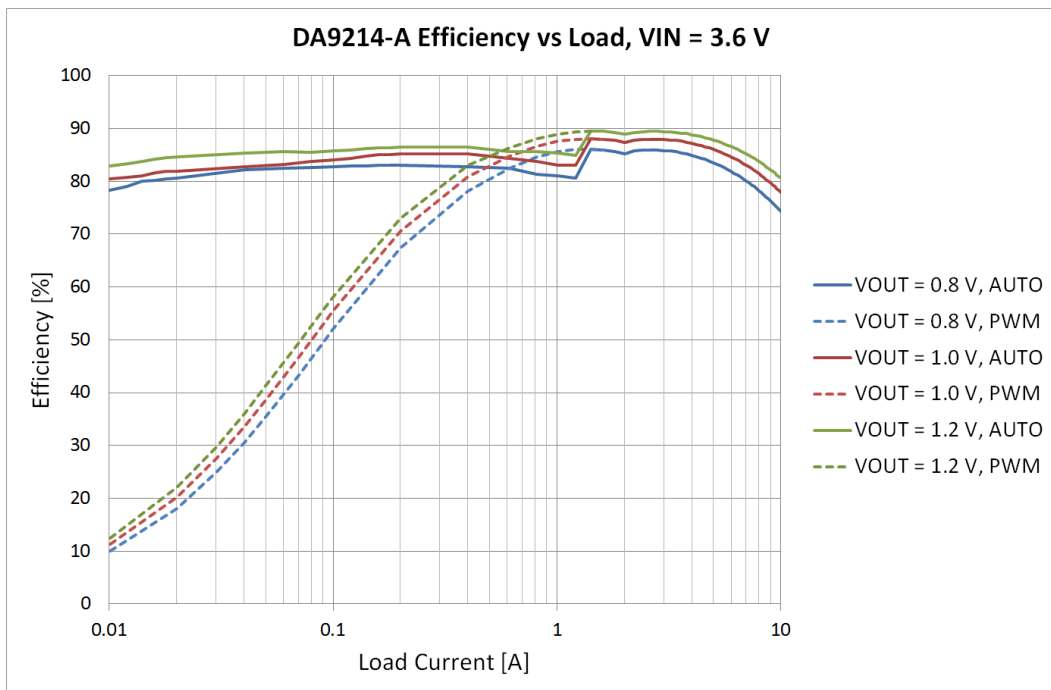


Figure 10: DA9214-A Efficiency vs Load, VIN = 3.6 V, 0-10 A

7 Functional Description

Flexible configurability and the availability of different control schemes make both DA9213-A and DA9214-A the ideal single/dual buck companion ICs to expand the existing capabilities of a master PMIC such as DA9063.

Due to the advanced compatibility between both DA9213-A and DA9214-A and the DA9063, they offer several advantages when they are operated together. These advantages include:

- DA9213-A and DA9214-A can be enabled and controlled by DA9063 during the power up sequence, thanks to DA9063's dedicated output signals during power-up, and compatible input controls in both DA9213-A and DA9214-A.
- DA9213-A and DA9214-A can be used in a completely transparent way for the host processor and can share the same Control Interface (same SPI chip select or I²C address), thanks to the compatible registers map. DA9213-A and DA9214-A has a dedicated register space for configuration and control which doesn't conflict with DA9063.
- DA9213-A and DA9214-A supports a power-good configurable port for enhanced communication to the host processor and improved power-up sequencing.
- DA9213-A and DA9214-A can both share the same interrupt line with DA9063.

In addition, the 2-WIRE / 4-WIRE interfaces allow DA9213-A and DA9214-A to fit to many standard PMU parts and power applications.

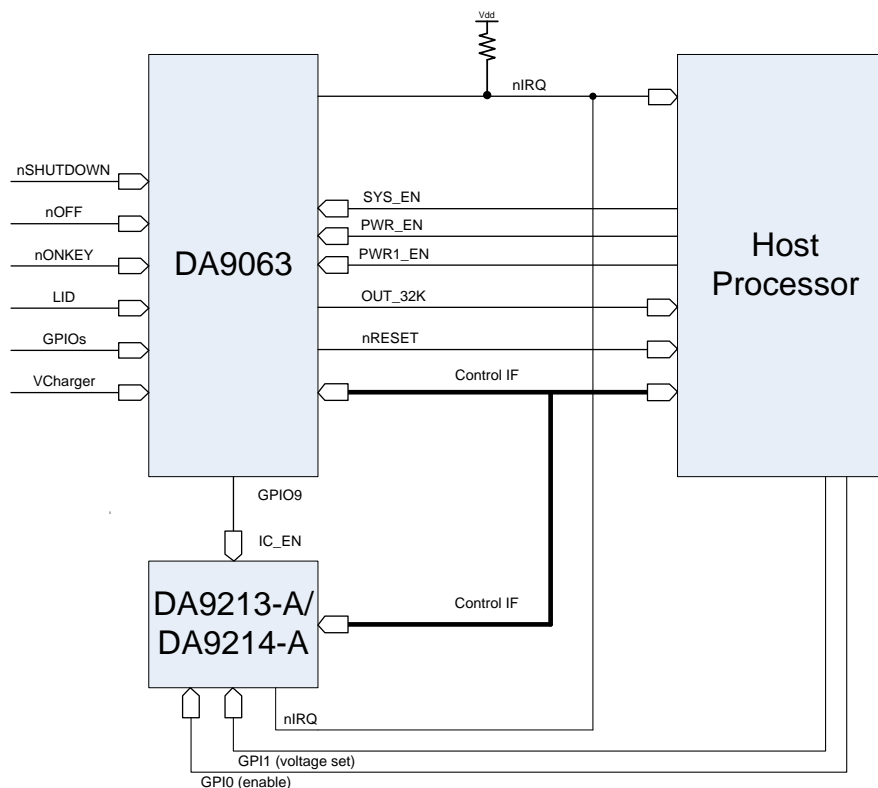


Figure 11: Interface of DA9213-A/14-A with DA9063 and the Host Processor

As shown in [Figure 11](#), a typical application case includes a host processor, a main PMIC (for example, DA9063) and DA9213-A or DA9214-A used as companion IC for the high power core supply.

Auto Grade Multi-Phase 5A/Phase Buck Converter

The easiest way of controlling DA9213-A and DA9214-A is through the Control Interface. The master initiating the communication must always be the host processor that reads and writes to the main PMIC, and to the DA9213-A and DA9214-A registers. To poll the status of DA9213-A or DA9214-A, the host processor must access the dedicated register area through the Control Interface. DA9213-A and DA9214-A can additionally be controlled by means of hardware inputs.

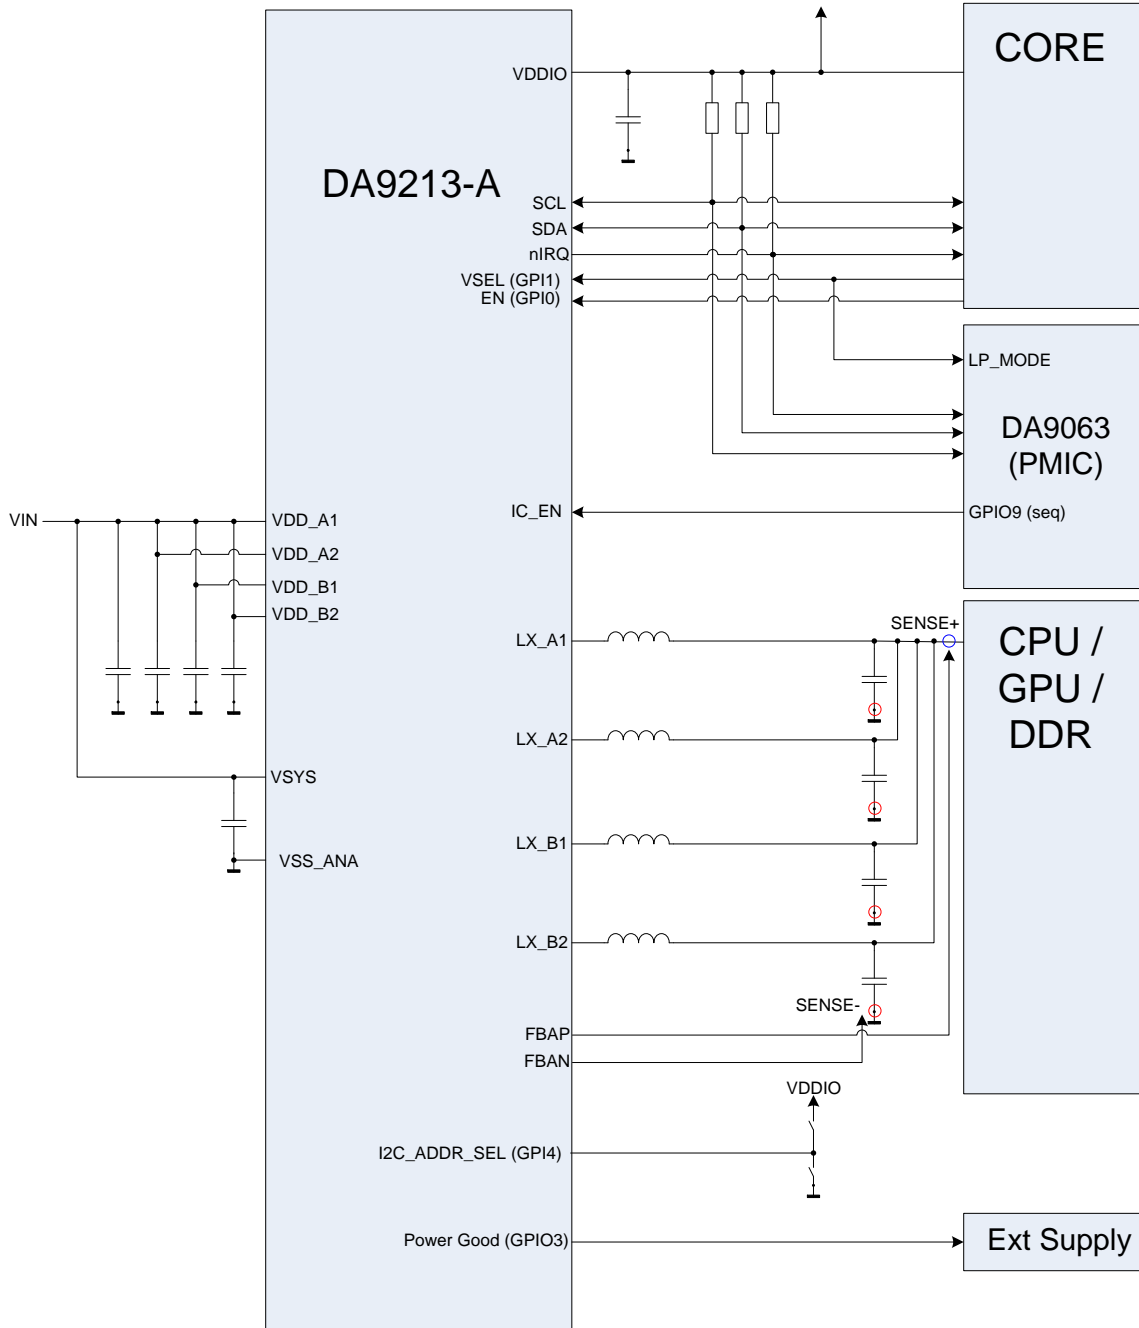


Figure 12: Typical Application of DA9213-A

Figure 12 shows a typical use case of DA9213-A for the supply of CPU, GPU, or DDR rails. The IC is enabled and disabled by the main PMIC via IC_EN port as part of its sequencer. Once the IC is

Auto Grade Multi-Phase 5A/Phase Buck Converter

enabled, the CORE application processor enables the buck converter with the EN1 signal and manages the output voltage selection with the VSEL signal.

The VSEL signal can be shared between the main PMIC and the DA9213-A. Three GPI/GPIOs embedded in DA9213-A are used in this case:

- GPIO2 signals the insertion of an external charger in the application (through interrupt to the host processor)
- GPIO3 indicates a power-good-condition, either to proceed with the power up sequence or to enable an external supply connected to the port
- GPI4 is used for the I²C interface address hardware selection

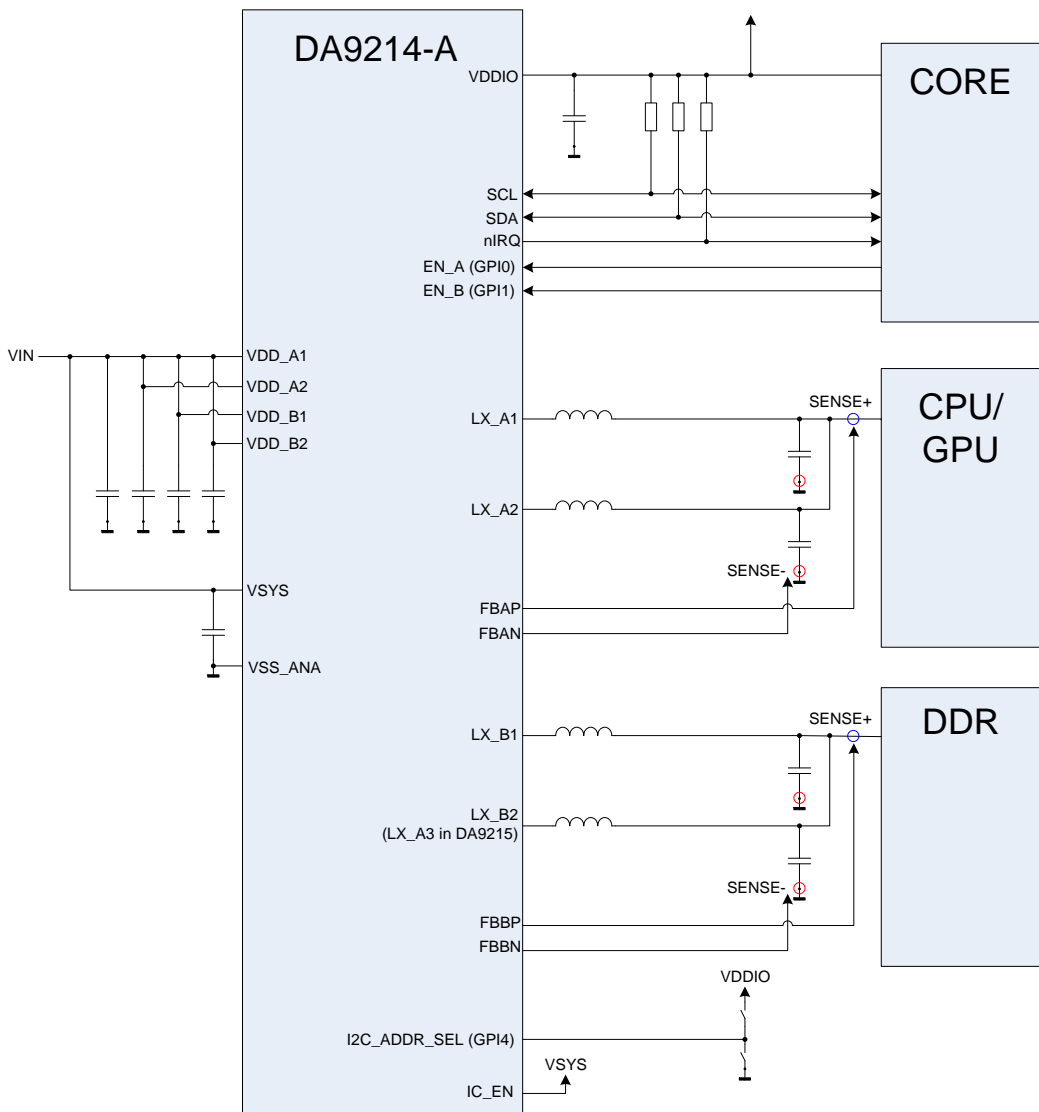


Figure 13: Typical Application of DA9214-A

Figure 13 shows a typical use case of DA9214-A for the simultaneous supply of a CPU and a GPU rail. The IC is always enabled because IC_EN is shorted to the battery voltage. The CORE application processor enables and disables the CPU/GPU and the DDR individually via dedicated ports on DA9214-A.

Auto Grade Multi-Phase 5A/Phase Buck Converter

7.1 DC-DC Buck Converter

DA9213-A is a four-phase 20 A high efficiency synchronous step-down DVC regulator, operating at a high frequency of typically 3 MHz. It supplies an output voltage of typically 1.0 V for a CPU rail, configurable in the range 0.3 – 1.57 V, with high accuracy in steps of 10 mV.

DA9214-A contains two buck converters, Buck A and Buck B, each capable of delivering 10 A.

To improve the accuracy of the delivered voltage, each buck converter is able to support a differential sensing of the configured voltage directly at the point of load via dedicated positive and negative sense pins.

Both Buck A and Buck B have two voltage registers each. One defines the normal output voltage, while the other offers an alternative retention voltage. In this way different application power modes can easily be supported. The voltage selection can be operated either via GPI or via control interface to guarantee the maximum flexibility according to the specific host processor status in the application.

When a buck is enabled, its output voltage is monitored and a power-good signal indicates that the buck output voltage has reached a level higher than the $V_{TH}(PG)$ threshold. The power-good is lost when the voltage drops below $V_{TH}(PG) - V_{HYS}(PG)$, which is the level at which the signal is de-asserted. The power good signalling should not be used in conjunction with fast start up rates, configured in $BUCKx_UP_CTRL$ register fields and can be individually masked during DVC transitions using the PGA_DVC_MASK and PGB_DVC_MASK bits. For each of the buck converters the status of the power-good indicator can be read back via I²C from the $PWRGOOD_A$ and $PWRGOOD_B$ status bits. It can be also individually assigned to either GPIO2 or GPIO3 using $BUCKA_PG_SEL$ and $BUCKB_PG_SEL$. For correct functionality, the GPIO ports need to be configured as output. An I²C write in $GPIOx_MODE$ can overwrite the internal configuration so that a new update will be automatically done only when the internal power-good indicator changes status.

The buck converters are capable of supporting DVC transitions that occur:

- When the active and selected A-voltage or B-voltage is updated to a new target value.
- When the voltage selection is changed from the A-voltage to the B-voltage (or B-voltage to the A-voltage) using $VBUCKA_SEL$ and $VBUCKB_SEL$.

The DVC controller operates in Pulse Width Modulation (PWM) mode with synchronous rectification. When the host processor changes the output voltage, the voltage transition of each buck converter can be individually signalled with a READY signal routed to either GPIO2 or GPIO3. The port has to be configured as GPO and selected for the functionality via $READYA_CONF$ or $READYB_CONF$. In contrast to the power-good signal, the READY only informs the host processor about the completion of the digital DVC ramp without confirming that the target voltage has actually been reached.

The slew rate of the DVC transition is individually programmed for each buck converter at 10mV per (4, 2, 1 or 0.5 μ s) via control bit $SLEW_RATE_A$ and $SLEW_RATE_B$.

The typical supply current is in the order of 8 mA per phase (quiescent current and charge/discharge current) and drops to <1 μ A when the buck is turned off.

When the buck is disabled, a pull-down resistor (typically 150 Ω) for each phase is activated depending of the value stored in register bits $BUCKA_PD_DIS$ and $BUCKB_PD_DIS$. Phases disabled using $PHASE_SEL_A$ and $PHASE_SEL_B$ will not have any pull-down. The pull-down resistor is always disabled at all phases when DA9213-A and DA9214-A are OFF.

Auto Grade Multi-Phase 5A/Phase Buck Converter

7.1.1 Switching Frequency

The switching frequency is chosen to be high enough to allow the use of a small 0.22 μH inductor (see a complete list of coils in the Application Information, Section 9). The buck switching frequency can be tuned using register bit `OSC_TUNE`. The internal 6 MHz oscillator frequency is tuned in steps of 180 kHz. This impacts the buck converter frequency in steps of 90 kHz and helps to mitigate possible disturbances to other HF systems in the application.

7.1.2 Operation Modes and Phase Selection

The buck converters can operate in synchronous PWM mode and PFM mode. The operating mode is selected using register bits `BUCKA_MODE` and `BUCKB_MODE`.

An automatic phase shedding can be enabled for each buck converter in PWM mode via `PH_SH_EN_A`, `PH_SH_EN_B`, thereby automatically reducing or increasing the number of active phases depending on the output load current. For DA9214-A the phase shedding will automatically change between 1-phase and 2-phase operation at a typical current of 2.0 A. For DA9213-A the phase shedding will automatically change between 1-phase and 4-phase operation at a typical current of 2.5 A. The `PHASE_SEL_A` and `PHASE_SEL_B` register fields limit the maximum number of active phases under any conditions.

If the automatic operation mode is selected on `BUCKA_MODE` or `BUCKB_MODE`, the buck converters will automatically change between synchronous PWM mode and PFM depending on the load current. This improves the efficiency of the converters across the whole range of output load currents.

7.1.3 Output Voltage Selection

The switching converter can be configured using either a 2-WIRE or a 4-WIRE interface. For security reasons, the re-programming of registers that can cause damage when wrongly programmed (for example, the voltage settings) can be disabled by asserting the control `V_LOCK`. When `V_LOCK` is asserted, reprogramming the registers 0xD0 to 0x14F from control interfaces is disabled.

For each buck converter two output voltages can be pre-configured inside registers `VBUCKA_A` and `VBUCKB_A`, and registers `VBUCKA_B` and `VBUCKB_B`. The output voltage can be selected by either toggling register bits `VBUCKA_SEL` and `VBUCKB_SEL` or by re-programming the selected voltage control register. Both changes will result into ramped voltage transitions, during which the `READY` signal is asserted. After being enabled, the buck converter will by default use the register settings in `VBUCKA_A` and `VBUCKB_A` unless the output voltage selection is configured via the GPI port.

If "00" has been selected in `BUCKA_MODE` or `BUCKB_MODE`, A-/B- voltage selection registers `VBUCKx_x` control the operation of the PWM and PFM modes.

Regardless of the values programmed in the `VBUCKx_A` and `VBUCKx_B` registers, the registers `VBUCKA_MAX`, `VBUCKB_MAX` will individually limit the output voltage that can be set for each of the buck converters.

The buck converter provides an optional hardware enable/disable via selectable GPI, and configured via control register bits `BUCKA_GPI` and `BUCKB_GPI`. A change of the output voltage from the state of a GPI is enabled via control register bits `VBUCKA_GPI` and `VBUCKB_GPI`. After detecting a rising or falling edge at the related GPIs, DA9213-A and DA9214-A will configure the buck converters according to their status.

In addition to selecting between the A/B voltages, a track mode can be activated for Buck A to set the output voltage. In the DA9213-A, the track mode is applied to the 4-phase buck converter. This feature can be enabled on GPI0 via `GPI0_PIN`. The output voltage will be configured to follow the value applied at a selected GPI pin. The voltage applied at GPI0 must be in the same range as the

Auto Grade Multi-Phase 5A/Phase Buck Converter

nominal output voltage selectable for the buck rail (see [VBUCKA_A](#) and [VBUCKA_B](#) registers). In Track Mode, only single ended remote sensing is possible.

In Track Mode, the content of the [VBUCKA_SEL](#) bit is ignored, as well as [VBUCKA_A](#) and [VBUCKA_B](#) bits. They will become active again once the voltage track mode is disabled. The GPIO does not generate any event in this case.

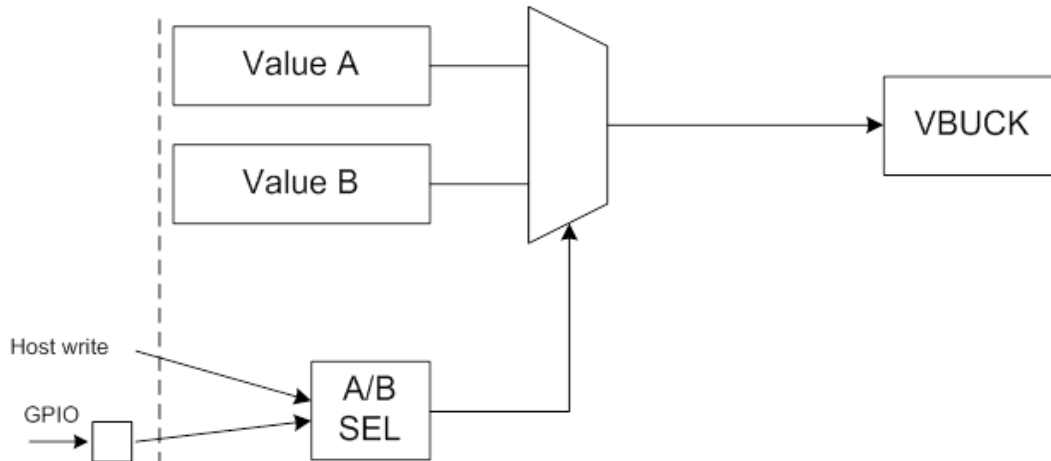


Figure 14: Concept of Control of the Buck's Output Voltage

7.1.4 Soft Start Up

To limit in-rush current from V_{SYS} , the buck converters can perform a soft-start after being enabled. The start-up behavior is a compromise between acceptable inrush current from the battery and turn-on time. In DA9213-A and DA9214-A different ramp times can be individually configured for each buck converter on register [BUCKA_UP_CTRL](#) and [BUCKB_UP_CTRL](#). Rates higher than 20 mV/ μ s may produce overshoot during the start-up phase, so they should be considered carefully.

A ramped power-down can be selected on register bits [BUCKA_DOWN_CTRL](#) and [BUCKB_DOWN_CTRL](#). When no ramp is selected, the output node will be discharged only by the pull-down resistor, if enabled via [BUCKA_PD_DIS](#) and [BUCKB_PD_DIS](#).

7.1.5 Current Limit

The integrated current limit is meant to protect DA9213-A and DA9214-A power stages and the external coil from excessive current. The bucks' current limit should be configured to be at least 40% higher than the required maximum continuous output current (see table below).

When reaching the current limit, each buck converter generates an event and an interrupt to the host processor unless the interrupt has been masked using the [OCx_MASK](#) controls. These [OCA_MASK](#) and [OCB_MASK](#) control bits can be used to mask the generation of over-current events during DVC transitions. An extra masking time as defined in [OCx_MASK](#) will be automatically added to the DVC interval after the DVC has finished in order to ensure that the possible high current levels needed for DVC do not influence the event generation.

7.1.6 Variable VOUT above 1.57 V

The whole product family is also available with an adjustable output voltage up to 4.3V. A resistive divider from VOUT to FBAN (or FBBN) can be used to set the output voltage higher than 1.57 V, see [Figure 15](#).

Auto Grade Multi-Phase 5A/Phase Buck Converter

The value of the output voltage V_{OUT} is set by the selection of the resistive divider shown in equation 1. The total resistance of the divider resistors ($R1+R2$) should be less than 40 k Ω .

$$V_{OUT} = \left(1 + \frac{R1}{R2}\right) \cdot V_{REF}$$

Equation 1

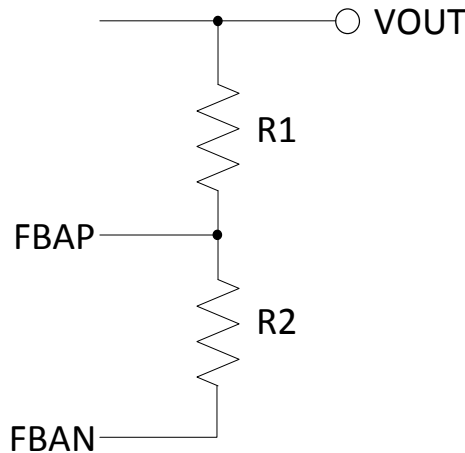


Figure 15: Resistive Divider from VOUT to FBAN

For example, to program the output voltage V_{OUT} to 1.8 V, with V_{REF} set to 1.2 V, suggest 10 k Ω on $R1$ and 20 k Ω on $R2$.

Note 1 The resistors need to be properly selected since the output voltage accuracy will be directly affected by any errors on the resistors. The voltage across FBAP and FBAN (V_{REF}) is guaranteed, but not the output voltage accuracy.



CAUTION

The followings are important notes that need to be considered before using resistive divider on DA9213-A and DA9214-A:

1. Please contact your region's Dialog representative when adopting the resistive divider technique. Dialog need to prepare a special OTP because incorrect OTP settings may result in a different output voltage than expected.
2. The voltage difference between input voltage and output voltage needs to be: above 1.2 V, $V_{IN}-V_{OUT} > 1.2$ V.
3. The total resistance ($R1+R2$) is less than 40 k Ω .
4. It is recommended that the device is operated in PWM mode only.

Auto Grade Multi-Phase 5A/Phase Buck Converter

7.2 Ports Description

This section describes the functionality of each input / output port.

7.2.1 VDDIO

VDDIO is an independent IO supply rail input to DA9213-A and DA9214-A that can be assigned to the power manager interface and to the GPIOs (see control [PM_IF_V](#) and [GPI_V](#)). The rail assignment determines the IO voltage levels and logical thresholds (see also the Digital I/O Characteristics in [Table 7](#)).

An integrated under voltage lockout circuit for the VDDIO prevents internal errors by disabling the I²C communication when the voltage drops below [VULO_IO](#). In that case the buck converters are also disabled and cannot be re-enabled (even via input port) until the VDDIO under-voltage condition has been resolved. At the exit of the VDDIO under voltage condition an event [E_UVLO_IO](#) is generated and the nIRQ line is driven active if the event is not masked.

The VDDIO under-voltage circuit monitors voltages relative to a nominal voltage of 1.8V. If a different rail voltage is being used, the under-voltage circuit can be disabled via [UVLO_IO_DIS](#).

Note that the maximum speed at 4-WIRE interface is only available if the selected supply rail is greater than 1.6 V.

7.2.2 IC_EN

IC_EN is a general enable signal for DA9213-A and DA9214-A turning on and off the internal circuitry (for example, the reference, the digital core, etc.). Correct control of this port has a direct impact on the quiescent current of the whole application. A low level of IC_EN allows the device to reach the minimum quiescent current. The voltage at this pin is continuously sensed by a dedicated analogue circuit.

The host processor will be allowed to start the communication with DA9213-A and DA9214-A through the Control Interface and, for example to turn on the buck converters, a delay time of t_{EN} after assertion of the IC_EN pin. If the bucks are enabled via OTP (see [BUCKA_EN](#) and [BUCKB_EN](#) controls), they will start up automatically after assertion of IC_EN.

The IC_EN activation threshold is defined with a built in hysteresis to avoid glitching transitions that take place with unstable rising or falling edges.

7.2.3 nIRQ

The nIRQ port indicates that an interrupt-causing event has occurred and that the event/status information is available in the related registers. The nIRQ is an output signal that can either be push-pull or open drain (selected via [IRQ_TYPE](#)). If an active high IRQ signal is required, it can be achieved by asserting control [IRQ_LEVEL](#) (recommended for push-pull mode).

Examples of this type of information can be critical temperature and voltage, fault conditions, status changes at GPI ports, and so forth. The event registers hold information about the events that have occurred. Events are triggered by a status change at the monitored signals. When an event bit is set, the nIRQ signal is asserted unless this interrupt is masked by a bit in the IRQ mask register. The nIRQ will not be released until all event registers with asserted bits have been read and cleared. New events that occur during reading an event register are held until the event register has been cleared, ensuring that the host processor does not miss them.

7.2.4 GPIO Extender

DA9213-A and DA9214-A includes a GPIO extender that offers up to five 5 V-tolerant general purpose input/output ports. Each port is controlled via registers from the host processor.

Auto Grade Multi-Phase 5A/Phase Buck Converter

The GPIO3 and GPI4 ports are pin-shared with the 4-WIRE Control Interface. For instance, if [GPIO3_PIN = 01](#), [GPI4_PIN = 01](#) (Interface selected), the GPIO3 and GPI4 ports will be exclusively dedicated to output and chip-select signaling for 4-WIRE purposes. If the alternative function is selected, all GPIOs configuration as per registers 0x58 to 0x5A and 0x145 will be ignored.

GPIs are supplied from the internal rail VDDCORE or VDDIO (selected via [GPI_V](#)) and can be configured to be active high or active low (selected via [GPIOx_TYPE](#)). The input signals can be debounced or directly change the state of the assigned status register [GPIx](#) to high or low, according to the setting of [GPIOx_MODE](#). The debouncing time is configurable via control [DEBOUNCE](#) (10 ms default).

Whenever the status has changed to its configured active state (edge sensitive), the assigned event register is set and the [nIRQ](#) signal is asserted (unless this [nIRQ](#) is masked, see also [Figure 16](#)).

Whenever DA9213-A and DA9214-A is enabled and enters ON mode (also when enabled changing the setting of [GPIOx_PIN](#)) the GPI status bits are initiated towards their configured passive state. This ensures that already active signals are detected, and that they create an event immediately after the GPI comparators are enabled.

The buck enable signal ([BUCKx_EN](#)) can be controlled directly via a GPI, if so configured in the [BUCKA_GPI](#) and [BUCKB_GPI](#) registers. If it is required that GPI ports do not generate an event when configured for the HW control of the switching regulator, the relative mask bit should be set.

GPIs can alternatively be selected to toggle the [VBUCKA_SEL](#) and [VBUCKB_SEL](#) from rising and falling edges at these inputs. Apart from changing the regulator output voltage this also provides hardware control of the regulator mode (normal/low power mode) from the settings of [BUCKA_SL_A](#), [BUCKA_SL_B](#), [BUCKB_SL_A](#), and [BUCKB_SL_B](#) (enabled if [BUCKA_MODE](#) or [BUCKB_MODE](#) = '00').

All GPI ports have the additional option of activating a 100 k Ω pull-down resistor via [GPIOx_PUPD](#), which ensures a well-defined level in case the input is not actively driven.

If enabled via [ADDR_SEL_CONF](#), the I²C address selection can be assigned to a specific GPI. An active voltage level at the selected GPI configures the slave address of DA9213-A and DA9214-A to [IF_BASE_ADDR1](#) while a passive voltage level configures the slave address to [IF_BASE_ADDR2](#). If no GPI is selected then the [IF_BASE_ADDR1](#) is automatically used.

If defined as an output, GPIOs can be configured to be open-drain or push-pull. If configured as push-pull, the supply rail is VDDIO. By disabling the internal 120 k Ω pull-up resistor in open-drain mode, the GPO can also be supplied from an external rail. The output state will be assigned as configured by the GPIO register bit [GPIOx_MODE](#).

A specific power-good port for each of the buck converters can be configured via [BUCKA_PG_SEL](#) and [BUCKB_PG_SEL](#). The respective port must be configured as GPO for correct operation. If assigned to the same GPO, it is necessary that the power-good indicators for Buck A and Buck B are both active (supply voltages in range) to assert the overall power-good. The signal will be released as soon as one of the single power-good signals is not active (that is, at least one supply is out of range).

The power good signalling should not be used in conjunction with fast start up rates, configured in [BUCKx_UP_CTRL](#) register fields.

Once enabled via [RELOAD_FUNC_EN](#) the GPIO0 can be used as input port to operate a partial OTP download. When the input level is changed to active, the registers 0x5D, 0x5E, 0xD1 to 0xDA are updated to their OTP default. This allows a complete buck re-configuration that resets all the changes done to those registers previously (soft reset). If the buck should be kept on during the soft reset, the OTP values for the enable bits should be asserted because they are also part of the re-load.

Auto Grade Multi-Phase 5A/Phase Buck Converter

Whenever the GPIO unit is off (POR or OFF Mode) all ports are configured as open drain active high (pass device switched off, high impedance state). When leaving POR the pull-up or pull-down resistors will be configured from register GPIOx_PUPD.

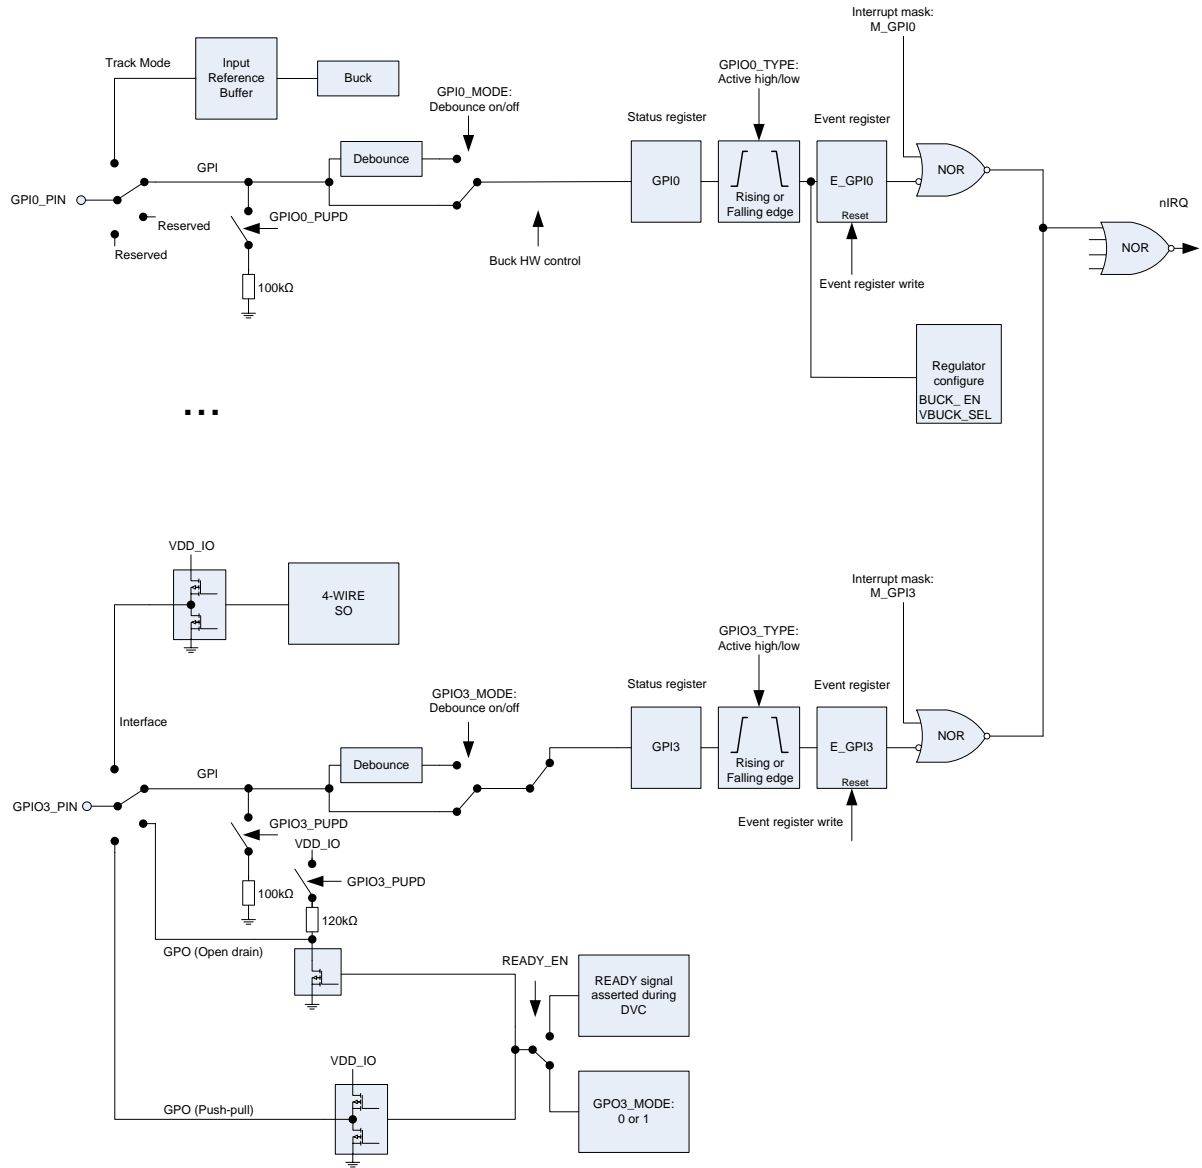


Figure 16: GPIO Principle of Operation (example paths)

Auto Grade Multi-Phase 5A/Phase Buck Converter

7.3 Operating Modes

7.3.1 ON Mode

DA9213-A and DA9214-A are in ON Mode when the IC_EN port is higher than EN_ON and the supply voltage is higher than VTH (UVLO)(VDD). Once enabled, the host processor can start the communication with DA9213-A and DA9214-A via Control Interface after the t_{EN} delay needed for internal circuit start up.

If **BUCKA_EN** or **BUCKB_EN** is asserted when DA9213-A and DA9214-A are in ON Mode the power up of the related buck converter is initiated. If the bucks are controlled via GPI, the level of the controlling ports is checked when entering ON mode, so that an active level will immediately have effect on the buck. If **BUCKA_EN** or **BUCKB_EN** are not asserted and all controlling GPI ports are inactive, the buck converter will stay off with the output pull-down resistor enabled/disabled according to the setting of **BUCKA_PD_DIS** and **BUCKB_PD_DIS**.

7.3.2 OFF Mode

DA9213-A and DA9214-A are in OFF Mode when the IC_EN port is lower than EN_OFF. In OFF Mode, the bucks are always disabled and the output pull-down resistors are disabled independently of **BUCKA_PD_DIS** and **BUCKB_PD_DIS**. All I/O ports of DA9213-A and DA9214-A are configured as high impedance.

7.4 Control Interfaces

All the features of DA9213-A and DA9214-A can be controlled by SW through a serial control interfaces. The communication is selectable to be either a 2-WIRE (I²C compliant) or a 4-WIRE connection (SPI compliant) via control **IF_TYPE**, which will be selected during the initial OTP read. If 4-WIRE is selected, the GPIO3 and GPIO4 are automatically configured as interface pins. Data is shifted into or out of DA9213-A and DA9214-A under the control of the host processor, which also provides the serial clock. In a normal application case the interface is only configured once from OTP values, which are loaded during the initial start-up of DA9213-A and DA9214-A.

DA9213-A and DA9214-A react only on read/write commands where the transmitted register address (using the actual page bits as a MSB address range extensions) is within 0x50 to 0x67, 0xD0 to DF, 0x140 to 0x14F and (read only) 0x200 to 0x27F. Host access to registers outside these ranges will be ignored. This means there will be no acknowledge after receiving the register address in 2-WIRE Mode, and SO stays HI-Z in 4-WIRE Mode. During debug and production modes write access is available to page 4 (0x200 to 0x27F). DA9213-A and DA9214-A react only on write commands where the transmitted register address is 0x00, 0x80, 0x100 to 0x106. The host processor must read the content of those registers before writing, thereby changing only the bit fields that are not marked as reserved (the content of the read back comes from the compatible PMIC, for example DA9063).

If the **STAND_ALONE** bit is asserted (OTP bit), DA9213-A and DA9214-A also react to read commands.

7.4.1 4-WIRE Communication

In 4-WIRE Mode the interface uses a chip-select line (nCS/nSS), a clock line (SK), data input (SI) and data output line (SO).

The DA9213-A and DA9214-A register map is split into four pages that each contain up to 128 registers. The register at address zero on each page is used as a page control register. The default active page after turn-on includes registers 0x50 to 0x6F. Writing to the page control register changes the active page for all subsequent read/write operations unless an automatic return to page 0 was selected by asserting bit **REVERT**. Unless the **REVERT** bit was asserted after modifying the

Auto Grade Multi-Phase 5A/Phase Buck Converter

active page, it is recommended to read back the page control register to ensure that future data exchange is accessing the intended registers.

All registers outside the DA9213-A and DA9214-A range are write only, that is, the DA9213-A and DA9214-A will not answer to a read command and the data bus is tri-state (they are implicitly directed to DA9063). In particular the information contained in registers 0x105 and 0x106 is used by DA9213-A and DA9214-A to configure the control interface. They must be the same as the main PMIC (DA9063), so that a write to those registers configures both the main PMIC and DA9213-A and DA9214-A at the same time. The default OTP settings also need to be identical for a correct operation of the system.

The 4-WIRE interface features a half-duplex operation, that is, data can be transmitted and received within a single 16-bit frame at enhanced clock speed (up to 14 MHz). It operates at the clock frequencies provided by the host.

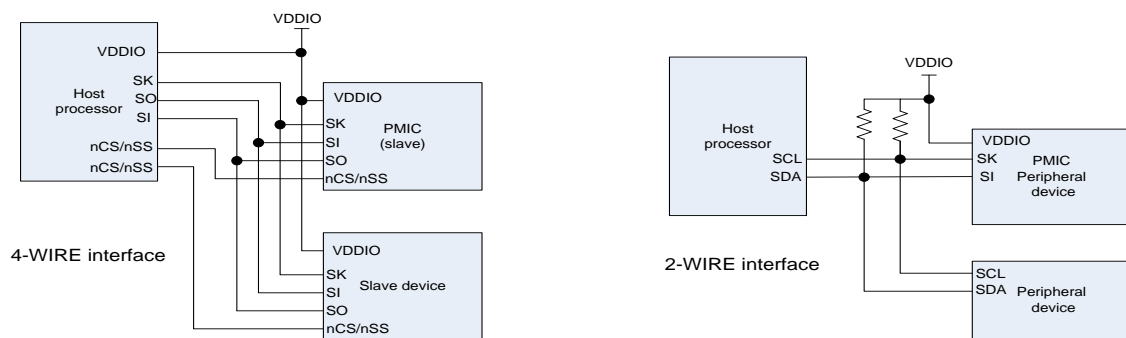


Figure 17: Schematic of 4-WIRE and 2-WIRE Power Manager Bus

A transmission begins when initiated by the host. Reading and writing is accomplished by the use of an 8-bit command, which is sent by the host prior to the exchanged 8-bit data. The byte from the host begins shifting in on the SI pin under the control of the serial clock SK provided from the host. The first seven bits specify the register address (0x01 to 0x07) that will be written or read by the host. The register address is automatically decoded after receiving the seventh address bit. The command word ends with an R/W bit, which together with the control bit **R/W_POL** specifies the direction of the following data exchange. During register writing the host continues sending out data during the following eight SK clocks. For reading, the host stops transmitting and the 8-bit register is clocked out of DA9213-A and DA9214-A during the consecutive eight SK clocks of the frame. Address and data are transmitted with MSB first. The polarity (active state) of nCS is defined by control bit **nCS_POL**. nCS resets the interface when inactive and it has to be released between successive cycles.

The SO output from DA9213-A and DA9214-A is normally in high-impedance state and active only during the second half of read cycles. A pull-up or pull-down resistor may be needed at the SO line if a floating logic signal can cause unintended current consumption inside other circuits.

Table 10: 4-WIRE Clock Configurations

Configurations			
CPHA Clock Polarity	CPOL Clock Phase	Output Data is Updated at SK Edge	Input Data is Registered at SK Edge
0 (idle low)	0	Falling	Rising
0 (idle low)	1	Rising	Falling
1 (idle high)	0	Rising	Falling
1 (idle high)	1	Falling	Rising

Auto Grade Multi-Phase 5A/Phase Buck Converter

DA9213-A and DA9214-A's 4-WIRE interface offers two further configuration bits. Clock polarity (**CPOL**) and clock phase (**CPHA**) define when the interface will latch the serial data bits. **CPOL** determines whether SK idles high (**CPOL** = 1) or low (**CPOL** = 0). **CPHA** determines on which SK edge data is shifted in and out. With **CPOL** = 0 and **CPHA** = 0, DA9213-A and DA9214-A latch data on the SK rising edge. If the **CPHA** is set to 1 the data is latched on the SK falling edge. **CPOL** and **CPHA** states allow four different combinations of clock polarity and phase. Each setting is incompatible with the other three. The host and DA9213-A and DA9214-A must be set to the same **CPOL** and **CPHA** states to communicate with each other.

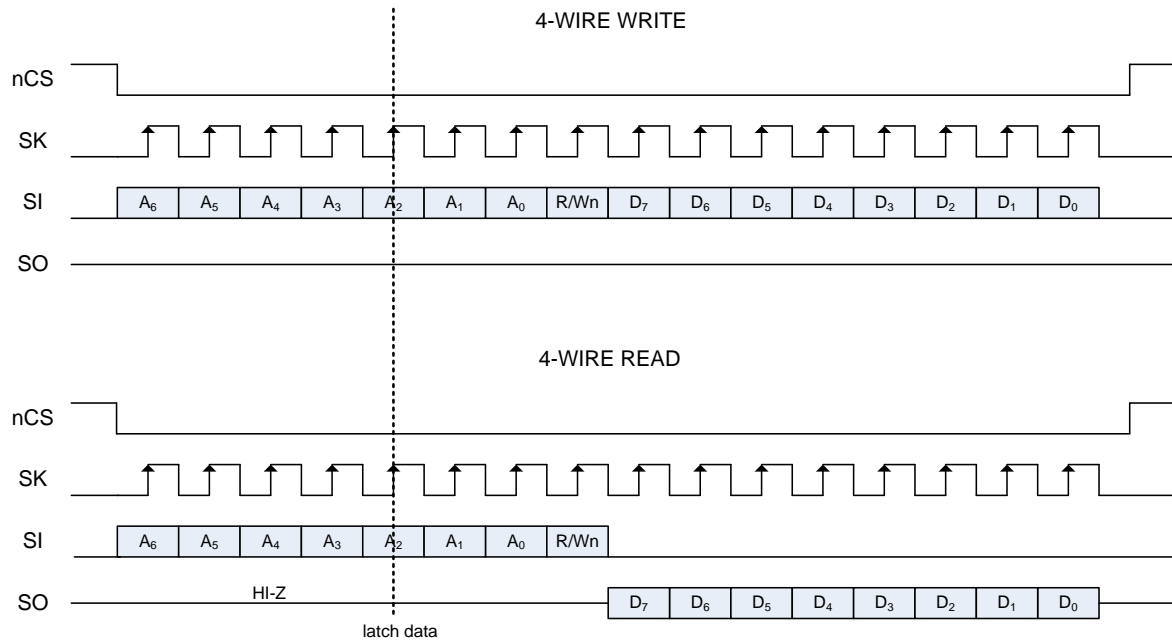


Figure 18: 4-WIRE Host Write and Read Timing ($nCS_POL = '0'$, $CPOL = '0'$, $CPHA = '0'$)

Auto Grade Multi-Phase 5A/Phase Buck Converter

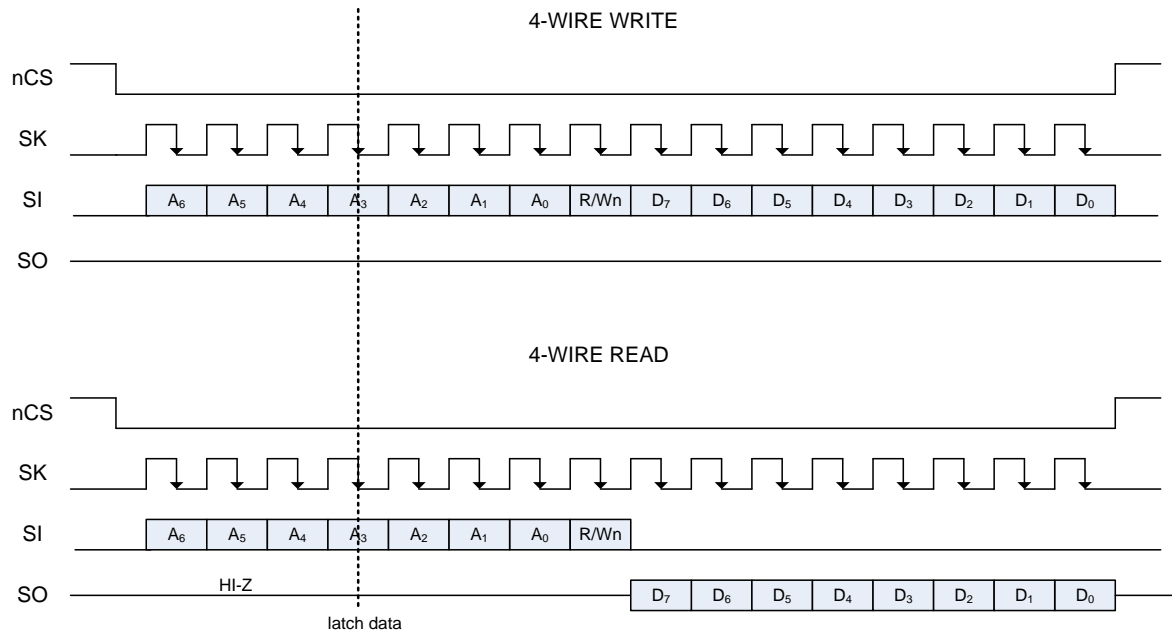


Figure 19: 4-WIRE Host Write and Read Timing ($nCS_POL = '0'$, $CPOL = '0'$, $CPHA = '1'$)

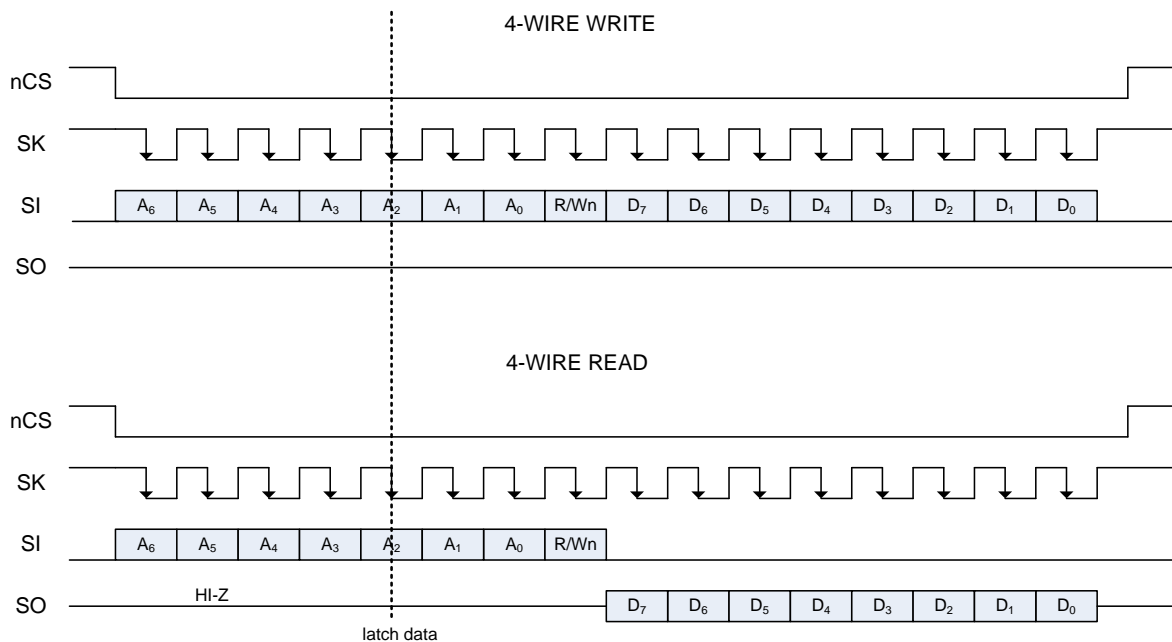


Figure 20: 4-WIRE Host Write and Read Timing ($nCS_POL = '0'$, $CPOL = '1'$, $CPHA = '0'$)

Auto Grade Multi-Phase 5A/Phase Buck Converter

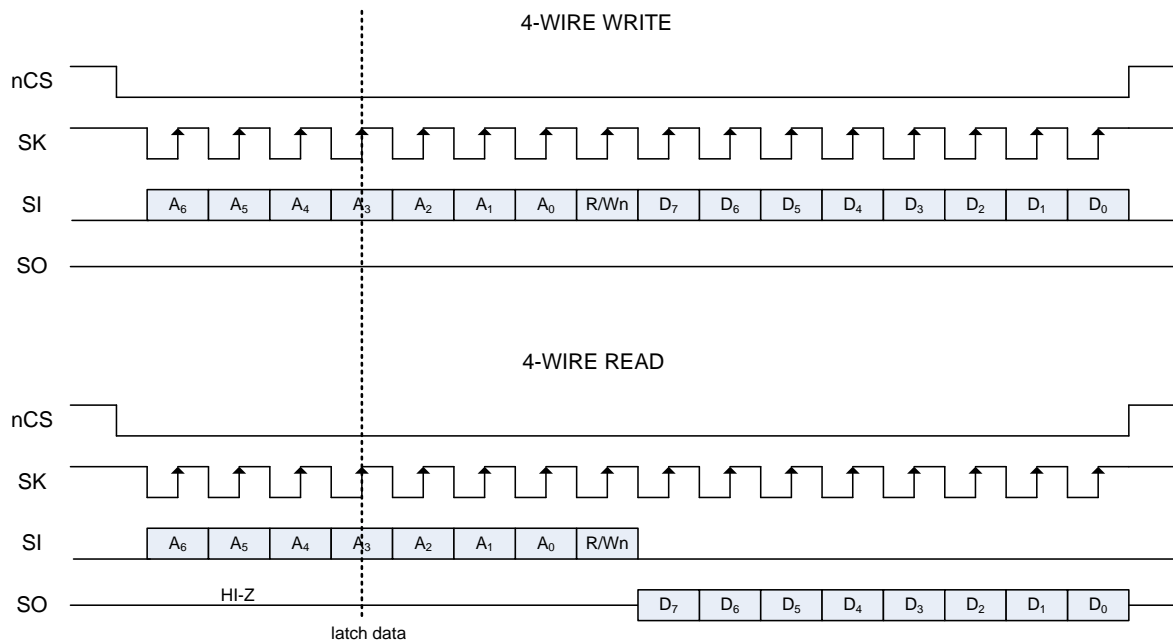


Figure 21: 4-WIRE Host Write and Read Timing ($nCS_POL = '0'$, $CPOL = '1'$, $CPHA = '1'$)

Auto Grade Multi-Phase 5A/Phase Buck Converter

Table 11: 4-WIRE Interface Summary

Parameters		
Signal Lines	nCS	Chip select
	SI Serial input data	Master out Slave in
	SO Serial output data	Master in Slave out
	SK	Transmission clock
Interface	Push-pull with tristate	
Supply voltage	Selected from VDDIO	1.6 V to 3.3 V
Data rate	Effective read/write data	Up to 7 Mbps
Transmission	Half-duplex	MSB first
	16 bit cycles	7-bit address, 1 bit read/write, 8-bit data
Configuration	CPOL	Clock polarity
	CPHA	Clock phase
	nCS_POL	nCS is active low/high

Note that reading the same register at high clock rates directly after writing it does not guarantee a correct value. It is recommended to keep a delay of one frame until re-accessing a register that has just been written (for example, by writing/reading another register address in between).

7.4.2 2-WIRE Communication

The [IF_TYPE](#) bit in the INTERFACE2 register can be used to configure the DA9213-A and DA9214-A control interface as a 2-WIRE serial data interface. In this case the GPIO3 and GPI4 are free for regular input/output functions. DA9213-A and DA9214-A has a configurable device write address (default: 0xD0) and a configurable device read address (default: 0xD1). See control [IF_BASE_ADDR1](#) for details of configurable addresses. The [ADDR_SEL_CONF](#) bit is used to configure the device address as [IF_BASE_ADDR1](#) or [IF_BASE_ADDR2](#) depending on the voltage level applied at a configurable GPI port (see [GPIO Extender](#)).

The SK port functions as the 2-WIRE clock and the SI port carries all the power manager bi-directional 2-WIRE data. The 2-WIRE interface is open-drain supporting multiple devices on a single line. The bus lines have to be pulled HIGH by external pull-up resistors (in the 2 kΩ to 20 kΩ range). The attached devices only drive the bus lines LOW by connecting them to ground. As a result two devices cannot conflict if they drive the bus simultaneously. In standard/fast mode the highest frequency of the bus is 400 kHz. The exact frequency can be determined by the application and does not have any relation to the DA9213-A and DA9214-A internal clock signals. DA9213-A and DA9214-A will follow the host clock speed within the described limitations, and does not initiate any clock arbitration or slow down. An automatic interface reset can be triggered using control [2WIRE_TO](#) if the clock signal stops to toggle for more than 35 ms.

The interface supports operation compatible to Standard, Fast, Fast-Plus and High Speed mode of the I²C-bus specification Rev 4. Operation in high speed mode at 3.4 MHz requires mode changing in order to set spike suppression and slope control characteristics to be compatible with the I²C-bus specification. The high speed mode can be enabled on a transfer by transfer basis by sending the master code (0000 1XXX) at the beginning of the transfer. DA9213-A and DA9214-A do not make use of clock stretching, and deliver read data without additional delay up to 3.4 MHz.

Alternatively, [PM_IF_HSM](#) configures the interface to use high speed mode continuously. In this case, the master code is not required at the beginning of every transfer. This reduces the

Auto Grade Multi-Phase 5A/Phase Buck Converter

communication overhead on the bus but limits the slaves attachable to the bus to compatible devices.

The communication on the 2-WIRE bus always takes place between two devices, one acting as the master and the other as the slave. The DA9213-A and DA9214-A will only operate as a SLAVE.

In contrast to the 4-WIRE mode, the 2-WIRE interface has direct access to two pages of the register map (up to 256 addresses). The register at address zero on each page is used as a page control register (with the 2-WIRE bus ignoring the LSB of control `REG_PAGE`). Writing to the page control register changes the active page for all subsequent read/write operations unless an automatic return to page 0 was selected by asserting control `REVERT`. Unless `REVERT` was asserted after modifying the active page, it is recommended to read back the page control register to ensure that future data exchange is accessing the intended registers.

In 2-WIRE operation DA9213-A and DA9214-A offer an alternative way to access register page 2 and page 3. It removes the need for preceding page selection writes by incrementing the device write/read address by one (default 0xD2/0xD3) for any direct access of page 2 and page 3 (page 0 and 1 access requires the basic write/read device address with the MSB of `REG_PAGE` to be '0').

7.4.3 Details of the 2-WIRE Control Bus Protocol

All data is transmitted across the 2-WIRE bus in groups of eight bits. To send a bit the SDA line is driven towards the intended state while the SCL is LOW (a low on SDA indicates a zero bit). Once the SDA has settled, the SCL line is brought HIGH and then LOW. This pulse on SCL clocks the SDA bit into the receiver's shift register.

A two-byte serial protocol is used containing one byte for address and one byte data. Data and address transfer are transmitted MSB first for both read and write operations. All transmissions begin with the START condition from the master while the bus is in IDLE state (the bus is free). It is initiated by a high to low transition on the SDA line while the SCL is in the high state (a STOP condition is indicated by a low to high transition on the SDA line while the SCL is in the high state).



Figure 22: Timing of 2-WIRE START and STOP Condition

The 2-WIRE bus is monitored by DA9213-A and DA9214-A for a valid SLAVE address whenever the interface is enabled. It responds immediately when it receives its own slave address. The acknowledge is done by pulling the SDA line low during the following clock cycle (white blocks marked with 'A' in [Figure 23](#) to [Figure 27](#)).

The protocol for a register write from master to slave consists of a start condition, a slave address with read/write bit and the 8-bit register address followed by eight bits of data terminated by a STOP condition. DA9213-A and DA9214-A respond to all bytes with Acknowledge. This is illustrated in [Figure 23](#).

Auto Grade Multi-Phase 5A/Phase Buck Converter

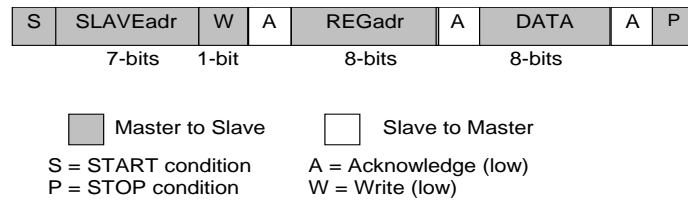


Figure 23: 2-WIRE Byte Write (SDA Line)

When the host reads data from a register it first has to write to DA9213-A and DA9214-A with the target register address and then read from DA9213-A and DA9214-A with a Repeated START or alternatively a second START condition. After receiving the data, the host sends No Acknowledge and terminates the transmission with a STOP condition. This is illustrated in Figure 24.

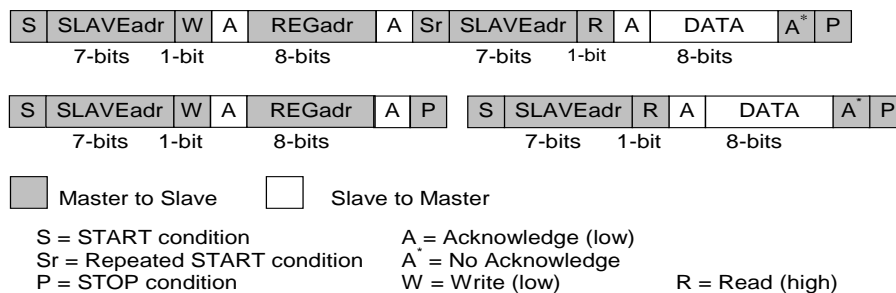


Figure 24: Examples of 2-WIRE Byte Read (SDA Line)

Consecutive (page) read out mode is initiated from the master by sending an Acknowledge instead of Not acknowledge after receipt of the data word. The 2-WIRE control block then increments the address pointer to the next 2-WIRE address and sends the data to the master. This enables an unlimited read of data bytes until the master sends a Not acknowledge directly after the receipt of data, followed by a subsequent STOP condition. If a non-existent 2-WIRE address is read out, the DA9213-A and DA9214-A will return code zero. This is illustrated in Figure 25.

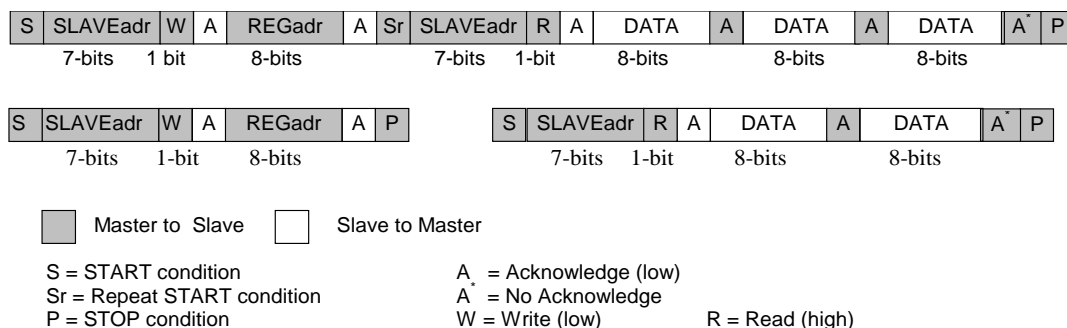


Figure 25: Examples of 2-WIRE Page Read (SDA Line)

Note that the slave address after the Repeated START condition must be the same as the previous slave address.

Consecutive (page) write mode is supported if the Master sends several data bytes following a slave register address. The 2-WIRE control block then increments the address pointer to the next 2-WIRE address, stores the received data and sends an Acknowledge until the master sends the STOP condition. This is illustrated in Figure 26.

Auto Grade Multi-Phase 5A/Phase Buck Converter

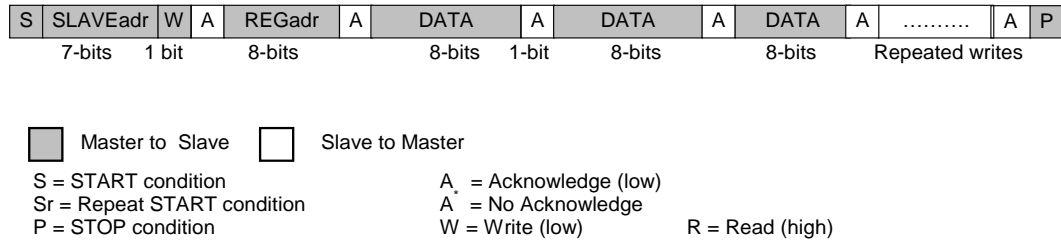


Figure 26: 2-WIRE Page Write (SDA Line)

Via control **WRITE_MODE** an alternate write mode can be configured. Register addresses and data are sent in alternation like in **Figure 27** to support host repeated write operations that access several non-consecutive registers. Data will be stored at the previously received register address.

An update of **WRITE_MODE** cannot be done without interruption within a transmission frame. Thus, if not previously selected or not set as OTP default, the activation of Repeated Write must be done with a regular write on **WRITE_MODE** followed by a stop condition. The next frame after a start condition can be written in Repeated Write.

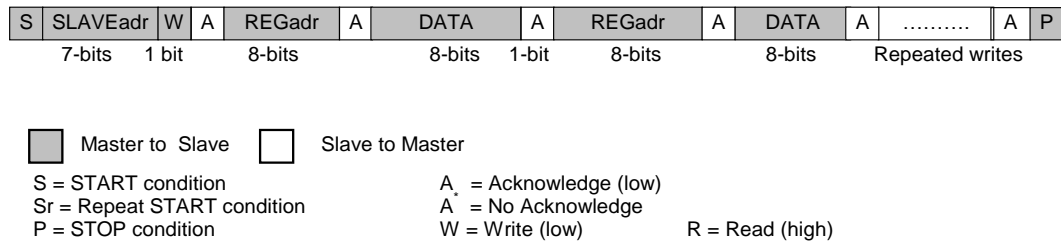


Figure 27: 2-WIRE Repeated Write (SDA Line)

If a new START or STOP condition occurs within a message, the bus will return to IDLE-mode.

Auto Grade Multi-Phase 5A/Phase Buck Converter

7.5 Internal Temperature Supervision

To protect DA9213-A and DA9214-A from damage due to excessive power dissipation, the internal temperature is continuously monitored. There are three temperature thresholds:

Table 12: Over-Temperature Thresholds

Temperature Threshold	Typical Temperature Setting	Interrupt Event	Status Bit	Masking Bit
TEMP_WARN	125 °C	E_TEMP_WARN	TEMP_WARN	M_TEMP_WARN
TEMP_CRIT	140 °C	E_TEMP_CRIT	TEMP_CRIT	M_TEMP_CRIT
TEMP_POR	150 °C			

When the junction temperature reaches the TEMP_WARN threshold, DA9213-A and DA9214-A will assert the bit TEMP_WARN and will generate the event E_TEMP_WARN. If not masked using bit M_TEMP_WARN, the output port nIRQ will be asserted. The status bit TEMP_WARN will remain asserted as long as the junction temperature remains higher than TEMP_WARN.

When the junction temperature increases further to TEMP_CRIT, DA9213-A and DA9214-A will immediately disable the buck converter, assert the bit TEMP_CRIT, and will generate the event E_TEMP_CRIT. If not masked via bit M_TEMP_CRIT, the output port nIRQ will be asserted. The status bit TEMP_CRIT will remain asserted as long as the junction temperature remains higher than TEMP_CRIT. The buck converter will be kept disabled as long as the junction temperature is above TEMP_CRIT. It will not be automatically re-enabled even after the temperature drops below the valid threshold (even if the controlling GPI is asserted). A direct write into [BUCKA_EN](#) or [BUCKB_EN](#), or a toggling of the controlling GPI, is needed to enable the buck converter.

Whenever the junction temperature exceeds TEMP_POR, a power on reset to the digital core is immediately asserted, which will stop all functionalities of DA9213-A and DA9214-A. This is needed to prevent possible permanent damage in the case of a rapid temperature increase.

8 Register Definitions

8.1 Register Map

Table 13 displays the register map, where all bits loaded from OTP are marked in bold.

Auto Grade Multi-Phase 5A/Phase Buck Converter

Table 13: Register Map

Addr	Function	7	6	5	4	3	2	1	0
Register Page 0									
0x00	PAGE_CON	REVERT	WRITE_MODE	Reserved	Reserved	REG_PAGE			
0x50	STATUS_A	Reserved	Reserved	Reserved	GP14	GP13	GP12	GP11	GP10
0x51	STATUS_B	RAMP_READY_B	RAMP_READY_A	OV_CURR_B	OV_CURR_A	TEMP_CRIT	TEMP_WARN	PWRGOOD_B	PWRGOOD_A
0x52	EVENT_A	Reserved	E_UVLO_ID	Reserved	E_GPH	E_GP13	E_GP12	E_GP11	E_GP10
0x53	EVENT_B	Reserved	Reserved	E_OV_CURR_B	E_OV_CURR_A	E_TEMP_CRIT	E_TEMP_WARN	E_PWRGOODB	E_PWRGOOD_A
0x54	MASK_A	Reserved	M_UVLO_IO	Reserved	M_GP14	M_GP13	M_GP12	M_GP11	M_GP10
0x55	MASK_B	Reserved	Reserved	M_OV_CURR_B	M_OV_CURR_A	M_TEMP_CRIT	M_TEMP_WARN	M_PWRGOOD_B	M_PWRGOOD_A
0x56	CONTROL_A	V_LOCK	SLEW_RATE_B		SLEW_RATE_A		DEBOUNCING		
0x57	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved
0x58	GPIO0-1	GP11_MODE	GP11_TYPE	GP11_PIN		GP10_MODE	GP10_TYPE	GP10_PIN	
0x59	GPIO2-3	GPIO3_MODE	GPIO3_TYPE	GPIO3_PIN		GPIO2_MODE	GPIO2_TYPE	GPIO2_PIN	
0x5A	GPIO4	Reserved	Reserved	Reserved		GP14_MODE	GP14_TYPE	GP14_PIN	
0x5B	Reserved	Reserved	Reserved	Reserved		Reserved	Reserved	Reserved	
0x5C	Reserved	Reserved	Reserved	Reserved		Reserved	Reserved	Reserved	
0x5D	BUCKA_CONT	Reserved	VBUCKA_GPI		VBUCKA_SEL	BUCKA_PD_DIS	BUCKA_GPI		BUCKA_EN
0x5E	BUCKB_CONT	Reserved	VBUCKB_GPI		VBUCKB_SEL	BUCKB_PD_DIS	BUCKB_GPI		BUCKB_EN
Register Page 1									
0x80	PAGE_CON	REVERT	WRITE_MODE	Reserved	Reserved	Reserved	REG_PAGE		
0xD0	BUCK_ILIM	BUCKB_ILIM				BUCKA_ILIM			
0xD1	BUCKA_CONF	BUCKA_DOWN_CTRL				BUCKA_UP_CTRL			BUCKA_MODE
0xD2	BUCKB_CONF	BUCKB_DOWN_CTRL				BUCKB_UP_CTRL			BUCKB_MODE
0xD3	BUCK_CONF	Reserved	Reserved	Reserved	PH_SH_EN_B	PH_SH_EN_A	PHASE_SEL_B	PHASE_SEL_A	
0xD4	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved
0xD5	VBUCKA_MAX	Reserved	VBUCKA_MAX				VBUCKA_MAX		
0xD6	VBUCKB_MAX	Reserved	VBUCKB_MAX				VBUCKB_MAX		
0xD7	VBUCKA_A	BUCKA_SL_A				VBUCKA_A			
0xD8	VBUCKA_B	BUCKA_SL_B				VBUCKA_B			
0xD9	VBUCKB_A	BUCKB_SL_A				VBUCKB_A			
0xDA	VBUCKB_B	BUCKB_SL_B				VBUCKB_B			
Register Page 2									
0x100	PAGE_CON	REVERT	WRITE_MODE	Reserved	Reserved	Reserved	REG_PAGE		
0x101	OTP_CONT	Reserved	Reserved	Reserved	Reserved	PC_DONE	OTP_APPS_RD	Reserved	OTP_TM
0x102	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved
0x103	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved
0x104	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved
0x105	INTERFACE	IF_BASE_ADDR1				R/W_POL	CPHA	CPOL	nCS_POL
0x106	INTERFACE2	IF_TYPE	PM_IF_HSM	PM_IF_FMP	PM_IF_V	Reserved	Reserved	Reserved	Reserved
0x140	OTP_CONT2	OTP_CONF_LOCK	OTP_APPS_LOCK	Reserved	Reserved	Reserved	Reserved	Reserved	Reserved
0x141	OTP_ADDR	OTP_ADDR							
0x142	OTP_DATA	OTP_DATA							
0x143	CONFIG_A	Reserved	Reserved	Reserved	2WIRE_TO	GP1_V	Reserved	IRQ_TYPE	IRQ_LEVEL
0x144	CONFIG_B	UVLO_IO_DIS	PGB_DVC_MASK	PGA_DVC_MASK	OCB_MASK		OCA_MASK		RELOAD_FUNC_EN
0x145	CONFIG_C	Reserved	Reserved	Reserved	GP14_PUPD	GPIO3_PUPD	GPIO2_PUPD	GP11_PUPD	GPIO_PUPD
0x146	CONFIG_D	BUCKB_PG_SEL			BUCKA_PG_SEL		READYB_CONF		READYA_CONF
0x147	CONFIG_E	STAND_ALONE	Reserved	Reserved	Reserved	OSC_TUNE			
0x148	CONFIG_F	IF_BASE_ADDR2				Reserved	Reserved	ADDR_SEL_CONF	

Auto Grade Multi-Phase 5A/Phase Buck Converter

8.2 Register Definitions

8.2.1 Register Page Control

Register	Bit	Type	Label	Description
0x00 PAGE_CON	7	R/W	REVERT	Resets REG_PAGE to 000 after read/write access has finished
	6	R/W	WRITE_MODE	2-WIRE multiple write mode (0) 0: Page Write Mode 1: Repeated Write Mode
	5:3	R/W	(reserved)	
	2:0	R/W	REG_PAGE	I ² C 00x: Selects Register 0x00 to 0xFF 01x: Selects Register 0x100 to 0x17F SPI 000: Selects Register 0x00 to 0x7F 001: Selects Register 0x80 to 0xFF 010: Selects Register 0x100 to 0x17F >010: Reserved for production and test

Not used for 4-WIRE-IF

8.2.2 Register Page 0

8.2.2.1 System Control and Event

The STATUS registers report the current value of the various signals at the time that it is read out.

Register	Bit	Type	Label	Description
0x50 STATUS_A	7:5	R	(reserved)	
	4	R	GPI4	GPI4 level
	3	R	GPI3	GPI3 level
	2	R	GPI2	GPI2 level
	1	R	GPI1	GPI1 level
	0	R	GPI0	GPI0 level

Register	Bit	Type	Label	Description
0x51 STATUS_B	7	R	RAMP_READY_B	De-asserted during Buck A DVC, power up and power down
	6	R	RAMP_READY_A	De-asserted during Buck B DVC, power up and power down
	5	R	OV_CURR_B	Asserted as long as the current limit for Buck B is hit
	4	R	OV_CURR_A	Asserted as long as the current limit for Buck A is hit
	3	R	TEMP_CRIT	Asserted as long as the thermal shutdown threshold is reached
	2	R	TEMP_WARN	Asserted as long as the thermal warning threshold is reached

Auto Grade Multi-Phase 5A/Phase Buck Converter

Register	Bit	Type	Label	Description
	1	R	PWRGOOD_B	Asserted as long as the Buck B output voltage is in range
	0	R	PWRGOOD_A	Asserted as long as the Buck A output voltage is in range

The EVENT registers hold information about events that have occurred in DA9213-A and DA9214-A. Events are triggered by a change in the status register which contains the status of monitored signals. When an EVENT bit is set in the event register, the IRQ signal is asserted unless the event is masked by a bit in the mask register. **The IRQ triggering event register will be cleared from the host by writing back its read value.** New events occurring during clearing will be delayed before they are passed to the event register, ensuring that the host controller does not miss them.

Register	Bit	Type	Label	Description
0x52 EVENT_A	7	R	(reserved)	
	6	R	E_UVLO_IO	UVLO_IO caused the event
	5	R	(reserved)	
	4	R	E_GPI4	GPI4 event according to active state setting
	3	R	E_GPI3	GPI3 event according to active state setting
	2	R	E_GPI2	GPI2 event according to active state setting
	1	R	E_GPI1	GPI1 event according to active state setting
	0	R	E_GPI0	GPI0 event according to active state setting

Register	Bit	Type	Label	Description
0x53 EVENT_B	7:6	R	(reserved)	
	5	R	E_OV_CURR_B	OV_CURR Buck B caused event
	4	R	E_OV_CURR_A	OV_CURR Buck A caused event
	3	R	E_TEMP_CRIT	TEMP_CRIT caused event
	2	R	E_TEMP_WARN	TEMP_WARN caused event
	1	R	E_PWRGOOD_B	PWRGOOD loss at Buck B caused event
	0	R	E_PWRGOOD_A	PWRGOOD loss at Buck A caused event

Register	Bit	Type	Label	Description
0x54 MASK_A	7	R/W	(reserved)	
	6	R/W	M_UVLO_IO	Mask UVLO_IO caused nIRQ
	5	R/W	(reserved)	
	4	R/W	M_GPI4	Masks nIRQ interrupt at GPI4
	3	R/W	M_GPI3	Masks nIRQ interrupt at GPI3
	2	R/W	M_GPI2	Masks nIRQ interrupt at GPI2
	1	R/W	M_GPI1	Masks nIRQ interrupt at GPI1
	0	R/W	M_GPI0	Masks nIRQ interrupt at GPI0

Auto Grade Multi-Phase 5A/Phase Buck Converter

Register	Bit	Type	Label	Description
0x55 MASK_B	7:6	R/W	(reserved)	
	5	R/W	M_OV_CURR_B	OV_CURR Buck B caused event
	4	R/W	M_OV_CURR_A	OV_CURR Buck A caused event
	3	R/W	M_TEMP_CRIT	TEMP_CRIT caused event
	2	R/W	M_TEMP_WARN	TEMP_WARN caused event
	1	R/W	M_PWRGOOD_B	PWRGOOD Buck B caused event
	0	R/W	M_PWRGOOD_A	PWRGOOD Buck A caused event

Register	Bit	Type	Label	Description
0x56 CONTROL_A	7	R/W	V_LOCK	0: Allows host writes into registers 0xD0 to 0x14F 1: Disables register 0xD0 to 0x14F re-programming from control interfaces
	6:5	R/W	SLEW_RATE_B	Buck B DVC slewing is executed at 00: 10mV every 4.0 μ s 01: 10mV every 2.0 μ s 10: 10mV every 1.0 μ s 11: 10mV every 0.5 μ s
	4:3	R/W	SLEW_RATE_A	Buck A DVC slewing is executed at 00: 10mV every 4.0 μ s 01: 10mV every 2.0 μ s 10: 10mV every 1.0 μ s 11: 10mV every 0.5 μ s
	0:2	R/W	DEBOUNCE	Input signals debounce time: 000: no debounce time 001: 0.1 ms 010: 1.0 ms 011: 10 ms 100: 50 ms 101: 250 ms 110: 500 ms 111: 1000 ms

8.2.2.2 GPIO Control

Register	Bit	Type	Label	Description
0x58 GPIO-1	7	R/W	GPI1_MODE	0: GPI: debouncing off 1: GPI: debouncing on
	6	R/W	GPI1_TYPE	0: GPI: active low 1: GPI: active high
	5:4	R/W	GPI1_PIN	PIN assigned to: 00: GPI >00: Reserved
	3	R/W	GPIO_MODE	0: GPI: debouncing off 1: GPI: debouncing on

Auto Grade Multi-Phase 5A/Phase Buck Converter

Register	Bit	Type	Label	Description
	2	R/W	GPI0_TYPE	0: GPI: active low 1: GPI: active high
	1:0	R/W	GPI0_PIN	PIN assigned to: 00: GPI 01: Track enable 1x: Reserved

Register	Bit	Type	Label	Description
0x59 GPIO2-3	7	R/W	GPIO3_MODE	0: GPI: debouncing off GPO: Sets output to passive level 1: GPI: debouncing on GPO: Sets output to active level
	6	R/W	GPIO3_TYPE	0: GPI/GPO: active low 1: GPI/GPO: active high
	5:4	R/W	GPIO3_PIN	PIN assigned to: 00: GPI 01: Reserved 10: GPO (Open drain) 11: GPO (Push-pull)
	3	R/W	GPIO2_MODE	0: GPI: debouncing off GPO: Sets output to passive level 1: GPI: debouncing on GPO: Sets output to active level
	2	R/W	GPIO2_TYPE	0: GPI/GPO: active low 1: GPI/GPO: active high
	1:0	R/W	GPIO2_PIN	PIN assigned to: 00: GPI 01: Reserved 10: GPO (Open drain) 11: GPO (Push-pull)

Register	Bit	Type	Label	Description
0x5A GPI4	7:4	R/W	(reserved)	
	3	R/W	GPI4_MODE	0: GPI: debouncing off 1: GPI: debouncing on
	2	R/W	GPI4_TYPE	0: GPI: active low 1: GPI: active high
	1:0	R/W	GPI4_PIN	PIN assigned to: 00: GPI 01: Reserved 1x: Reserved

Auto Grade Multi-Phase 5A/Phase Buck Converter

8.2.2.3 Regulators Control

Register	Bit	Type	Label	Description
0x5D BUCKA_CON T	7	R/W	(reserved)	
	6:5	R/W	VBUCKA_GPI	Selects the GPI that specifies the target voltage of VBUCKA. This is VBUCKA_A on active to passive transition, VBUCKA_B on passive to active transition. Active high/low is controlled by GPIx_TYPE. 00: Not controlled by GPIO 01: GPIO1 controlled 10: GPIO2 controlled 11: GPIO4 controlled
	4	R/W	VBUCKA_SEL	Buck A voltage is selected from (ramping): 0: VBUCKA_A 1: VBUCKA_B
	3	R/W	BUCKA_PD_DIS	0: Enable pull-down resistor of Buck A when the buck is disabled 1: Disable pull-down resistor of Buck A when the buck is disabled
	2:1	R/W	BUCKA_GPI	GPIO enables the Buck A on passive to active state transition, disables the Buck A on active to passive state transition 00: Not controlled by GPIO 01: GPIO0 controlled 10: GPIO1 controlled 11: GPIO3 controlled
	0	R/W	BUCKA_EN	0: Buck A disabled 1: Buck A enabled

Register	Bit	Type	Label	Description
0x5E BUCKB_CON T	7	R/W	(reserved)	
	6:5	R/W	VBUCKB_GPI	Selects the GPI that specifies the target voltage of VBUCKB. This is VBUCKB_A on active to passive transition, VBUCKB_B on passive to active transition. Active high/low is controlled by GPIx_TYPE. 00: Not controlled by GPIO 01: GPIO1 controlled 10: GPIO2 controlled 11: GPIO4 controlled
	4	R/W	VBUCKB_SEL	Buck A voltage is selected from (ramping): 0: VBUCKB_A 1: VBUCKB_B
	3	R/W	BUCKB_PD_DIS	0: Enable pull-down resistor of Buck B when the buck is disabled 1: Disable pull-down resistor of Buck B when the buck is disabled
	2:1	R/W	BUCKB_GPI	GPIO enables the Buck B on passive to active state transition, disables the Buck B on active to passive state transition

Auto Grade Multi-Phase 5A/Phase Buck Converter

Register	Bit	Type	Label	Description
				00: Not controlled by GPIO 01: GPIO0 controlled 10: GPIO1 controlled 11: GPIO3 controlled
	0	R/W	BUCKB_EN	0: Buck B disabled 1: Buck B enabled

8.2.3 Register Page 1

Register	Bit	Type	Label	Description
0x80 PAGE_CON	7	R/W	REVERT	Resets REG_PAGE to 000 after read/write access has finished
	6	R/W	WRITE_MODE	2-WIRE multiple write mode 0: Page Write Mode 1: Repeated Write Mode
	5:3	R/W	(reserved)	
	2:0	R/W	REG_PAGE	I ² C 00x: Selects Register 0x00 to 0xFF 01x: Selects Register 0x100 to 0x17F SPI 000: Selects Register 0x00 to 0x7F 001: Selects Register 0x80 to 0xFF 010: Selects Register 0x100 to 0x17F >010: Reserved for production and test

8.2.3.1 Regulators Settings

Register	Bit	Type	Label	Description
0xD0 BUCK_ILIM	7:4	R/W	BUCKB_ILIM	Current limit per phase: 0000: 4000 mA 0001: 4200 mA 0010: 4400 mA continuing through... 1001: 5800 mA to... 1110: 6800 mA 1111: 7000 mA
	3:0	R/W	BUCKA_ILIM	Current limit per phase: 0000: 4000 mA 0001: 4200 mA 0010: 4400 mA continuing through... 1001: 5800 mA to... 1110: 6800 mA

Auto Grade Multi-Phase 5A/Phase Buck Converter

Register	Bit	Type	Label	Description
				1111: 7000 mA

Register	Bit	Type	Label	Description			
0xD1 BUCKA_CONF	7:5	R/W	BUCKA_DOWN_CTRL	Buck A voltage ramping during power down 000: 1.25 mV/μs 001: 2.5 mV/μs 010: 5 mV/μs 011: 10 mV/μs 100: 20 mV/μs 101: 30 mV/μs 110: 40 mV/μs 111: Reserved			
				4:2	R/W	BUCKA_UP_CTRL	Buck A voltage ramping during start up 000: 1.25 mV/μs 001: 2.5 mV/μs 010: 5 mV/μs 011: 10 mV/μs 100: 20 mV/μs (Note 1) 101: 30 mV/μs 110: 40 mV/μs 111: target voltage applied immediately (no soft start)
							1:0

Note 1 Settings higher than 20 mV/μs may cause significant overshoot

Register	Bit	Type	Label	Description
0xD2 BUCKB_CONF	7:5	R/W	BUCKB_DOWN_CTRL	Buck B voltage ramping during power down 000: 1.25 mV/μs 001: 2.5 mV/μs 010: 5 mV/μs 011: 10 mV/μs 100: 20 mV/μs 101: 30 mV/μs 110: 40 mV/μs 111: Reserved
				4:2

Auto Grade Multi-Phase 5A/Phase Buck Converter

Register	Bit	Type	Label	Description
	1:0	R/W	BUCKB_MODE	00: PFM/PWM mode controlled via voltage A and B registers 01: Automatic mode 10: Buck B always operates in PWM mode 11: Automatic mode

Note 2 Settings higher than 20mV/μs may cause significant overshoot

Register	Bit	Type	Label	Description
0xD3 BUCK_CONF	7:5	R/W	(reserved)	
	4	R/W	PH_SH_EN_B	Enable current dependent phase shedding in PWM for Buck B
	3	R/W	PH_SH_EN_A	Enable current dependent phase shedding in PWM for Buck A
	2	R/W	PHASE_SEL_B	Phase selection for Buck B in PWM 0: 1 phase is selected 1: 2 phases are selected
	1:0	R/W	PHASE_SEL_A	Phase selection for Buck A in PWM mode. Settings >01 apply only for DA9213-A otherwise the number of phases is limited to max 2 00: 1 phase is selected 01: 2 phases are selected 10: 3 phases are selected (uneven 0/90/180 phase shift) 11: 4 phases are selected

Register	Bit	Type	Label	Description
0xD5 VBUCKA_MAX	7	R/W	(reserved)	
	6:0	R	VBUCKA_MAX	Sets the maximum voltage allowed for Buck A (OTP programmed, access only in test mode) 0000000: 0.30 V 0000001: 0.31 V 0000010: 0.32 V Continuing through... 1000110: 1.0 V to... 1111101: 1.55 V 1111110: 1.56 V 1111111: 1.57 V

Register	Bit	Type	Label	Description
0xD6 VBUCKB_MAX	7	R/W	(reserved)	
	6:0	R	VBUCKB_MAX	Sets the maximum voltage allowed for Buck B (OTP

Auto Grade Multi-Phase 5A/Phase Buck Converter

Register	Bit	Type	Label	Description
X				programmed, access only in test mode) 0000000: 0.30 V 0000001: 0.31 V 0000010: 0.32 V Continuing through... 1000110: 1.0 V to... 1111101: 1.55 V 1111110: 1.56 V 1111111: 1.57 V

Register	Bit	Type	Label	Description
0xD7 VBUCKA_A	7	R/W	BUCKA_SL_A	0: Configures Buck A to PWM mode whenever selecting A voltage setting 1: Configures Buck A to automatic mode whenever selecting A voltage setting
	6:0	R/W	VBUCKA_A	0000000: 0.30 V 0000001: 0.31 V 0000010: 0.32 V Continuing through... 1000110: 1.0 V to... 1111101: 1.55 V 1111110: 1.56 V 1111111: 1.57 V

Register	Bit	Type	Label	Description
0xD8 VBUCKA_B	7	R/W	BUCKA_SL_B	0: Configures Buck A to PWM mode, whenever selecting B voltage setting 1: Configures Buck A to automatic mode, whenever selecting B voltage setting
	6:0	R/W	VBUCKA_B	0000000: 0.30 V 0000001: 0.31 V 0000010: 0.32 V Continuing through... 1000110: 1.0 V to... 1111101: 1.55 V 1111110: 1.56 V 1111111: 1.57 V

Auto Grade Multi-Phase 5A/Phase Buck Converter

Register	Bit	Type	Label	Description
0xD9 VBUCKB_A	7	R/W	BUCKB_SL_A	0: Configures Buck B to PWM mode, whenever selecting A voltage setting 1: Configures Buck B to automatic mode, whenever selecting A voltage setting
	6:0	R/W	VBUCKB_A	0000000: 0.30 V 0000001: 0.31 V 0000010: 0.32 V Continuing through... 1000110: 1.0 V to... 1111101: 1.55 V 1111110: 1.56 V 1111111: 1.57 V

Register	Bit	Type	Label	Description
0xDA VBUCKB_B	7	R/W	BUCKB_SL_B	0: Configures Buck B to PWM mode, whenever selecting B voltage setting 1: Configures Buck B to automatic mode, whenever selecting B voltage setting
	6:0	R/W	VBUCKB_B	0000000: 0.30 V 0000001: 0.31 V 0000010: 0.32 V Continuing through... 1000110: 1.0 V to... 1111101: 1.55 V 1111110: 1.56 V 1111111: 1.57 V

Auto Grade Multi-Phase 5A/Phase Buck Converter

8.2.4 Register Page 2

Register	Bit	Type	Label	Description
0x100 PAGE_CON	7	R/W	REVERT	Resets REG_PAGE to 000 after read/write access has finished
	6	R/W	WRITE_MODE	2-WIRE multiple write mode 0: Page Write Mode 1: Repeated Write Mode
	5:3	R/W	(reserved)	
	2:0	R/W	REG_PAGE	I ² C 00x: Selects Register 0x00 to 0xFF 01x: Selects Register 0x100 to 0x17F SPI 000: Selects Register 0x00 to 0x7F 001: Selects Register 0x80 to 0xFF 010: Selects Register 0x100 to 0x17F >010: Reserved for production and test

8.2.4.1 Interface and OTP Settings (shared with DA9063)

Register	Bit	Type	Label	Description
0x101 OTP_CONT	7:4	R/W	(reserved)	
	3	R/W	PC_DONE	Asserted from Power Commander software after the emulated OTP read has finished, automatically cleared when leaving emulated OTP read
	2	R/W	OTP_APPS_RD	Reads on assertion application specific registers 0x105, 0x106, 0x143 to 0x149 and OTP_APPS_LOCK) from OTP
	1	R/W	(reserved)	
	0	R/W	OTP_TIM	OTP read timing: 0: normal read 1: marginal read (for OTP fuse verification)

Register	Bit	Type	Label	Description
0x105 INTERFACE	7:4	R/W	IF_BASE_ADDR1	4 MSB of 2-WIRE control interfaces base address XXXX0000 11010000 = 0xD0 write address of PM 2-WIRE interface (page 0 and 1) 11010001 = 0xD1 read address of PM 2-WIRE interface (page 0 and 1) 11010010 = 0xD2 write address of PM-2-WIRE interface (page 2 and 3) 11010011 = 0xD3 read address of PM-2-WIRE interface (page 2 and 3) Code '0000' is reserved for unprogrammed OTP (triggers start-up with hardware default interface address)
	3	R/W	R/W_POL	4-WIRE: Read/Write bit polarity 0: Host indicates reading access via R/W bit = '0'

Auto Grade Multi-Phase 5A/Phase Buck Converter

Register	Bit	Type	Label	Description
				1: Host indicates reading access via R/W bit = '1'
	2	R/W	CPHA	4-WIRE interface clock phase (see Table 10)
	1	R/W	CPOL	4-WIRE interface clock polarity 0: SK is low during idle 1: SK is high during idle
	0	R/W	nCS_POL	4-WIRE chip select polarity 0: nCS is low active 1: nCS is high active

Register	Bit	Type	Label	Description
0x106 INTERFACE2	7	R/W	IF_TYPE	0: Power manager interface is 4-WIRE. Automatically configures GPIO3 and GPI4 as interface signals. The GPIO configuration is overruled. 1: Power manager interface is 2-WIRE
	6	R/W	PM_IF_HSM	Enables continuous high speed mode on 2-WIRE interface if asserted (no master code required)
	5	R/W	PM_IF_FMP	Enables 2-WIRE interface operating with fast mode+ timings if asserted
	4	R/W	PM_IF_V	0: Power manager interface in 2-WIRE mode is supplied from VDDCORE (4-WIRE always from VDDIO) 1: Power manager interface in 2-WIRE mode is supplied from VDDIO (4-WIRE always from VDDIO)
	0:3	R/W	(reserved)	

8.2.4.2 OTP Fusing Registers

Register	Bit	Type	Label	Description
0x140 OTP_CONT2	7	R/W	OTP_CONF_LOCK	0: Registers 0x54 to 0x5E and 0xD0 to 0xDA are not locked for OTP programming (should be selected for unmarked evaluation samples) 1: Registers 0x54 to 0x5E and 0xD0 to 0xDA are locked in OTP (no further fusing possible)
	6	R/W	OTP_APPS_LOCK	0: Registers 0x105, 0x106, 0x143 to 0x149 are not locked for OTP programming (should be selected for unmarked evaluation samples) 1: Registers 0x105, 0x106, 0x143 to 0x149 are locked in OTP (no further fusing possible)
	5:0	R/W	(reserved)	

Register	Bit	Type	Label	Description
0x141 OTP_ADDR	7:0	R/W	OTP_ADDR	OTP Array address

Register	Bit	Type	Label	Description
0x142	7:0	R/W	OTP_DATA	OTP read/write data

Auto Grade Multi-Phase 5A/Phase Buck Converter

Register	Bit	Type	Label	Description
OTP_DATA				OTP_DATA written to OTP_ADDR selects the IC and accepts unlock sequence (1 + 3 bytes)

8.2.4.3 Application Configuration Settings

Register	Bit	Type	Label	Description
0x143 CONFIG_A	7:5	R/W	(reserved)	
	4	R/W	2WIRE_TO	Enables automatic reset of 2-WIRE interface if the clock stays low for >35 ms 0: Disabled 1: Enabled
	3	R/W	GPI_V	GPIs are supplied from: 0: VDDCORE 1: VDDIO
	2	R/W	(reserved)	
	1	R/W	IRQ_TYPE	nIRQ output port is: 0: Push-pull 1: Open drain (requires external pull-up resistor)
	0	R/W	IRQ_LEVEL	nIRQ output port is: 0: Active low 1: Active high

Register	Bit	Type	Label	Description
0x144 CONFIG_B	7	R/W	UVLO_IO_DIS	Disable the UVLO for the VDDIO rail and its comparator (suggested for rail voltages different to 1.8 V and to save quiescent current)
	6	R/W	PGB_DVC_MASK	Power-good configuration for Buck B 0: Power-good signal not masked during DVC transitions 1: Power-good signal masked during DVC transitions (keep previous status)
	5	R/W	PGA_DVC_MASK	Power-good configuration for Buck A 0: Power-good signal not masked during DVC transitions 1: Power-good signal masked during DVC transitions (keep previous status)
	4:3	R/W	OCB_MASK	Over Current configuration for Buck B 00: Event generation due to over current hit is always active during DVC transitions of the Buck converter 01: Event generation due to over current hit is masked during DVC transitions of the buck converter + 2 μ s extra masking at the end 10: Event generation due to over current hit is masked during DVC transitions of the buck converter + 10 μ s extra masking at the end 11: Event generation due to over current hit is masked during DVC transitions of the buck converter + 50 μ s extra masking at the end
	2:1	R/W	OCA_MASK	Over Current configuration for Buck A

Auto Grade Multi-Phase 5A/Phase Buck Converter

Register	Bit	Type	Label	Description
				00: Event generation due to over current hit is always active during DVC transitions of the buck converter 01: Event generation due to over current hit is masked during DVC transitions of the buck converter + 2 μ s extra masking at the end 10: Event generation due to over current hit is masked during DVC transitions of the buck converter + 10 μ s extra masking at the end 11: Event generation due to over current hit is masked during DVC transitions of the buck converter + 50 μ s extra masking at the end
	0	R/W	RELOAD_FUNC_EN	Enable the OTP re-load function for GPIO0 when configured as input port

Register	Bit	Type	Label	Description
0x145 CONFIG_C	7:5	R/W	(reserved)	
	4	R/W	GPI4_PUPD	0: GPI: pull-down resistor disabled 1: GPI: pull-down resistor enabled
	3	R/W	GPIO3_PUPD	0: GPI: pull-down resistor disabled GPO (open drain): pull up resistor disabled (external pull-up resistor) 1: GPI: pull-down resistor enabled GPO (open drain): pull up resistor
	2	R/W	GPIO2_PUPD	0: GPI: pull-down resistor disabled GPO (open drain): pull up resistor disabled (external pull-up resistor) 1: GPI: pull-down resistor enabled GPO (open drain): pull up resistor enabled
	1	R/W	GPI1_PUPD	0: GPI: pull-down resistor disabled 1: GPI: pull-down resistor enabled
	0	R/W	GPIO_PUPD	0: GPI: pull-down resistor disabled 1: GPI: pull-down resistor enabled

Register	Bit	Type	Label	Description
0x146 CONFIG_D	7:6	R/W	BUCKB_PG_SEL	Selection of the PG signal for Buck B 00: none 01: GPO2 10: GPO3 11: reserved
	5:4	R/W	BUCKA_PG_SEL	Selection of the PG signal for Buck A 00: none 01: GPO2 10: GPO3 11: reserved
	3:2	R/W	READYB_CONF	Selection of the READY signal for Buck B 00: none 01: GPO2 10: GPO3

Auto Grade Multi-Phase 5A/Phase Buck Converter

Register	Bit	Type	Label	Description
				11: reserved
	1:0	R/W	READYA_CONF	Selection of the READY signal for Buck A 00: none 01: GPO2 10: GPO3 11: reserved

Register	Bit	Type	Label	Description
0x147 CONFIG_E	7	R/W	STAND_ALONE	0: DA9213-A and DA9214-A is used as companion IC to DA9063 or DA9063-compliant 1: DA9213-A and DA9214-A is stand alone or as companion IC with another PMU not DA9063-compliant
	6:5	R/W	(reserved)	
	4:3	R/W	(reserved)	
	2:0	R/W	OSC_TUNE	Tune the main 6 MHz oscillator frequency: 000: no tune 001: +180 kHz 010: +360 kHz 011: +540 kHz 100: +720 kHz 101: +900 kHz 110: +1080 kHz 111: +1260 kHz

Register	Bit	Type	Label	Description
0x148 CONFIG_F	7:4	R/W	IF_BASE_ADDR2	If a second I ² C address is to be selected on ADR_SEL_CONF, this field configures the second address. 4 MSB of 2-WIRE control interfaces base address XXXX0000 11010000 = 0xD0 write address of PM 2-WIRE interface (page 0 and 1) 11010001 = 0xD1 read address of PM 2-WIRE interface (page 0 and 1) 11010010 = 0xD2 write address of PM-2-WIRE interface (page 2 and 3) 11010011 = 0xD3 read address of PM-2-WIRE interface (page 2 and 3) Code '0000' is reserved for unprogrammed OTP (triggers start-up with hardware default interface address)
	3:2	R	(reserved)	
	1	R/W	ADDR_SEL_CONF	Selects the GPI for the alternative I ² C address selection: 00: none 01: GPI0 10: GPI1 11: GPI4

Auto Grade Multi-Phase 5A/Phase Buck Converter

9 Application Information

The following recommended components are examples selected from requirements of a typical application.

9.1 Capacitor Selection

Ceramic capacitors are used as bypass capacitors at all VDD and output rails. When selecting a capacitor, especially for types with high capacitance at smallest physical dimension, the DC bias characteristic has to be taken into account.

Table 14: Recommended Capacitor Types

Application	Value	Size	Temp Char	Tol	V-Rate	Type
VOUT output bypass	47 uF	1210	X7R +/-15 %	+/-10 %	6.3 V	Murata GCM32ER70J476KE19
	22 uF	1206	X7R +/-15 %	+/-10 %	6.3 V	Murata GCM31CR70J226KE23
	10 uF	0805	X7R +/-15 %	+/-10 %	6.3 V	Murata GCM21BR70J106KE22
VDDx bypass	10 uF	0805	X7R +/-15 %	+/-10 %	10 V	Murata GCM21BR71A106KE22
VSYS bypass	1 uF	0603	X7R +/-15 %	+/-10 %	16 V	Murata GCM188R71C105KA64
VDDIO bypass	100 nF	0402	X7R +/-15 %	+/-10 %	50 V	Murata GCM155R71H104KE02

Auto Grade Multi-Phase 5A/Phase Buck Converter

9.2 Inductor Selection

Inductors should be selected based upon the following parameters:

- Rated max. current: usually a coil provides two current limits: The I_{sat} specifies the maximum current at which the inductance drops by 30% of the nominal value. The I_{max} is defined by the maximum power dissipation and is applied to the effective current.
- DC resistance: critical for the converter efficiency and should therefore be minimized.

Table 15: Recommended Inductor Types

Application	Value	Size	$I_{max}(dc)$	I_{sat}	Tol	DC res	Type
BUCK	0.22 uH	2.5 mm x 2.0 mm x 1.0 mm	7.1 A	8.0 A	+/-20%	12 mΩ	TDK TFM252010ALMAR22MT AA
	0.22 uH	2.5 mm x 2.0 mm x 1.2 mm	8.5 A	10 A	+/-20%	8 mΩ	TDK TFM252012ALMAR22MT AA
	0.24 uH	2.0 mm x 1.6 mm x 1.0 mm	7.0 A	7.5 A	+/-20%	15 mΩ	TDK TFM201610ALMAR24MT AA
	0.24 uH	2.0 mm x 1.6 mm x 1.2 mm	4.8 A	5.9 A	+/-20%	16 mΩ	TOKO DFE201612PD- R24M
	0.47 uH	2.5 mm x 2.0 mm x 1.0 mm	5.4 A	6.5 A	+/-20%	20 mΩ	TDK TFM252010ALMAR47MT AA
	0.47 uH	2.5 mm x 2.0 mm x 1.2 mm	5.6 A	6.5 A	+/-20%	19 mΩ	TDK TFM252012ALMAR47MT AA
	0.47 uH	2.5 mm x 2.0 mm x 1.2 mm	4.7 A	6.1 A	+/-20%	21 mΩ	TOKO DFE252012PD- R47M
	0.47 uH	2.0 mm x 1.6 mm x 1.0 mm	5.0 A	5.8 A	+/-20%	28 mΩ	TDK TFM201610ALMAR47MT AA
	0.47 uH	2.0 mm x 1.6 mm x 1.2 mm	3.8 A	4.5 A	+/-20%	26 mΩ	TOKO DFE201612PD- R47M
	0.24 uH	2.0 mm x 1.6 mm x 1.2 mm	5.0 A	7.7 A	+/-20%	16 mΩ	Taiyo Yuden MEMK2016TR24MV
	0.47 uH	2.0 mm x 1.6 mm x 1.2 mm	3.8 A	5.5 A	+/-20%	28 mΩ	Taiyo Yuden MEMK2016TR47MV
	0.24 uH	2.5 mm x 2.0 mm x 1.2 mm	5.9 A	8.5 A	+/-20%	13 mΩ	Taiyo Yuden MEMK2520TR24MV
	0.47 uH	2.5 mm x 2.0 mm x 1.2 mm	4.7 A	6.2 A	+/-20%	21 mΩ	Taiyo Yuden MEMK2520TR47MV

10 Package Information

10.1 Package Outlines

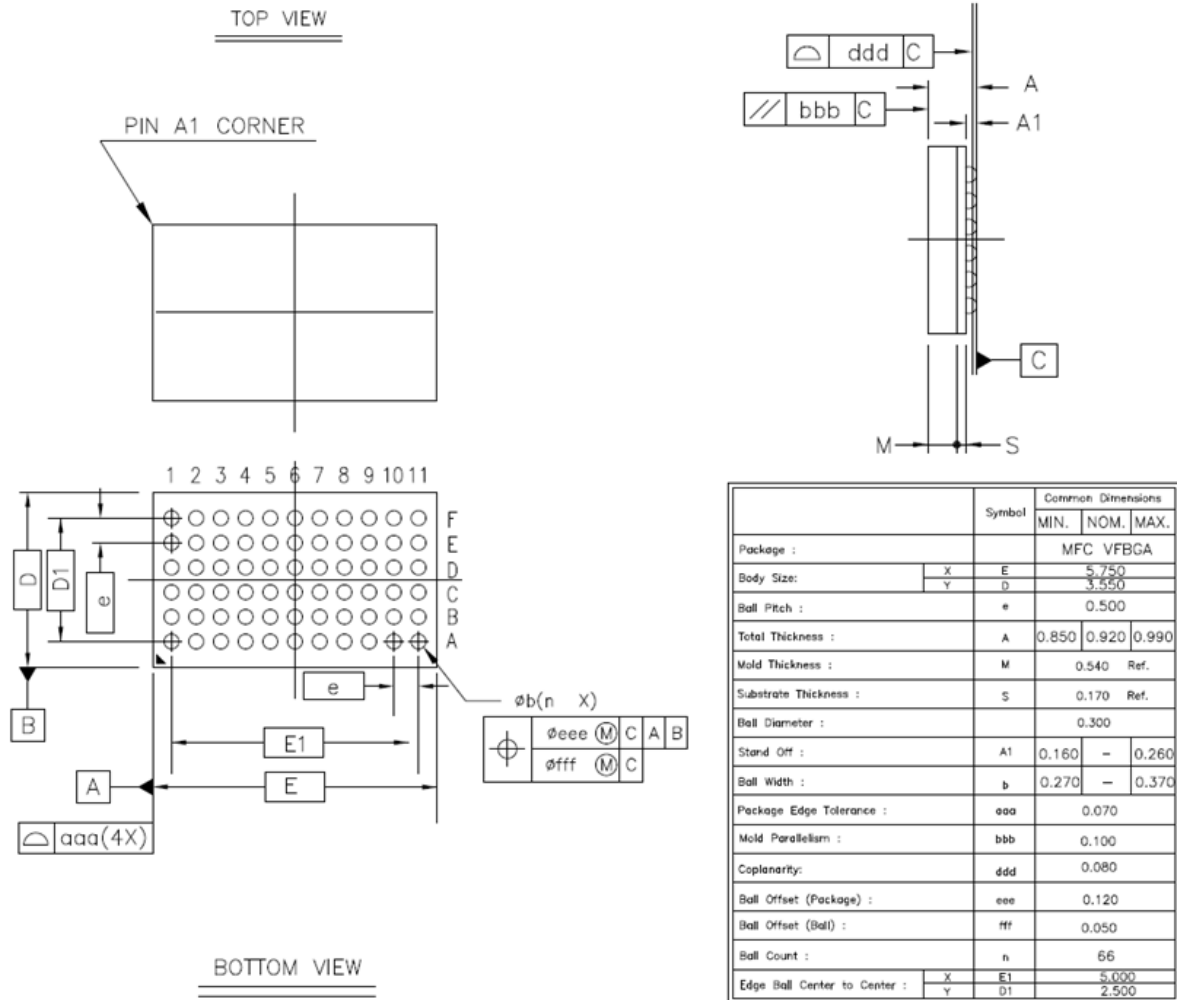


Figure 28: DA9213-A/14-A VFBGA Package Outline Drawing

11 Ordering Information

The ordering number consists of the part number followed by a suffix indicating the packing method. For details and availability, please consult Dialog Semiconductor's [customer portal](#) or your local sales representative.

Table 16: Ordering Information

Part Number	Package	Package Description	Comment	Package Outline
DA9213-xxFS1-A	66 VFBGA	Tray	Auto Grade 2	Figure 28
DA9213-xxFS2-A	66 VFBGA	T&R, 5000pcs	Auto Grade 2	
DA9214-xxFS1-A	66 VFBGA	Tray	Auto Grade 2	
DA9214-xxFS2-A	66 VFBGA	T&R, 5000pcs	Auto Grade 2	
DA9213-xxFS1-AT	66 VFBGA	Tray	Auto Grade 2 with HighTemp screening	Figure 28
DA9213-xxFS2-AT	66 VFBGA	T&R, 5000pcs	Auto Grade 2 with HighTemp screening	
DA9214-xxFS1-AT	66 VFBGA	Tray	Auto Grade 2 with HighTemp screening	
DA9214-xxFS2-AT	66 VFBGA	T&R, 5000pcs	Auto Grade 2 with HighTemp screening	

Auto Grade Multi-Phase 5A/Phase Buck Converter

Status Definitions

Revision	Datasheet Status	Product Status	Definition
1.<n>	Target	Development	This datasheet contains the design specifications for product development. Specifications may be changed in any manner without notice.
2.<n>	Preliminary	Qualification	This datasheet contains the specifications and preliminary characterization data for products in pre-production. Specifications may be changed at any time without notice in order to improve the design.
3.<n>	Final	Production	This datasheet contains the final specifications for products in volume production. The specifications may be changed at any time in order to improve the design, manufacturing and supply. Major specification changes are communicated via Customer Product Notifications. Datasheet changes are communicated via www.dialog-semiconductor.com .
4.<n>	Obsolete	Archived	This datasheet contains the specifications for discontinued products. The information is provided for reference only.

Auto Grade Multi-Phase 5A/Phase Buck Converter

Disclaimer

Suitability for use in automotive applications — This Dialog Semiconductor product has been qualified for use in automotive applications. Unless otherwise agreed in writing, the product is not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an Dialog Semiconductor product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Dialog Semiconductor and its suppliers accept no liability for inclusion and/or use of Dialog Semiconductor products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Information in this document is believed to be accurate and reliable. However, Dialog Semiconductor does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information. Dialog Semiconductor furthermore takes no responsibility whatsoever for the content in this document if provided by any information source outside of Dialog Semiconductor.

Dialog Semiconductor reserves the right to change without notice the information published in this document, including without limitation the specification and the design of the related semiconductor products, software and applications.

Applications, software, and semiconductor products described in this document are for illustrative purposes only. Dialog Semiconductor makes no representation or warranty that such applications, software and semiconductor products will be suitable for the specified use without further testing or modification. Unless otherwise agreed in writing, such testing or modification is the sole responsibility of the customer and Dialog Semiconductor excludes all liability in this respect.

Customer notes that nothing in this document may be construed as a license for customer to use the Dialog Semiconductor products, software and applications referred to in this document. Such license must be separately sought by customer with Dialog Semiconductor.

All use of Dialog Semiconductor products, software and applications referred to in this document are subject to Dialog Semiconductor's [Standard Terms and Conditions of Sale](#), available on the company website (www.dialog-semiconductor.com) unless otherwise stated.

Dialog and the Dialog logo are trademarks of Dialog Semiconductor plc or its subsidiaries. All other product or service names are the property of their respective owners.

© 2018 Dialog Semiconductor. All rights reserved.

Contacting Dialog Semiconductor

United Kingdom (Headquarters)
Dialog Semiconductor (UK) LTD
Phone: +44 1793 757700

Germany
Dialog Semiconductor GmbH
Phone: +49 7021 805-0

The Netherlands
Dialog Semiconductor B.V.
Phone: +31 73 640 8822

Email:
enquiry@diasemi.com

North America
Dialog Semiconductor Inc.
Phone: +1 408 845 8500

Japan
Dialog Semiconductor K. K.
Phone: +81 3 5769 5100

Taiwan
Dialog Semiconductor Taiwan
Phone: +886 281 786 222

Web site:
www.dialog-semiconductor.com

Hong Kong
Dialog Semiconductor Hong Kong
Phone: +852 2607 4271

Korea
Dialog Semiconductor Korea
Phone: +82 2 3469 8200

China (Shenzhen)
Dialog Semiconductor China
Phone: +86 755 2981 3669

China (Shanghai)
Dialog Semiconductor China
Phone: +86 21 5424 9058