

Photointerrupters(Transmissive)

KODENSHI

DG - 211V

The DG - 211V carrying a unique hysteresis transistor (BAMBIT) developed by KODENSHI CORP. facilitates digital output by means of two leads.

FEATURES


- DIGITAL OUTPUT : directly connect to a microcomputer digital port.
- HYSTERESIS : stable against chattering of the object
- HIGH-SPEED RESPONSE: faster than phototransistor type
- Setting easy

APPLICATIONS

- Detection of paper or marks
- Detection of high-speed object
- Detection of bar codes

DIMENSIONS

(Unit : mm)

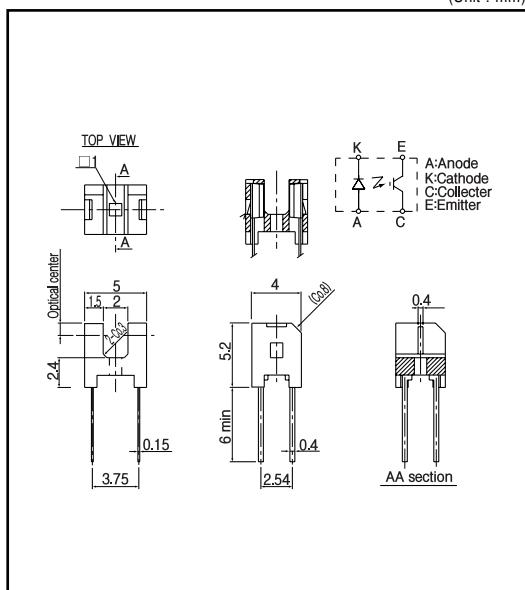

MAXIMUM RATINGS

(Ta=25 °C)

Item	Symbol	Rating	Unit
Input	P _D	75	mW
	I _F	50	mA
	V _R	5	V
Output	I _C	0.5	mA
	V _{CEO}	10	V
	V _{ECD}	0.3	V
Operating temp. ¹	T _{opr.}	-20 ~ +80	
Soldering temp. ²	T _{sol.}	240	

*1. No icebound or dew

*2. For MAX.5 seconds at the position of 1mm from the package

ELECTRO-OPTICAL CHARACTERISTICS

(Ta=25 °C)

Item	Symbol	Conditions	Min.	Typ.	Max.	Unit
Input	V _F	I _f =20mA		1.2	1.4	V
	I _R	V _R =5V		10	10	μA
	p	I _f = 20mA	940			nm
Output	V _{CC}		2.0		5.5	V
	V _{OL}	V _{CC} = 3V, I _f = 0mA, R _E = 100k	0.35	0.35	0.5	V
	V _{OH}	V _{CC} = 3V, I _f = 8mA, R _E = 100k	2.5	2.65		V
Transmissor	p		880			nm
	I _{FLH}	V _{CC} = 3V, R _E = 100k	2.8	2.8	6.0	mA
	I _{FLH} /I _{FLL}	V _{CC} = 3V, R _E = 100k	0.85			
Hysteresis ⁵	I _{PLH}		15			μsec.
	t _{PLH}		40			μsec.
	t _{PHL}	V _{CC} = 3V, I _f = 12mA, R _E = 100k	4	4		μsec.
	t _{PLL}		30			μsec.
Rise time	t _r					
	t _f					

*4. IFLH represents forward current when output changes from low to high.

*5. IFHL represents forward current when output changes from high to low.

Photointerrupters(Transmissive)

DG - 211V

