

## General Description

The EA8212F is a 2A buck regulator, designed to operate from 4.5V to 18V input voltage range. Built-in low  $R_{DS(ON)}$  high/low side Power-MOSFETS not only reduce external components and has up to 95% efficiency, ideal for 2A output current applications. The EA8212F is designed to take into account the light load mode operation. At output loading 20mA condition, the efficiency up to 92%. The EA8212F has complete protection functions, including cycle-by-cycle current limit, short circuit protection, OTP and UVLO protection. The internal compensation design not only allows users to more simplified application, and can reduce the cost of external components. The EA8212F is available in the SOT-23-6 package and easy to use.

## Features

- ▶ Built-in Low  $R_{DS(ON)}$  Power-MOSFETS
- ▶ Efficiency Up to 96%
- ▶ Light Load Efficiency Up to 92%
- ▶ 4.5V to 18V Input Voltage Range
- ▶ Output Adjustable Down to 0.9V
- ▶ 2A Continuous Load Current
- ▶ Fixed 500KHz Switching Frequency
- ▶ Internal Compensation
- ▶ Cycle-by-Cycle Current Limit
- ▶ Auto Recovery Hiccup Mode Short Circuit Protection
- ▶ Input UVLO Protection
- ▶ Auto Recovery OTP Protection
- ▶ Available in SOT-23-6 Package

## Applications

- ▶ Distributed Power Systems
- ▶ Netcom Products
- ▶ LCD TVs and Flat TVs
- ▶ Notebooks



## Pin Configurations

(TOP VIEW)

SWITCH PWR RUN

6 5 4

Marking

1 2 3

BOOT GND FBK

SOT-23-6

# EA8212F

## 18V, 2A, 500KHz Synchronous Buck Converter

Datasheet

### Pin Description

| Pin Name | Function Description                                                                                                                                                                              | Pin No. |
|----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| BOOT     | The power input of the internal high side N-MOSFET gate driver. Connect a 33nF ceramic capacitor from BOOT pin to SWITCH pin.                                                                     | 1       |
| GND      | Ground pin.                                                                                                                                                                                       | 2       |
| FBK      | Feedback input. Connect FBK pin and GND pin with voltage dividing resistors to set the output voltage. $V_{REF} = 0.6V$                                                                           | 3       |
| RUN      | The device turns on/turns off control input. The EA8212F on/off state can be controlled by RUN pin voltage level. Connect RUN pin to PWR pin with a 150KΩ pull up resistor for automatic startup. | 4       |
| PWR      | The EA8212F power input pin. Recommended to use two 10uF MLCC capacitors between PWR pin and GND pin.                                                                                             | 5       |
| SWITCH   | Internal MOSFET switching output. Connect SWITCH pin with a low pass filter circuit to obtain a stable DC output voltage.                                                                         | 6       |

### Function Block Diagram

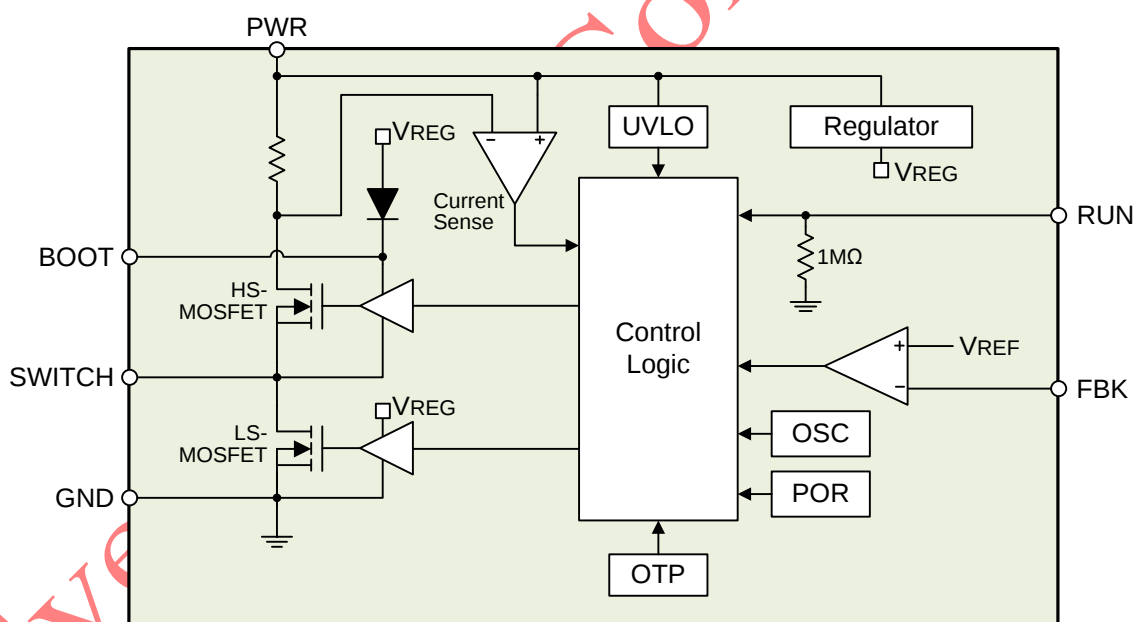


Figure 1. EA8212F internal function block diagram

## **Absolute Maximum Ratings**

| Parameter                                     | Value                                |
|-----------------------------------------------|--------------------------------------|
| Input Voltage ( $V_{PWR}$ )                   | -0.3V to +19V                        |
| RUN Pin Input Voltage ( $V_{RUN}$ )           | -0.3V to +19V                        |
| BOOT Pin Voltage ( $V_{BOOT}$ )               | $V_{SWITCH}-0.3V$ to $V_{SWITCH}+6V$ |
| SWITCH Pin Voltage ( $V_{SWITCH}$ )           | -0.3V to +19V                        |
| FBK Pin Voltage ( $V_{FBK}$ )                 | -0.3V to +6V                         |
| Ambient Temperature operating Range ( $T_A$ ) | -40°C to +85°C                       |
| Maximum Junction Temperature ( $T_{Jmax}$ )   | +150°C                               |
| Lead Temperature (Soldering, 10 sec)          | +260°C                               |
| Storage Temperature Range ( $T_S$ )           | -65°C to +150°C                      |

Note (1): Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. Exposure to "Absolute Maximum Ratings" conditions for extended periods may affect device reliability and lifetime.

## **Package Thermal Characteristics**

| Parameter                                                           | Value   |
|---------------------------------------------------------------------|---------|
| SOT-23-6 Thermal Resistance ( $\theta_{JC}$ )                       | 125°C/W |
| SOT-23-6 Thermal Resistance ( $\theta_{JA}$ )                       | 250°C/W |
| SOT-23-6 Power Dissipation at $T_A=25^\circ\text{C}$ ( $P_{Dmax}$ ) | 0.5W    |

Note (1):  $P_{Dmax}$  is calculated according to the formula:  $P_{Dmax}=(T_{Jmax}-T_A)/\theta_{JA}$ .

## **Recommended Operating Conditions**

| Parameter                            | Value           |
|--------------------------------------|-----------------|
| Input Voltage ( $V_{PWR}$ )          | +4.5V to +18V   |
| RUN Pin Input Voltage ( $V_{RUN}$ )  | -0.3V to +18V   |
| Output Voltage ( $V_{OUT}$ )         | +0.9V to +12V   |
| Junction Temperature Range ( $T_J$ ) | -40°C to +125°C |

**Electrical Characteristics**V<sub>PWR</sub>=12V, T<sub>A</sub>=25°C, unless otherwise noted

| Parameter                        | Symbol                 | Test Conditions                                                                          | Min   | Typ | Max   | Unit |
|----------------------------------|------------------------|------------------------------------------------------------------------------------------|-------|-----|-------|------|
| Input Voltage                    | V <sub>PWR</sub>       |                                                                                          | 4.5   |     | 18    | V    |
| Shutdown Supply Current          | I <sub>SD</sub>        | V <sub>RUN</sub> = 0V                                                                    |       | 2   | 10    | uA   |
| Quiescent Current                | I <sub>Q</sub>         | V <sub>RUN</sub> = 2V, V <sub>FBK</sub> = 105% V <sub>REF</sub> , I <sub>LOAD</sub> = 0A |       | 370 | 600   | uA   |
| UVLO Threshold                   | V <sub>UVLO</sub>      | V <sub>PWR</sub> Rising                                                                  |       | 4.2 |       | V    |
| UVLO Hysteresis                  | V <sub>UV-HYST</sub>   |                                                                                          |       | 300 |       | mV   |
| Output Load Current              | I <sub>LOAD</sub>      |                                                                                          |       |     | 2     | A    |
| Reference Voltage                | V <sub>REF</sub>       | 4.5V ≤ V <sub>PWR</sub> ≤ 18V                                                            | 0.588 | 0.6 | 0.612 | V    |
| Switching Frequency              | F <sub>SW</sub>        |                                                                                          | 400   | 500 | 600   | KHz  |
| Input OVP Voltage                | V <sub>OVP</sub>       |                                                                                          |       | 20  |       | V    |
| High Side MOSFET On-Resistance   | R <sub>DS(ON)-HM</sub> |                                                                                          |       | 150 |       | mΩ   |
| Low Side MOSFET On-Resistance    | R <sub>DS(ON)-LM</sub> |                                                                                          |       | 90  |       | mΩ   |
| High Side MOSFET Current Limit   | I <sub>LIM-HM</sub>    |                                                                                          | 2.4   |     |       | A    |
| High Side MOSFET Leakage Current | I <sub>LEAK-HM</sub>   | V <sub>RUN</sub> = 0V, V <sub>SWITCH</sub> = 0V                                          |       | 1   | 10    | uA   |
| RUN Pin Input Low Voltage        | V <sub>RUN-L</sub>     |                                                                                          |       |     | 0.4   | V    |
| RUN Pin Input High Voltage       | V <sub>RUN-H</sub>     |                                                                                          | 1.5   |     |       | V    |
| Maximum Duty Cycle               | D <sub>MAX</sub>       | V <sub>FBK</sub> = 0.5V                                                                  |       | 95  |       | %    |
| High Side MOSFET Minimum On Time | T <sub>ONMIN</sub>     |                                                                                          |       | 70  |       | ns   |
| Internal Soft-Start Time         | t <sub>SS</sub>        |                                                                                          |       | 1   |       | ms   |
| Thermal Shutdown Threshold       | T <sub>OTP</sub>       |                                                                                          |       | 150 |       | °C   |
| Thermal Shutdown Hysteresis      | T <sub>HYST</sub>      |                                                                                          |       | 20  |       | °C   |

Note (1): MOSFET on-resistance specifications are guaranteed by correlation to wafer level measurements.

(2): Thermal shutdown specifications are guaranteed by correlation to the design and characteristics analysis.

## Application Circuit Diagram

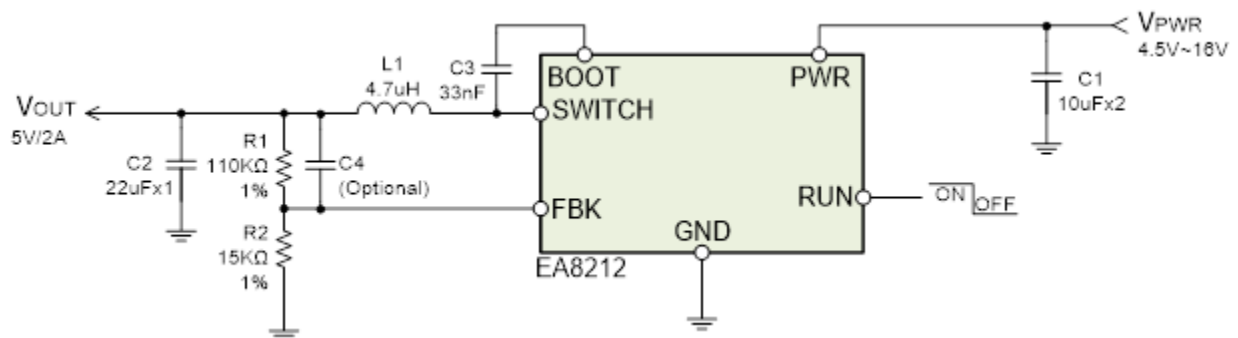


Figure 2. Typical application circuit diagram

## Ordering Information






| Part Number | Package Type | Packing Information |
|-------------|--------------|---------------------|
| EA8212FT6R  | SOT-23-6     | Tape & Reel / 3000  |

Note (1): "T6": Package type code.


(2): "R": Tape & Reel.

**Typical Operating Characteristics**

$V_{PWR}=12V$ ,  $V_{OUT}=3.3V$ ,  $L1=6.8\mu H$ ,  $C1=10F \times 2$ ,  $C2=22\mu F$ ,  $T_A=25^\circ C$ , unless otherwise noted

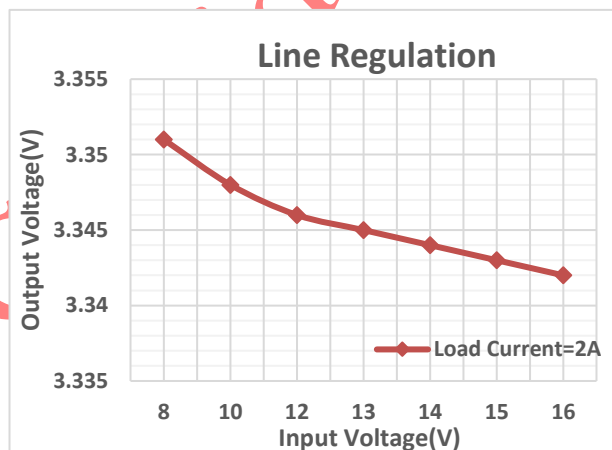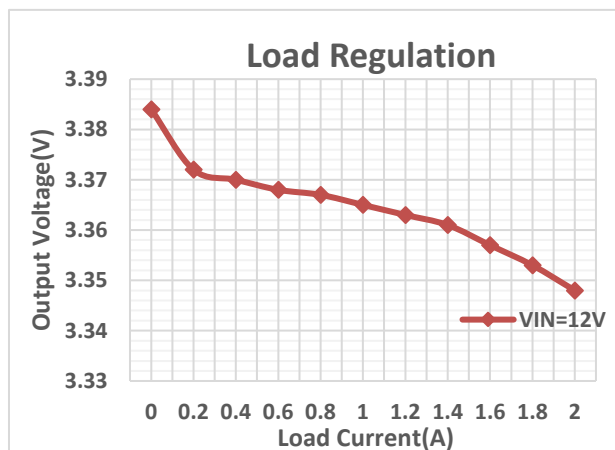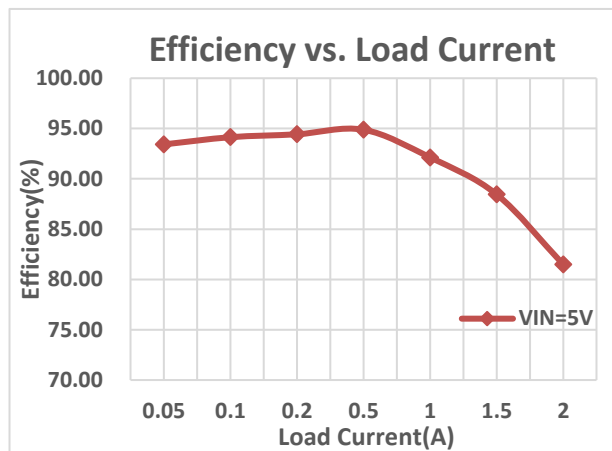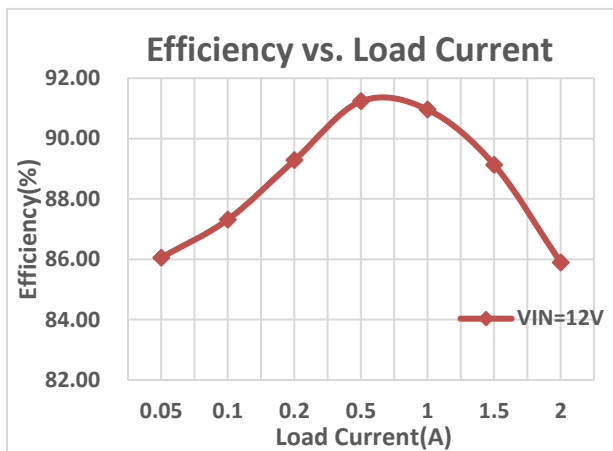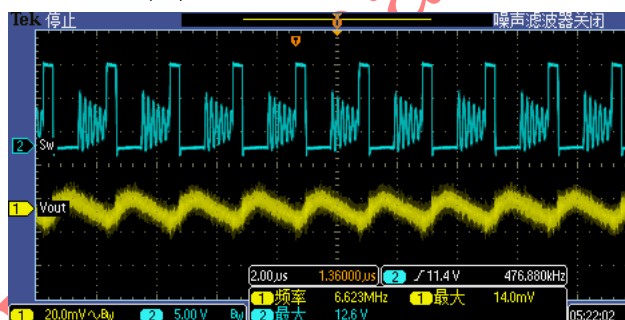CH1:  $V_{OUT}(AC)$  CH2:  $V_{SW}$ 

DCM Mode Waveform

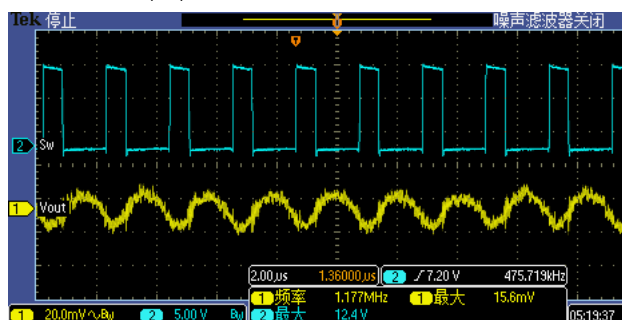CH1:  $V_{OUT}(AC)$  CH2:  $V_{SW}$ 

CCM Mode Waveform

## Application Information

### Enable Control

The EA8212F use RUN pin to control the regulator turns on / turns off. When the RUN pin input voltage is higher than 1.5V, the EA8212F enters the operating mode. Drive the RUN pin input voltage lower than 0.4V to ensure the EA8212F into shutdown mode, as shown in Figure3. When the device works in the shutdown mode, the shutdown supply current is less than 10uA. The EA8212F also provides automatic startup function as shown in Figure 4. Connect RUN pin and PWR pin with a 150KΩ resistor, when the PWR supply input voltage increasing and higher than RUN pin threshold voltage, the EA8212F will enter operating mode automatically.

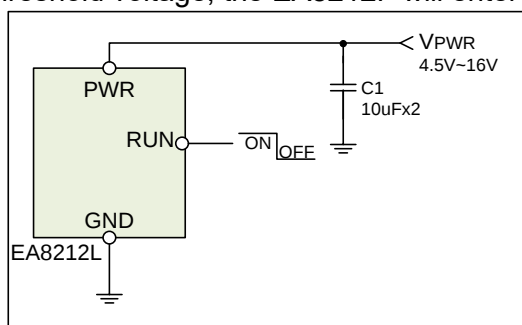


Figure 3. Enable control by RUN pin voltage

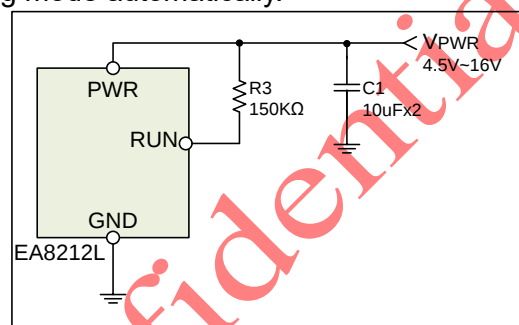


Figure 4. Automatic startup application circuit

### Output Voltage Setting

The EA8212F output voltage can be set via a resistor divider (R1, R2). The output voltage is calculated by following equation:

$$V_{OUT} = 0.6 \times \frac{R1}{R2} + 0.6 \text{ V}$$

Taking into account the loop stability, R1 resistance value must be greater than 100KΩ. The following table lists common output voltage and the corresponding R1, R2 resistance value for reference.

| Output Voltage | R1 Resistance | R2 Resistance | Tolerance |
|----------------|---------------|---------------|-----------|
| 5V             | 220KΩ         | 30KΩ          | 1%        |
| 3.3V           | 510KΩ         | 110KΩ         | 1%        |
| 1.8V           | 200KΩ         | 100KΩ         | 1%        |
| 1.2V           | 100KΩ         | 100KΩ         | 1%        |

### Input / Output Capacitors Selection

The input capacitors are used to suppress the noise amplitude of the input voltage and provide a stable and clean DC input to the device. Because the ceramic capacitor has low ESR characteristic, so it is suitable for input capacitor use. It is recommended to use X5R or X7R MLCC capacitors in order to have better temperature performance and smaller capacitance tolerance. In order to suppress the output voltage ripple, the MLCC capacitor is also the best choice. The suggested part numbers of input / output capacitors are as follows:

| Vendor | Part Number    | Capacitance | Edc  | Parameter | Size |
|--------|----------------|-------------|------|-----------|------|
| TDK    | C2012X5R1C106K | 10uF        | 16V  | X5R       | 0805 |
| TDK    | C3216X5R1E106K | 10uF        | 25V  | X5R       | 1206 |
| TDK    | C2012X5R0J226K | 22uF        | 6.3V | X5R       | 0805 |
| TDK    | C3216X5R1A226M | 22uF        | 10V  | X5R       | 1206 |

### Output Inductor Selection

The output inductor selection mainly depends on the amount of ripple current through the inductor  $\Delta I_L$ . Large  $\Delta I_L$  will cause larger output voltage ripple and loss, but the user can use a smaller inductor to save cost and space. On the contrary, the larger inductance can get smaller  $\Delta I_L$  and thus the smaller output voltage ripple and loss. But it will increase the space and the cost. The inductor value can be calculated as:

$$L = \frac{V_{PWR} - V_{OUT}}{\Delta I_L \times F_{SW}} \times \frac{V_{OUT}}{V_{PWR}}$$


For most applications, 4.7uH to 10uH inductors are suitable for EA8212F. The suggested part numbers of output inductors are as follows:

| Vendor | Part Number   | Inductance | DCR (Max.) | Saturation Current | Dimensions (mm)<br>(WxLxH) |
|--------|---------------|------------|------------|--------------------|----------------------------|
| SUMIDA | CDRH8D38-4R7  | 4.7uH      | 29mΩ       | 4A                 | 8x8x3.8                    |
| SUMIDA | CDRH8D43R-6R8 | 6.8uH      | 29.8mΩ     | 4.2A               | 8.3x8.5x4.5                |

### PCB Layout Recommendations

For EA8212F PCB layout considerations, please refer to the following suggestions in order to get good performance.

- ▶ High current path traces (shown as Figure 5.) need to be widened.
- ▶ Place the input capacitors as close as possible to the PWR pin to reduce noise interference.
- ▶ Keep the feedback path (from  $V_{OUT}$  to FBK) away from the noise node (ex. SWITCH).
- ▶ SWITCH is a high current noise node. Complete the layout by using short and wide traces.

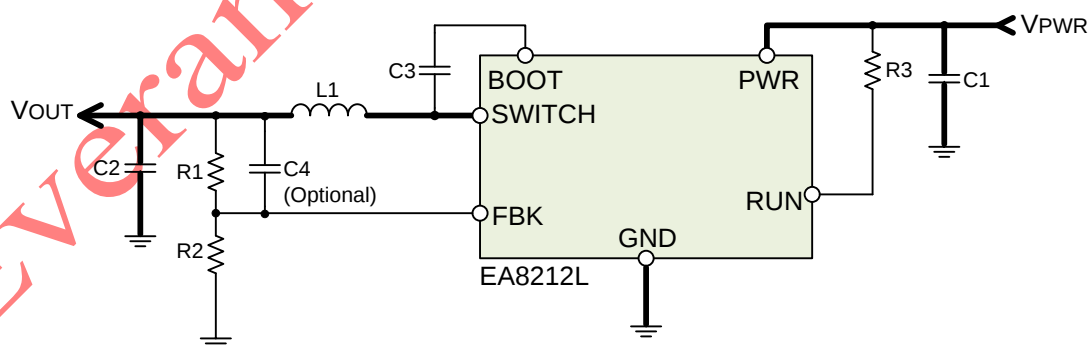


\* Bold lines indicate high current paths


Figure 5. Recommended high current traces layout guide

## Package Information


### SOT-23-6 Package

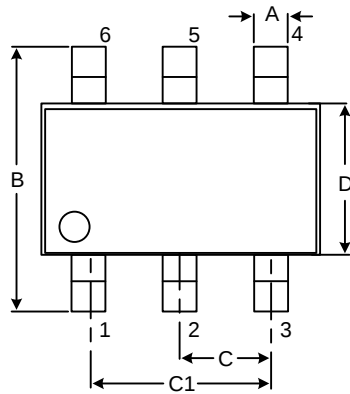


Top View

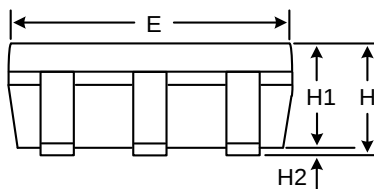

Side View

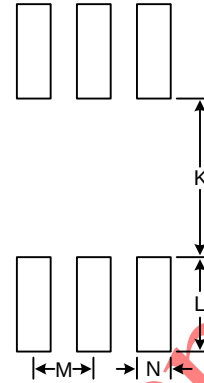

Recommended Layout Pattern



Front View

Unit: mm

| Symbol | Dimension Min | Dimension Max | Symbol | Dimension Typ |
|--------|---------------|---------------|--------|---------------|
| A      | 0.25          | 0.52          | K      | 1.40          |
| B      | 2.59          | 3.01          | L      | 1.40          |
| C      | 0.85          | 1.05          | M      | 0.95          |
| C1     | 1.70          | 2.10          | N      | 0.65          |
| D      | 1.40          | 1.80          |        |               |
| E      | 2.70          | 3.10          |        |               |
| F      | 0.30          | 0.62          |        |               |
| G      | 0.08          | 0.25          |        |               |
| H      | 0.89          | 1.35          |        |               |
| H1     | 0.89          | 1.20          |        |               |
| H2     | 0.00          | 0.15          |        |               |