

### TRIODE-HEPTODE

Triode-heptode intended for use as mixer in car radio sets and as sync separator in TV receivers.

#### QUICK REFERENCE DATA

Triode

|                      |       |     |      |      |      |
|----------------------|-------|-----|------|------|------|
| Anode voltage        | $V_a$ | 25  | 12.6 | 6.3  | V    |
| Anode current        | $I_a$ | 2   | 0.75 | 0.3  | mA   |
| Transconductance     | S     | 2.2 | 1.4  | 0.8  | mA/V |
| Amplification factor | $\mu$ | 20  | 18.3 | 14.6 | -    |

Heptode as mixer

|                          |               |     |      |     |                 |
|--------------------------|---------------|-----|------|-----|-----------------|
| Anode voltage            | $V_a$         | 25  | 12.6 | 6.3 | V               |
| Grids No.2 and 4 voltage | $V_{g_{2+4}}$ | 25  | 12.6 | 6.3 | V               |
| Conversion conductance   | $S_c$         | 450 | 220  | 90  | $\mu\text{A/V}$ |

Heptode as R.F. or I.F. amplifier

|                          |               |     |      |      |      |
|--------------------------|---------------|-----|------|------|------|
| Anode voltage            | $V_a$         | 25  | 12.6 | 6.3  | V    |
| Grids No.2 and 4 voltage | $V_{g_{2+4}}$ | 25  | 12.6 | 6.3  | V    |
| Transconductance         | S             | 1.5 | 0.75 | 0.35 | mA/V |



**HEATING:** Indirect by A.C. or D.C.; parallel or series supply

|                |       |     |    |
|----------------|-------|-----|----|
| Heater voltage | $V_f$ | 6.3 | V  |
| Heater current | $I_f$ | 300 | mA |

**DIMENSIONS AND CONNECTIONS**

Dimensions in mm

Base: Noval



## CAPACITANCES

### Triode section

|                          |            |        |
|--------------------------|------------|--------|
| Anode to all except grid | $C_{a(g)}$ | 2.1 pF |
| Grid to all except anode | $C_{g(a)}$ | 2.6 pF |
| Anode to grid            | $C_{ag}$   | 1.0 pF |

### Heptode section

|                        |              |               |
|------------------------|--------------|---------------|
| Anode to all           | $C_a$        | 7.9 pF        |
| Grid No.1 to all       | $C_{g_1}$    | 4.8 pF        |
| Anode to grid No.1     | $C_{ag_1}$   | max. 0.012 pF |
| Grid No.3 to all       | $C_{g_3}$    | 6.0 pF        |
| Grid No.1 to grid No.3 | $C_{g_1g_3}$ | max. 0.3 pF   |

### Between heptode and triode sections

|   |                  |              |
|---|------------------|--------------|
| Anode heptode to anode triode                     | $C_{aHaT}$       | 0.20 pF      |
| Anode heptode to grid triode                      | $C_{aHgT}$       | max. 0.09 pF |
| Grid No.1 heptode to anode triode                 | $C_{g_1HaT}$     | max. 0.06 pF |
| Grid No.1 heptode to grid triode                  | $C_{g_1HgT}$     | max. 0.17 pF |
| Grid No.1 heptode to grid triode<br>and grid No.3 | $C_{g_1H/gTg_3}$ | max. 0.45 pF |
| Anode heptode to grid triode<br>and grid No.3     | $C_{aH/gTg_3}$   | max. 0.35 pF |

## TYPICAL CHARACTERISTICS

### Triode section

|                      |       |     |      |      |      |
|----------------------|-------|-----|------|------|------|
| Anode voltage        | $V_a$ | 25  | 12.6 | 6.3  | V    |
| Grid voltage         | $V_g$ | 1)  | 1)   | 1)   | -    |
| Anode current        | $I_a$ | 2   | 0.75 | 0.3  | mA   |
| Transconductance     | $S$   | 2.2 | 1.4  | 0.8  | mA/V |
| Amplification factor | $\mu$ | 20  | 18.3 | 14.6 | -    |

1) Obtained by grid current biasing:  $R_g = 47 \text{ k}\Omega$ .

**OPERATING CHARACTERISTICS**

Heptode as mixer, circuit fig.1.

|                          |               |      |      |     |           |
|--------------------------|---------------|------|------|-----|-----------|
| Anode voltage            | $V_a$         | 25   | 12.6 | 6.3 | V         |
| Grids No.2 and 4 voltage | $V_{g_{2+4}}$ | 25   | 12.6 | 6.3 | V         |
| Grid No.1 voltage        | $V_{g_1}$     | 1)   | 1)   | 1)  |           |
| Oscillator voltage       | $V_{osc}$     | 3.5  | 1.7  | 1.1 | $V_{RMS}$ |
| Grid No.3 resistor       | $R_{g_3}$     | 47   | 47   | 47  | $k\Omega$ |
| Grid No.3 current        | $I_{g_3}$     | 40   | 18   | 7   | $\mu A$   |
| Anode current            | $I_a$         | 550  | 170  | 50  | $\mu A$   |
| Grids No.2 and 4 current | $I_{g_{2+4}}$ | 1000 | 300  | 80  | $\mu A$   |
| Conversion conductance   | $S_c$         | 450  | 220  | 90  | $\mu A/V$ |
| Internal resistance      | $R_i$         | 0.5  | 1.5  | 1.3 | $M\Omega$ |

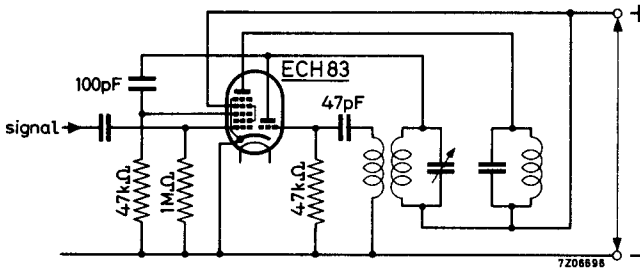


fig. 1

Heptode as R.F. or I.F. amplifier

|                                   |                 |      |      |      |           |
|-----------------------------------|-----------------|------|------|------|-----------|
| Anode voltage                     | $V_a$           | 25   | 12.6 | 6.3  | V         |
| Grids No.2, No.3 and No.4 voltage | $V_{g_{2+3+4}}$ | 25   | 12.6 | 6.3  | V         |
| Grid No.1 voltage                 | $V_{g_1}$       | 1)   | 1)   | 1)   |           |
| Anode current                     | $I_a$           | 1.25 | 0.4  | 0.11 | mA        |
| Grids No.2, No.3 and 4 current    | $I_{g_{2+3+4}}$ | 0.85 | 0.25 | 0.08 | mA        |
| Transconductance                  | $S$             | 1.5  | 0.75 | 0.35 | mA/V      |
| Internal resistance               | $R_i$           | 0.2  | 0.85 | 0.6  | $M\Omega$ |
| Equivalent noise resistance       | $R_{eq}$        | 5    | 6.5  | 8.5  | $k\Omega$ |

1) Obtained by grid current biasing:  $R_{g_1} = 1 M\Omega$ .

**LIMITING VALUES (Design centre rating system)**

Triode section

|                           |           |                   |
|---------------------------|-----------|-------------------|
| Anode voltage             | $V_{a_0}$ | max. 550 V        |
|                           | $V_a$     | max. 250 V        |
| Anode dissipation         | $W_a$     | max. 0.8 W        |
| Cathode current           | $I_k$     | max. 6.5 mA       |
| Grid resistor             | $R_g$     | max. 3 M $\Omega$ |
| Cathode to heater voltage | $V_{kf}$  | max. 150 V        |
| D.C. component            |           | max. 100 V        |

Heptode section

|                           |               |                    |
|---------------------------|---------------|--------------------|
| Anode voltage             | $V_{a_0}$     | max. 550 V         |
|                           | $V_a$         | max. 50 V          |
| Grids No.2 and 4 voltage  | $V_{g_{2+4}}$ | max. 50 V          |
| Cathode current           | $I_k$         | max. 5 mA          |
| Grid No.1 resistor        | $R_{g_1}$     | max. 3 M $\Omega$  |
| Grid No.3 resistor        | $R_{g_3}$     | max. 50 k $\Omega$ |
| Cathode to heater voltage | $V_{kf}$      | max. 150 V         |
| D.C. component            |               | max. 100 V         |

# PHILIPS

Data handbook



Electronic  
components  
and materials

## ECH83

| <b>page</b> | <b>sheet</b> | <b>date</b> |
|-------------|--------------|-------------|
| 1           | 1            | 1969.12     |
| 2           | 2            | 1969.12     |
| 3           | 3            | 1969.01     |
| 4           | 4            | 1969.12     |
| 5           | FP           | 1999.08.15  |