

Low cost, PWM Dimming Control, Linear AC LED Driver

General Description

The EMD2182 is a non-isolated linear LED driver for general purpose LED lighting applications. It is capable of driving LEDs in multiple series connections. With larger output power, the EMD2182 could also drive external power MOS to conduct larger current.

The EMD2182 is based on a patented architecture that allows minimal external components to greatly enhance the lighting system reliability and drastically reduce system cost. Due to its non-switching behavior, the system is never an EMI issue. The EMD2182 can be easily used for PWM dimming as shown in Fig.1.


Features

- Non-isolated, Linear Application.
- AC 110V/220V or DC 20V~100V Adaption.
- High Power Factor.
- Low EMI.
- Adjustable LED Current.
- Power compensation.
- Dimming Function.
 - PWM dimming control.
- Over Temperature Protection (OTP).
- Over Voltage Protection (OVP).
- UVLO.

Applications

- E27/E14/E12/G9 Compatible Lamp.
- LED Strings.
- General Illumination.


Typical Application

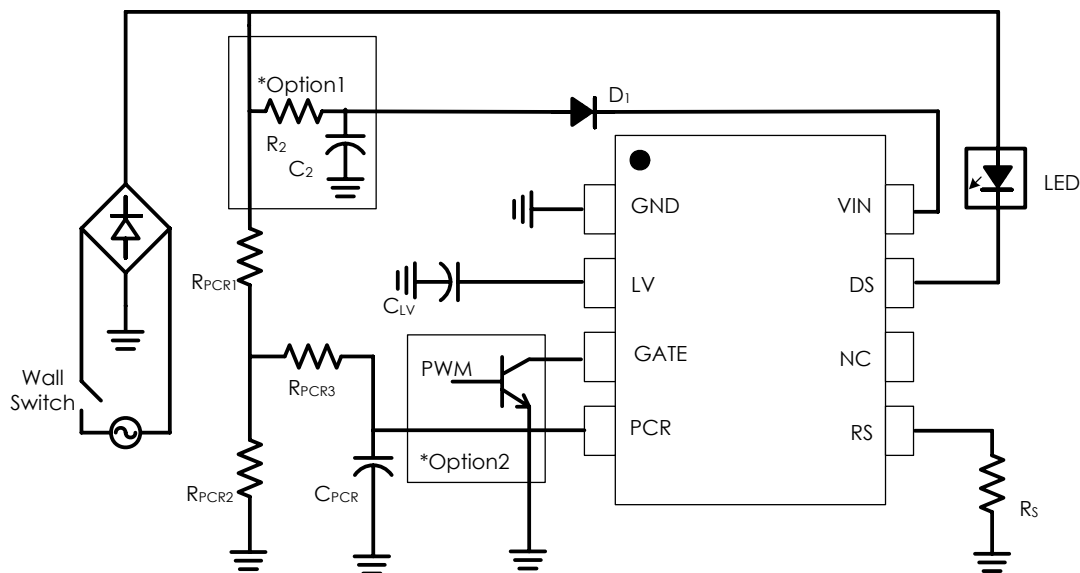

*Option1 : for surge test
 *Option2 : for PWM-dimming

Fig. 1 Typical application with PWM-dimming

Connection Diagram

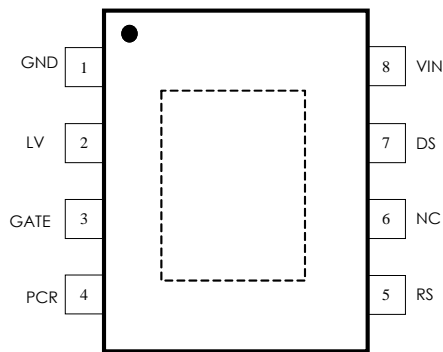

Order Information

EMD2182-XXSG08NRR
 XX Input voltage
 00: 100 ~ 240VAC
 SG08 E-SOP-8L Package
 NRR RoHS & Halogen free package
 Rating: -40 to 85°C
 Package in Tape & Reel

Order, Marking & Packing Information

Package	Vout	Product ID	Marking	Packing
E-SOP-8L	Adjustable	EMD2182-00SG08NRR		Tape & Reel 3Kpcs

Function Block

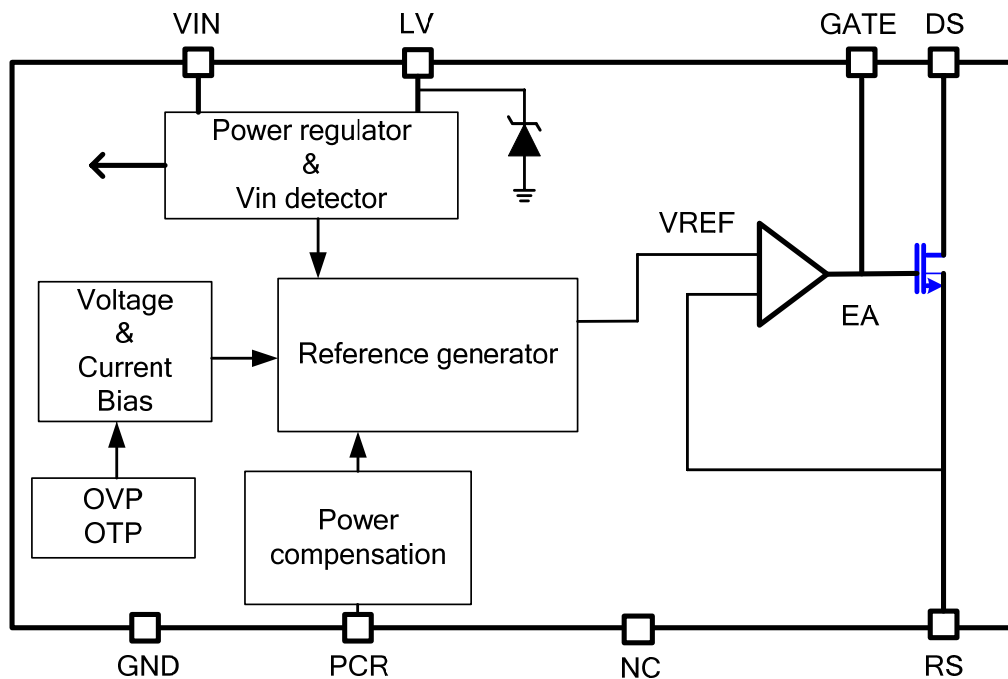


Fig. 2 EMD2182 Function block

Pin Functions

E-SOP-8L Pin #	Pin Name	Function
1	GND	Ground Pin.
2	LV	Internal power Pin. Power for internal circuit which is regulated by an internal power regulator. Connect capacitor directly to stable the internal power. Don't use this power pin to supply others device.
3	GATE	GATE Pin. Connects an external power MOS to drive larger current. Maximum output load is 1000pF
4	PCR	PCR Pin. Connects a resistor between PCR pin and GND to set the power compensation ratio.
5	RS	RS Pin. Connects a resistor between RS pin and GND to set the LED current.
6	NC	NC Pin. No connection.
7	DS	DS Pin. Drain terminal of internal power MOS. Connects to the cathode of HV LEDs.
8	VIN	Power Supply Input Pin. Sustains the peak voltage of 240VAC power which is rectified by a bridge rectified. Un-rectified power is NOT allowed to connect with this terminal.

Absolute Maximum Ratings

Devices are subjected to failure if they stay above absolute maximum ratings

VIN	<500V	Operating Temperature Range	-25°C to 125°C
DS	<500V	Storage Temperature	-65°C to 150°C
GATE	<10V	Junction Temperature	150°C
LV	<5.8V(Note 1)	Lead Temperature (Soldering, 10 sec)	260°C
PCR, RS	<LV		
ESD Susceptibility	HBM 2kV MM 200V		

Note 1: Zener diode that built in EMD2182, Don't connect extra power source to LV pin.

Thermal data

Package	Thermal resistance	Parameter	Value
E-SOP-8L	θ_{JA} (Note 2)	Junction-to-ambient	50°C/W
	θ_{JT} (Note 3)	Junction-to-top surface of package	39°C/W
	θ_{JC} (Note 4)	Junction-to-case	10°C/W

Note 1: T_J is a function of the ambient temperature T_A and power dissipation P_D ($T_J = T_A + (P_D) * \theta_{JA}$).

Note 2: θ_{JA} is simulated in the natural convection at $T_A=25^\circ\text{C}$ on a highly effective thermal conductivity (thermal land area completed with $>3 \times 3 \text{cm}^2$ area) board (2 layers, 2SOP) according to the JEDEC 51-7 thermal measurement standard.

Note 3: θ_{JT} represents the heat resistance between the chip junction and the top surface of package.

Note 4: θ_{JC} represents the heat resistance between the chip junction and the center of the exposed pad on the underside of the package.

Electrical Characteristics


$T_A = 25^\circ\text{C}$. $V_{IN} = 110\text{VAC}$ unless otherwise specified.

Symbol	Parameter	Conditions	Min	Typ	Max	Units
V_{IN}	Input Voltage Range	$V_{DS} = 15\text{V}$	90		260	Vac
I_{IN}	IC Supply Current	AC: $260\text{Vrms} > V_{IN} > 35\text{Vrms}$, $C_{LV} = 1\mu\text{F}$ DC: $300\text{V} > V_{IN} > 50\text{V}$	1	2.1	3	mA
V_{OVP}	Over Voltage Protect		380	400		V
V_{LV}	LV Voltage Range	$V_{IN} = 40\text{V} \sim 260\text{V}$	4.5	5.6	5.8	V
V_{UVLO}	Rising		4.5	5	5.5	V
	Falling		3.5	4	4.5	V
DS_leak	DS Pin Leakage	$V_{GATE} = 0\text{V}$, $V_{IN} = 50\text{V} \sim 300\text{V}$, $V_{DS} = 10\text{V}$			10	μA
PCR_leak	PCR Pin Leakage	$V_{PCR} = V_{LV}$			1	μA
V_{PCR}	PCR Voltage range		0.3		1	V
V_{GATE}	Gate Pin voltage			7.8	8.5	V
V_{RS}	RS Pin Voltage Range	$V_{IN} = 97\text{V(DC)}$, $V_{PCR} = 0.483\text{V(DC)}$, $V_{DS} = 15\text{V}$, $I_{RS} = 10\text{mA}$, For 110v system.	0.426	0.474	0.521	V

Symbol	Parameter	Conditions	Min	Typ	Max	Units
V _{RS}	RS Pin Voltage Range	V _{IN} = 197V(DC), V _{PCR} = 0.980V(DC), V _{DS} = 15V, I _{RS} = 10mA, for 220v system	0.234	0.276	0.317	V
OTP	Over Temperature Protection		127.5	150	172.5	°C
	hysteresis		42.5	50	57.5	°C

Typical Performance Characteristics

VIN=110VAC, VLED=128V, TA=25°C, unless otherwise specified

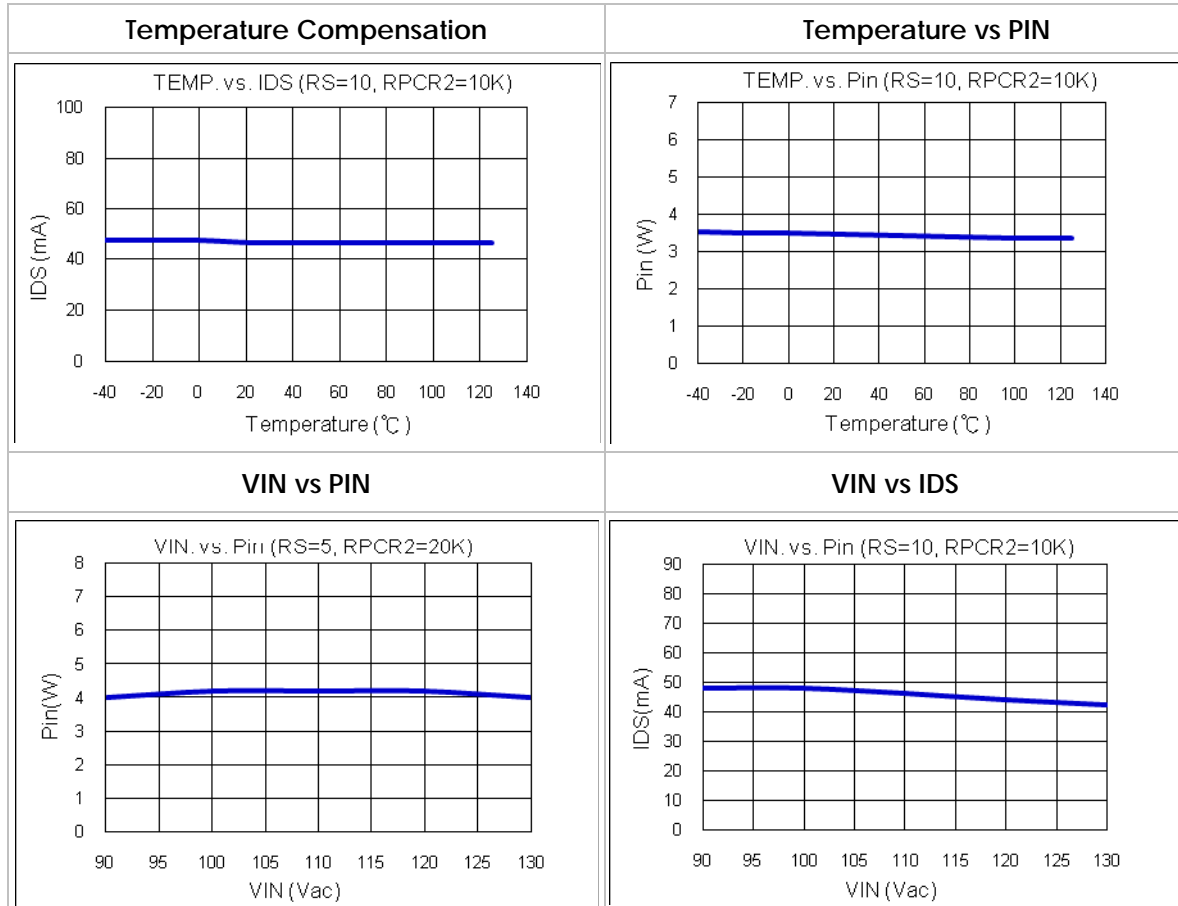

Applications

Detailed Description

The EMD2182 is a low cost non-isolated linear LED driver for general purpose LED lighting applications. In simple low power application as Fig.3, EMD2182 only need 5 external components that provide one channel LED sinking current with power compensation. Gate pin drives output switching MOS for high power lighting application.

The EMD2182 can be adjusted LED current with RS pin which meets difference power application.

Capacitor Selection

For best performance, low ESR X5R or X7R ceramic capacitor are recommended.

The capacitor on LV pin (CLV) is for stabilizing the internal power. The CLV value of a least 10uF is recommended to minimize start-up current. The C1 value of a least 1uF is recommended fixing e-dimming power which is between VDD and GND. A ceramic capacitor placed as close as possible to the LV/VDD and GND pin of the IC is recommended.

Power Compensation

The EMD2182 detects Vin through low-pass filter, RPCR1, RPCR2 and CPCR. The compensates for the LED current based on the voltage of Vin. The LED current, set by RS, is seen as EMD2182 supplied by 110Vac. If Vin dropped (increased) to 90 (130) Vac, the LED current is increased (decreased) to compensate LED power.

RS & PCR Selection

The LED current can be set by the RS pin, connecting with external resistors to GND. The value of the external resistor of RS should not be left floating.

For difference LED numbers of LED segments application. User can adjust RPCR2 to adjust power

compensation ratio. This feature can broaden LED's application range. The PCR pin operation voltage range is from 0.3V~1.4V. With typical application, the recommended typical RPCR1 resistor value is 1M~2MΩ, the value of RPCR2 is recommended 5K~10KΩ.

Table 1 lists the recommended component value for typical application.

Table 1

Input power	LED Total Vf	RS	RPCR1	RPCR2	RPCR3	CPCR1	CLV
3.5W/ AC110V	120V	10Ω	2MΩ	10K	10K	1uF	4.7uF
4W/ AC220V	240V	10Ω	2MΩ	10K	10K	1uF	4.7uF

Protection Circuit

To improve the lighting system reliability, some protection circuits are designed in to protect both EMD2182 and LEDs from damage under the following unexpected conditions.

- OVP (Over Voltage Protection):

The EMD2182 will be shut down if Vin is over 400V(typ.). The EMD2182 will remain in shut down mode until Vin drops below 40V(typ.).

- OTP (Over Temperature Protection):

The EMD2182 will be shut down if the ambient temperature is over 150°C(typ.). The EMD2182 will remain in shut down mode until the ambient temperature drops below 100°C(typ.).

- UVLO:

The EMD2182 will be shut down when the internal supply voltage is lower than 4V(typ.). The EMD2182 will remain in shut down mode until the internal supply voltage is increased higher than 5V(typ.).

Application Circuit


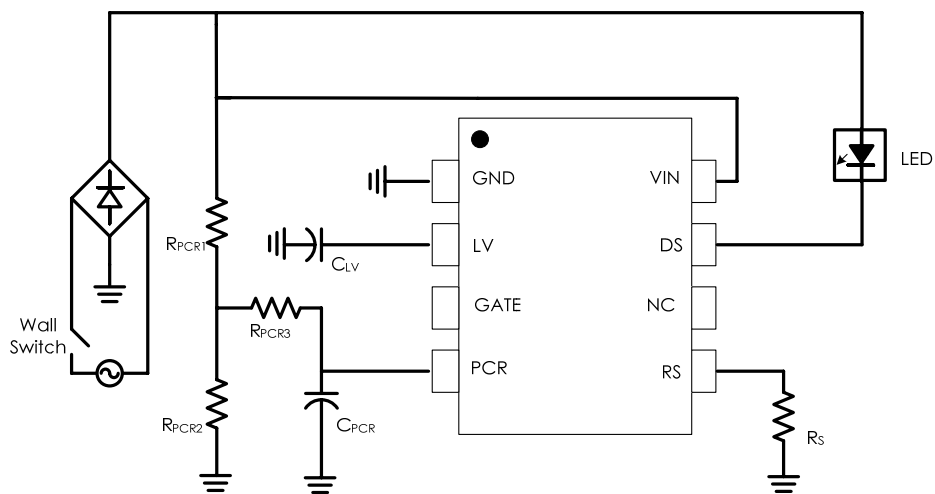


Fig. 3 Low power application

Package Outline Drawing

E-SOP-8 (150 mil)

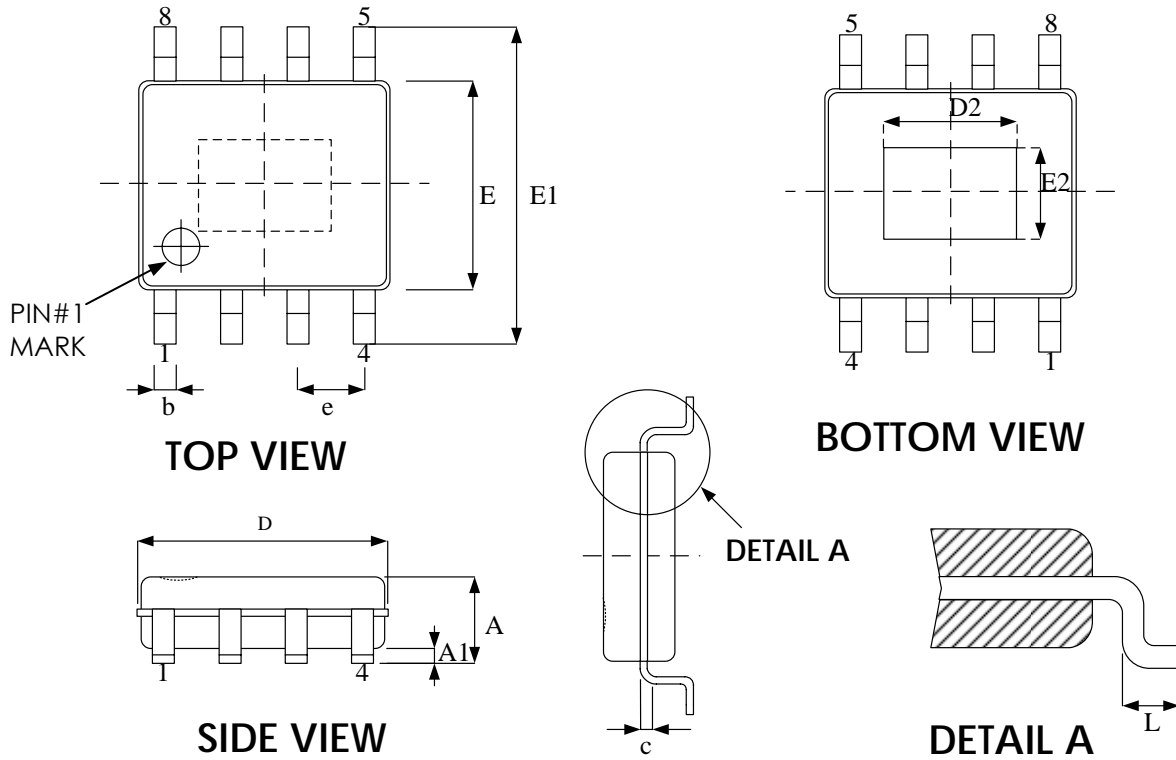

Symbol	Dimension in mm	
	Min	Max
A	1.35	1.75
A1	0.00	0.25
b	0.33	0.51
c	0.17	0.25
D	4.80	5.00
E	3.81	4.00
E1	5.79	6.20
e	1.27 BSC	
L	0.41	1.27

Exposed pad

	Dimension in mm	
	Min	Max
D2	2.84	3.10
E2	2.06	2.31

Revision History

Revision	Date	Description
1.0	2016.02.18	Original version
1.1	2016.04.18	Modify: 1. Application circuit: add RPCR3 2. Update Table1

Important Notice

All rights reserved.

No part of this document may be reproduced or duplicated in any form or by any means without the prior permission of ESMT.

The contents contained in this document are believed to be accurate at the time of publication. ESMT assumes no responsibility for any error in this document, and reserves the right to change the products or specification in this document without notice.

The information contained herein is presented only as a guide or examples for the application of our products. No responsibility is assumed by ESMT for any infringement of patents, copyrights, or other intellectual property rights of third parties which may result from its use. No license, either express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of ESMT or others.

Any semiconductor devices may have inherently a certain rate of failure. To minimize risks associated with customer's application, adequate design and operating safeguards against injury, damage, or loss from such failure, should be provided by the customer when making application designs.

ESMT's products are not authorized for use in critical applications such as, but not limited to, life support devices or system, where failure or abnormal operation may directly affect human lives or cause physical injury or property damage. If products described here are to be used for such kinds of application, purchaser must do its own quality assurance testing appropriate to such applications.