

## 3W, 0.85V Startup Voltage, Synchronous Step-Up Converter with Real-Shutdown and Short-Circuit Protection

### DESCRIPTION

The ETA1035 is a high efficiency synchronous step-up converter that can provide up to 3W of power to a boosted output from a low voltage source. Unlike most step-up converter, not only it starts up at a very low input voltage down to 0.85V, it also incorporates circuits that disconnect the input from output, during shutdown, short-circuit or other conditions when output is higher than the input such as output current overloading. This eliminates the need for an external MOSFET and its control circuitry in order to disconnect the input from output, and provides robust output overload protection.

The ETA1035 starts up from a voltage as low as 0.85V making it ideal for applications with single-cell or two-cell alkaline, NiCd, and NiMh batteries.

A switching frequency of 2MHz minimizes solution footprint by allowing the use of tiny, low profile inductors and ceramic capacitors. An internal synchronous MOSFET provides highest efficiency and with a current mode control that is internally compensated, external parts count is reduced to minimal.

### FEATURES

- Output Disconnect
- Short-circuit Protection
- 3W Output Power
- Output to Input Reversed Current Protection
- 0.85V Low Voltage Start-up
- VIN range from 0.6V to 4.5V
- Up to 96% Efficiency
- 40 $\mu$ A No load IQ and light load PFM Mode
- Internal Synchronous Rectifier
- Current Mode control
- Logic Control Shutdown and Thermal shutdown
- DFN2x2-6 Package



### APPLICATIONS

- USB OTG for MIDs, Smartphones
- Mobile back-up Battery Chargers
- Alkaline, NiCd, and NiMh batteries applications
- USB powered devices

### ORDERING INFORMATION


PART #	PACKAGE PIN	TOP MARK
ETA1035D2G-T	DFN2x2-6	DPYW └── Date Code └── Product Number

### TYPICAL APPLICATION

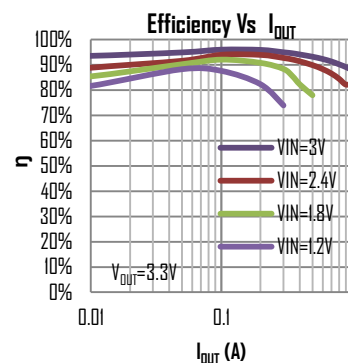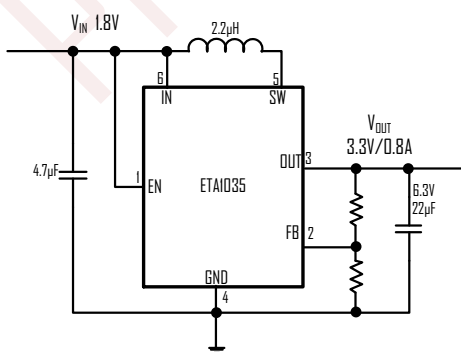

# ETA1035

## PIN CONFIGURATION



## ABSOLUTE MAXIMUM RATINGS

(Note: Exceeding these limits may damage the device. Exposure to absolute maximum rating conditions for long periods may affect device reliability.)

SW, OUT Voltage.....	-0.3V to 5.5V
All Other PIN Voltages.....	-0.3V to 5V
SW to ground current .....	Internally limited
Operating Temperature Range .....	-40°C to 85°C
Storage Temperature Range .....	-55°C to 150°C
Thermal Resistance	$\theta_{JA}$ $\theta_{JC}$
DFN2x2-6.....	80.....30 .....°C/W

## ELECTRICAL CHARACTERISTICS

( $V_{IN} = 1.8V$ ,  $V_{OUT} = 3.3V$ , unless otherwise specified. Typical values are at  $T_A = 25^\circ C$ .)








PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
Minimum Input Voltage			0.6		V
Startup Voltage			0.85	1.1	V
FB Feedback Voltage	$V_{OUT} = 2.5$ to $5V$	0.582	0.6	0.618	V
FB Input Current				50	nA
Output Voltage Range	External divider	2.1		5	V
Quiescent Current at IN	$V_{FB} = 0.7V$		40		$\mu A$
Shutdown Supply Current at IN	$V_{EN} = GND$		1	10	$\mu A$
Switching Frequency			2		MHz
Maximum Duty Cycle		90			%
NMOS Switch On Resistance	$I_{SW} = 100mA$		0.15	0.35	$\Omega$
PMOS Switch On Resistance	$I_{SW} = 100mA$		0.15	0.35	$\Omega$
NMOS Switch Current Limit		1.2	1.5		A
Start-up Current Limit			0.5		A
Output to Input Reverse Leakage Current	$V_{EN} = GND$ , Measure at IN pin		5		$\mu A$
SW Leakage Current	$V_{OUT} = 5V, V_{SW} = 0$ or $5V, V_{EN} = GND$			10	$\mu A$
EN Input Current			0.1	1	$\mu A$
EN Input Low Voltage				0.3	V
EN Input High Voltage		0.6			V
Thermal Shutdown	Rising, Hysteresis= $10^\circ C$		150		$^\circ C$

## PIN DESCRIPTION

PIN #	NAME	DESCRIPTION
1	EN	Enable pin for the IC. Drive this pin to high to enable the part, low to disable.
2	FB	Feedback Input. Connect an external resistor divider from the output to FB and GND to set $V_{OUT}$
3	OUT	Output pin. Bypass with a $22\mu F$ ceramic capacitor closely between this pin and GND
4	GND	Ground Pin
5	SW	Inductor Connection. Connect an inductor Between SW and the regulator output.
6	IN	Input Supply Voltage. Bypass with a $4.7\mu F$ ceramic capacitor to GND










TYPICAL CHARACTERISTICS

(Typical values are at TA = 25°C unless otherwise specified.)

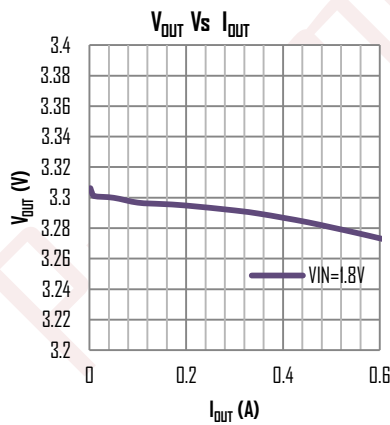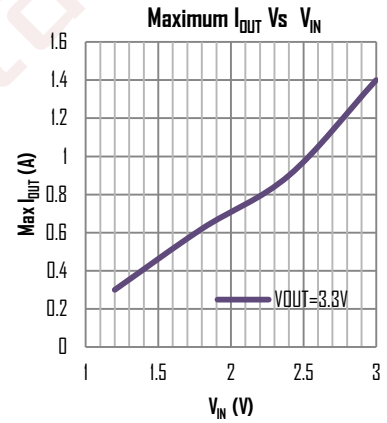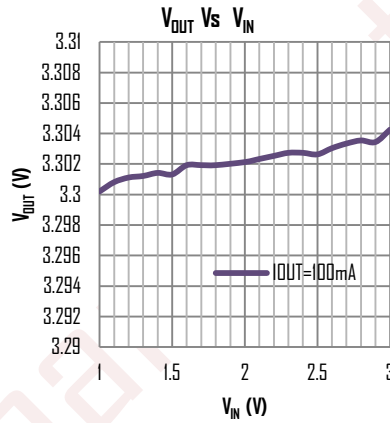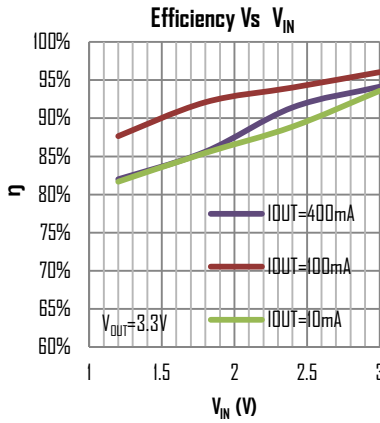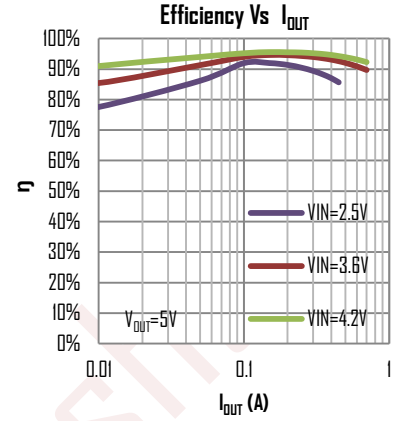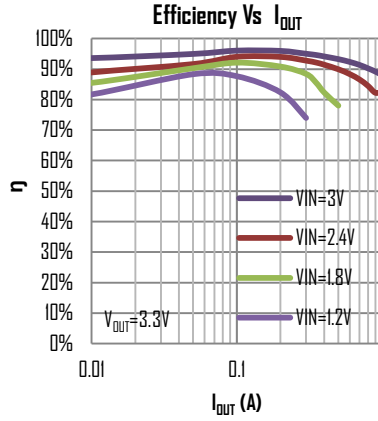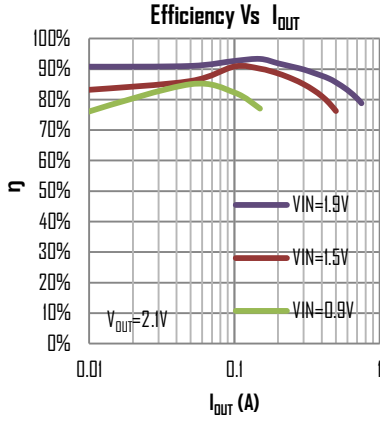

**TYPICAL CHARACTERISTICS**

(Typical values are at TA = 25°C unless otherwise specified.)

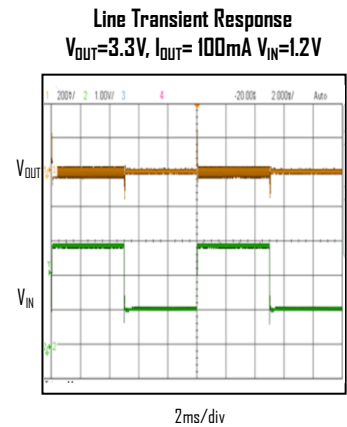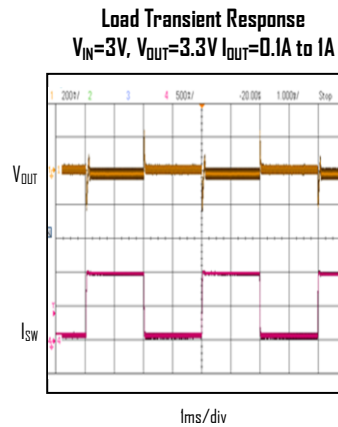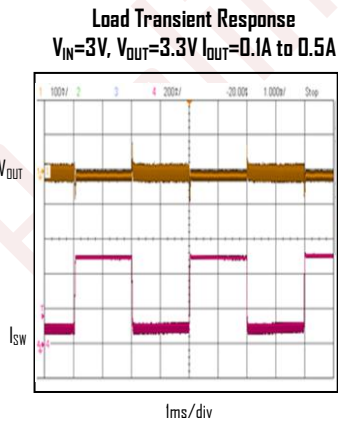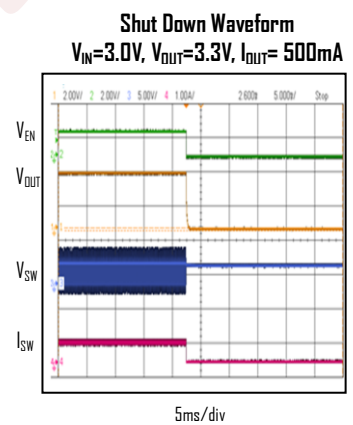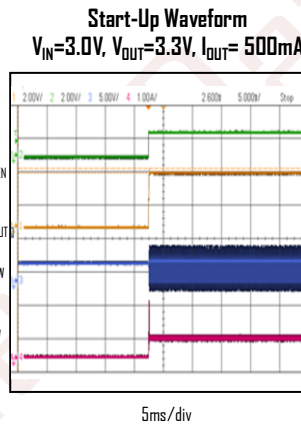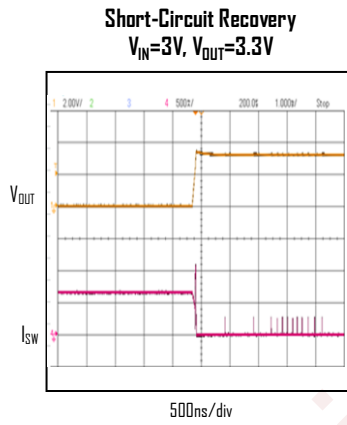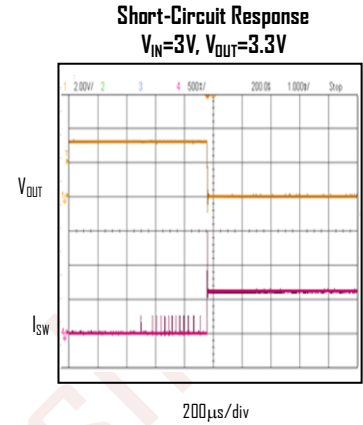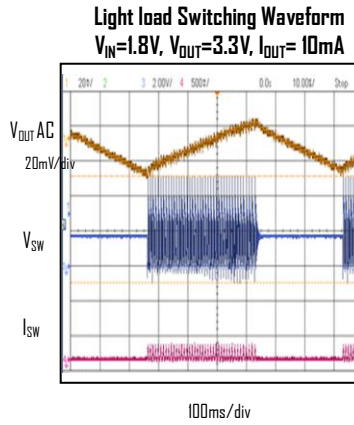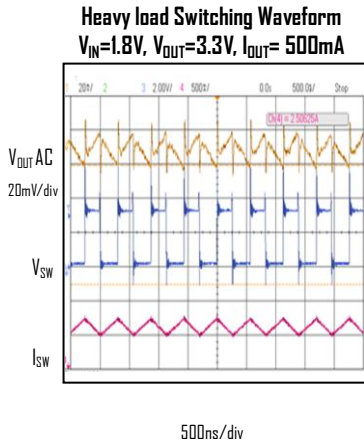

# ETA1035

## FUNCTIONAL DESCRIPTIONS

### Loop Operation

The ETA1035 is a wide input range, high-efficiency, DC-to-DC step-up switching regulator, capable of delivering up to 3W of output power, integrated with a 150mΩ high side MOSFET and 150 mΩ synchronous rectifier. It uses a PWM current-mode control scheme. An error amplifier integrates error between the FB signal and the internal reference voltage. The output of the integrator is then compared to the sum of a current-sense signal and the slope compensation ramp. This operation generates a PWM signal that modulates the duty cycle of the power MOSFETs to achieve regulation for output voltage.

### Light Load Operation

Traditionally, a fixed constant frequency PWM DC-DC regulator always switches even when the output load is small. When energy is shuffling back and forth through the power MOSFETs, power is lost due to the finite RDS(ON)s of the MOSFETs and parasitic capacitances. At light load, this loss is prominent and efficiency is therefore very low. ETA1035 employs a proprietary control scheme that improves efficiency in this situation by enabling the device into a power save mode during light load, thereby extending the range of high efficiency operation.


### Short-Circuit Protection

Unlike most step-up converters, the ETA1035 allows for short circuits on the output. In the event of a short circuit, the device first turns off the NMOS when the sensed current reaches the current limit. The device then enters a linear charge period with the current limited as with the start-up period. In addition, the thermal regulation circuit further controls the input current if the die temperature rises above 150°C.

### Down Mode ( $V_{IN} > V_{OUT}$ ) Operation


The ETA1035 will continue to supply the output voltage even when the input voltage exceeds the output voltage. Since the PMOS no longer acts as a low-impedance switch in this mode, power dissipation increases within the IC to cause a sharp drop in efficiency. Limit the maximum output current to maintain an acceptable junction temperature.

## BLOCK DIAGRAM

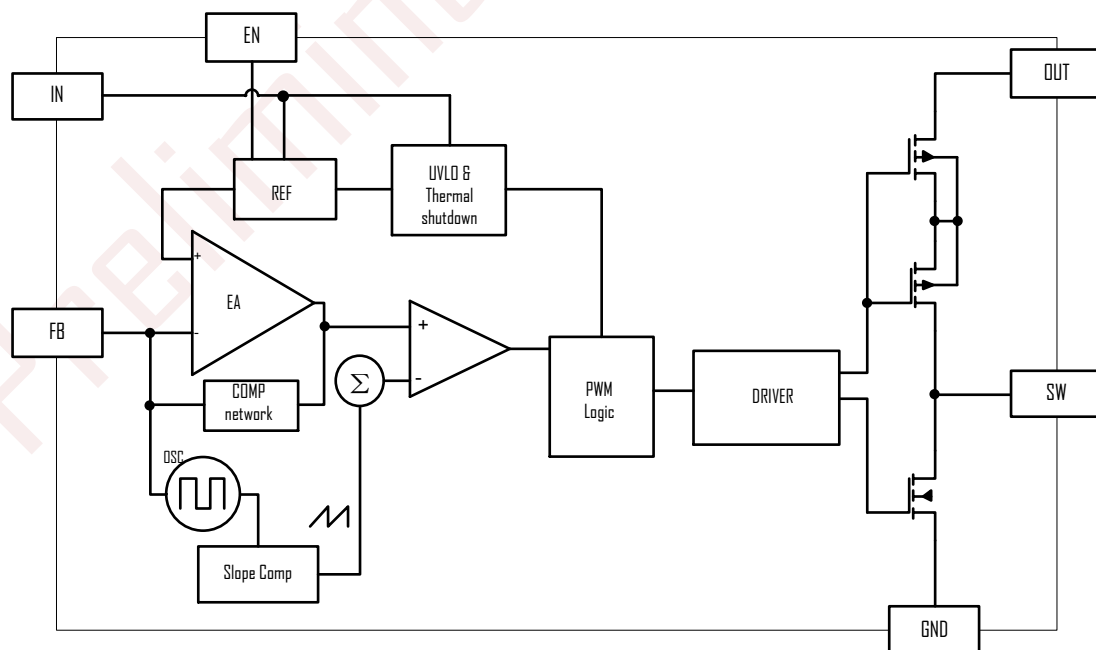


## 5V APPLICATIONS

When output voltage is programmed to above 4.75V, in order to maintain an acceptable peak voltage at SW, a small parallel capacitor snubber between SW and OUT is necessary, and an output cap of greater than 44 $\mu$ F is also required as shown in below figure.

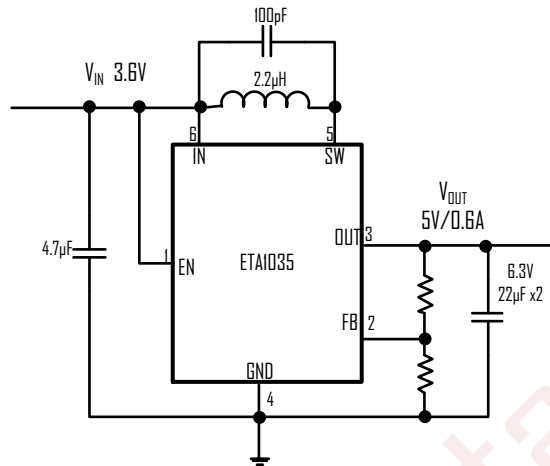

## PACKAGE OUTLINE

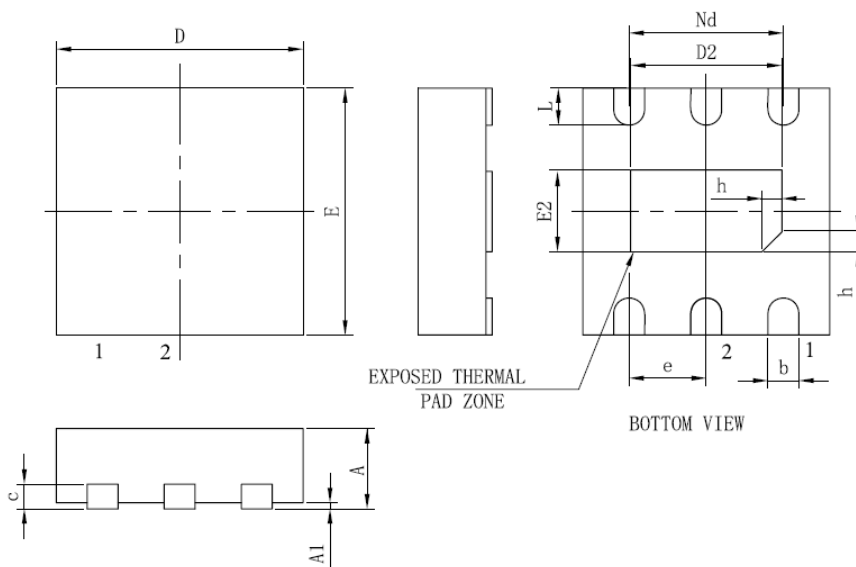

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
A	0.70	0.75	0.80
A1	—	0.02	0.05
b	0.25	0.30	0.35
c	0.18	0.20	0.25
D	1.95	2.00	2.05
D2	1.00	—	1.45
e	0.65BSC		
Nd	1.30BSC		
E	1.95	2.00	2.05
E2	0.50	—	0.85
L	0.25	0.30	0.40
h	0.10	0.15	0.20