

1.2A Switching Charger, 1.2A Boost and Fuel Gauge in One SOP8 with Single Inductor

DESCRIPTION

ETA9720 is a switching Li-Ion battery charger capable of delivering up to 1.2A of charging current to the battery and also capable of delivering up to 5V/1.2A in boost operation, with high efficiency in both charging mode and boost mode. It also includes a fuel gauge system for power indication. For charging, it uses a proprietary control scheme that eliminates the current sense resistor for conventional constant current control, maximizing efficiency, reducing charging time and reducing costs. It can also output a 5V voltage in the reversed direction by boosting from the battery. It only needs a single inductor to provide power bi-directionally with a proprietary automatic mode detect and switch scheme. ETA9720 is an ideal all-in-one solution for battery charging and discharge applications, such as power banks, smart phones, and tablets with only one USB port that can be used for charging battery function.

ETA9720 is suitable for charging a 4.2V Li-ion battery. And ETA9720 is in SOP8 package.


FEATURES

- ◆ Bi-Directional Power conversion with Single Inductor
- ◆ Automatic Mode Switching
- ◆ Switching Charger
- ◆ 5V Synchronous Boost
- ◆ Up to 96% Efficiency
- ◆ Up to 1.2A Max charging current and 1.2A discharging
- ◆ No-Battery detection
- ◆ No External Sense resistor
- ◆ 4 LEDs Fuel gauge

APPLICATIONS

- ◆ Tablet, MID
- ◆ Smart Phone
- ◆ Power Bank


TYPICAL APPLICATION

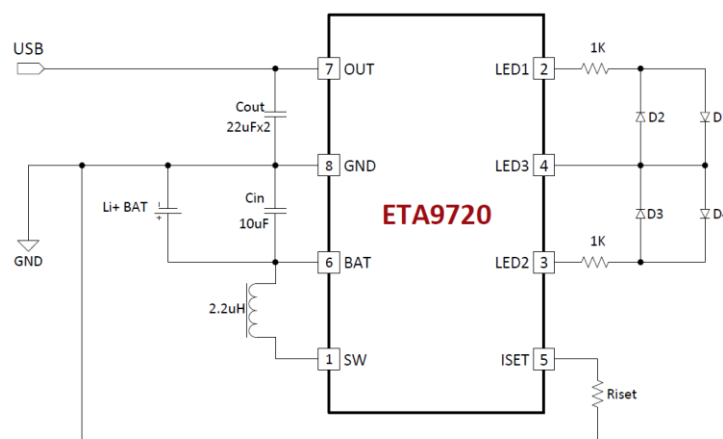

ORDERING INFORMATION

| PART No. | PACKAGE | TOP MARK | Pcs/Reel |
|------------|---------|----------|----------|
| ETA9720S8A | SOP8 | ETA9720 | 4000 |

PIN CONFIGURATION

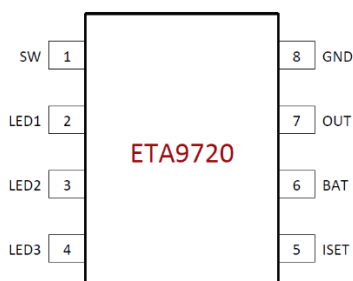

ABSOLUTE MAXIMUM RATINGS

(Note: Exceeding these limits may damage the device. Exposure to absolute maximum rating conditions for long periods may affect device reliability.)

| | |
|--|-----------------------------|
| OUT, SW Voltage | -0.3V to 6V |
| All Other Pin Voltage | -0.3V to 6V |
| SW to ground current..... | Internally limited |
| Operating Temperature Range | -40°C to 85°C |
| Storage Temperature Range | -55°C to 150°C |
| Thermal Resistance | θ_{JA} θ_{JC} |
| SOP8 | 120.....50..... °C/W |
| Lead Temperature (Soldering, 10ssec) | 260°C |
| ESD HBM (Human Body Mode) | 2KV |
| ESD MM (Machine Mode) | 200V |

ELECTRICAL CHARACTERISTICS

($V_{IN} = 5V$, unless otherwise specified. Typical values are at $T_A = 25^\circ C$.)

| PARAMETER | CONDITIONS | MIN | TYP | MAX | UNITS |
|----------------------------------|-------------------------------|------|------|------|-----------|
| BUCK MODE | | | | | |
| USB Range | | 4.5 | | 5.5 | V |
| USB UVLO Voltage | Rising, Hys=500mV | | 4.5 | | V |
| USB Operating Current as BUCK | Switcher Enable, Switching | | 5 | | mA |
| | Switcher Enable, No Switching | | 800 | | μA |
| BATTERY CHARGER | | | | | |
| Battery CV Voltage | $I_{BAT} = 0mA$, default | 4.17 | 4.21 | 4.25 | V |
| Charger Restart Threshold | From DONE to Fast Charge | | -160 | | mV |
| Battery Pre-Condition Voltage | V_{BAT} Rising Hys=250mV | | 2.8 | | V |
| Pre-Condition Charge Current | | | 200 | | mA |
| Fast Charge Current | Riset=160K | | 1.2 | | A |
| Charge Termination Current | | | 180 | | mA |
| Charge Termination Blanking time | | | 16 | | S |
| BOOST MODE | | | | | |
| BATT Ok Threshold | Rising, HYS=0.4 V | | 3.2 | | V |
| Output Voltage Range | $I_{out} = 0$ | 5.05 | 5.1 | 5.25 | V |
| Quiescent Current At BATT | $V_{bat} = 3.6V$ | | 80 | | μA |
| Switching Frequency | $V_{IN} < 4.3V$ | 550 | 650 | 750 | KHz |
| Inductor Peak Current Limit | | | 3.5 | | A |
| Maximum Duty Cycle | | | 90 | | % |
| High side Pmos R_{dson} | $I_{sw} = 500mA$ | | 75 | | $m\Omega$ |

| PARAMETER | CONDITIONS | MIN | TYP | MAX | UNITS |
|---------------------------------------|------------------------|-----|------|-----|-------|
| Low side Nmos R _{ds(on)} | I _{sw} =500mA | | 70 | | mΩ |
| Short Circuit Hiccup Current | | | 1.6 | | A |
| Short Circuit Hiccup Timer | On Time | | 45 | | ms |
| | Off Time | | 2000 | | |
| Charging Thermal Regulation threshold | | | 85 | | °C |
| Thermal Shutdown | Rising, Hys=20°C | | 150 | | °C |



PIN DESCRIPTION

| PIN # | NAME | DESCRIPTION |
|-------|------|--|
| 1 | SW | Inductor Connection. Connect an inductor Between SW and the regulator output |
| 2 | LED1 | Fuel gauge LED1, LED2 connection pin |
| 3 | LED2 | Fuel gauge LED3, LED4 connection pin |
| 4 | LED3 | Fuel gauge LED1, LED2, LED3, LED4 connection pin |
| 5 | ISET | Buck Charging current setting pin. Connect a resistor between this pin and analog ground to set the current level. |
| 6 | BAT | Battery pin. Connect a Battery to this pin, and with a bypass capacitor 10uF. |
| 7 | OUT | Output pin. Bypass with a 22uF or larger ceramic capacitor closely between this pin and GND |
| 8 | GND | Ground Pin |



TYPICAL CHARACTERISTICS

(V_{in}=5V, T_A=25°C, unless otherwise specified)

In CHARGE MODE, Efficiency Vs V_{bat} at 1.2A and 2A charge current

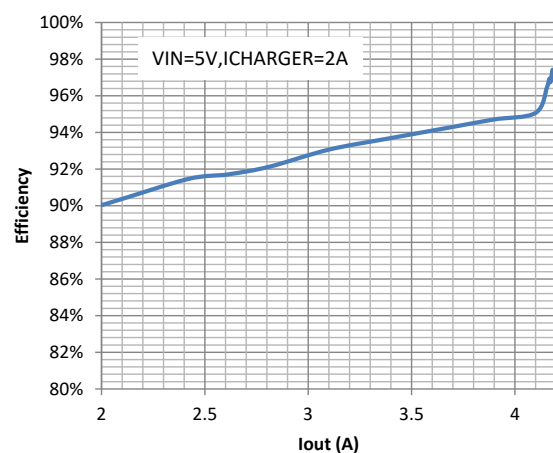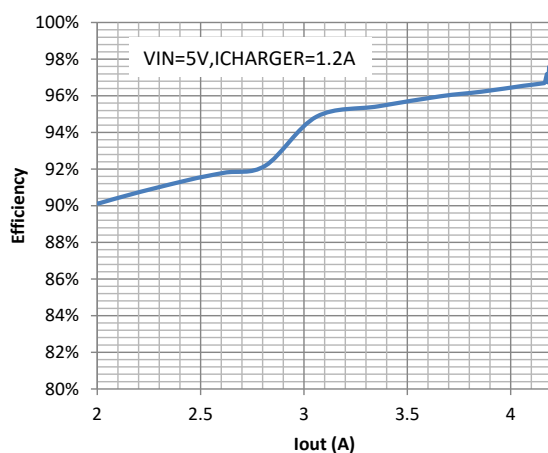


In BOOST MODE

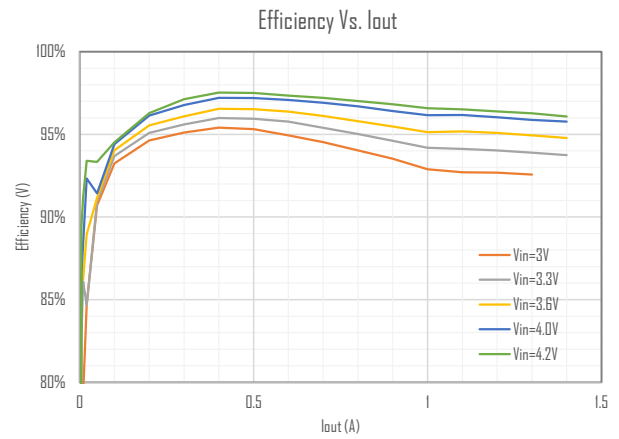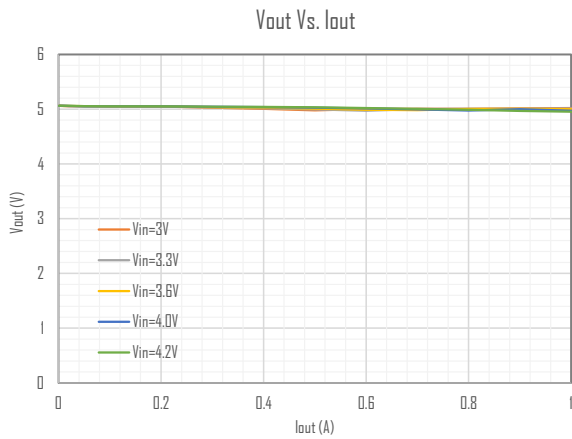

APPLICATION SUPPORT

Please contact local distributor or ETA sales representatives for technical support.


PCB GUIDELINES

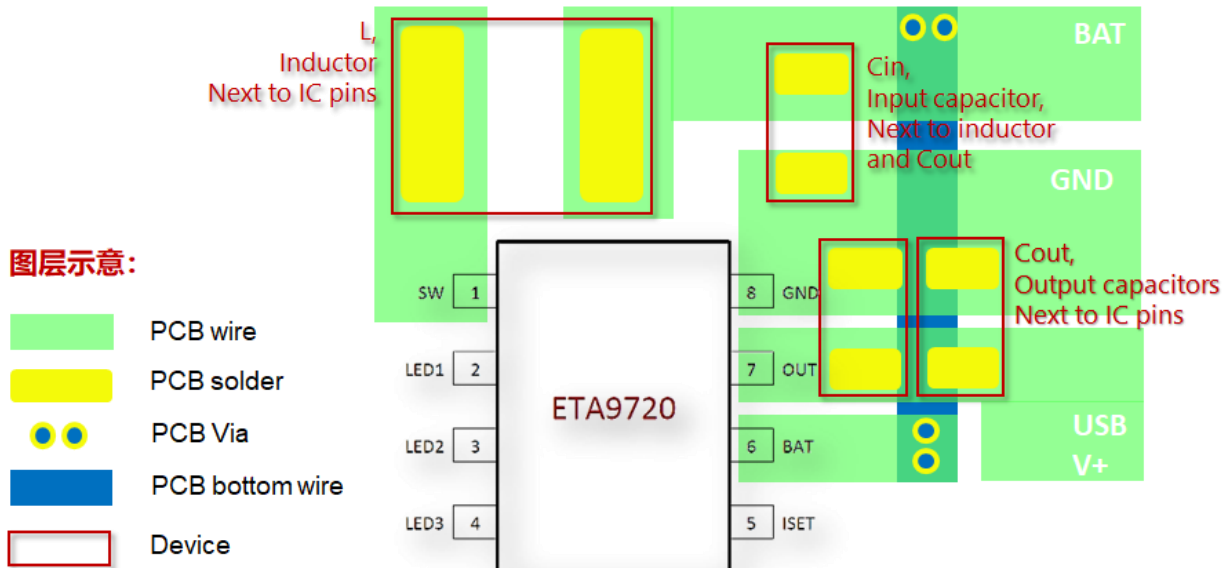

Please have C_{IN} , C_{OUT} , and L placed just next to the IC pins so that the power traces are kept to the shortest to achieve a good performance of ETA9720 and good EMI.

PACKAGE OUTLINE

Package: SOP-8

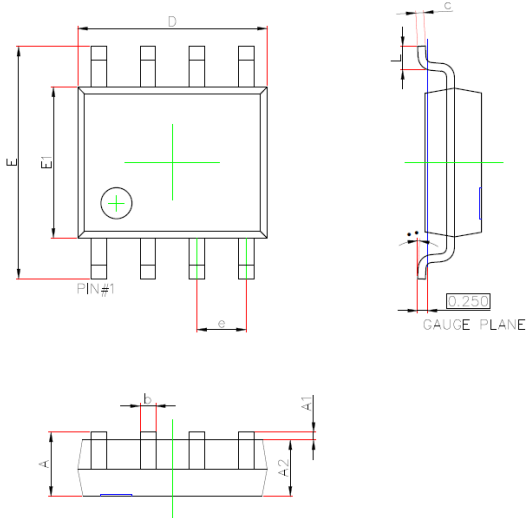

| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|--------|---------------------------|-------|----------------------|-------|
| | Min. | Max. | Min. | Max. |
| A | 1.350 | 1.750 | 0.053 | 0.069 |
| A1 | 0.100 | 0.250 | 0.004 | 0.010 |
| A2 | 1.350 | 1.550 | 0.053 | 0.061 |
| b | 0.330 | 0.510 | 0.013 | 0.020 |
| c | 0.170 | 0.250 | 0.007 | 0.010 |
| D | 4.800 | 5.000 | 0.189 | 0.197 |
| e | 1.270 (BSC) | | 0.050 (BSC) | |
| E | 5.800 | 6.200 | 0.228 | 0.244 |
| E1 | 3.800 | 4.000 | 0.150 | 0.157 |
| L | 0.400 | 1.270 | 0.016 | 0.050 |
| θ | 0° | 8° | 0° | 8° |