

To : _____

Specification of FDTC TFT-LCD module

FLC48SXC8V-05H

Approval

Date :


By :

This Product is designed, developed and manufactured as contemplated for general use, including without limitation, general office use, personal use, household use, and ordinary industrial use, but is not designed, developed and manufactured as contemplated for use accompanying fatal risks or dangers that, unless extremely high safety is secured, could lead directly to death, personal injury, severe physical damage or other loss (hereinafter "High Safety Required Use"), including without limitation, nuclear reaction control in nuclear facility, aircraft flight control, air traffic control, mass transport control, medical life support system, missile launch control in weapon system. Fujitsu shall not be liable against the Customer and/or any third party for any claims or damages arising in connection with the High Safety Required Use of the Product without permission.

Specification No. : Tech Bes LCD – 00245

Issue Date : Dec. 22, 2003

Issued by :



F. Yamada

Director

Design Dept. LCD Products Div.

FUJITSU DISPLAY TECHNOLOGIES CORPORATION

REVISION HISTORY

A

A

| Revision | Date | Prepared | Checked | | Approved | Summary |
|----------|-------------|----------|---------|--|-----------|-----------------------|
| 01A | Dec.22,2003 | T.Ito | | | F. Yamada | 1 st issue |
| | | | | | | |
| | | | | | | |

B

B

C

C

D

D

E

DOCUMENT CONTROL SECTION

DATE

| | | | | | | | | |
|------|--------|----------|--------|-------|-------------|--|--------------------|--------|
| | | | | | | TITLE | FLC48SXC8V-05H | |
| | | | | | | DRAW. NO. | Tech Bes LCD-00245 | CUST. |
| | | | | | | FUJITSU DISPLAY TECHNOLOGIES CORPORATION | | 1 / 36 |
| EDIT | DATE | DESIG. | CHECK | APPR. | DESCRIPTION | | | |
| | DESIG. | 20031222 | T. Ito | CHECK | | APPR. | F. Yamada | |

F

TABLE OF CONTENTS

| | |
|--|----|
| 1. APPLICATIONS | 3 |
| 2. PRODUCT NAME AND MODEL NUMBER | 3 |
| 2-1.Product Name | 3 |
| 2-2.Model Number | 3 |
| 2-3.Drawing Number | 3 |
| 3. OVERVIEW | 3 |
| 4. CONFIGURATION | 3 |
| 5. MECHANICAL SPECIFICATIONS | 4 |
| 6. ABSOLUTE MAXIMUM RATING | 5 |
| 7. RECOMMENDED OPERATING CONDITIONS | 5 |
| 8. ELECTRICAL SPECIFICATIONS | 6 |
| 9. OPTICAL SPECIFICATIONS | 8 |
| 10. INTERFACE SPECIFICATIONS | 12 |
| 10-1.Signal Descriptions | 12 |
| 10-2.LVDS Data Assignment | 13 |
| 10-3. Color Data Assignment | 14 |
| 10-4. Input Signal Timing | 15 |
| 10-5. Correspondence between Data and Display Position | 17 |
| 10-6.Power Supply Sequence | 17 |
| 11. BACK-LIGHT SPECIFICATIONS | 18 |
| 11-1.Pin configuration for Back-light | 18 |
| 11-2.Life | 18 |
| 11-3.Lamp assembly set | 18 |
| 12. APPEARANCE SPECIFICATIONS | 19 |
| 12-1.Appearance | 19 |
| 12-2.Dot defects | 20 |
| 13. ENVIRONMENTAL SPECIFICATIONS | 21 |
| 14. INDICATIONS | 22 |
| 15. PACKAGING | 22 |
| 15-1.Packing Specifications | 22 |
| 15-2.Packing Method | 22 |
| 16. WARRANTY | 27 |
| 17. PRECAUTIONS | 27 |
| 18. PRECAUTIONS FOR USE | 33 |
| 19. MISCELLANEOUS | 33 |

A

A

B

B

C

C

D

D

E

DOCUMENT CONTROL SECTION

DATE

| | | | | | | | | | | | | |
|------|--------|--------|-------|-------|-------------|-------|--|--|--|--|--------------------|-------|
| | | | | | | | | | | TITLE | FLC48SXC8V-05H | |
| | | | | | | | | | | DRAW. NO. | Tech Bes LCD-00245 | CUST. |
| | | | | | | | | | | FUJITSU DISPLAY TECHNOLOGIES CORPORATION | | 2/ |
| EDIT | DATE | DESIG. | CHECK | APPR. | DESCRIPTION | | | | | | | |
| | DESIG. | | CHECK | | | APPR. | | | | | | |

F

1. APPLICATION

This specification is applied to the 19-inch SXGA supported TFT-LCD module.

A

A

2. PRODUCT NAME AND MODEL NUMBER

2-1 Product Name : LCD Module

2-2 Model Name : FLC48SXC8V-05H

2-3 Drawing Number : NA19020-C975

B

B

3. OVERVIEW

This LCD module has a TFT active matrix type liquid crystal panel 1280x1024 pixels, and diagonal size of 48cm(19-inch). This LCD has a LVDS dual interface and can display 16,777,216 colors.

The power supply of this LCD module is +5V DC voltage

This module has the characteristics for applying TCO'99.

C

C

4. CONFIGURATION

This LCD module consists of a color TFT-LCD panel that is mounted with TFT driver ICs and a cold-cathode fluorescent tube back-light.

The inverter for the back-light is not included.

Figure 4-1 shows a block diagram of this LCD module.

D

D

DOCUMENT CONTROL SECTION

DATE

E

| | | | | | | | | |
|------|------|--------|-------|-------|-------------|--|--------------------|-------|
| | | | | | | TITLE | FLC48SXC8V-05H | |
| | | | | | | DRAW. NO. | Tech Bes LCD-00245 | CUST. |
| | | | | | | FUJITSU DISPLAY TECHNOLOGIES CORPORATION | | 3/ |
| EDIT | DATE | DESIG. | CHECK | APPR. | DESCRIPTION | | | |
| | | | | | | | | |

F

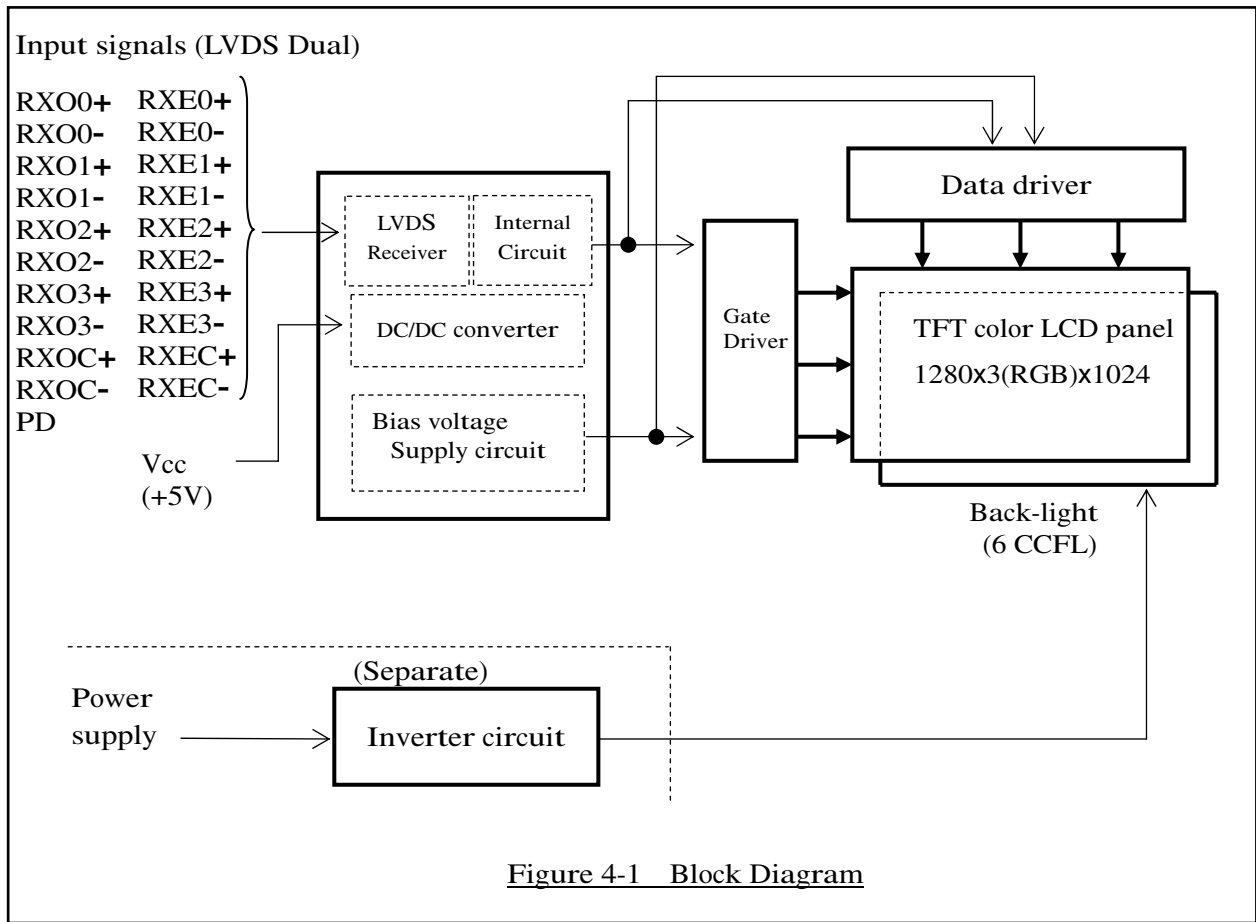


Figure 4-1 Block Diagram

5. MECHANICAL SPECIFICATIONS

Table 5-1 shows the mechanical specifications of this LCD module.

Table 5-1 Mechanical Specifications

| Item | Specifications | Unit | Remark |
|--------------------|------------------|------|---|
| Dimensions | 414x335x23(TYP.) | mm | Edge type back-light is used. (ϕ 2.6 CCFLx6) Without inverter. For details on dimensions, see dimensional outline drawing. (at page 34,35,36:Figure 19-1,2,3) Excluding inverter. |
| Display Resolution | (1280x3)x1024 | — | |
| Display Dot Area | 376.32x301.056 | mm | |
| Dot Pitch | (0.098x3)x0.294 | mm | |
| Pixel Aspect Ratio | 1:1 | — | |
| Weight | 3,000 MAX | g | |
| FG-SG | Short circuit | — | |

DOCUMENT CONTROL SECTION

DATE

| | | | | | | | | | |
|------|------|--------|-------|-------|-------------|-----------|--|--------------------|----|
| | | | | | | TITLE | | FLC48SXC8V-05H | |
| | | | | | | DRAW. NO. | | Tech Bes LCD-00245 | |
| | | | | | | | | CUST. | |
| EDIT | DATE | DESIG. | CHECK | APPR. | DESCRIPTION | | FUJITSU DISPLAY TECHNOLOGIES CORPORATION | | 4/ |
| | | | | | | | | | |

6. ABSOLUTE MAXIMUM RATING

Table 6-1 shows the absolute maximum rating of this LCD module.

Table 6-1 Absolute Maximum Rating

| Item | Symbol | Condition | MIN. | TYP. | MAX. | Unit |
|--|-----------------|-----------|------|------|------|------|
| Supply Voltage | V _{CC} | Ta=25°C | -0.3 | — | 6.0 | V |
| Input Signal Voltage (LVDS signal, PD) | V _{IN} | Ta=25°C | -0.3 | — | 3.6 | V |

7. RECOMMENDED OPERATING CONDITIONS

Table 7-1 shows the recommended operating conditions of this LCD module.

Table 7-1 Recommended Operating Conditions

| Item | Symbol | MIN. | TYP. | MAX. | Unit |
|-----------------------|-----------------|-----------------|------|------|------|
| Supply Voltage(Logic) | V _{CC} | 4.75 | — | 5.25 | V |
| Ripple Voltage | V _{CC} | V _{RP} | — | 0.1 | V |

DATE DOCUMENT CONTROL SECTION

| | | | | | | | |
|--------|------|--------|-------|-------|-------------|--|--|
| | | | | | | TITLE FLC48SXC8V-05H | |
| | | | | | | DRAW. NO. Tech Bes LCD-00245 | |
| | | | | | | CUST. | |
| EDIT | DATE | DESIG. | CHECK | APPR. | DESCRIPTION | FUJITSU DISPLAY TECHNOLOGIES CORPORATION | |
| DESIG. | | | CHECK | | APPR. | 5/ | |

8. ELECTRICAL SPECIFICATIONS

Table 8-1 shows the electrical specifications of this LCD module. Figure 8-1 shows the measurement circuit. Figure 8-2(A) shows the equivalent circuit of the logic signal input area. Figure 8-2(B) shows the equivalent circuit of the supply voltage Input area.

Table 8-1 Electrical Specifications

| Item | Symbol | Condition | MIN. | TYP. | MAX. | Unit | Remark |
|---|----------------------|--|--|------|-------|-------|------------------|
| Differential-input Voltage (High) | V _{IH} | V _{CM} =+1.2V | — | — | 100 | mV | |
| Differential-input Voltage (Low) | V _{IL} | | -100 | — | — | mV | |
| Input PD Voltage (High) | V _{IHPD} | V _{CC} =+5.0±0.25V V _{SS} =0V DCLK=54MHz Ta=25° C | 2.0 | — | 3.3 | V | |
| Input PD Voltage (Low) | V _{ILPD} | | 0 | — | 0.8 | V | |
| Supply Current | I _{CC} | | — | 800 | 1,500 | mA | *1 |
| Supply Rush Current | I _{SCC} | | — | — | 3.5 | A | *2 |
| Supply Rush Current Duration(1.5A excess) | T _{SCC} | — | — | 1 | ms | | |
| BACK LIGHT | CCFL Turn on Voltage | V _S | f _L =50kHz, Ta=25°C | — | 1,400 | 1,600 | V _{rms} |
| | | | f _L =50kHz, Ta=0°C | — | — | 1,600 | |
| D | Lighting Voltage | V _L | f _L =50kHz I _L =7mA | — | 750 | — | V _{rms} |
| | Lighting Frequency | f _L | V _L =750V _{rms} | 40 | 50 | 60 | kHz |
| | Tube Current | I _L | f _L =50kHz V _L =750V _{rms} | 4 | — | 8 | mArms *4 |

(*1) Typical current situation : Color bar pattern. V_{CC}=5.0V
Maximum current situation : White pattern. V_{CC}=4.75V
Without rush current.

(*2) These items prescribe the rush current for starting internal DC/DC.
Charging current to capacitors of V_{CC} is not prescribed.

(*3) Back-light specifications are valid when using a suitable inverter such as the T.B.D.

(*4) Tube current (I_L) shows the value of the current that is consumed at one lamp.
This LCD module has 6 lamps. Each 3 lamps are placed at upper side and lower side of the display.
3 lamps is connected independently. Each low voltage terminals are connected with separate cable to Back-light connector.

DOCUMENT CONTROL SECTION

DATE

| | | | | | | | |
|--------|------|--------|-------|-------|--|--------------------|--|
| | | | | | | TITLE | |
| | | | | | | FLC48SXC8V-05H | |
| | | | | | | DRAW. NO. | |
| | | | | | | Tech Bes LCD-00245 | |
| | | | | | | CUST. | |
| EDIT | DATE | DESIG. | CHECK | APPR. | DESCRIPTION | | |
| DESIG. | | | CHECK | | FUJITSU DISPLAY TECHNOLOGIES CORPORATION | | |
| | | | | | | 6/ | |

9. OPTICAL SPECIFICATIONS

Table 9-1 shows the optical specifications of this LCD module.

Table 9-1 Optical Specifications

Ta=25°C, Signal timing=Typ.

| Item | Symbol | Condition | Specifications | | | Unit | Remark | | |
|-------------------------------|---------------|--|------------------------|---|------------------------|-------|-------------------|-------------------|-------------------------|
| | | | MIN. | TYP. | MAX. | | | | |
| Visual Angle | Horizontal | $\theta_{L,R}$ | $CR \geq 10$ | $\theta_{U,D}=0^\circ$ | 85 | — | — | deg | (1)(2) (3)(5) (6) |
| | Vertical | $\theta_{U,D}$ | | $\theta_{L,R}=0^\circ$ | 85 | — | — | deg | |
| | All Direction | θ | | — | 80 | — | — | deg | |
| Contrast Ratio | CR | $\theta_{L,R,U,D}=0^\circ$ | | 400 | 600 | — | — | White/Black | (1)(2) (3)(5) |
| Response Time(ON) (B→W) | t_{on} | $\theta_{L,R,U,D}=0^\circ$ | Ta=25°C | — | 15 | 30 | ms | (1) (4) (5) | |
| | | | Ta=0°C | — | 50 | 100 | ms | | |
| Response Time(OFF) (W→B) | t_{off} | $\theta_{L,R,U,D}=0^\circ$ | Ta=25°C | — | 10 | 25 | ms | (1) (4) (5) | |
| | | | Ta=0°C | — | 50 | 100 | ms | | |
| Brightness | I | $\theta_{L,R,U,D}=0^\circ$ $V_{CC}=5V$ $I_t=7mA$ | | 360 | 450 | — | cd/m ² | White*1 | (1)(5) |
| Brightness Uniformity | ΔI | | | 70 | — | — | % | | (1)(5) (7) |
| Chromaticity | W | | x | fL=50kHz R*,G*,B* Signal =All "H" | 0.283 | 0.313 | 0.343 | | — |
| | | y | 0.299 | | 0.329 | 0.359 | — | | |
| | R G B | (x, y) | Red | | (0.640 , 0.350) Typ. | | | | |
| | | | Green | | (0.288 , 0.598) Typ. | | | | |
| | | Blue | (0.142 , 0.075) Typ. | | | | | | |
| LCD Panel Type | | | | TFT Color | | | | | |
| Display Mode | | | | Normaly Black | | | | | |
| Wide Viewing Angle Technology | | | | MVA | | | | | |
| Optimum Viewing Angle | | | | — (symmentry) | | | | (6) | |
| Display Color | | | | 16,777,216 (8-bit color) | | | | | |
| Color of non-display area | | | | Black | | | | | |
| Surface Treatment | | | | Anti-glare (Haze value: 25%), 2H) | | | | | |

(*1) Value at 15~20 minutes after lighting on.

(Note) •CS-1000 (MINOLTA Co., Ltd.) Field=1°, L=500mm

•Back-light current = 7mA, Dark room condition(1 lux or less)

Be carefull that the luminance meter, which you use, may not be able to get correct brightenss if it's no set correctly.

DOCUMENT CONTROL SECTION

DATE

| | | | | | | | | | |
|--------|------|--------|-------|-------|-------------|-----------|--|--------------------|-----|
| | | | | | | TITLE | | FLC48SXC8V-05H | |
| | | | | | | DRAW. NO. | | Tech Bes LCD-00245 | |
| | | | | | | CUST. | | | |
| EDIT | DATE | DESIG. | CHECK | APPR. | DESCRIPTION | | FUJITSU DISPLAY TECHNOLOGIES CORPORATION | | 8 / |
| DESIG. | | | CHECK | | APPR. | | | | |

Note 1) Definition of Viewing Angle (1)

Based on Figure 9-1.

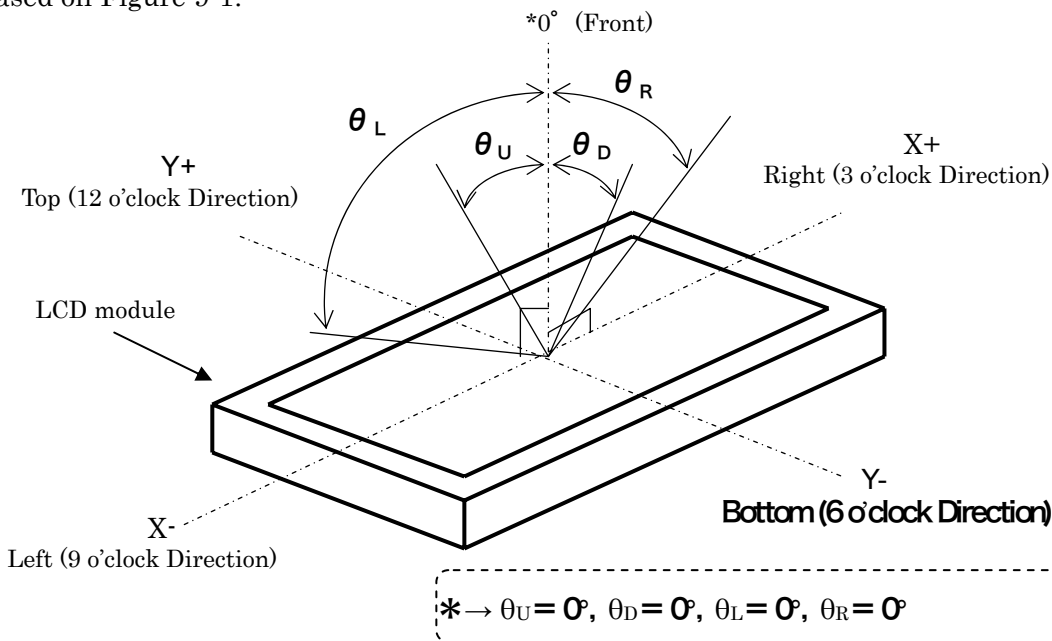


Figure 9-1 Definition of Viewing Angle (1)

Note 2) Definition of Viewing Angle (2)

Based on Figure 9-2.

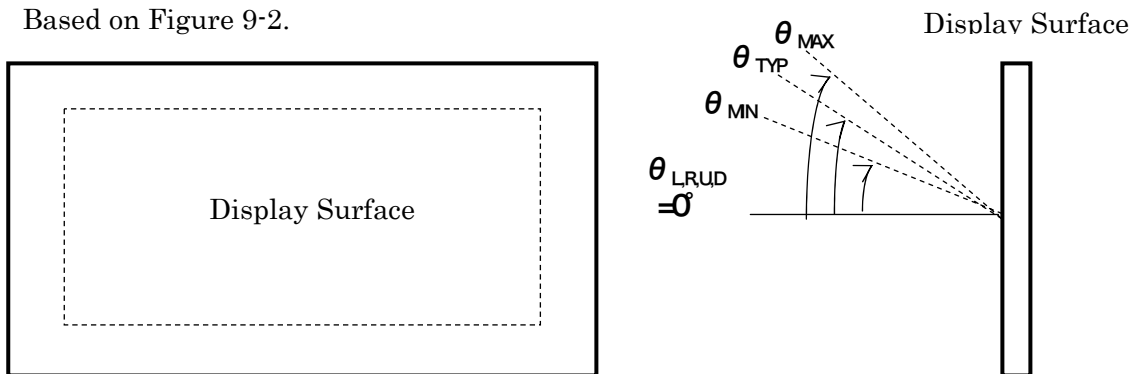


Figure 9-2 Definition of Viewing Angle (2)

Note 3) Definition of Contrast Ratio (CR)

Determined by Formula (1) based on Figure 9-3 Voltage-Brightness characteristics.

$$= \frac{L_w \text{ (Brightness at white)}}{L_b \text{ (Brightness at black) } \dots\dots(1)}$$

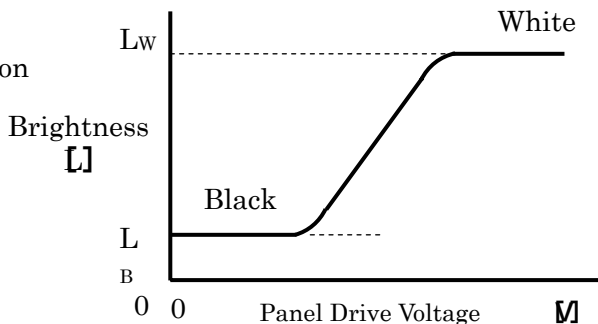


Figure 9-3 Voltage-Brightness Characteristics

| |
|--------------------------|
| DOCUMENT CONTROL SECTION |
| DATE |

| | | | | | | | |
|--------|------|--------|-------|-------|---|---------------------------------|---|
| | | | | | | TITLE FLC48SXC8V-05H | |
| | | | | | | DRAW. NO. Tech Bes LCD-00245 | |
| | | | | | | CUST. | |
| EDIT | DATE | DESIG. | CHECK | APPR. | DESCRIPTION FUJITSU DISPLAY TECHNOLOGIES CORPORATION | | |
| DESIG. | | | CHECK | APPR. | SHEET 9 / | | F |

10. INTERFACE SPECIFICATIONS

10-1 Signal descriptions

Table 10-1 shows the description and configuration of interface signals (CN1).

Table 10-1 Interface signals (CN1)

| Pin No. | Symbol | I/O | Function |
|---------|--------|-----|-----------------------------|
| 1 | RxO0- | I | Negative differential input |
| 2 | RxO0+ | I | Positive differential input |
| 3 | RxO1- | I | Negative differential input |
| 4 | RxO1+ | I | Positive differential input |
| 5 | RxO2- | I | Negative differential input |
| 6 | RxO2+ | I | Positive differential input |
| 7 | GND | — | G round |
| 8 | RxOC- | I | Negative differential input |
| 9 | RxOC+ | I | Positive differential input |
| 10 | RxO3- | I | Negative differential input |
| 11 | RxO3+ | I | Positive differential input |
| 12 | RxE0- | I | Negative differential input |
| 13 | RxE0+ | I | Positive differential input |
| 14 | GND | — | G round |
| 15 | RxE1- | I | Negative differential input |
| 16 | RxE1+ | I | Positive differential input |
| 17 | GND | — | G round |
| 18 | RxE2- | I | Negative differential input |
| 19 | RxE2+ | I | Positive differential input |
| 20 | RxEC- | I | Negative differential input |
| 21 | RxEC+ | I | Positive differential input |
| 22 | RxE3- | I | Negative differential input |
| 23 | RxE3+ | I | Positive differential input |
| 24 | GND | — | G round |
| 25 | TST | — | Test pin *1 |
| 26 | PD | I | LVDS Core Power Down |
| 27 | TST | — | Test pin *1 |
| 28 | Vcc | — | +5V power supply |
| 29 | Vcc | — | +5V power supply |
| 30 | Vcc | — | +5V power supply |

Connector : FI-X30S-HF (Japan Aviation Electronics)
 User's connector : FI-X30M (FPC type) (Japan Aviation Electronics)
 FI-X30H (Wire type)
 FI-X30C (Coaxial cable type)

*1: Keep open. (Internal test use only.)

*2: When using a connector other than the recommended one, a defect in the initial stage or a problem concerning long term reliability may occur.

DOCUMENT CONTROL SECTION

DATE

| | | | | | | | | | |
|--------|------|--------|-------|-------|-------------|--------------------|--|----------------|-----------|
| | | | | | | TITLE | | FLC48SXC8V-05H | |
| | | | | | | DRAW. NO. | | CUST. | |
| | | | | | | Tech Bes LCD-00245 | | | |
| EDIT | DATE | DESIG. | CHECK | APPR. | DESCRIPTION | | FUJITSU DISPLAY TECHNOLOGIES CORPORATION | | Sheet 12/ |
| DESIG. | | | CHECK | | APPR. | | | | |

10-2 LVDS Data Assignment

Table 10-2 shows the LVDS Data Assignment.

Table 10-2 LVDS Data Assignment

| Input signal *1 | | Transmitter DS90CF383,C385 | | Interface connector | | | Receiver DS90CF386 THC63LVDF84 | | LCD Control input |
|-----------------|------|-------------------------------|------------|---------------------|------------|-------|--------------------------------------|---------|-------------------------|
| | | pin | INPUT | System side | LCD module | | pin | OUTPUT | |
| | | | | | pin | | | | |
| LVDS Odd | RO2 | 51 | TxIN0 | Tx OUT0+ | 2 | RxO0+ | 27 | RxOUT0 | RO2 |
| | RO3 | 52 | TxIN1 | | | | 29 | RxOUT1 | RO3 |
| | RO4 | 54 | TxIN2 | | | | 30 | RxOUT2 | RO4 |
| | RO5 | 55 | TxIN3 | | | | 32 | RxOUT3 | RO5 |
| | RO6 | 56 | TxIN4 | Tx OUT0- | 1 | RxO0- | 33 | RxOUT4 | RO6 |
| | RO7 | 3 | TxIN6 | | | | 35 | RxOUT6 | RO7 |
| | GO2 | 4 | TxIN7 | | | | 37 | RxOUT7 | GO2 |
| | GO3 | 6 | TxIN8 | | | | 38 | RxOUT8 | GO3 |
| | GO4 | 7 | TxIN9 | Tx OUT1+ | 4 | RxO1+ | 39 | RxOUT9 | GO4 |
| | GO5 | 11 | TxIN12 | | | | 43 | RxOUT12 | GO5 |
| | GO6 | 12 | TxIN13 | | | | 45 | RxOUT13 | GO6 |
| | GO7 | 14 | TxIN14 | | | | 46 | RxOUT14 | GO7 |
| | BO2 | 15 | TxIN15 | Tx OUT1- | 3 | RxO1- | 47 | RxOUT15 | BO2 |
| | BO3 | 19 | TxIN18 | | | | 51 | RxOUT18 | BO3 |
| | BO4 | 20 | TxIN19 | | | | 53 | RxOUT19 | BO4 |
| | BO5 | 22 | TxIN20 | | | | 54 | RxOUT20 | BO5 |
| | BO6 | 23 | TxIN21 | Tx OUT2+ | 6 | RxO2+ | 55 | RxOUT21 | BO6 |
| | BO7 | 24 | TxIN22 | | | | 1 | RxOUT22 | BO7 |
| | RSVD | 27 | TxIN24 | | | | 3 | RxOUT24 | Not use |
| | RSVD | 28 | TxIN25 | | | | 5 | RxOUT25 | Not use |
| ENAB | 30 | TxIN26 | Tx OUT2- | 5 | RxO2- | 6 | RxOUT26 | ENAB | |
| RO0 | 50 | TxIN27 | | | | 7 | RxOUT27 | RO0 | |
| RO1 | 2 | TxIN5 | | | | 34 | RxOUT5 | RO1 | |
| GO0 | 8 | TxIN10 | | | | 41 | RxOUT10 | GO0 | |
| GO1 | 10 | TxIN11 | Tx OUT3+ | 11 | RxO3+ | 42 | RxOUT11 | GO1 | |
| BO0 | 16 | TxIN16 | | | | 49 | RxOUT16 | BO0 | |
| BO1 | 18 | TxIN17 | | | | 50 | RxOUT17 | BO1 | |
| RSVD | 25 | TxIN23 | | | | 2 | RxOUT23 | Not use | |
| DCLK | 31 | TxCLK IN | TxCLK OUT+ | 9 | RxCLK IN+ | 26 | RxCLK OUT | DCLK | |
| | | | TxCLK OUT- | 8 | RxCLK IN- | | | | |
| LVDS Even | RE2 | 51 | TxIN0 | Tx OUT0+ | 13 | RxE0+ | 27 | RxOUT0 | RE2 |
| | RE3 | 52 | TxIN1 | | | | 29 | RxOUT1 | RE3 |
| | RE4 | 54 | TxIN2 | | | | 30 | RxOUT2 | RE4 |
| | RE5 | 55 | TxIN3 | | | | 32 | RxOUT3 | RE5 |
| | RE6 | 56 | TxIN4 | Tx OUT0- | 12 | RxE0- | 33 | RxOUT4 | RE6 |
| | RE7 | 3 | TxIN6 | | | | 35 | RxOUT6 | RE7 |
| | GE2 | 4 | TxIN7 | | | | 37 | RxOUT7 | GE2 |
| | GE3 | 6 | TxIN8 | | | | 38 | RxOUT8 | GE3 |
| | GE4 | 7 | TxIN9 | Tx OUT1+ | 16 | RxE1+ | 39 | RxOUT9 | GE4 |
| | GE5 | 11 | TxIN12 | | | | 43 | RxOUT12 | GE5 |
| | GE6 | 12 | TxIN13 | | | | 45 | RxOUT13 | GE6 |
| | GE7 | 14 | TxIN14 | | | | 46 | RxOUT14 | GE7 |
| | BE2 | 15 | TxIN15 | Tx OUT1- | 15 | RxE1- | 47 | RxOUT15 | BE2 |
| | BE3 | 19 | TxIN18 | | | | 51 | RxOUT18 | BE3 |
| | BE4 | 20 | TxIN19 | | | | 53 | RxOUT19 | BE4 |
| | BE5 | 22 | TxIN20 | | | | 54 | RxOUT20 | BE5 |
| | BE6 | 23 | TxIN21 | Tx OUT2+ | 19 | RxE2+ | 55 | RxOUT21 | BE6 |
| | BE7 | 24 | TxIN22 | | | | 1 | RxOUT22 | BE7 |
| | RSVD | 27 | TxIN24 | | | | 3 | RxOUT24 | Not use |
| | RSVD | 28 | TxIN25 | | | | 5 | RxOUT25 | Not use |
| RSVD | 30 | TxIN26 | Tx OUT2- | 18 | RxE2- | 6 | RxOUT26 | Not use | |
| RE0 | 50 | TxIN27 | | | | 7 | RxOUT27 | RE0 | |
| RE1 | 2 | TxIN5 | | | | 34 | RxOUT5 | RE1 | |
| GE0 | 8 | TxIN10 | | | | 41 | RxOUT10 | GE0 | |
| GE1 | 10 | TxIN11 | Tx OUT3+ | 23 | RxE3+ | 42 | RxOUT11 | GE1 | |
| BE0 | 16 | TxIN16 | | | | 49 | RxOUT16 | BE0 | |
| BE1 | 18 | TxIN17 | | | | 50 | RxOUT17 | BE1 | |
| RSVD | 25 | TxIN23 | | | | 2 | RxOUT23 | Not use | |
| DCLK | 31 | TxCLK IN | TxCLK OUT+ | 21 | RxCLK IN+ | 26 | RxCLK OUT | Not use | |
| | | | TxCLK OUT- | 20 | RxCLK IN- | | | | |

*1 ⚡RSVD (reserved) pin on a transmitter should be connected with Ground.

⚡Input odd or even data depending on the display position of the LCD module.

DOCUMENT CONTROL SECTION

DATE

| | | | | | | | |
|--------|------|--------|-------|-------|-------------|---------------------------------|--|
| | | | | | | TITLE FLC48SXC8V-05H | |
| | | | | | | DRAW. NO. Tech Bes LCD-00245 | |
| | | | | | | CUST. | |
| EDIT | DATE | DESIG. | CHECK | APPR. | DESCRIPTION | | FUJITSU DISPLAY TECHNOLOGIES CORPORATION |
| DESIG. | | | CHECK | | APPR. | | Sheet 13/ |

10-3 Color Data Assignment

Table 10-3 shows the Color Data Assignment.

Table 10-3 Color Data Assignment

| Color | | R Input data | | | | | | | | G Input data | | | | | | | | B Input data | | | | | | | | |
|-------------|----------|--------------|----|----|----|----|----|----|----|--------------|----|----|----|----|----|----|----|--------------|----|----|----|----|----|----|----|---|
| | Odd | R7 | R6 | R5 | R4 | R3 | R2 | R1 | R0 | G7 | G6 | G5 | G4 | G3 | G2 | G1 | G0 | B7 | B6 | B5 | B4 | B3 | B2 | B1 | B0 | |
| | Even | R7 | R6 | R5 | R4 | R3 | R2 | R1 | R0 | G7 | G6 | G5 | G4 | G3 | G2 | G1 | G0 | B7 | B6 | B5 | B4 | B3 | B2 | B1 | B0 | |
| Basic Color | Black | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | |
| | Blue | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | |
| | Green | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | |
| | Cyan | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | |
| | Red | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | |
| | Magenta | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | |
| | Yellow | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | |
| | White | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | |
| Red | Black | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | |
| | ↑ | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | ↑ | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | |
| | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | |
| | ↓ | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | |
| | Brighter | 253 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | ↓ | 254 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Red | 255 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | |
| Green | Black | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | |
| | ↑ | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | ↑ | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | |
| | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | |
| | ↓ | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | |
| | Brighter | 253 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | ↓ | 254 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Green | 255 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | |
| Blue | Black | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | |
| | ↑ | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 |
| | ↑ | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | |
| | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | |
| | ↓ | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | |
| | Brighter | 253 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 1 |
| | ↓ | 254 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 |
| Blue | 255 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | |

Note.1) Definition of gray scale:Color (n)...”n” indicates gray scale level.

Larger number means brighter level.

Note.2) Data; 1:High, 0:Low

Note 3) Color data consist of 8 bit red, green and blue data of odd and even number pixel data. Total data number is 48 signals. This module is able to display 16,777,216 colors because each red, green and blue data is controlled independently.

DOCUMENT CONTROL SECTION

DATE

| | | | | | | | | | | | |
|--------|------|--------|-------|-------|-------------|--------------------|--|----------------|-------|--|-----------|
| | | | | | | TITLE | | FLC48SXC8V-05H | | | |
| | | | | | | DRAW. NO. | | | CUST. | | |
| | | | | | | Tech Bes LCD-00245 | | | | | |
| EDIT | DATE | DESIG. | CHECK | APPR. | DESCRIPTION | | | | | FUJITSU DISPLAY TECHNOLOGIES CORPORATION | Sheet 14/ |
| DESIG. | | | CHECK | | | APPR. | | | | | |

10-4 Input Signal Timing

Table 10-4 and Figure 10-1 shows the Input Signal Timing at LVDS transmitter.

Table 10-4 Timing Characteristics

(Ta=0~50°C, Vcc=5±0.25V)

| Item | | Symbol | Min. | Typ. | Max. | Unit | Remark |
|---------------------------|---------------------|--------|-------------|------|---------|------|------------------|
| DCLK signal (Clock) | Period | Tc | 16.0 | 18.5 | 25.0 | ns | |
| | Frequency | 1/Tc | 40 | 54 | 62.5 | MHz | |
| | Duty | Tch/Tc | 45 | 50 | 55 | % | |
| | High time | TelkH | 5.0 | — | — | ns | |
| | Low time | TelkL | 5.0 | — | — | ns | |
| DCLK-Data Timing | Setup time | Tset | 2.5 | — | — | ns | LVDS Tr spec. |
| | Hold time | Thold | 0 | — | — | ns | |
| ENAB signal | Hor. Period (1) | Th | 5350/Tc+435 | 844 | 887 *1 | DCLK | Tc=ns *4 |
| | Hor. Period (2) | Th | 648 | — | 1023 | DCLK | *4 |
| | Hor. Display period | Thd | 640 | 640 | 640 | DCLK | *2 |
| | Vertical Period | Tv | 1028 *1 | 1066 | 1088 *1 | Th | 16.67ms |
| | Ver. Frequency | 1/Tv | 50 | 60 | 76.2 | Hz | |
| | Ver. Display period | Tvd | 1024 | 1024 | 1024 | Th | *2 |
| Data-ENAB timing | Tdn | — | 0 | — | DCLK | *3 | |

- *1) • horizontal display position is specified by the rise of ENAB.
The data latched at falling edge of DCLK after rise of ENAB is displayed at the left edge of the display area.
- Vertical display position is specified by the rise of ENAB after low level continuation over 2048 DCLK.
The data latched at the rise of ENAB is displayed at the top line of the display area.
- *2) • If the “High” level period of ENAB is less than 640 DCLK or the number of ENAB in a frame period (Tv) is less than 1024, black color is displayed at the rest of the display area.
- *3) • If ENAB does not synchronize with the effective display data, the display position does not fit to the display area.
- *4) • Hor. Period (2) shows the operating range where internal circuit can work correctly.
• When ENAB signal is out of Hor. Period (1), the display quality may deteriorate.


DOCUMENT CONTROL SECTION

DATE

| | | | | | | | |
|--------|------|--------|-------|-------|-------------|---------------------------------|--|
| | | | | | | TITLE FLC48SXC8V-05H | |
| | | | | | | DRAW. NO. Tech Bes LCD-00245 | |
| | | | | | | CUST. | |
| EDIT | DATE | DESIG. | CHECK | APPR. | DESCRIPTION | | FUJITSU DISPLAY TECHNOLOGIES CORPORATION |
| DESIG. | | | CHECK | | APPR. | | 15/ |


A

A

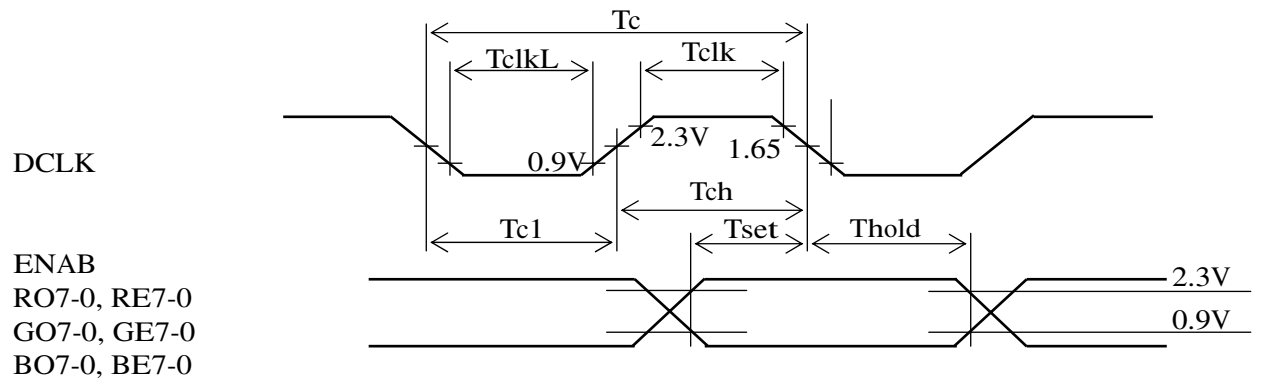


B

B

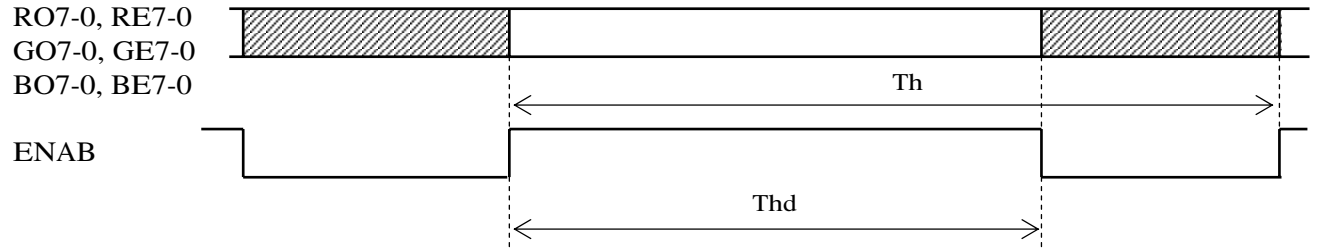

C

C

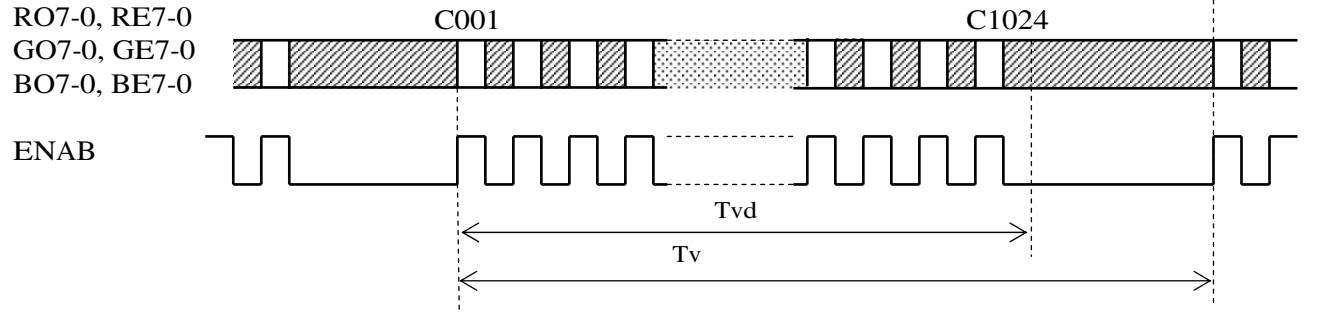

D

D

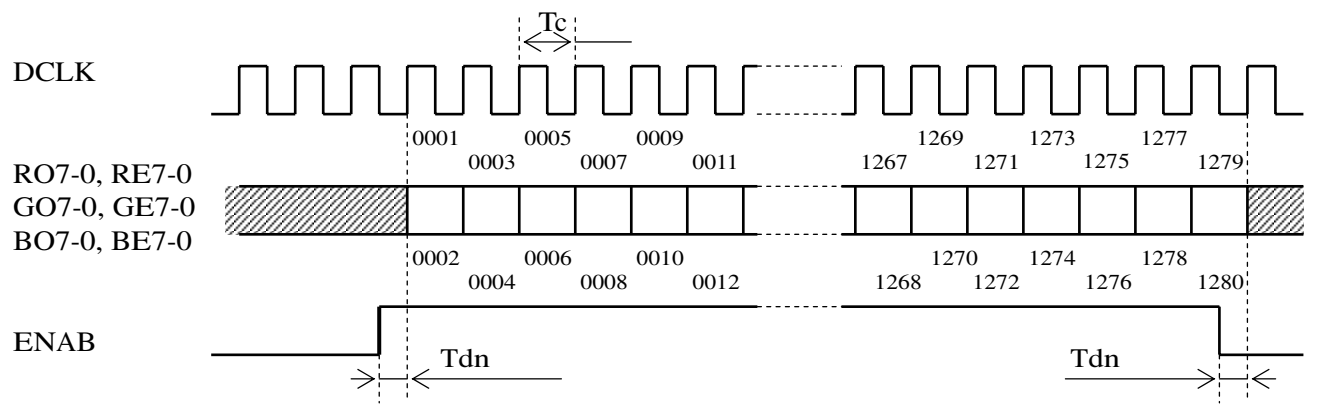


Figure 10-1 Input Signal Timing Chart

DOCUMENT CONTROL SECTION

DATE

E

F

| | | | | | | | |
|--------|------|--------|-------|-------|-------------|--|--|
| | | | | | | TITLE FLC48SXC8V-05H | |
| | | | | | | DRAW. NO. Tech Bes LCD-00245 | |
| | | | | | | CUST. | |
| EDIT | DATE | DESIG. | CHECK | APPR. | DESCRIPTION | | |
| DESIG. | | | CHECK | | APPR. | FUJITSU DISPLAY TECHNOLOGIES CORPORATION | |
| | | | | | | SHEET 16/ | |

10-4 Correspondence between Data and Display Position

Figure 10-2 shows the Correspondence between Data and Display Position.


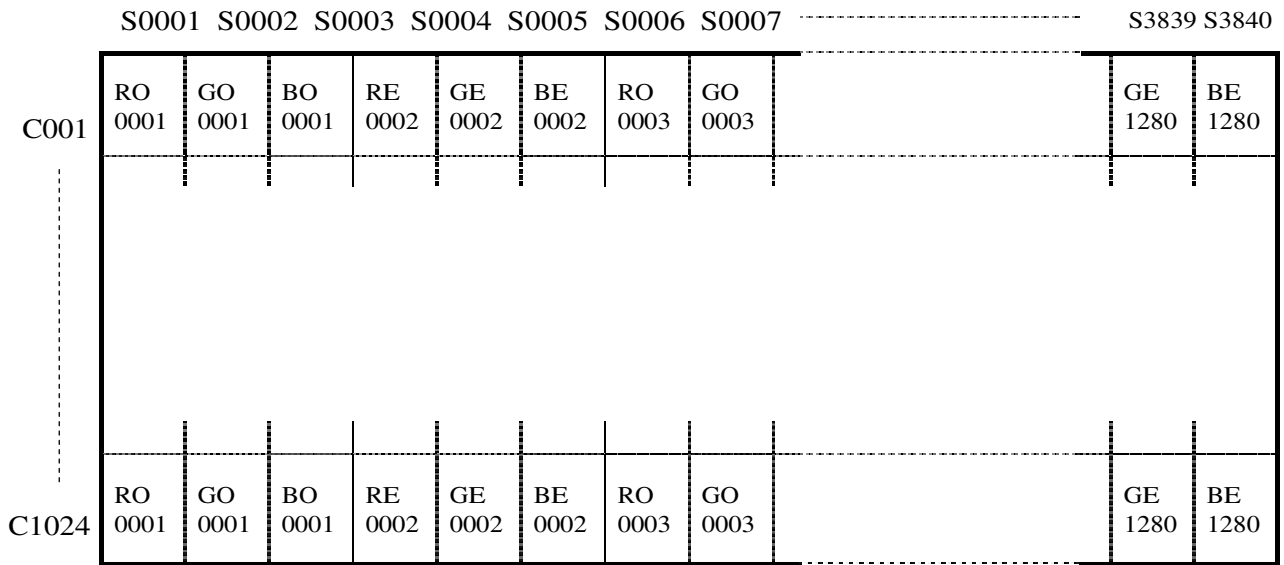


Figure 10-2 Correspondence Data and Display Position

10-5 Power Supply Sequence

The sequence of input signals and On/Off of the power supply of this LCD module should be in the specification shown in Figure 10-3 to prevent latch-up of the driver ICs and DC driving of the LCD panel.

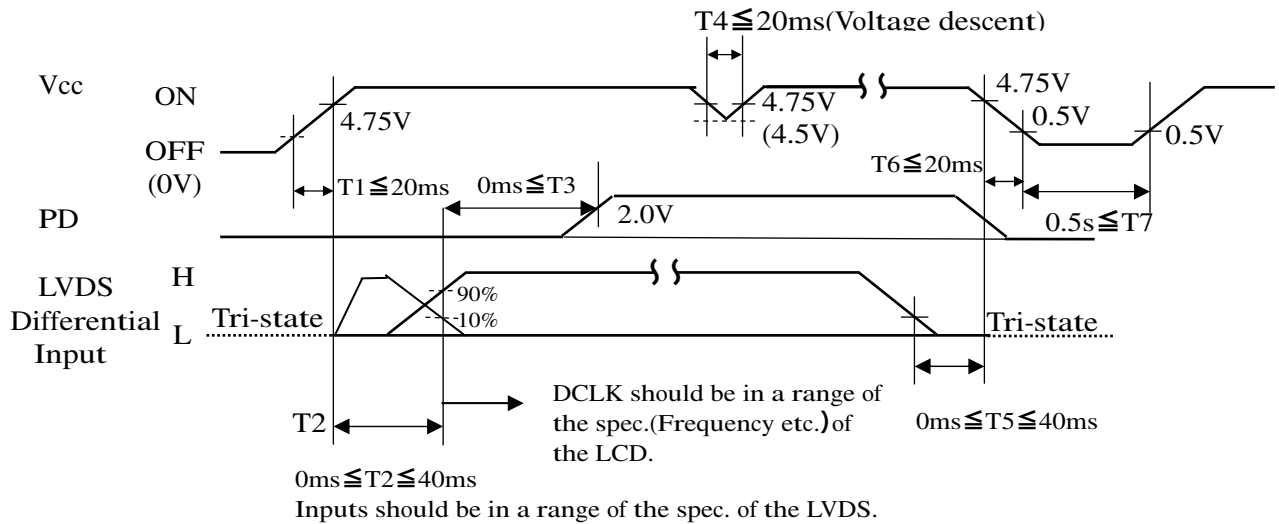

*Note : PD input can be set open, if it is not used.

Figure 10-3 Power Supply Sequence

DOCUMENT CONTROL SECTION

DATE

| | | | | | | | |
|--------|------|--------|-------|-------|--|---------------------------------|--|
| | | | | | | TITLE FLC48SXC8V-05H | |
| | | | | | | DRAW. NO. Tech Bes LCD-00245 | |
| | | | | | | CUST. | |
| EDIT | DATE | DESIG. | CHECK | APPR. | DESCRIPTION | | |
| DESIG. | | | CHECK | APPR. | FUJITSU DISPLAY TECHNOLOGIES CORPORATION | | |
| | | | | | | 17/ | |

11. BACK-LIGHT SPECIFICATIONS

A 11-1 Pin configuration for Back-light

Table 11-1 shows the description and Pin assignment of the connectors (CN-A to D) for the Back-light of this LCD module.

Table 11-1 Pin Assignment of CN-A to CN-D

| Pin No. | Signal | | | | | | Function | Cable color and FL tube position Front/Center/Rear |
|---------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|--------------|---|
| | CN-A | CN-B | CN-C | CN-D | CN-E | CN-F | | |
| 1 | V _{L1} | V _{L2} | V _{L3} | V _{L4} | V _{L5} | V _{L6} | Power supply | Pink/Red/Orange |
| 2 | — | — | — | — | — | — | — | — |
| 3 | GND | GND | GND | GND | GND | GND | Ground | Blue/White/Gray |

Connector : Housing : BHR-03VS-1
 Contact : SBH-001T-P0.5
 User's Connector : Post with base: SM02(8.0)B-BHS-1-TB
 Supplier : Japan Solderless Terminal Trading Company LTD. (J.S.T.)

C 11-2 Life

The life of the back-light is a minimum of 50,000 hours at the following conditions.

(1) Working conditions

- ①Ambient temperature : 25 ± 5°C
- ②Tube current (I_L) : (7mA or less)

(2) Definition of life

- ①Brightness becomes 50% or less than the minimum brightness value shown in Table 9-1.
- ②The lamp cannot be lit by the minimum value of the breakdown voltage(1760Vrms) shown in Table 8-1.
- ③Flashing.

D 11-3 Lamp assembly set (for replacement)

Lamp assembly set(with charge)is prepared for replacing old lamp to new one. This set consists of a upper lamp assembly and a lower lamp assembly.

Type number : FLCL-37
 Minimum order qty. unit : 20 pcs

DOCUMENT CONTROL SECTION

DATE

| | | | | | | | |
|--------|------|--------|-------|-------|-------------|--|--|
| | | | | | | TITLE FLC48SXC8V-05H | |
| | | | | | | DRAW. NO. Tech Bes LCD-00245 | |
| | | | | | | CUST. | |
| EDIT | DATE | DESIG. | CHECK | APPR. | DESCRIPTION | | |
| DESIG. | | | CHECK | | APPR. | FUJITSU DISPLAY TECHNOLOGIES CORPORATION | |
| | | | | | | 18/ | |

12. APPEARANCE SPECIFICATIONS

12-1 Appearance

| No. | Item | Judgment method and standard | | |
|-----|--|--|------------------|----------|
| 1 | Bright spot (high and Low) | ≤ 4 dots | | (Note 1) |
| 2 | Bright spot connection (high and low) | ≤ 2 pair (2 dot connection in horizontal only) | | (Note 1) |
| 3 | Total of bright spot | ≤ 4 dots | | |
| 4 | Dark spot | ≤ 8 dots | | (Note 2) |
| 5 | Dark spot connection | ≤ 3 pairs | | (Note 2) |
| 6 | Total of dark spot | ≤ 8 dots | | (Note 2) |
| 7 | Total of dot defect (bright and dark) | ≤ 8 dots | | |
| 8 | Distance of bright spot | high-high | ≥ 15 mm | |
| | | others | ≥ 5 mm | |
| 9 | Distance of dark spot | ≥ 5 mm | | |
| 10 | Scratch on polarizer, line shape | $W \leq 0.03$ | ----- | Ignore |
| | | $0.03 < W \leq 0.05$ | $L \leq 6$ | Ignore |
| | | | $6 < L \leq 12$ | ≤ 5 |
| | | $0.05 < W \leq 0.10$ | $12 < L$ | 0 |
| | | | $L \leq 0.6$ | Ignore |
| | | $0.10 < W$ | $0.6 < L$ | 0 |
| 11 | Dent on polarizer, dot shape | $D \leq 0.3$ | Ignore | |
| | | $0.3 < D \leq 0.4$ | ≤ 5 | |
| | | $0.4 < D$ | 0 | |
| 12 | Bubble in polarizer | $D \leq 0.3$ | Ignore | |
| | | $0.3 < D \leq 0.5$ | ≤ 5 | |
| | | $0.5 < D$ | 0 | |
| 13 | Black white spot (Foreign circular matter) | $D \leq 0.3$ | Ignore | |
| | | $D \leq 0.5$ | ≤ 5 | |
| | | $0.5 < D$ | 0 | |
| 14 | Light leakage by foreign articles | $D \leq 0.3$ | Ignore | |
| | | $0.3 < D \leq 0.6$ | ≤ 4 | |
| | | $0.6 < D$ | 0 | |
| 15 | Lints, black/white line | $W \leq 0.03$ | ----- | Ignore |
| | | $0.03 < W \leq 0.05$ | $L \leq 6$ | Ignore |
| | | | $6 < L \leq 12$ | ≤ 4 |
| | | $0.05 < W \leq 0.10$ | $12 < L$ | 0 |
| | | | $L \leq 0.6$ | Ignore |
| | | $0.10 < W$ | $0.6 < L \leq 5$ | ≤ 2 |
| | | $5 < L$ | 0 | |
| | | $(W+L)/2=D$ | Conform to No.13 | |
| 16 | Mura | Invisible under 6% ND filter from center of display. (Display pattern : Black, White, 50% gray) | | |

D:Average diameter [mm], W:Width [mm], L:Length [mm], S=(bright spot size)/(dot size)

DOCUMENT CONTROL SECTION

DATE

| | | | | | | |
|--------|------|--------|-------|-------|---|-----|
| | | | | | TITLE FLC48SXC8V-05H | |
| | | | | | DRAW. NO. Tech Bes LCD-00245 | |
| | | | | | CUST. | |
| EDIT | DATE | DESIG. | CHECK | APPR. | DESCRIPTION FUJITSU DISPLAY TECHNOLOGIES CORPORATION | |
| DESIG. | | | CHECK | | APPR. | 19/ |

12-2 Dot defects (Bright spots, Dark spots)

A

12-2-1 Zone

- Inside display dot area (376.32×301.056mm)
- Display dot area means active area.
- One pixel consists of 3 dots (red, green and blue).
- Foreign particle and scratch unharmed to display image, such as the foreign particle under polarizer film but outside of the display area and scratch on metal bezel, backlight module or polarizer film out of the display area, etc., are not counted.

A

B

12-2-2 Bright spots

- (1) Bright spots by the defect of TFT.
 - Visible under bias of 2% ND filterHigh bright spot R•G
 - Visible under 5% but invisible under 2% ND filterLow bright spot R•G•B
 - Invisible under bias of 5% ND filter.....Not counted
- (2) Bright spots by the light passing through tears, breaks, etc in color filter.
 - Exceed size of a half dot.....High bright spot
 - A half dot or lessNot counted
- (3) Bright spots by the light passing through tears, breaks, etc in chromium mask.
 - Exceed 50µmHigh bright spot
 - 50µm or lessNot counted

B

C

12-2-3 Test condition

- Inspector must observe the LCD screen from the normal direction under the illumination by a single 20W fluorescent lamp. The distance between the LCD screen and the inspector should be a height of 50cm above the worktable. The vertical illuminance is 300 to 600lux (reference value).
- Bright spot should be counted under entire black screen.
- Dark spot should be counted under entire white screen.
- Input signal timing should be typical value.

C

D

(Note1) Please do not mistake a single bright spot for a bright spot connection due to Cs(supplemental capacitance) line at the center of each dot.

(Note2) If a pixel is dark partially, it connects into the number of dark spots in accordance with following rule.

- (a) $A < 1/3$: Not count. Only one of 4 dark connection is allowed.
 - (b) $1/3 \leq A < 2/3$: Considered as 0.5 dot.
 - (c) $2/3 \leq A$: Considered as 1 dot.
- (A=Dark spot size/dot size)

D

E

DOCUMENT CONTROL SECTION

DATE

| | | | | | | | |
|--------|------|--------|-------|-------|--|---------------------------------|--|
| | | | | | | TITLE FLC48SXC8V-05H | |
| | | | | | | DRAW. NO. Tech Bes LCD-00245 | |
| | | | | | | CUST. | |
| EDIT | DATE | DESIG. | CHECK | APPR. | DESCRIPTION | | |
| DESIG. | | | CHECK | | FUJITSU DISPLAY TECHNOLOGIES CORPORATION | | |
| | | | | | | 20/ | |

F

13. ENVIRONMENTAL SPECIFICATIONS

Table 13-1 show the environmental specifications.

Table 13-1 Environmental specifications

| Item | Condition | | Remark |
|-------------|---------------|---|---|
| Temperature | Operation | 0~50°C | Temperature on surface of LCD panel (display area.) |
| | Storage | -20~60°C | |
| Humidity | Operation | 20~85%RH | Maximum wet-bulb temperature should not exceed 29°C. No condensation. |
| | Storage | 5~85%RH | |
| Vibration | Non-operation | 10~500Hz, 1octave/ 20minute, 19.6m/s ² (2G), 1.5mm max, 1hour each X, Yand Z directions. | For single module without package. |
| Shock | Non-operation | 294m/s ² (30G), 6ms, 1time each ±X, ±Y and ±Z directions. | |

NOTE : Table 13-2 and Figure 13-1 show the shock resistance standard when module is packaged.

Table 13-2 Shock resistance standard when module is packaged

| Dropping location | Dropping height | Count |
|-------------------|-----------------|--------|
| A~J | 60cm | 1 time |

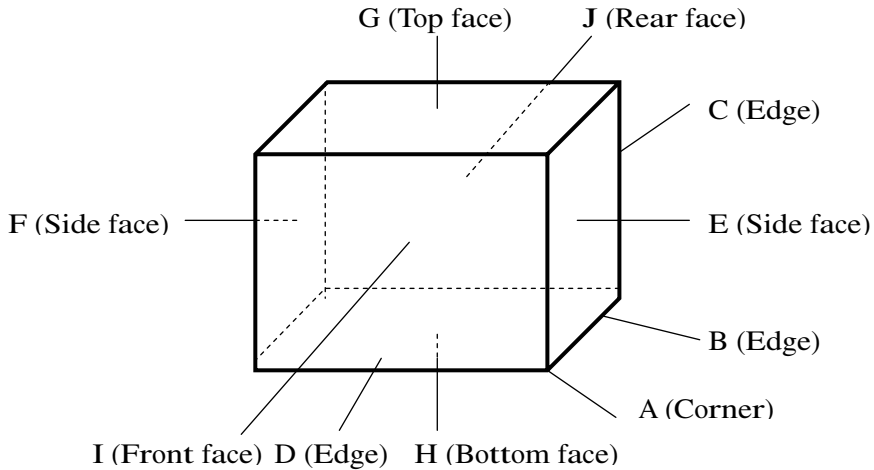


Figure 13-1 Direction to apply shock to package


DOCUMENT CONTROL SECTION

| | | | | | | | |
|--------|------|--------|-------|-------|--|---------------------------------|--|
| | | | | | | TITLE FLC48SXC8V-05H | |
| | | | | | | DRAW. NO. Tech Bes LCD-00245 | |
| | | | | | | CUST. | |
| EDIT | DATE | DESIG. | CHECK | APPR. | DESCRIPTION | | |
| DESIG. | | | CHECK | | FUJITSU DISPLAY TECHNOLOGIES CORPORATION | | |
| | | | | | | 21/ | |

14. INDICATIONS

This module has the following indications.

- (1) Product name : LCD unit
- (2) Model Number : FLC48SXC8V-05H
- (3) Product Drawing Number : NA19020-C975
- (4) Manufacturing Number : 3 Z 0 0 0 0 1

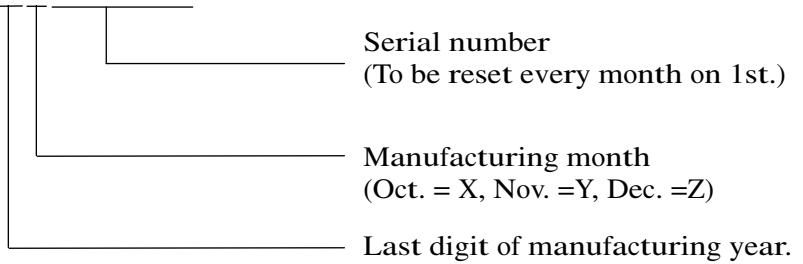

- (5) Version number : 01A (Example)
 - 1st 2 digits "01" means operational version.
 - 3rd alphabet means functional version.
- (6) Manufacturer Country Name : MADE IN JAPAN

- (7) Company Name : FUJITSU DISPLAY TECHNOLOGIES CORP.
- (8) Disposal method of cold-cathode tubes. (See Figure 14-2)
- (9) Caution when changing cold-cathode tubes. (See Figure 14-3)

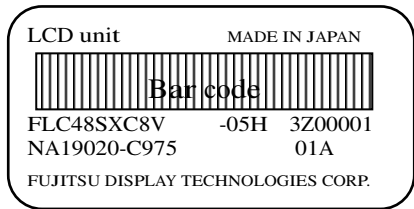


Figure 14-1 Product Label (Example)



Figure 14-2

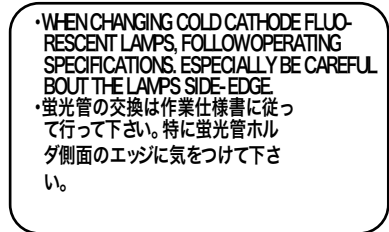


Figure 14-3

15. PACKAGING

15-1 Packing specifications

- (1) 5 LCD modules/1package.
- (2) Weight: approximately 16kg/1package.
- (3) Outline dimensions: 534mm (W)x329mm (D)x 480mm (H)

15-2 Packing method

Figure 15-2 show the packing method.

DOCUMENT CONTROL SECTION

| | | | | | | | |
|------|------|--------|-------|-------|--|---------------------------------|--|
| | | | | | | TITLE FLC48SXC8V-05H | |
| | | | | | | DRAW. NO. Tech Bes LCD-00245 | |
| | | | | | | CUST. | |
| EDIT | DATE | DESIG. | CHECK | APPR. | DESCRIPTION | | |
| | | | | | FUJITSU DISPLAY TECHNOLOGIES CORPORATION | | |
| | | | | | | 22/ | |

1


2

3

4


A

A

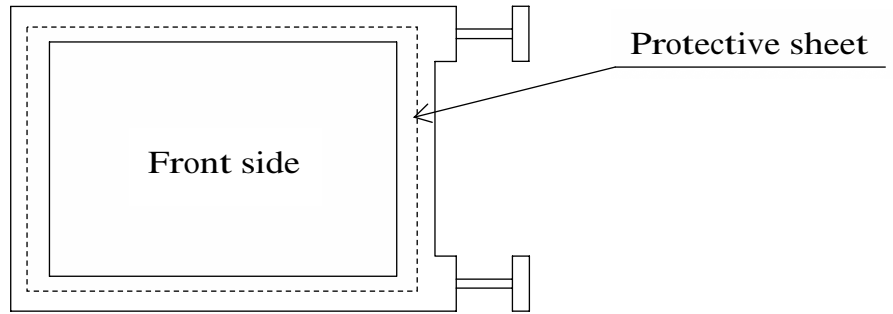

B

B

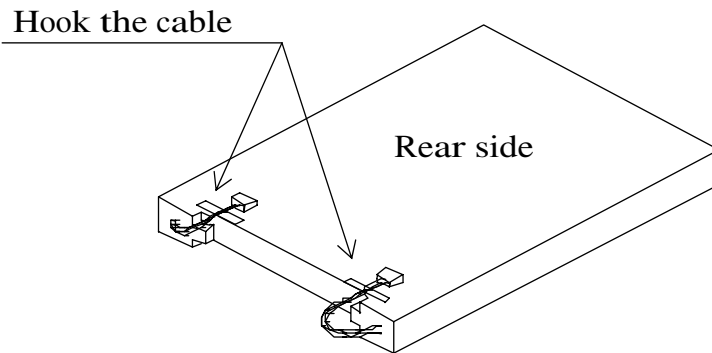


C

C



D

D

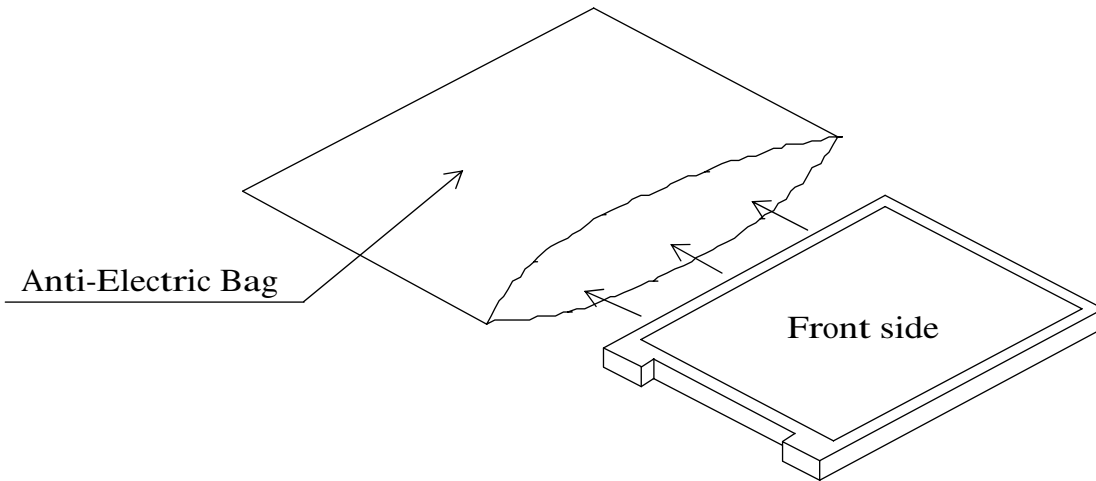

E


Fig.15-2 (a) Packaging Method

| | |
|--------------------------|--|
| DOCUMENT CONTROL SECTION | |
| DATE | |

| | | | | | | | | |
|------|--------|--------|-------|-------|--|-------------|--|--|
| | | | | | | TITLE | FLC48SXC8V-05H | |
| | | | | | | DRAW. NO. | Tech Bes LCD-00245 | |
| | | | | | | | CUST. | |
| EDIT | DATE | DESIG. | CHECK | APPR. | | DESCRIPTION | FUJITSU DISPLAY TECHNOLOGIES CORPORATION | |
| | DESIG. | | | CHECK | | APPR. | 23/ | |

F

1

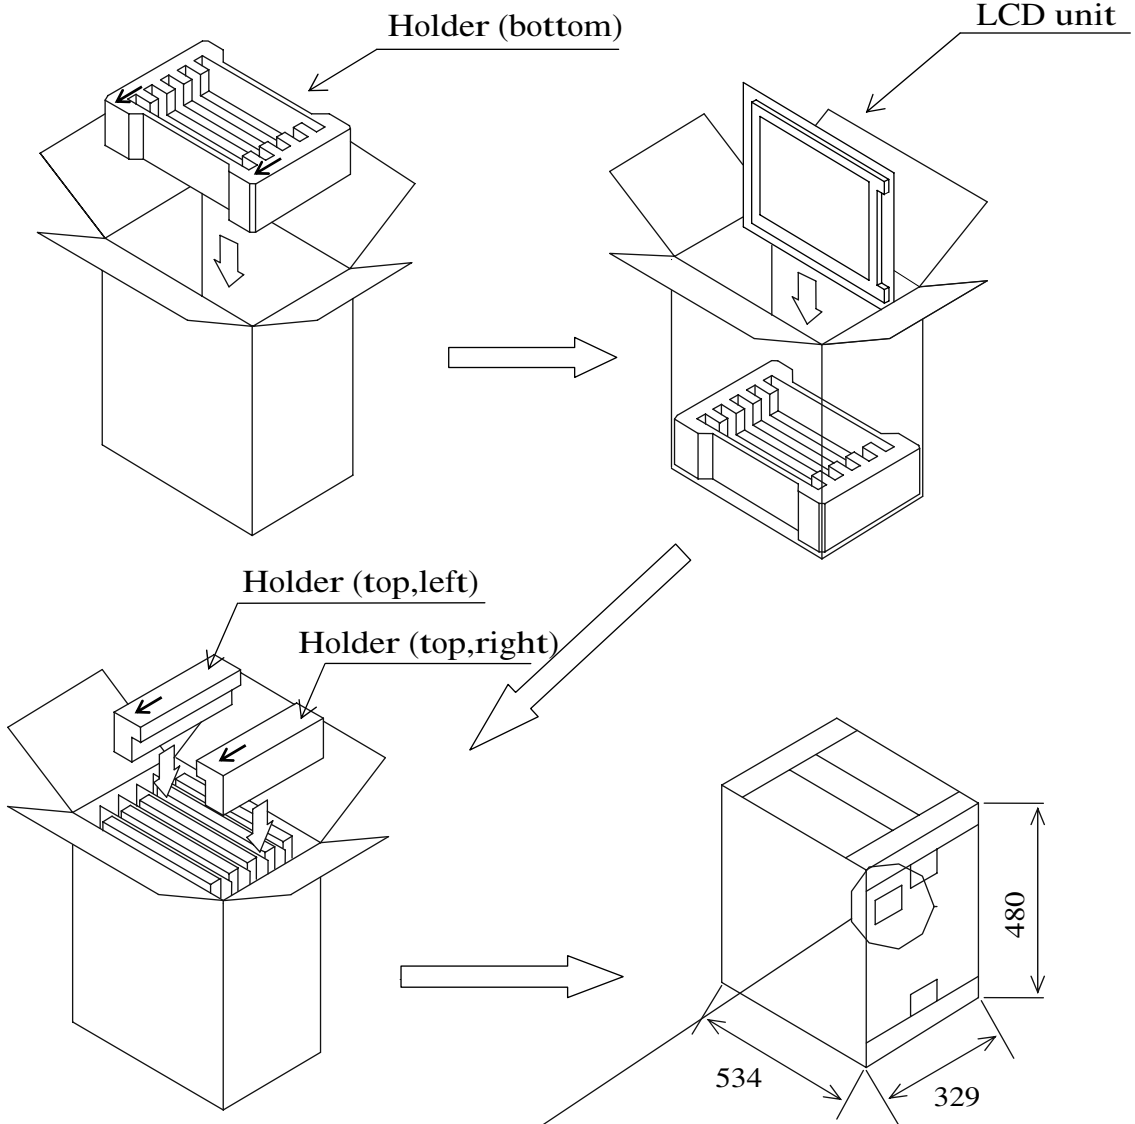

Label (example)

| | | | | |
|----------------|--------------|------|---------------|-----|
| 规格 (TYPE) | FLC48SXC8V | -05H | 数量 (QTY.) | 5 |
| 图番 (DRWG. NO.) | NA19020-C975 | | 版数 (REV. NO.) | 01A |
| Bar code | 3Z00001 | | Bar code | |
| | 3Z00002 | | | |
| | 3Z00003 | | | |
| | 3Z00004 | | | |
| | 3Z00005 | | | |
| Bar code | | | | |
| MADE IN JAPAN | | | | |

- Taping
Top : H or I method
Bottom : H method
- Top and bottom holders should be anti-electrostatic type.

Fig.15-2 (b) Packaging Method

| |
|--------------------------|
| DOCUMENT CONTROL SECTION |
| DATE |

| | | | | | | | | | |
|--------|------|--------|-------|-------|--|-----------|--|--------------------|------|
| | | | | | | TITLE | | FLC48SXC8V-05H | |
| | | | | | | DRAW. NO. | | Tech Bes LCD-00245 | |
| | | | | | | CUST. | | | |
| EDIT | DATE | DESIG. | CHECK | APPR. | DESCRIPTION | | | | |
| DESIG. | | | CHECK | | FUJITSU DISPLAY TECHNOLOGIES CORPORATION | | | | |
| | | | | | | | | SHEET | 24 / |

1 2 3 4

A

B

C

D

A


B

C

D

E

F

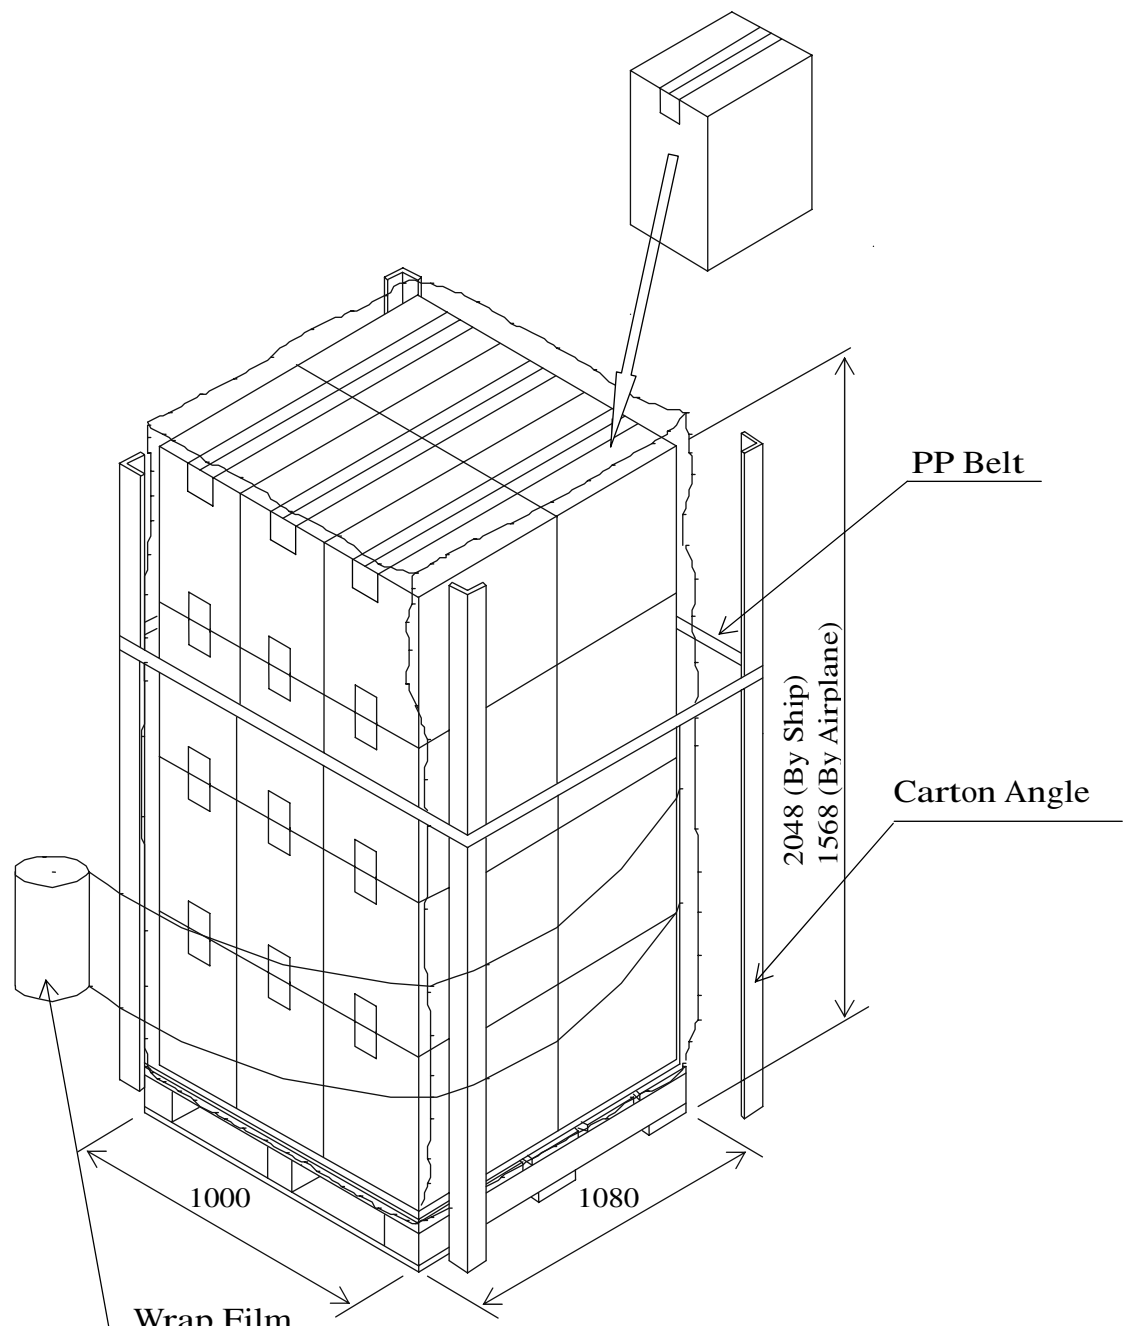

Wrap Film
 Up and Down : 3 times wrap
 Middle : 2 times wrap

Note:1) 6 boxes × 4 layers (maximum 24 boxes) : by ship
 6 boxes × 3 layers (maximum 18 boxes) : by airplane
 Note:2) This drawing shows marine transportation specification.

Fig.15-2 (c) Packaging Method

| |
|--------------------------|
| DOCUMENT CONTROL SECTION |
| |
| DATE |

| | | | | | | | | | |
|--------|------|--------|-------|-------|--|--------------------|--|--|------------|
| | | | | | | TITLE | | FLC48SXC8V-05H | |
| | | | | | | DRAW. NO. | | | CUST. |
| | | | | | | Tech Bes LCD-00245 | | | |
| EDIT | DATE | DESIG. | CHECK | APPR. | | DESCRIPTION | | FUJITSU DISPLAY TECHNOLOGIES CORPORATION | SHEETS 25/ |
| DESIG. | | | CHECK | | | APPR. | | | |

16.WARRANTY

A

The warranty period is one year after shipping. Products which fail during this period are repaired or replaced without charge, unless the failure is caused by user.

A

17.PRECAUTIONS

Adhere to the following precautions to use this LCD module properly.

(1) Fail safe design

B

LCD module has an inherent chance of failure. Customers must protect against injury, damage or loss from such failures by incorporating safety design measures into your facility and equipment such as redundancy, fire protection, and prevention of over-current levels and other abnormal operating conditions.

B

(2) Handling of LCD panel

① Do not apply any strong mechanical shock to the LCD panel.

Since the LCD panel is made of glass, excessive shock may damage the panel or cause a malfunction.

② Do not press hard on the LCD panel surface. (Max: 2kg/cm²)

C

In the LCD panel, the gap between two glass plates is kept perfectly even to maintain display properties and reliability. The hard pressure on the LCD panel may cause the following problems. If the pressure is over 2kg/cm², the problem don't return to normal condition.

C

- ① Ununiformity of color
- ② Disorder of orientation of liquid crystal

Problem ① returns to normal condition after a while. Problem ② returns to normal condition by turning the power off and turning on again. However these operations should be avoided to insure reliability.

D

③ Do not scratch the polarizer film on the LCD panel surface.

- Do not press or rub the display surface with a hard tool, tweezers, etc.
- For handling, use cotton or conductive gloves so that the display surface is not soiled.
- If dust or dirt soils the display surface, clean it as follows with a soft cloth (deerskin, etc.)

D

[Dust] Wipe off with a soft cloth. (do not rub.)

[Dirt] Apply clear water to a soft cloth and squeeze hard out of water drops, then lightly wipe off the specified parts. Only if the dirt is hardly wiped off, use isopropyl alcohol or ethanol.

Be careful not to splash the water or the solvents on the edge of polarizer and in the LCD unit.

The polarizer possibly exfoliates due to the solvent and water penetrated between the polarizer and the LCD panel.

Do not use unspecified solvent such as ketone (acetone, etc.) and aromatics (xylene, toluene, etc.)

E

DOCUMENT CONTROL SECTION

DATE

| | | | | | | | |
|--------|------|--------|-------|-------|--|---------------------------------|--|
| | | | | | | TITLE FLC48SXC8V-05H | |
| | | | | | | DRAW. NO. Tech Bes LCD-00245 | |
| | | | | | | CUST. | |
| EDIT | DATE | DESIG. | CHECK | APPR. | DESCRIPTION | | |
| DESIG. | | | CHECK | | FUJITSU DISPLAY TECHNOLOGIES CORPORATION | | |
| | | | | | | SHEET 27/ | |

F

(Caution) Be careful not to allow the water or solvent to enter the module.

•If saliva or water drops are left for a long period of time, the part may become deformed or discolored.

Wipe off immediately in the same way as for dirt.

•Do not allow oil to adhere to the module since excessive oil is hard to clean.

④ Do not place or contact objects on the display surface for a long period of time.

This may make some parts of the LCD module distorted and the quality of display may deteriorate.

(3) Handling of LCD module

① Do not pull the cold-cathode tube cable strongly.

If the cable is pulled with the strength of 2kg or more, the cable may be damaged or may lose reliability.

② Assemble the module into user's system in a dust free environment.

Conductive foreign matter adheres to the module may cause failures.

③ Take anti-electrostatic measures for assembling the module.

Since the LCD module contains CMOS-ICs, the following points should be observed.

•For assembling the module, operator should be grounded and wear cotton or conductive gloves.

•Floor of work area and work table to assemble the LCD module should be covered with electrostatic shielding in order to discharge static electricity via an earth wire.

•If necessary, ground operation tools (soldering iron, radio pliers, tweezers, etc.).

•Do not take the module out of the conductive bag until the module is assembled.

•Do not assemble the module under low humidity (50%RH or less).

④ Do not pull the connecting cable on the rear face of the LCD module strongly.

⑤ Do not disassemble or remodel the LCD module.

Disassembly or remodeling of the LCD module may result in malfunctions or deterioration of the display quality and reliability.

(4) Precautions in regards of operating the LCD module

① Adhere to the specified power supply sequence.

If not followed, the CMOS-IC may cause a latch-up, or DC voltage may be applied to the liquid crystal, which cause a failure or serious deterioration in display quality.

② Do not operate the LCD module when condensation occurs.

If the LCD module is operated when condensation is on the terminals of the LCD panel, the terminals cause electrochemical reaction, and may reach disconnection. Condensation easily occurs especially when the module is moved from cold environment to warm environment.


| |
|--------------------------|
| DOCUMENT CONTROL SECTION |
| DATE |

| | | | | | | | |
|--------|------|--------|-------|-------|-------------|--|------|
| | | | | | | TITLE FLC48SXC8V-05H | |
| | | | | | | DRAW. NO. Tech Bes LCD-00245 | |
| | | | | | | CUST. | |
| EDIT | DATE | DESIG. | CHECK | APPR. | DESCRIPTION | | |
| DESIG. | | | CHECK | | APPR. | FUJITSU DISPLAY TECHNOLOGIES CORPORATION | |
| | | | | | | Sheet | 28 / |


(9) Return method of the LCD module requested for repair or analysis of the problem

- When returning the LCD modules, adhere to the following procedures not to damage the LCD panel or the backlight cables. (Fig. 17-1(a)~(b))
- When the LCD module is returned without following the specified packaging procedures, FDTC will not take responsibility for the damages caused by the failure of the packaging method.

(1) Attach protective sheet.

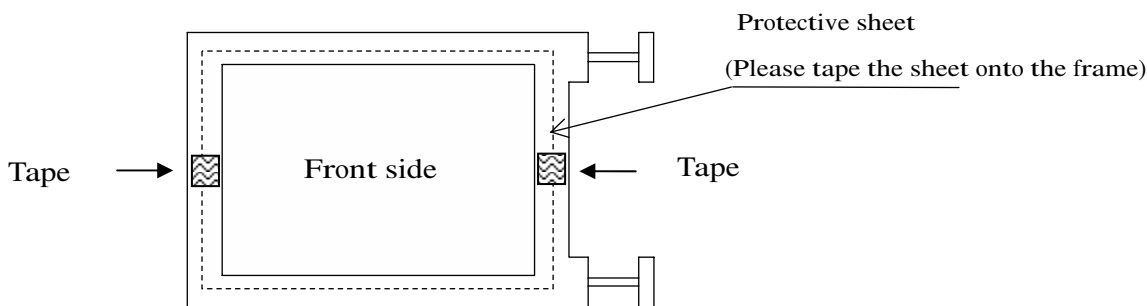

(2) Hook the backlight cables.

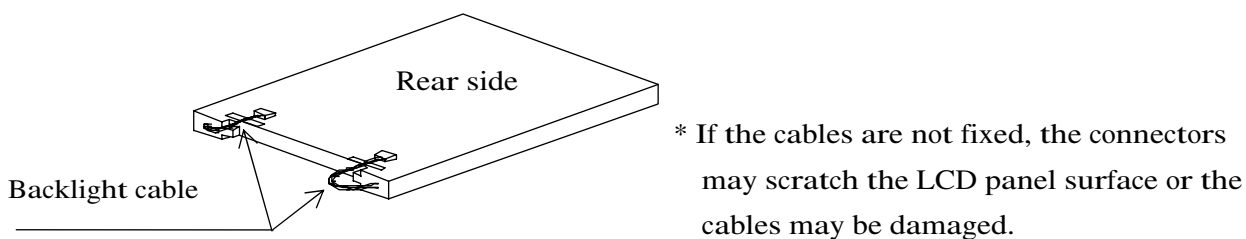

(3) Put the LCD module into the anti-electrostatic bag (Please do not use torn anti-electrostatic bags)

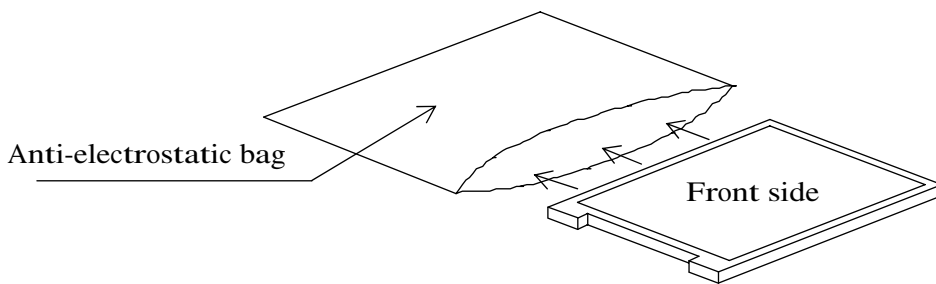


Fig. 17-1(a) Packaging method

| |
|--------------------------|
| DOCUMENT CONTROL SECTION |
| DATE |


| | | | | | | | |
|--------|------|--------|-------|-------|--|---------------------------------|--|
| | | | | | | TITLE FLC48SXC8V-05H | |
| | | | | | | DRAW. NO. Tech Bes LCD-00245 | |
| | | | | | | CUST. | |
| EDIT | DATE | DESIG. | CHECK | APPR. | DESCRIPTION | | |
| DESIG. | | | CHECK | | FUJITSU DISPLAY TECHNOLOGIES CORPORATION | | |
| | | | | | | SHEET 31 / | |

(4) Storage into the carton box

- When using the carton box manufactured by FDTC
(Please use carton boxes and arrowheads that are not collapsed)

A

A

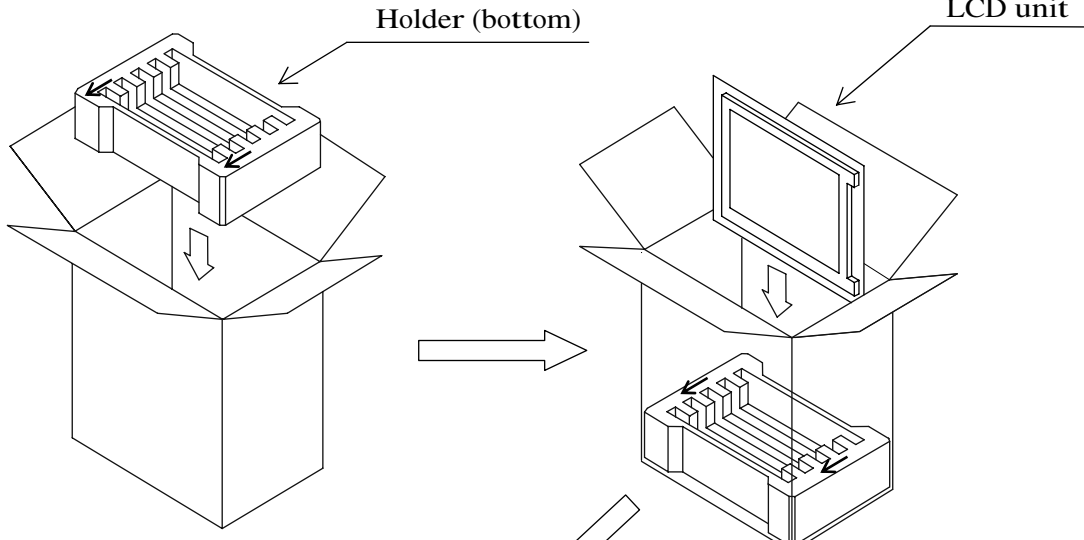


B

B

C

C

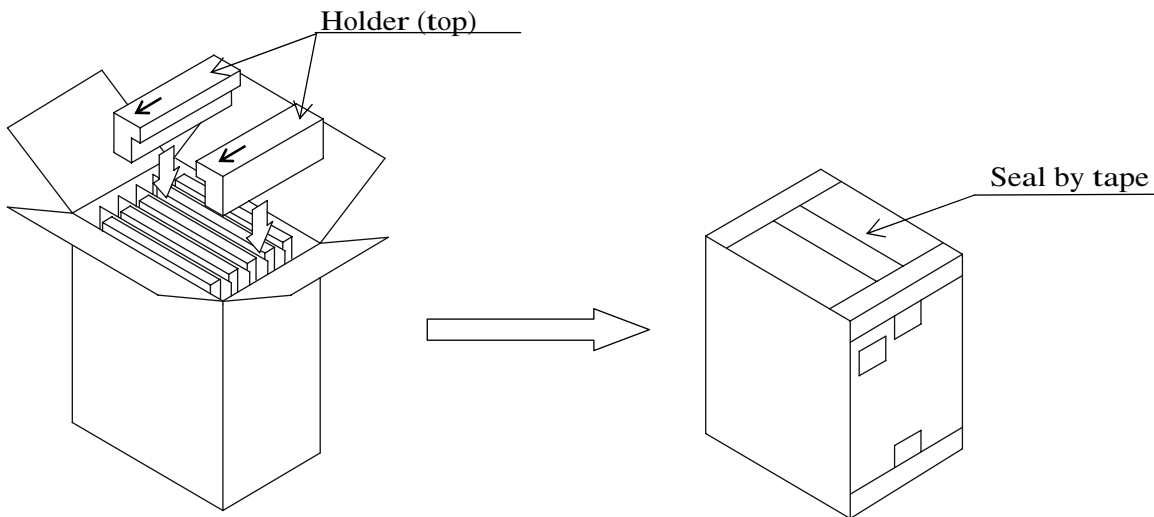

* The front side of LCD modules should face the direction of the arrowhead on holder (bottom).

* The direction of the arrowhead on holder (top) should face the front side of the LCD modules.

The arrowheads are shown on the holders.

Fig. 17-1(b) Packaging method

- When not using the carton box manufactured by FDTC
Please pack the LCD modules one by one and make sure not to damage the LCD modules when transporting.

DOCUMENT CONTROL SECTION

DATE

| | | | | | |
|--------|------|--------|-------|-------|-------------|
| EDIT | DATE | DESIG. | CHECK | APPR. | DESCRIPTION |
| DESIG. | | | CHECK | APPR. | |

| | | |
|--|--------------------|-------|
| TITLE | FLC48SXC8V-05H | |
| DRAW. NO. | Tech Bes LCD-00245 | CUST. |
| FUJITSU DISPLAY TECHNOLOGIES CORPORATION | | 32/ |

F

(10) Others

① **If the LCD panel is damaged, do not inhale and do not swallow the liquid crystal.**
 If the liquid crystal adhere to the body or cloths, wash it off with soap immediately.
 Follow regular precautions for electronic components.

② **Flux residue on the printed circuit board is harmless to the quality and reliability of LCD module.**
 Fujitsu has adopted non-wash technology on module assembly process.

18. PRECAUTIONS FOR USE

This Product is designed, developed and manufactured as contemplated for general use, including without limitation, general office use, personal use, household use, and ordinary industrial use, but is not designed, developed and manufactured as contemplated for use accompanying fatal risks or dangers that, unless extremely high safety is secured, could lead directly to death, personal injury, severe physical damage or other loss (hereinafter "High Safety Required Use"), including without limitation, nuclear reaction control in nuclear facility, aircraft flight control, air traffic control, mass transport control, medical life support system, missile launch control in weapon system. If customer's product possibly falls under the category of High Safety Required Use, please consult with our sales representatives in charge before such use. In addition, Fujitsu shall not be liable against the Customer and/or any third party for any claims or damages arising in connection with the High Safety Required Use of the Product without permission.

19. MISCELLANEOUS

Specifications of the TFT-LCD panel and other components used in the LCD module are subject to change. Both parties shall discuss together before change.
 If any doubt is raised in the content of the specifications, both parties shall discuss and make best effort for the agreement.

| |
|--------------------------|
| DOCUMENT CONTROL SECTION |
| DATE |

| | | | | | | | |
|--------|------|--------|-------|-------|--|---------------------------------|--|
| | | | | | | TITLE FLC48SXC8V-05H | |
| | | | | | | DRAW. NO. Tech Bes LCD-00245 | |
| | | | | | | CUST. | |
| EDIT | DATE | DESIG. | CHECK | APPR. | DESCRIPTION | | |
| DESIG. | | | CHECK | | FUJITSU DISPLAY TECHNOLOGIES CORPORATION | | |
| | | | | | | 33/ | |


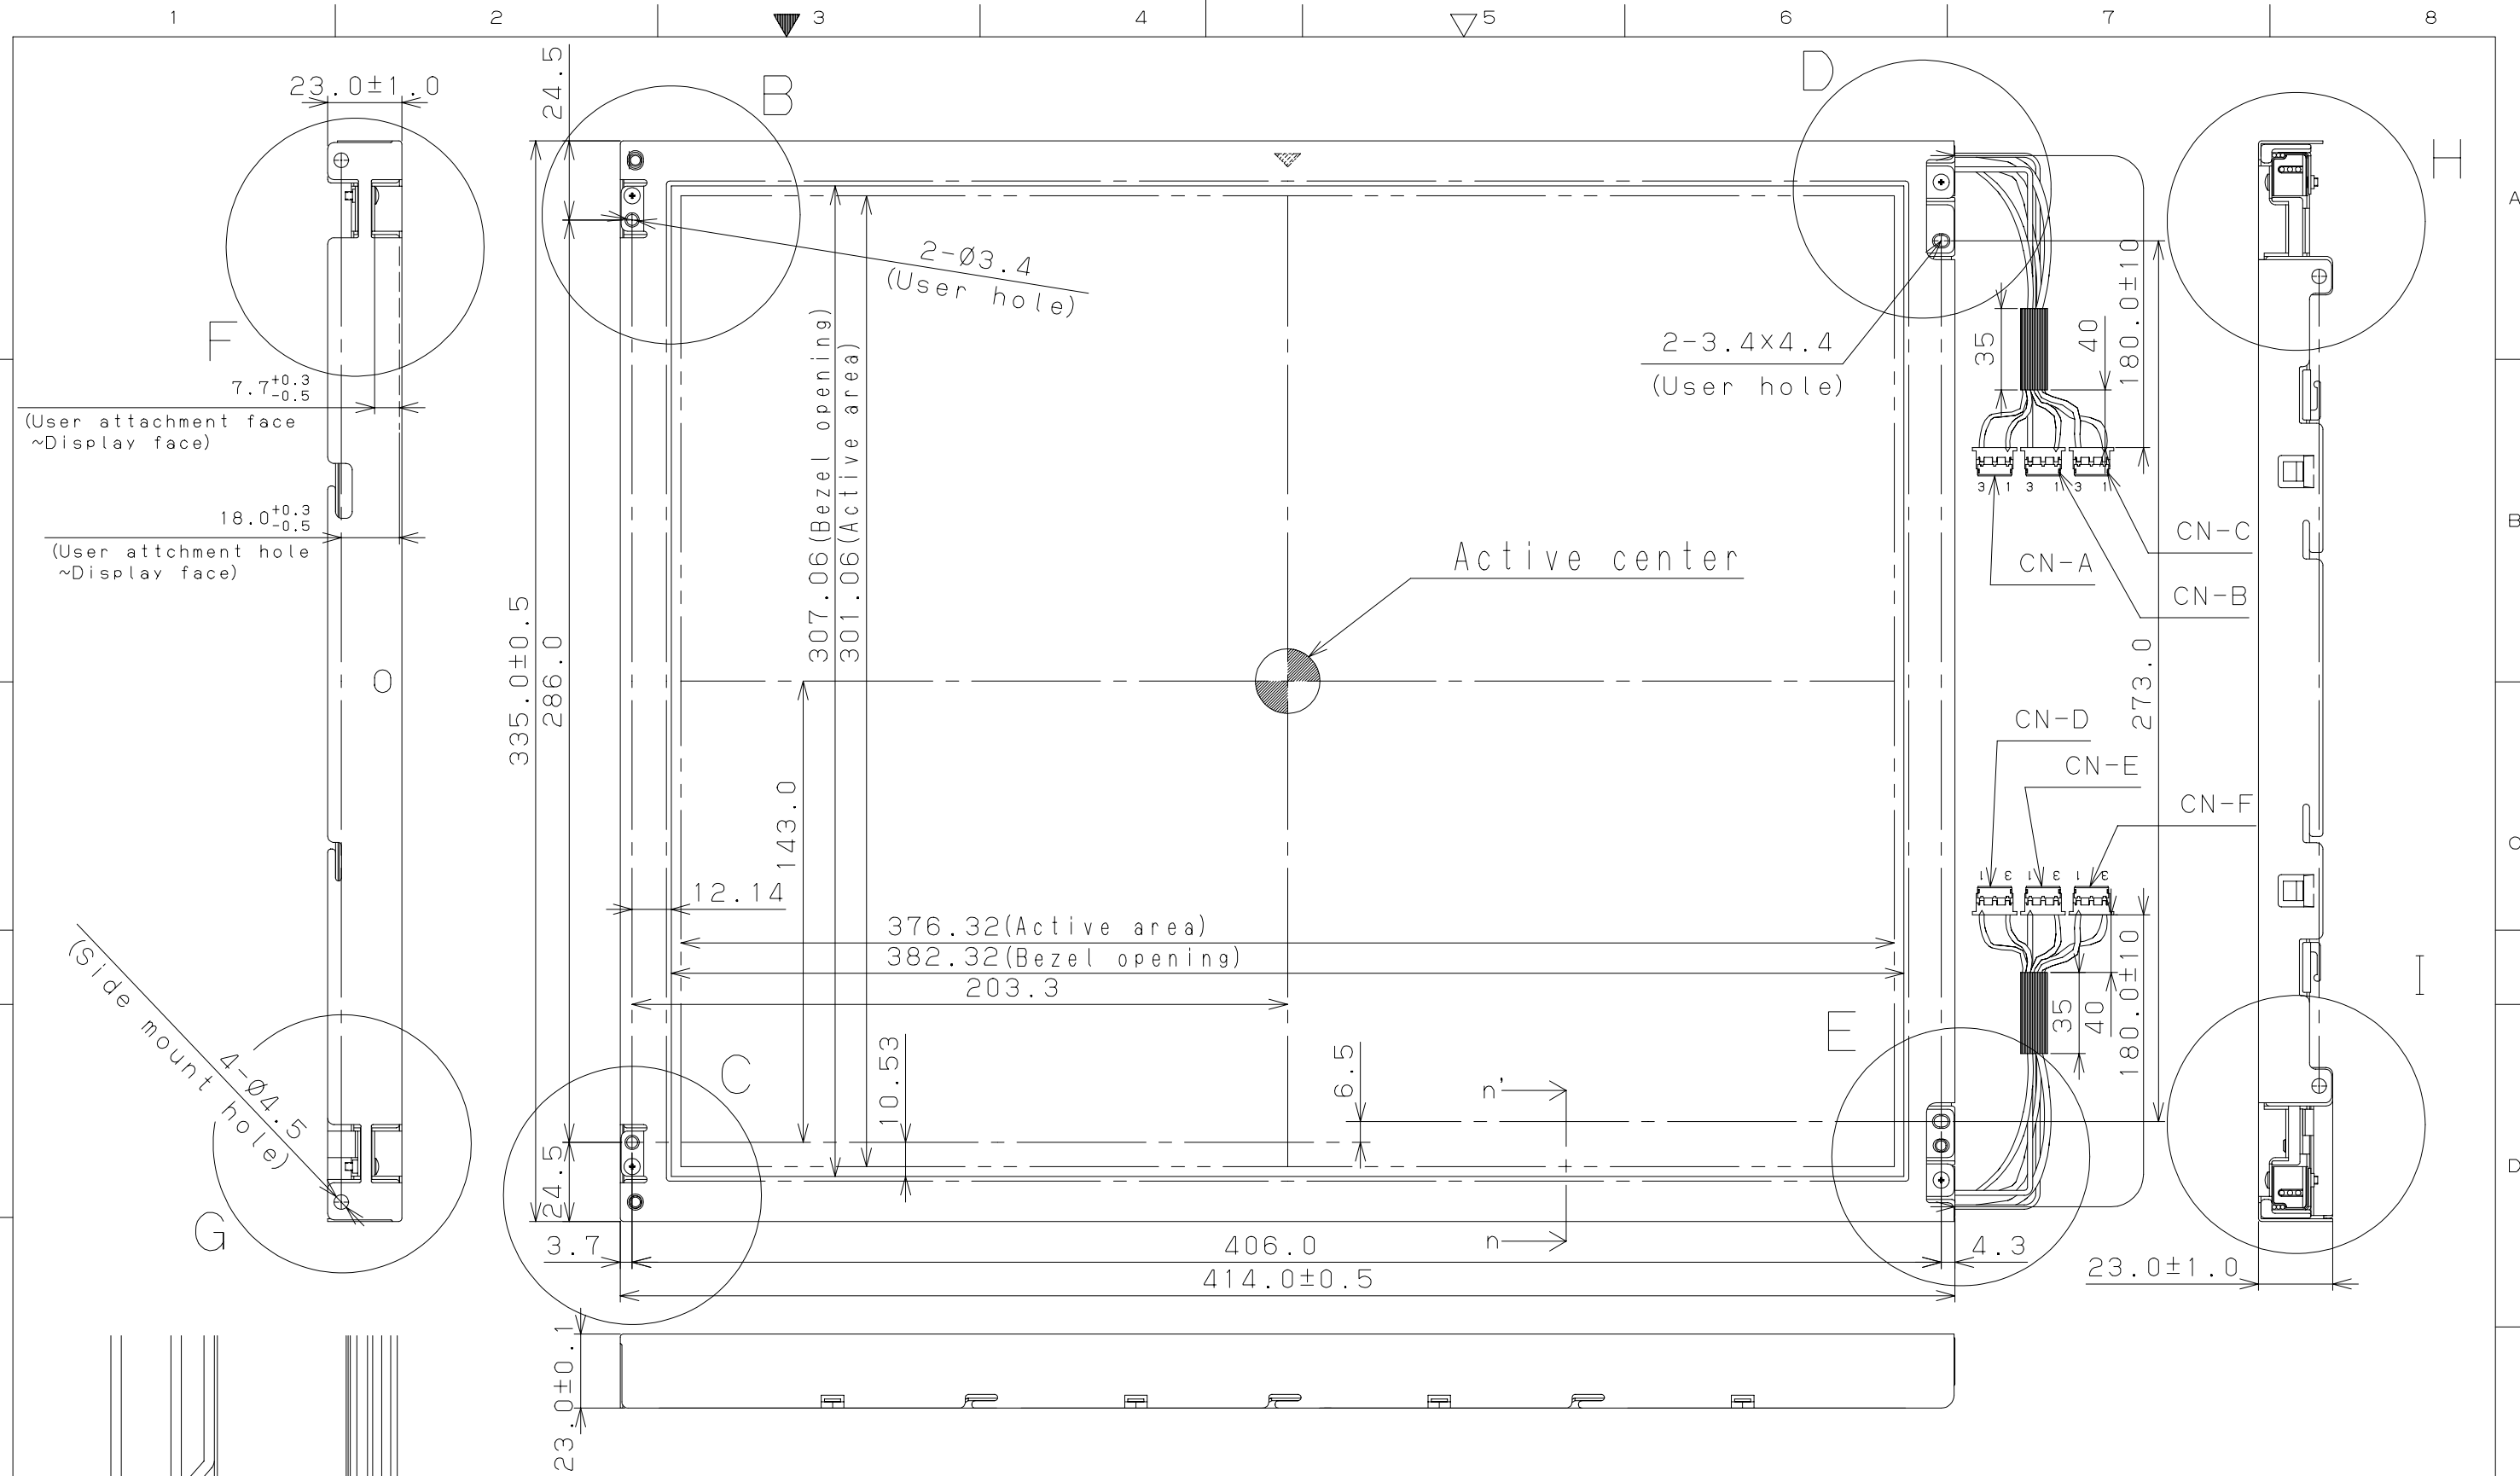


Figure 19-1 Unit outward form (front)

NOTE
1) Unspecified tolerance to be ±0.5

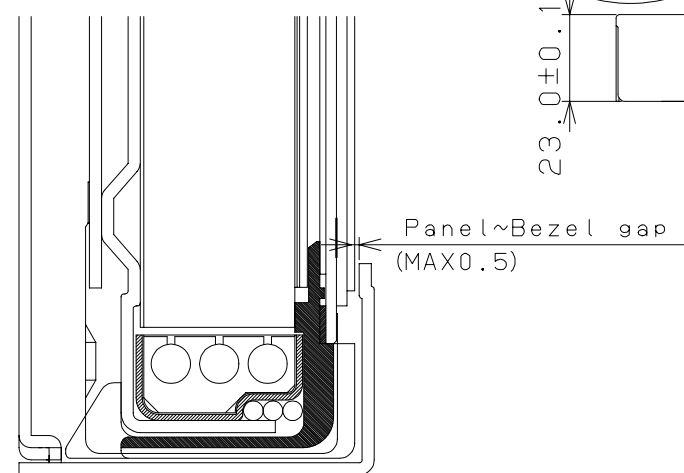

n-n' Cross section

DATE DOCUMENT CONTROL SECTION

| | | | | | | | |
|--------|------|--------|-------|-------------|--|--|--|
| | | | | | | TITLE FLC48SXC8V-05H | |
| | | | | | | DRAW. NO. Tech Bes LCD-0245 | |
| | | | | | | CUST. | |
| EDIT. | DATE | DESIG. | CHECK | DESCRIPTION | | FUJITSU DISPLAY TECHNOLOGIES CORPORATION | |
| DESIG. | | | CHECK | APPR. | | 34/ | |

1 2 3 4 5 6 7 8

A

B

C

D

A

B

C

D

E

F

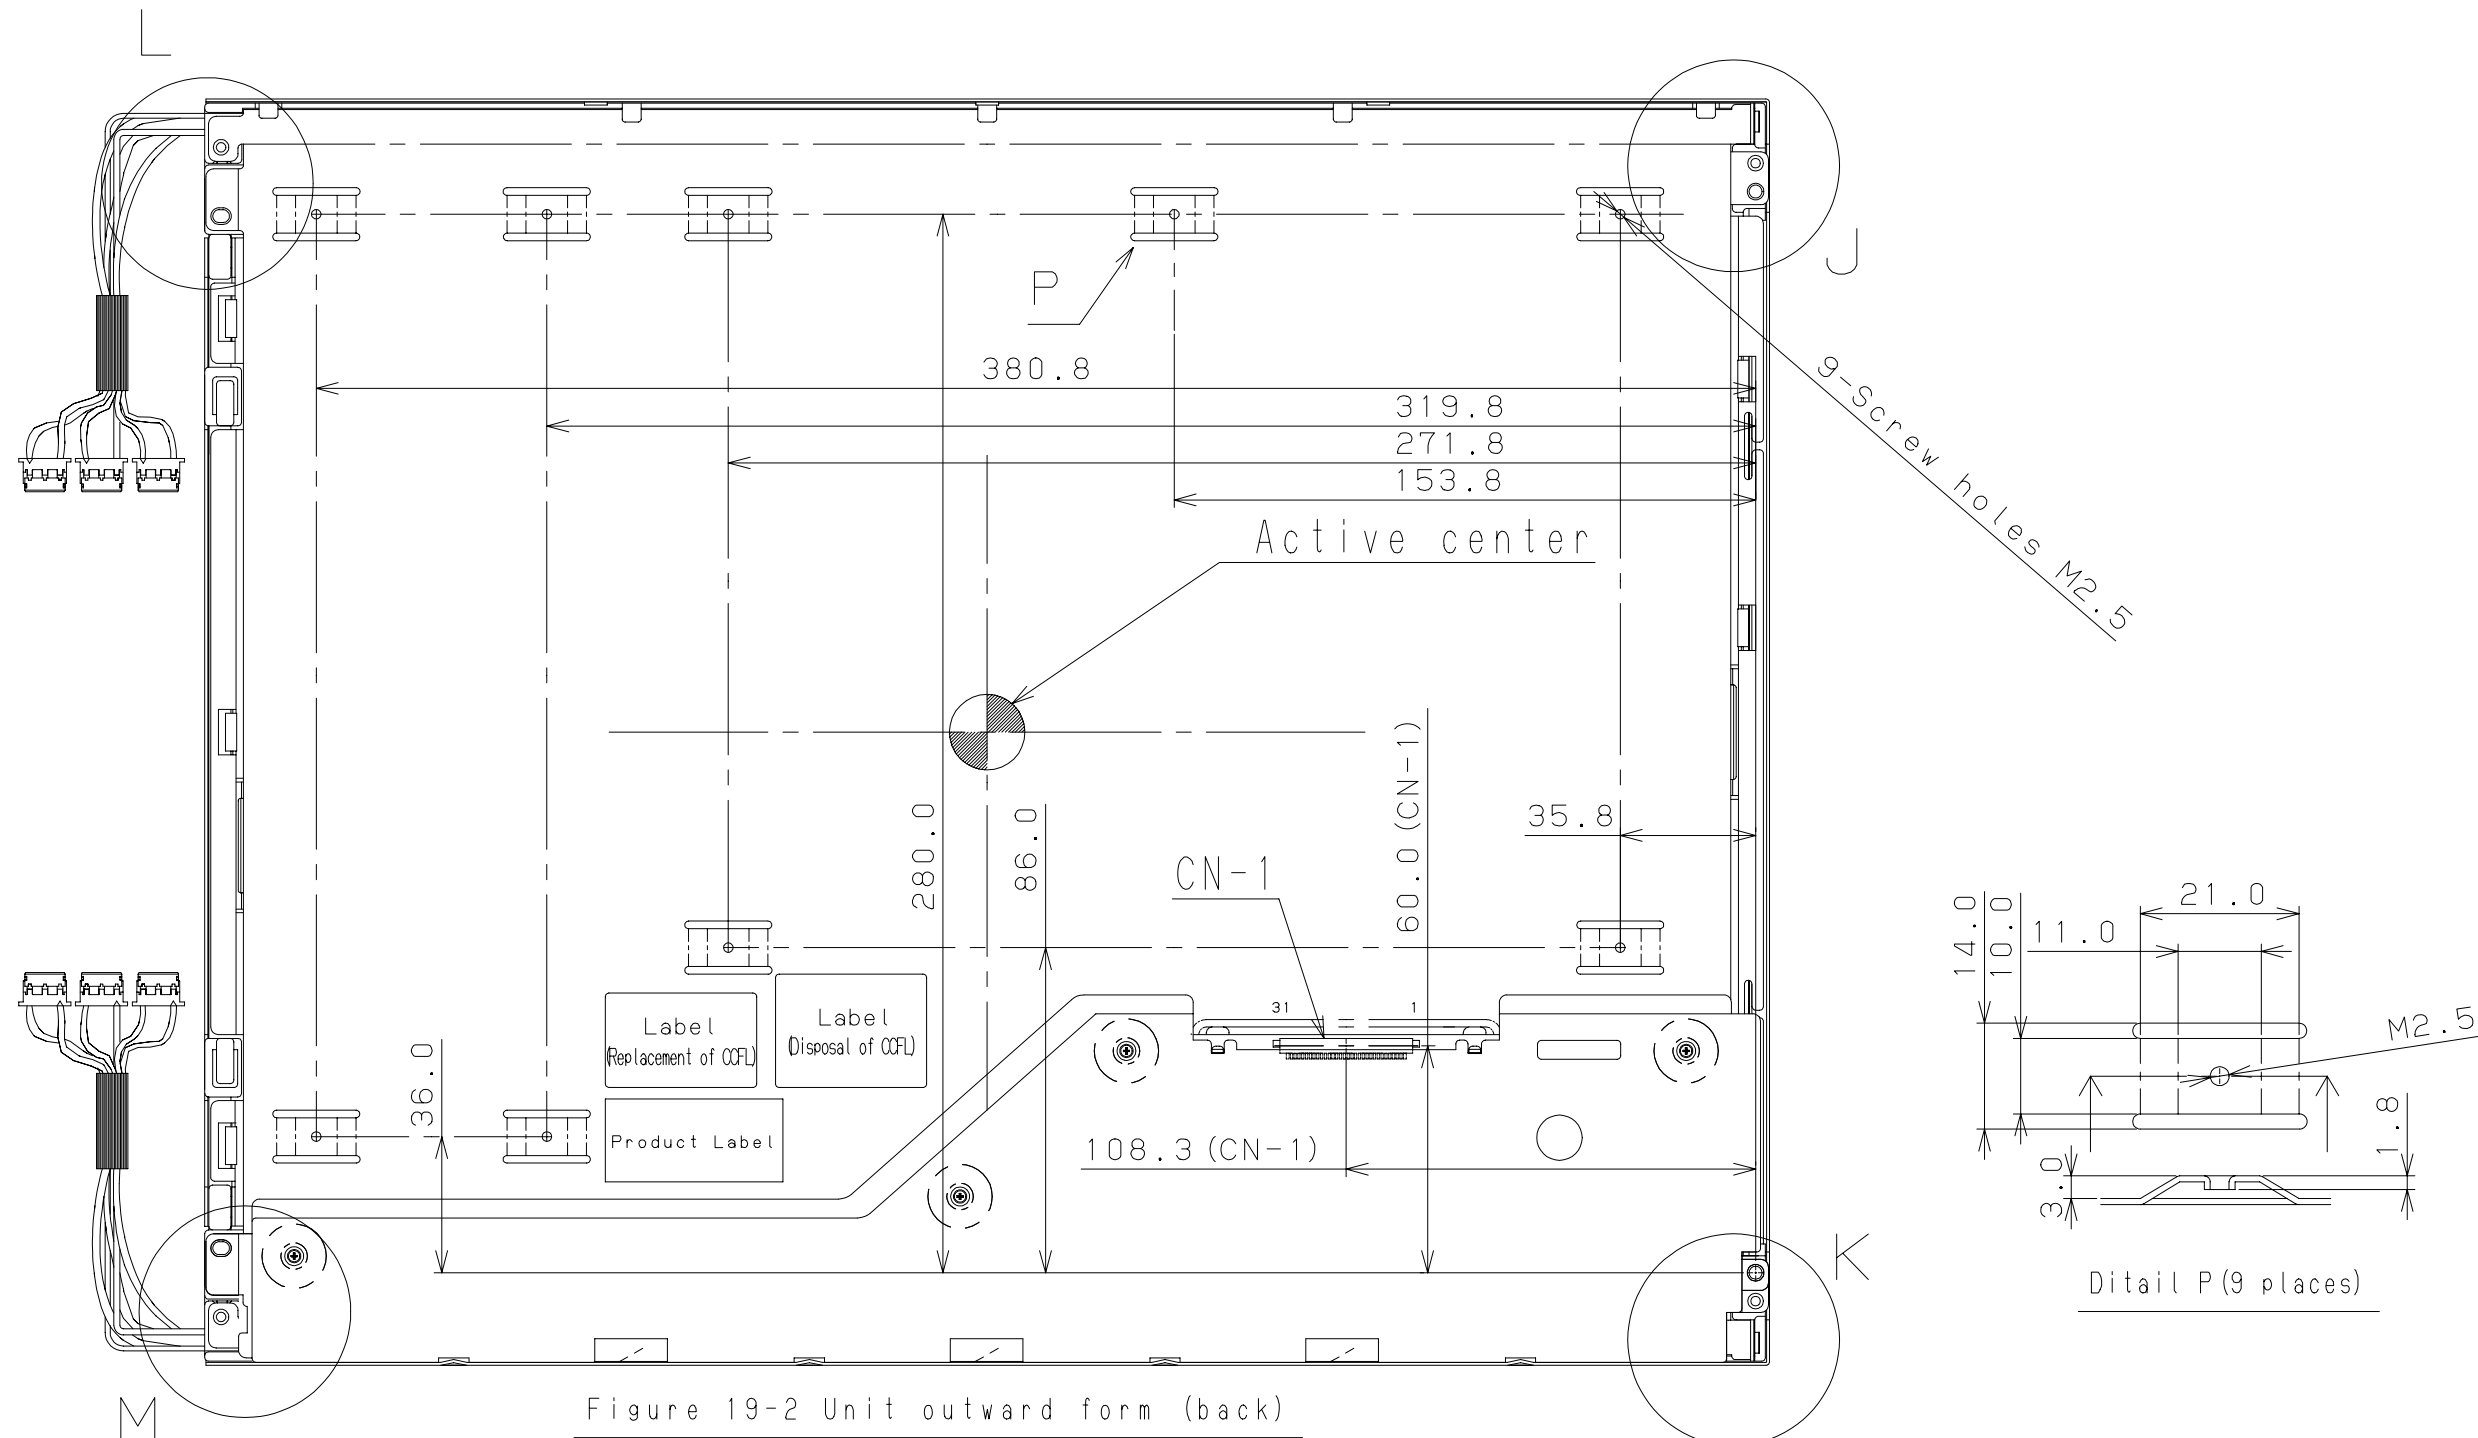


Figure 19-2 Unit outward form (back)

DOCUMENT CONTROL SECTION

DATE

NOTE

2) The height of interface connector does not include that of a counterpart connector.

| | | | | | | | |
|--------|------|--------|-------|-------------|--|--|--|
| | | | | | | TITLE FLC48SXC8V-05H | |
| | | | | | | DRAW. NO. Tech Bes LCD-0245 | |
| | | | | | | CUST. | |
| EDIT. | DATE | DESIG. | CHECK | DESCRIPTION | | FWJITSU DISPLAY TECHNOLOGIES CORPORATION | |
| DESIG. | | | CHECK | APPR. | | 35 / | |

1 2 3 4 5 6 7 8 93.04 FDNC:3901:3

