

1

2

3

4

TENTATIVE

A

A

B

B

C

C

D

D

E

# FLC58UWC8V

## Specifications

DOCUMENT CONTROL SECTION	↑
DATE	

						TITLE	FLC58UWC8V		
						DRAW.NO.	Tech Bes LCD-00274	1 / 30	F
02	20040705	S.Hayashimoto			Change p3-6,8,17,18,30				
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION	FUJITSU DISPLAY TECHNOLOGIES CORPORATION			
DESIG.	20040604	S.Hayashimoto	CHECK			APPR.			

TABLE OF CONTENTS

TENTATIVE

A

1. APPLICATIONS ..... 3

2. PRODUCT NAME AND MODEL NUMBER ..... 3

    2-1.Product Names ..... 3

    2-2.Model Numbers ..... 3

A

B

3. OVERVIEW ..... 3

4. CONFIGURATION ..... 3

5. MECHANICAL SPECIFICATIONS ..... 4

6. ABSOLUTE MAXIMUM RATING ..... 5

7. RECOMMENDED OPERATING CONDITIONS ..... 5

B

C

8. ELECTRICAL SPECIFICATIONS ..... 6

9. OPTICAL SPECIFICATIONS ..... 8

10. INTERFACE SPECIFICATIONS ..... 12

    10-1.Signal Descriptions ..... 12

    10-2.LVDS Data Assignment ..... 13

    10-3. Color Data Assignment ..... 14

    10-4. Input Signal Timing ..... 15

    10-5. Correspondence between Data and Display Position ..... 17

    10-6.Power Supply Sequence ..... 17

C

D

11. BACK-LIGHT SPECIFICATIONS ..... 18

    11-1.Pin configurations for Back-light ..... 18

    11-2.CCFL ..... 18

    11-3.Life ..... 18

12. APPEARANCE SPECIFICATIONS ..... 19

    12-1.Appearance ..... 19

    12-2.Dot defects ..... 20

13. ENVIRONMENTAL SPECIFICATIONS ..... 21

D

DOCUMENT CONTROL SECTION

E

14. INDICATIONS ..... 22

15. PACKAGING ..... 22

    15-1.Packing Specifications ..... 22

    15-2.Packing Method ..... 23

16. WARRANTY ..... 23

17. PRECAUTIONS ..... 23

18. MISCELLANEOUS ..... 28

DATE

F

						TITLE FLC58UWC8V	
						DRAW.NO. Tech Bes LCD-00274	
						2/	
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION		
DESIG.			CHECK	APPR.	FUJITSU DISPLAY TECHNOLOGIES CORPORATION		

TENTATIVE

1. APPLICATION

This specification is applied to the 23inch WUXGA supported TFT-LCD module.

A

2. PRODUCT NAME AND MODEL NUMBER

2-1 Product Name: LCD Module

2-2 Model Name: FLC58UWC8V

A

3. OVERVIEW

This LCD module has a TFT active matrix type liquid crystal panel 1920x1200 pixels, and diagonal size of 58m(23inch). This LCD has a LVDS dual interface and can display 16,777,216 colors.

The power supply of this LCD module is +12V DC(logic) and +24VDC(inverter).②

This module has high response time circuit (HRC).

B

B

C

C

4. CONFIGURATION

This LCD module consists of a color TFT-LCD panel that is mounted with TFT driver ICs, a cold-cathode fluorescent tube back-light.

The inverter for the backlight is included.

Figure 4-1 shows a block diagram of this LCD module.

D

D

DOCUMENT CONTROL SECTION

DATE

E

						TITLE		FLC58UWC8V	
						DRAW.NO.		Tech Bes LCD-00274	
02	20040705				Add comment			3/	
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION	FUJITSU DISPLAY TECHNOLOGIES CORPORATION			
	DESIG.		CHECK		APPR.				

F

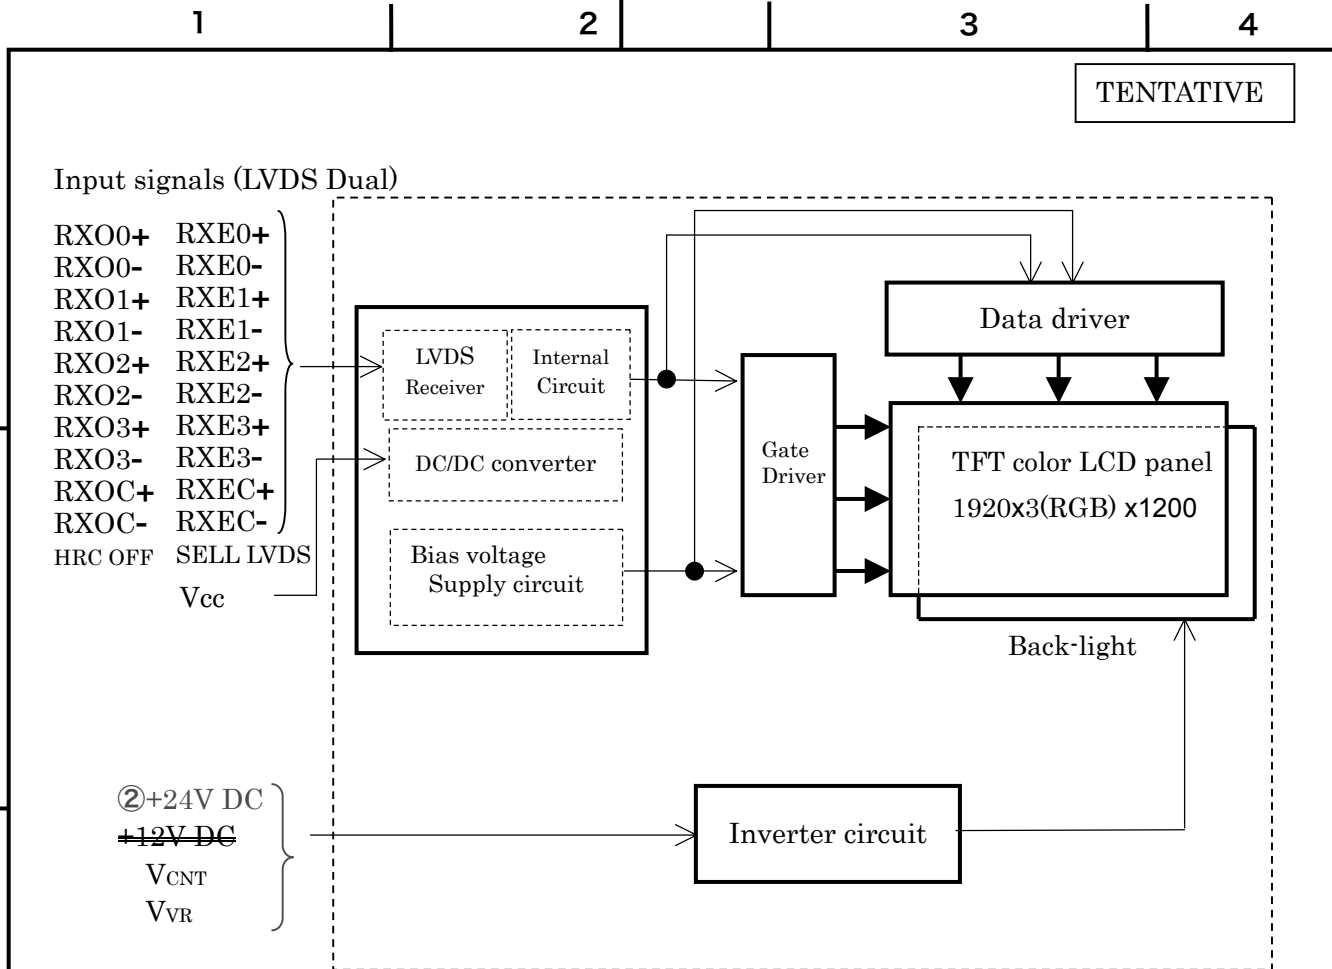


Figure 4-1 Block Diagram

## 5. MECHANICAL SPECIFICATIONS

Table 5-1 shows the mechanical specifications of this LCD module.

Table 5-1 Mechanical Specifications

Item	Specifications	Unit	Remark
Dimensions	523.4x335.6x36.2(TYP.) (The height of INV part is 41.0.)	mm	Direct back-light is used. (CCFLx12)  For details on dimensions, See dimensional outline drawing. (At page 29,30: Figure 5-1,2).
Display Resolution	(1920x3) x1200	—	
Display Dot Area	495.36 x 309.60	mm	
Dot Pitch	(0.0860 x 3) x 0.258	mm	
Aspect Ratio	1:1	—	
Weight	(2,900) Typ	g	
FG-SG	Short circuit	—	

DOCUMENT CONTROL SECTION

DATE

						TITLE FLC58UWC8V	
						DRAW.NO. Tech Bes LCD-00274	
02	20040705	Change inverter supply voltage				4/	
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION		
FUJITSU DISPLAY TECHNOLOGIES CORPORATION							
DESIG.			CHECK	APPR.			

## 6. ABSOLUTE MAXIMUM RATING

TENTATIVE

Table 6-1 shows the absolute maximum rating of this LCD module.

A

Table 6-1 Absolute Maximum Rating

Item	Symbol	Condition	MIN.	TYP.	MAX.	Unit
Supply Voltage	V <sub>CC</sub>	Ta=25°C	-0.3	—	14.0	V
	V <sub>INV</sub>	Ta=25°C	-0.3	—	<del>14.0</del> ②28.0	V
Input Signal Voltage (LVDS signal, PD, SEL LVDS,HRC OFF)	V <sub>IN</sub>	Ta=25°C	-0.3	—	3.6	V
Control Voltage	V <sub>CNT</sub>	Ta=25°C	-0.3	—	V <sub>INV</sub>	V
Brightness Control Voltage	V <sub>VR</sub>	Ta=25°C	0	—	4.0	V

B

## 7. RECOMMENDED OPERATING CONDITIONS

Table 7-1 shows the recommended operating conditions of this LCD module.

C

Table 7-1 Recommended Operating Conditions

Item	Symbol	MIN.	TYP.	MAX.	Unit
Supply Voltage (Logic)	V <sub>CC</sub>	11.5	12.0	12.5	V
Input Signal Voltage (SEL LVDS,PD,HRC OFF)	V <sub>IN</sub>	-0.3	—	3.6	V
Supply Voltage (Inverter)	V <sub>INV</sub>	10.8	<del>12.0</del> ②24.0	<del>13.2</del> ②26.4	V
Ripple Voltage	V <sub>CC</sub>	V <sub>RP</sub>	—	—	0.1 V

D

DOCUMENT CONTROL SECTION

DATE

A

B

C

D

E

F

						TITLE FLC58UWC8V	
						DRAW.NO. Tech Bes LCD-00274	
02	20040705				Change inverter supply voltage	5/	
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION	FUJITSU DISPLAY TECHNOLOGIES CORPORATION	
	DESIG.		CHECK	APPR.			

TENTATIVE

### 8. ELECTRICAL SPECIFICATIONS

Table 8-1 shows the electrical specifications of this LCD module. Figure 8-1 shows the measurement circuit. Figure 8-2(A) shows the equivalent circuit of the logic signal input area. Figure 8-2(B) shows the equivalent circuit of the supply voltage Input area.

Table 8-1 Electrical Specifications

Item	Symbol	Condition	MIN.	TYP.	MAX.	Unit	Remark		
Differential-input Voltage (High)	V <sub>IH</sub>	V <sub>CM</sub> =+1.2V	—	—	100	mV			
Differential-input Voltage (Low)	V <sub>IL</sub>		-100	—	—	mV			
Supply Current	I <sub>CC</sub>	V <sub>CC</sub> =+12.0±0.5V V <sub>SS</sub> =0V DCLK=81MHz 60Hz	—	(900)	(1200)	mA	*1		
Supply Rush Current	I <sub>SCC</sub>		—	—	TBD	A	*2		
Supply Rush Current Duration (1A excess)	T <sub>SCC</sub>		—	—	TBD	ms			
BACK LIGHT	Supply Current	I <sub>INV</sub>	V <sub>INV</sub> =②24.0 ±0.2V V <sub>VR</sub> =0V		—	<del>(4.2)</del> ②(2.2)	TBD	A	*3
	Brightness Control Voltage	V <sub>VR</sub>	0	—	3.5	V			
	Lighting Frequency	f	V <sub>INV</sub> =②24.0 ±0.2V, V <sub>VR</sub> =0V		—	(60)	—	kHz	
	Lighting Fix Voltage	V <sub>ent</sub>	0	—	0.8	V			
	Non-Lighting Fix Voltage	V <sub>ent</sub>	2.1	—	V <sub>INV</sub>				

(\*1) Typical current situation : Vertical gray scale. V<sub>CC</sub>=12.0V  
 Maximum current situation: (2pixel checker pattern. V<sub>CC</sub>=11.5V)  
 Without rush current.

(\*2) These items prescribe the rush current for starting internal DC/DC.  
 Charging current to capacitors of V<sub>CC</sub> is not prescribed.

(\*3) External power supply for inverter shall have the current capacity more than (TBD)A of the supply current (I<sub>INV</sub>), otherwise the protective circuit of inverter (fuse) might not work.

DOCUMENT CONTROL SECTION

DATE

						TITLE <b>FLC58UWC8V</b>	
						DRAW.NO. Tech Bes LCD-00274	
02	20040705					Change inverter supply voltage	6/
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION		
DESIG.			CHECK		<b>FUJITSU DISPLAY TECHNOLOGIES CORPORATION</b>		


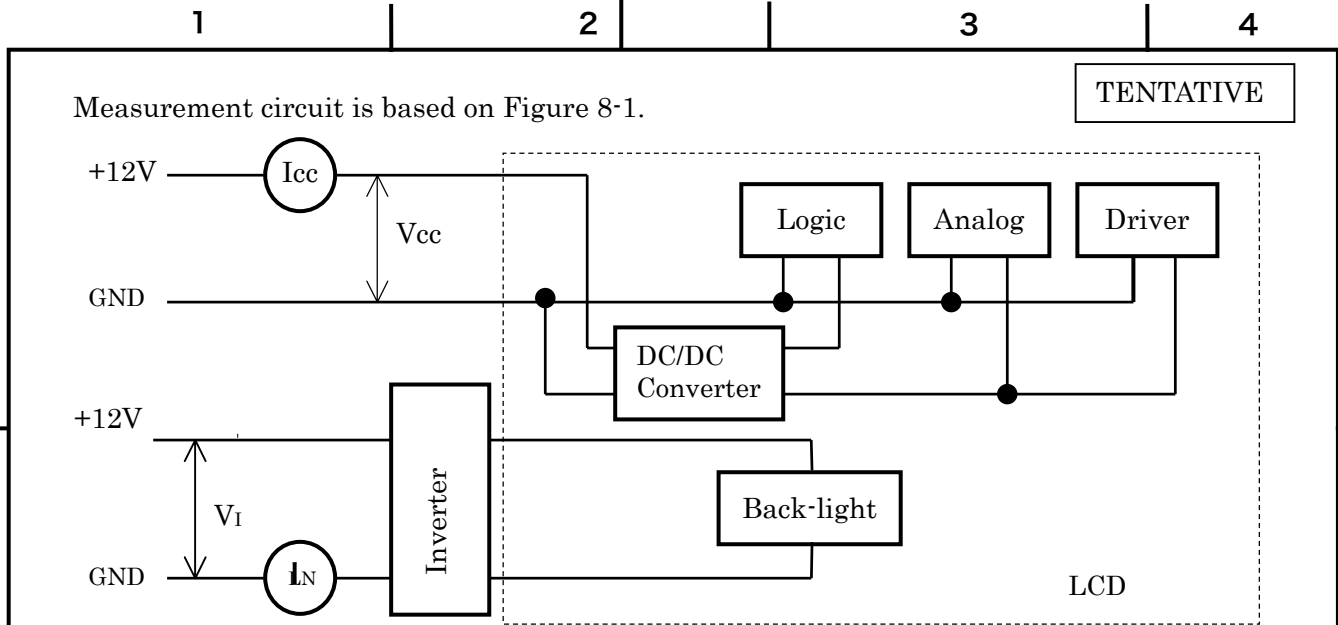


Figure 8-1 Measurement circuit


Input signals (LVDS Dual)

- RX00+ RXE0+
- RX00- RXE0-
- RX01+ RXE1+
- RX01- RXE1-
- RX02+ RXE2+
- RX02- RXE2-
- RX03+ RXE3+
- RX03- RXE3-
- RXOC+ RXEC+
- RXOC- RXEC-

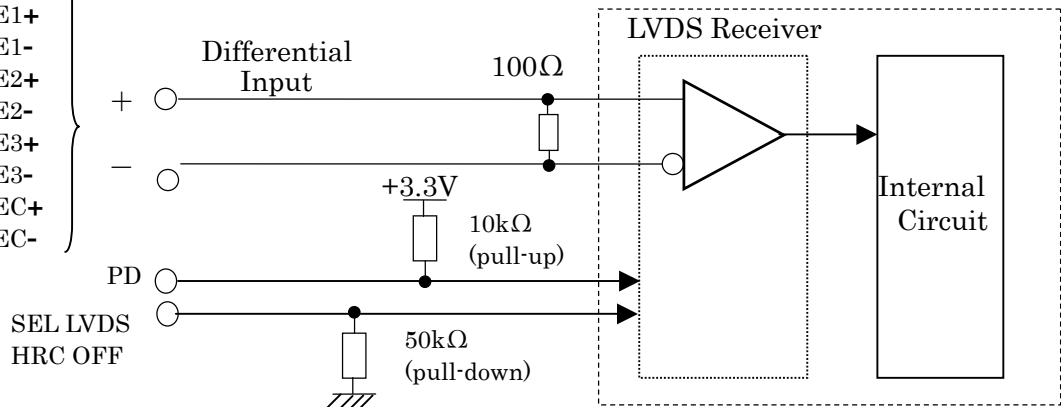

LVDS Receiver: THC63LVDF84B (Thine Electronics)

Figure 8-2(A) Equivalent circuit of logic signal Input

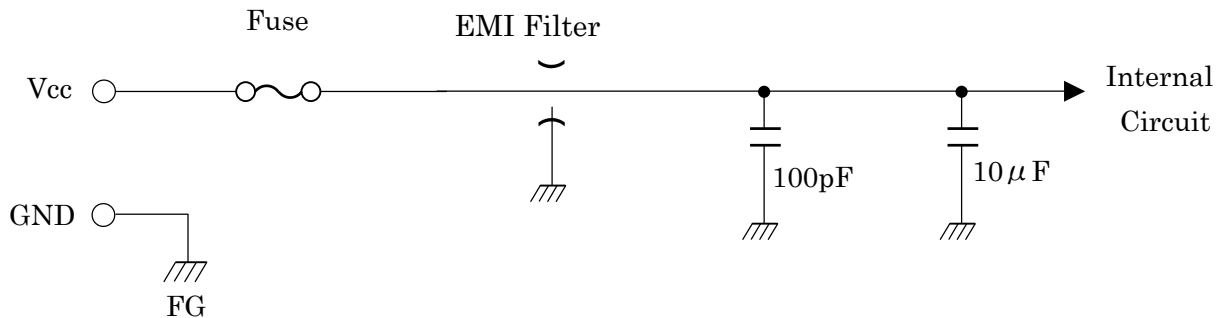

Frame ground)

Fuse: T.B.D

EMI Filter: T.B.D

Figure 8-2(B) Equivalent circuit of power supply

DOCUMENT CONTROL SECTION

DATE

						TITLE FLC58UWC8V	
						DRAW.NO. Tech Bes LCD-00274	
						7/	
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION	FUJITSU DISPLAY TECHNOLOGIES CORPORATION	

## 9. OPTICAL SPECIFICATIONS

TENTATIVE

Table 9-1 shows the optical specifications of this LCD module.

A

Table 9-1 Optical Specifications

Ta=25°C, Signal timing=typ.

A

Item	Symbol	Condition	Specifications			Unit	Remark		
			MIN.	TYP.	MAX.			Note	
Visual Angle	Horizontal	$\theta_{L,R}$	CR $\geq$ 10	$\theta_{U,D}=0^\circ$	85	—	—	deg	(1)(2) (3)(5) (6)
	Vertical	$\theta_{U,D}$		$\theta_{L,R}=0^\circ$	85	—	—	deg	
	All Direction	$\theta$		—	80	—	—	deg	
Contrast Ratio	CR	$\theta_{L,R,U,D}=0^\circ$		(350)	(600)	—	—	White/Black	(1)(2) (3)(5)
Response Time (ON) (B→W)	$\tau_{rise}$	$\theta_{L,R,U,D}=0^\circ$	Ta=25°C	—	(6)	(12)	ms	(1) (4) (5)	
			Ta=0°C	—	(20)	(40)	ms		
Response Time (OFF) (W→B)	$\tau_{fall}$	$\theta_{L,R,U,D}=0^\circ$	Ta=25°C	—	(6)	(15)	ms	(1) (4) (5)	
			Ta=0°C	—	(30)	(60)	ms		
Response Time (ON or OFF) (All gray scale)	$\tau_{avg}$	$\theta_{L,R,U,D}=0^\circ$	Ta=25°C 47~63Hz	—	(16) (2)(10)	—	ms	Average of Response Time	
Brightness	I	$\theta_{L,R,U,D}=0^\circ$ V <sub>CC</sub> =12.0V		(320)	400	—	cd/m <sup>2</sup>	White *1	(1)(5)
Brightness Uniformity	$\Delta I$	V <sub>INV</sub> =②24.0 <del>12V</del> (At maximum Brightness) R*,G*,B*Signal =All"H"		(70)	—	—	%		(1)(5) (7)
Chromaticity	W	x	Red ( 0.637,0.348) Typ. )	0.283	0.313	0.343	—		(1) (5)
		y		0.299	0.329	0.359	—		
	R G B	(x, y)		Green ( 0.285,0.593) Typ. )	Blue ( 0.142,0.069) Typ. )				
LCD Panel Type				TFT Color					
Display Mode				Normally Black					
Wide Viewing Angle Technology				MVA-Premium					
Optimum Viewing Angle				— (Symmetry)				(6)	
Display Color				16,777,216 (8-bit color)					
Color of non-display area				Black					
Surface Treatment				Anti-glare (Haze value: $\leq$ 5%), 2H)					

(\*1) Value at 20~30 minutes after lighting on.

(Note) •CS-1000 (MINOLTA Co. Ltd.) , Field=1° ,L=500mm

•Back-light current = 4mA, Dark room condition (1 lux or less)

•Be carefull that the luminance meter, which you use, may not be able to get correct brightness if it's no set correctly.

DOCUMENT CONTROL SECTION

DATE

						TITLE FLC58UWC8V	
						DRAW.NO. Tech Bes LCD-00274	
02	20040705				revise the table 9-1		8/
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION	FUJITSU DISPLAY TECHNOLOGIES CORPORATION	
	DESIG.		CHECK		APPR.		



TENTATIVE

Note 1) Definition of Viewing Angle (1)

Based on Figure 9-1.

A

A

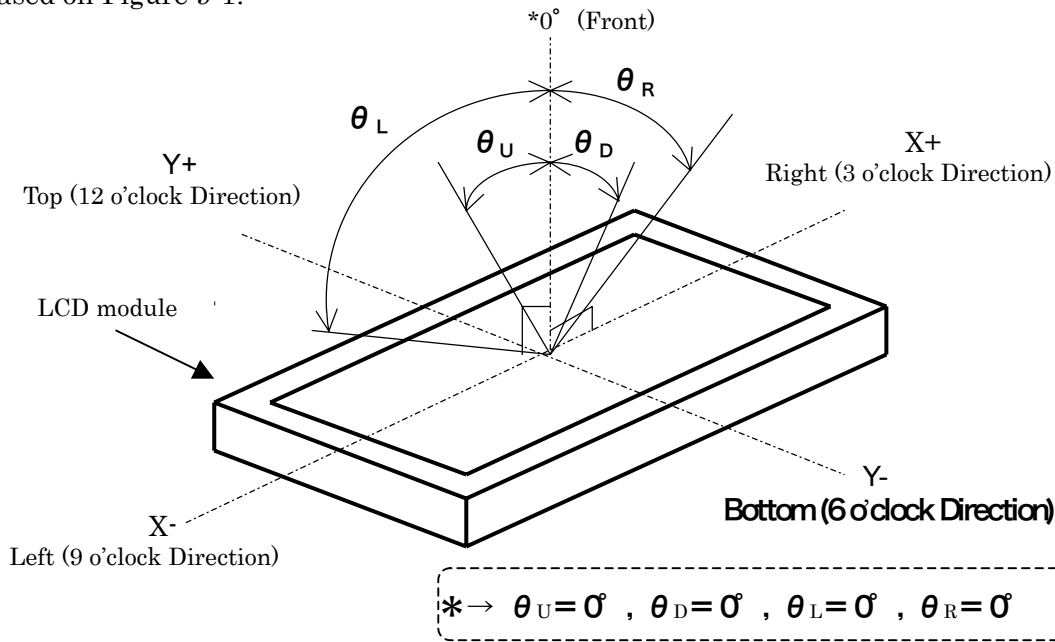


Figure 9-1 Definition of Viewing Angle (1)

Note 2) Definition of Viewing Angle (2)

Based on Figure 9-2.

C

C

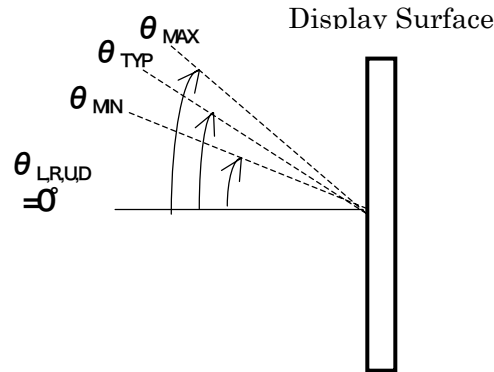
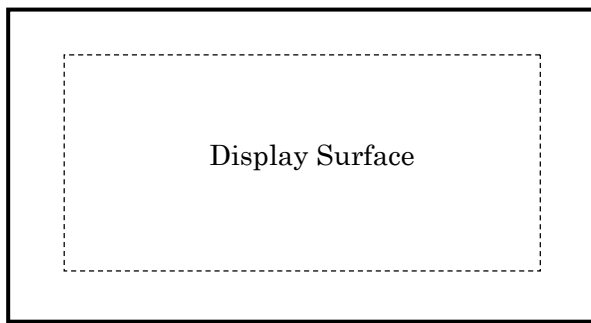


Figure 9-2 Definition of Viewing Angle (2)

Note 3) Definition of Contrast Ratio (CR)

Determined by Formula (1) based on Figure 9-3 Voltage-Brightness characteristics.

$$CR = \frac{L_w \text{ (Brightness at white)}}{L_b \text{ (Brightness at black)}} \dots\dots(1)$$

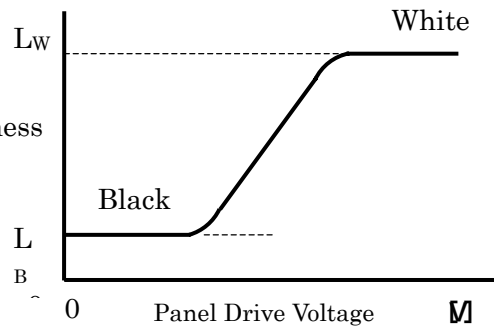


Figure 9-3 Voltage-Brightness Characteristics

DOCUMENT CONTROL SECTION  
DATE

EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION
DESIG.			CHECK	APPR.	

TITLE	FLC58UWC8V	
DRAW.NO.	Tech Bes LCD-00274	9/
FUJITSU DISPLAY TECHNOLOGIES CORPORATION		


Note 4) Definition of Response Time

Based on Figure 9-4.

TENTATIVE

A

Relative Brightness

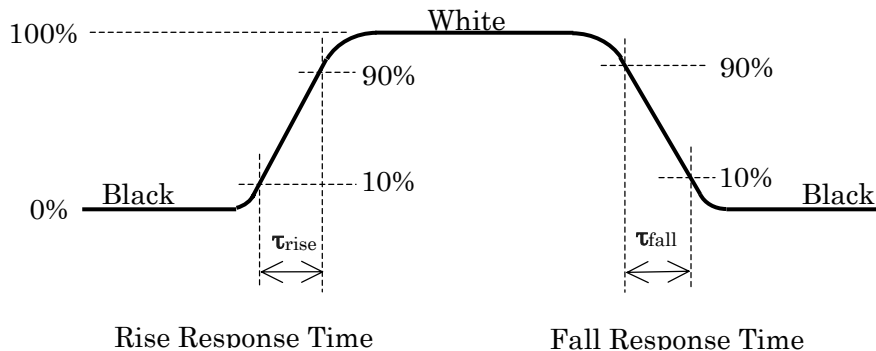

B

Rise Response Time

Fall Response Time

Figure 9-4 Definition of Response Time

Note 5) Contrast Ratio and Response Measurement System

Based on Figure 9-5.

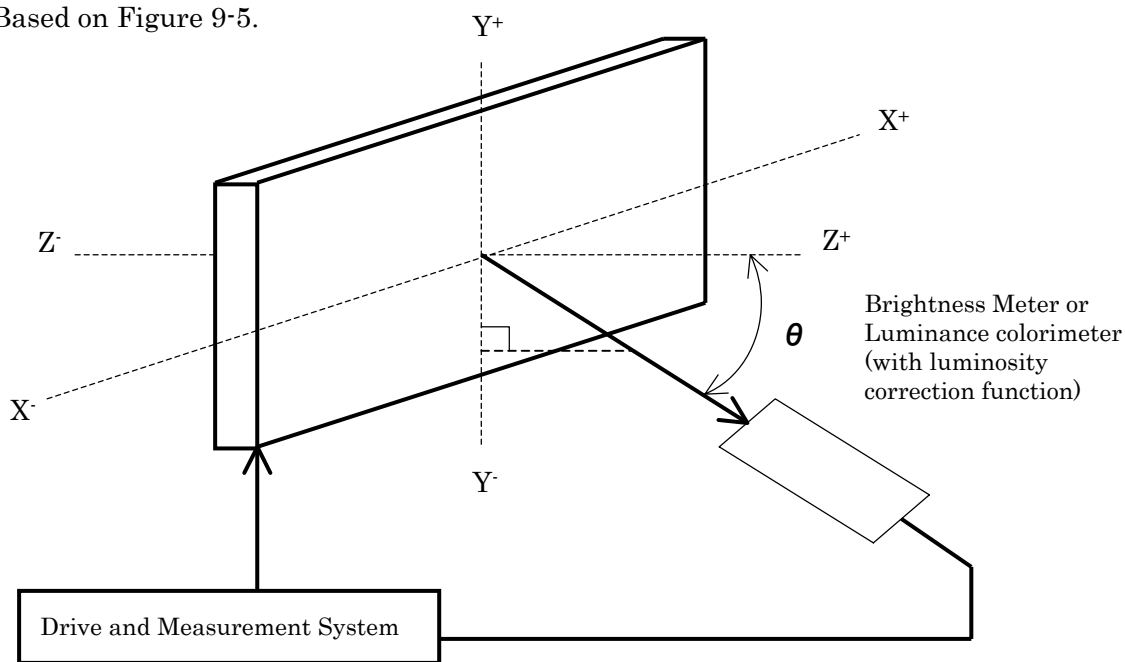


Figure 9-5 Contrast Ratio and Response Time Measurement System


DATE	↑	DOCUMENT CONTROL SECTION

						TITLE	FLC58UWC8V	
						DRAW.NO.	Tech Bes LCD-00274	10/
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION	FUJITSU DISPLAY TECHNOLOGIES CORPORATION		
	DESIG.			CHECK		APPR.		

Note 6) Definition of Optimum Viewing Angle

TENTATIVE

A

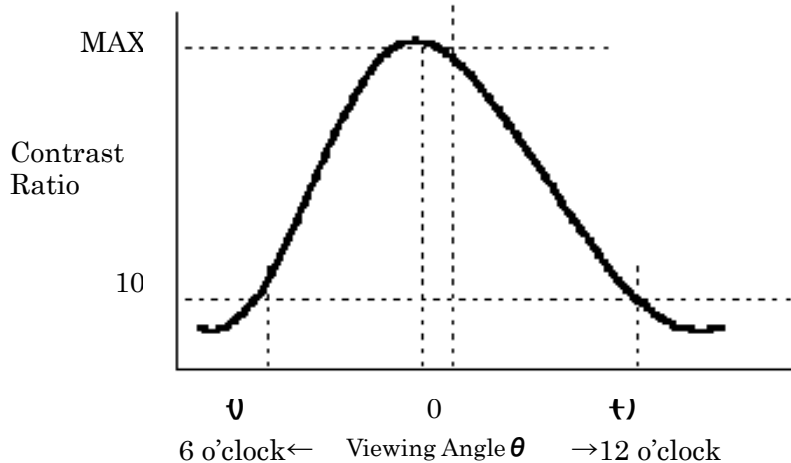

A

B

B

Figure 9-6 Definition of Viewing Angle

Note 7) Definition of Brightness Uniformity


Brightness uniformity is defined by the following formula.  
 Brightness (I1~I9) are measured at the following 9 points (①~⑨) on the display area that is shown in Figure 9-7.

C

$$\text{Brightness Uniformity } (\Delta L) = \frac{|\text{Min. In }|}{|\text{Max. In }|} \times 100 (\%), n = 1 \text{ to } 9$$

C

D

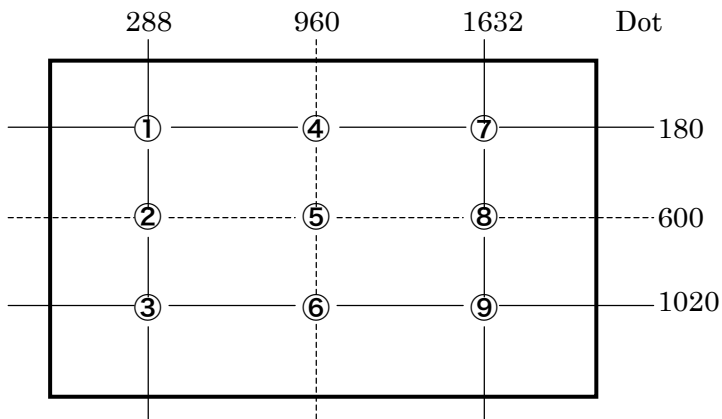

D

Note) Each measurement point (①~⑨) defines the center spot of view of Brightness Meter.  
 The tolerance of measurement position is  $\pm 3\text{mm}$ .

Figure 9-7 Measurement Points

E

DOCUMENT CONTROL SECTION

DATE

						TITLE FLC58UWC8V	
						DRAW.NO. Tech Bes LCD-00274	
						11/	
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION	FUJITSU DISPLAY TECHNOLOGIES CORPORATION	

F

## 10. INTERFACE SPECIFICATIONS

TENTATIVE

## 10-1 Signal descriptions

Table 10-1 shows the description and configuration of interface signals (CN1).

Table 10-1 Interface signals (CN1)

Pin No.	Symbol	I/O	Function
1	RxO0-	I	Negative differential input
2	RxO0+	I	Positive differential input
3	RxO1-	I	Negative differential input
4	RxO1+	I	Positive differential input
5	RxO2-	I	Negative differential input
6	RxO2+	I	Positive differential input
7	GND	—	G round
8	RxOC-	I	Negative differential input
9	RxOC+	I	Positive differential input
10	RxO3-	I	Negative differential input
11	RxO3+	I	Positive differential input
12	RxE0-	I	Negative differential input
13	RxE0+	I	Positive differential input
14	GND	—	G round
15	RxE1-	I	Negative differential input
16	RxE1+	I	Positive differential input
17	GND	—	G round
18	RxE2-	I	Negative differential input
19	RxE2+	I	Positive differential input
20	RxEC-	I	Negative differential input
21	RxEC+	I	Positive differential input
22	RxE3-	I	Negative differential input
23	RxE3+	I	Positive differential input
24	GND	—	G round
25	SELL LVDS	I	Select LVDS data order *1
26	PD	I	LVDS Core Power Down *2
27	HRC OFF	I	Fast response function control *2
28	Vcc	—	+12V power supply
29	Vcc	—	+12V power supply
30	Vcc	—	+12V power supply

Connector : FI-X30SSL-HF (Japan Aviation Electronics)

User's connector : FI-X30M (Japan Aviation Electronics)

FI-X30H

FI-X30C

\*1: 3.3V CMOS Signal input. (High or Low)

\*2: The fast response function is OFF at "H". Refer to item 10.4 for change over of timing.

\*3: When using a connector other than the recommended one, a defect in the initial stage or a problem concerning long term reliability may occur.

DOCUMENT CONTROL SECTION

DATE

						TITLE		FLC58UWC8V	
						DRAW.NO.		Tech Bes LCD-00274	
								12/	
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION				
					FUJITSU DISPLAY TECHNOLOGIES CORPORATION				
DESIG.			CHECK	APPR.					

10-2 LVDS Data Assignment

TENTATIVE

Table 10-2 shows the LVDS Data Assignment.

Table 10-2 LVDS Data Assignment

SELL LVDS	Input signal *1		Transmitter DS90CF383,C385		Interface connector			Receiver DS90CF386		LCD input (Sell LVDS)				
	Low	High	pin	INPUT	System side	LCD module		pin	OUTPUT	Low	High			
						pin								
LVDS Odd	RO2	RO0	51	TxIN0	Tx OUT0+	2	RxO0+	27	RxOUT0	RO2	RO0			
	RO3	RO1	52	TxIN1				29	RxOUT1	RO3	RO1			
	RO4	RO2	54	TxIN2				30	RxOUT2	RO4	RO2			
	RO5	RO3	55	TxIN3				32	RxOUT3	RO5	RO3			
	RO6	RO4	56	TxIN4				Tx OUT0-	1	RxO0-	33	RxOUT4	RO6	RO4
	RO7	RO5	3	TxIN6	35	RxOUT6	RO7				RO5			
	GO2	GO0	4	TxIN7	37	RxOUT7	GO2				GO0			
	GO3	GO1	6	TxIN8	38	RxOUT8	GO3				GO1			
	GO4	GO2	7	TxIN9	Tx OUT1+	4	RxO1+				39	RxOUT9	GO4	GO2
	GO5	GO3	11	TxIN12				43	RxOUT12	GO5	GO3			
	GO6	GO4	12	TxIN13				45	RxOUT13	GO6	GO4			
	GO7	GO5	14	TxIN14				Tx OUT1-	3	RxO1-	46	RxOUT14	GO7	GO5
	BO2	BO0	15	TxIN15							47	RxOUT15	BO2	BO0
	BO3	BO1	19	TxIN18	51	RxOUT18	BO3				BO1			
	BO4	BO2	20	TxIN19	Tx OUT2+	6	RxO2+				53	RxOUT19	BO4	BO2
	BO5	BO3	22	TxIN20							54	RxOUT20	BO5	BO3
	BO6	BO4	23	TxIN21				55	RxOUT21	BO6	BO4			
	BO7	BO5	24	TxIN22				1	RxOUT22	BO7	BO5			
	RSVD	RSVD	27	TxIN24				Tx OUT2-	5	RxO2-	3	RxOUT24	Not use	Not use
	RSVD	RSVD	28	TxIN25	5	RxOUT25	Not use				Not use			
	ENAB	ENAB	30	TxIN26	6	RxOUT26	ENAB				ENAB			
	RO0	RO6	50	TxIN27	Tx OUT3+	11	RxO3+				7	RxOUT27	RO0	RO6
	RO1	RO7	2	TxIN5							34	RxOUT5	RO1	RO7
	GO0	GO6	8	TxIN10				41	RxOUT1	GO0	GO6			
	GO1	GO7	10	TxIN11				42	RxOUT11	GO1	GO7			
BO0	BO6	16	TxIN16	Tx OUT3-				10	RxO3-	49	RxOUT16	BO0	BO6	
BO1	BO7	18	TxIN17		50	RxOUT17	BO1			BO7				
RSVD	RSVD	25	TxIN23		2	RxOUT23	Not use			Not use				
DCLK			31		TxCLK IN	TxCLK OUT+	9			RxCLK IN+	26	RxCLK OUT	DCLK	
						TxCLK OUT-	8			RxCLK IN-				
LVDS Even	RE2	RE0	51	TxIN0	Tx OUT0+	13	RxEO+	27	RxOUT0	RE2	RE0			
	RE3	RE1	52	TxIN1				29	RxOUT1	RE3	RE1			
	RE4	RE2	54	TxIN2				30	RxOUT2	RE4	RE2			
	RE5	RE3	55	TxIN3				32	RxOUT3	RE5	RE3			
	RE6	RE4	56	TxIN4				Tx OUT0-	12	RxEO-	33	RxOUT4	RE6	RE4
	RE7	RE5	3	TxIN6	35	RxOUT6	RE7				RE5			
	GE2	GE0	4	TxIN7	37	RxOUT7	GE2				GE0			
	GE3	GE1	6	TxIN8	38	RxOUT8	GE3				GE1			
	GE4	GE2	7	TxIN9	Tx OUT1+	16	RxE1+				39	RxOUT9	GE4	GE2
	GE5	GE3	11	TxIN12				43	RxOUT12	GE5	GE3			
	GE6	GE4	12	TxIN13				45	RxOUT13	GE6	GE4			
	GE7	GE5	14	TxIN14				Tx OUT1-	15	RxE1-	46	RxOUT14	GE7	GE5
	BE2	BE0	15	TxIN15							47	RxOUT15	BE2	BE0
	BE3	BE1	19	TxIN18	51	RxOUT18	BE3				BE1			
	BE4	BE2	20	TxIN19	Tx OUT2+	19	RxE2+				53	RxOUT19	BE4	BE2
	BE5	BE3	22	TxIN20							54	RxOUT20	BE5	BE3
	BE6	BE4	23	TxIN21				55	RxOUT21	BE6	BE4			
	BE7	BE5	24	TxIN22				1	RxOUT22	BE7	BE5			
	RSVD	RSVD	27	TxIN24				Tx OUT2-	18	RxE2-	3	RxOUT24	Not use	Not use
	RSVD	RSVD	28	TxIN25	5	RxOUT25	Not use				Not use			
	RSVD	RSVD	30	TxIN26	6	RxOUT26	Not use				Not use			
	RE0	RE6	50	TxIN27	Tx OUT3+	23	RxE3+				7	RxOUT27	RE0	RE6
	RE1	RE7	2	TxIN5							34	RxOUT5	RE1	RE7
	GE0	GE6	8	TxIN10				41	RxOUT10	GE0	GE6			
	GE1	GE7	10	TxIN11				42	RxOUT11	GE1	GE7			
BE0	BE6	16	TxIN16	Tx OUT3-				22	RxE3-	49	RxOUT16	BE0	BE6	
BE1	BE7	18	TxIN17		50	RxOUT17	BE1			BE7				
RSVD	RSVD	25	TxIN23		2	RxOUT23	Not use			Not use				
DCLK			31		TxCLK IN	TxCLK OUT+	21			RxCLK IN+	26	RxCLK OUT	Not use	
						TxCLK OUT-	20			RxCLK IN-				

\*1 RSVD (reserved) pin on a transmitter should be connected with Ground.

Input odd or even data depending on the display position of the LCD module.

DOCUMENT CONTROL SECTION

DATE

						TITLE FLC58UWC8V					
						DRAW.NO. Tech Bes LCD-00274					
						13/					
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION	FUJITSU DISPLAY TECHNOLOGIES CORPORATION					

10-3 Color Data Assignment

TENTATIVE

Table 10-3 shows the Color Data Assignment.

Table 10-3 Color Data Assignment

Color	R Input data								G Input data								B Input data									
	Odd	Even	R7	R6	R5	R4	R3	R2	R1	R0	G7	G6	G5	G4	G3	G2	G1	G0	B7	B6	B5	B4	B3	B2	B1	B0
Basic Color	Black		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Green		0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	Cyan		0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	Red		1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Magenta		1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Yellow		1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	White		1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Red	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	↑	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	↑	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	
	↓	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	
	Brighter	253	1	1	1	1	1	1	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	↓	254	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red	255	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Green	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	↑	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	
	↑	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
	↓	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
	Brighter	253	0	0	0	0	0	0	0	0	1	1	1	1	1	1	0	1	0	0	0	0	0	0	0	0
	↓	254	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0
	Green	255	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
Blue	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	↑	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	
	↑	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
	↓	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
	Brighter	253	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	0	1
	↓	254	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0
	Blue	255	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1

Note.1) Definition of gray scale:Color (n)···"n" indicates gray scale level.

Larger number means brighter level.

Note.2) Data: 1:High, 0:Low

Note 3) Color data consist of 8 bit red, green and blue data of odd and even number pixel data. Total data number is 48 signals. This module is able to display 16,777,216 colors because each red, green and blue data is controlled independently.

DOCUMENT CONTROL SECTION  
DATE

						TITLE FLC58UWC8V	
						DRAW.NO. Tech Bes LCD-00274	
						14/	
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION	FUJITSU DISPLAY TECHNOLOGIES CORPORATION	

TENTATIVE

10-4 Input Signal Timing

Table 10-4 and Figure 10-1 shows the Input Signal Timing at LVDS transmitter.

**Table 10-4 Timing Characteristics**

(Ta=0~45°C, Vcc=12±0.5V)

A

Item	Symbol	Min.	Typ.	Max.	Unit	Remark
DCLK signal (Clock)	Period	Tc	(11.765)	12.345	(20.000)	ns
	Frequency	1/Tc	(50.000)	81.000	(85.000)	MHz
	Duty	Tch/Tc	45	50	55	%
	High time	TelkH	3.5	—	—	ns
	Low time	TelkL	3.5	—	—	ns
DCLK-Data Timing	Setup time	Tset	3	—	—	ns
	Hold time	Thold	2	—	—	ns
ENAB signal	Horizontal Period	Th	(1020)	1080	(1130)*1	DCLK
	Hor. Period	Th	(13.0)	13.3	(14.65)	μs
	Hor. Display period	Thd	960	960	960	DCLK *2
	Vertical Period	Tv	1207*1	1250	1280*1	Th
	Ver. Frequency	1/Tv	(48)	60	(62)	Hz *4
	Ver. Display period	Tvd	1200	1200	1200	Th
Data-ENAB timing	Tdn	—	0	—	DCLK	*3

A

B

B

C

C

D

D

- \*1) • horizontal display position is specified by the rise of ENAB.  
The data latched at falling edge of DCLK after rise of ENAB is displayed at the left edge of the display area.
- Vertical display position is specified by the rise of ENAB after low level continuation over 5500 DCLK.  
The data latched at the rise of ENAB is displayed at the top line of the display area.
- \*2) • If the “High” level period of ENAB is less than 960 DCLK, black color is displayed at the rest of the display area.
- \*3) • If ENAB does not synchronize with the effective display data, the display position does not fit to the display area.
- \*4) • If Vertical ENAB blank time shorter than 5500DCLK, LCD unit may stop display.  
Please keep ENAB blank at anytime. (ex.: Change display mode. )


E

DOCUMENT CONTROL SECTION

DATE

						TITLE		FLC58UWC8V	
						DRAW.NO.		Tech Bes LCD-00274	
								15/	
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION				
					FUJITSU DISPLAY TECHNOLOGIES CORPORATION				
DESIG.			CHECK		APPR.				

F

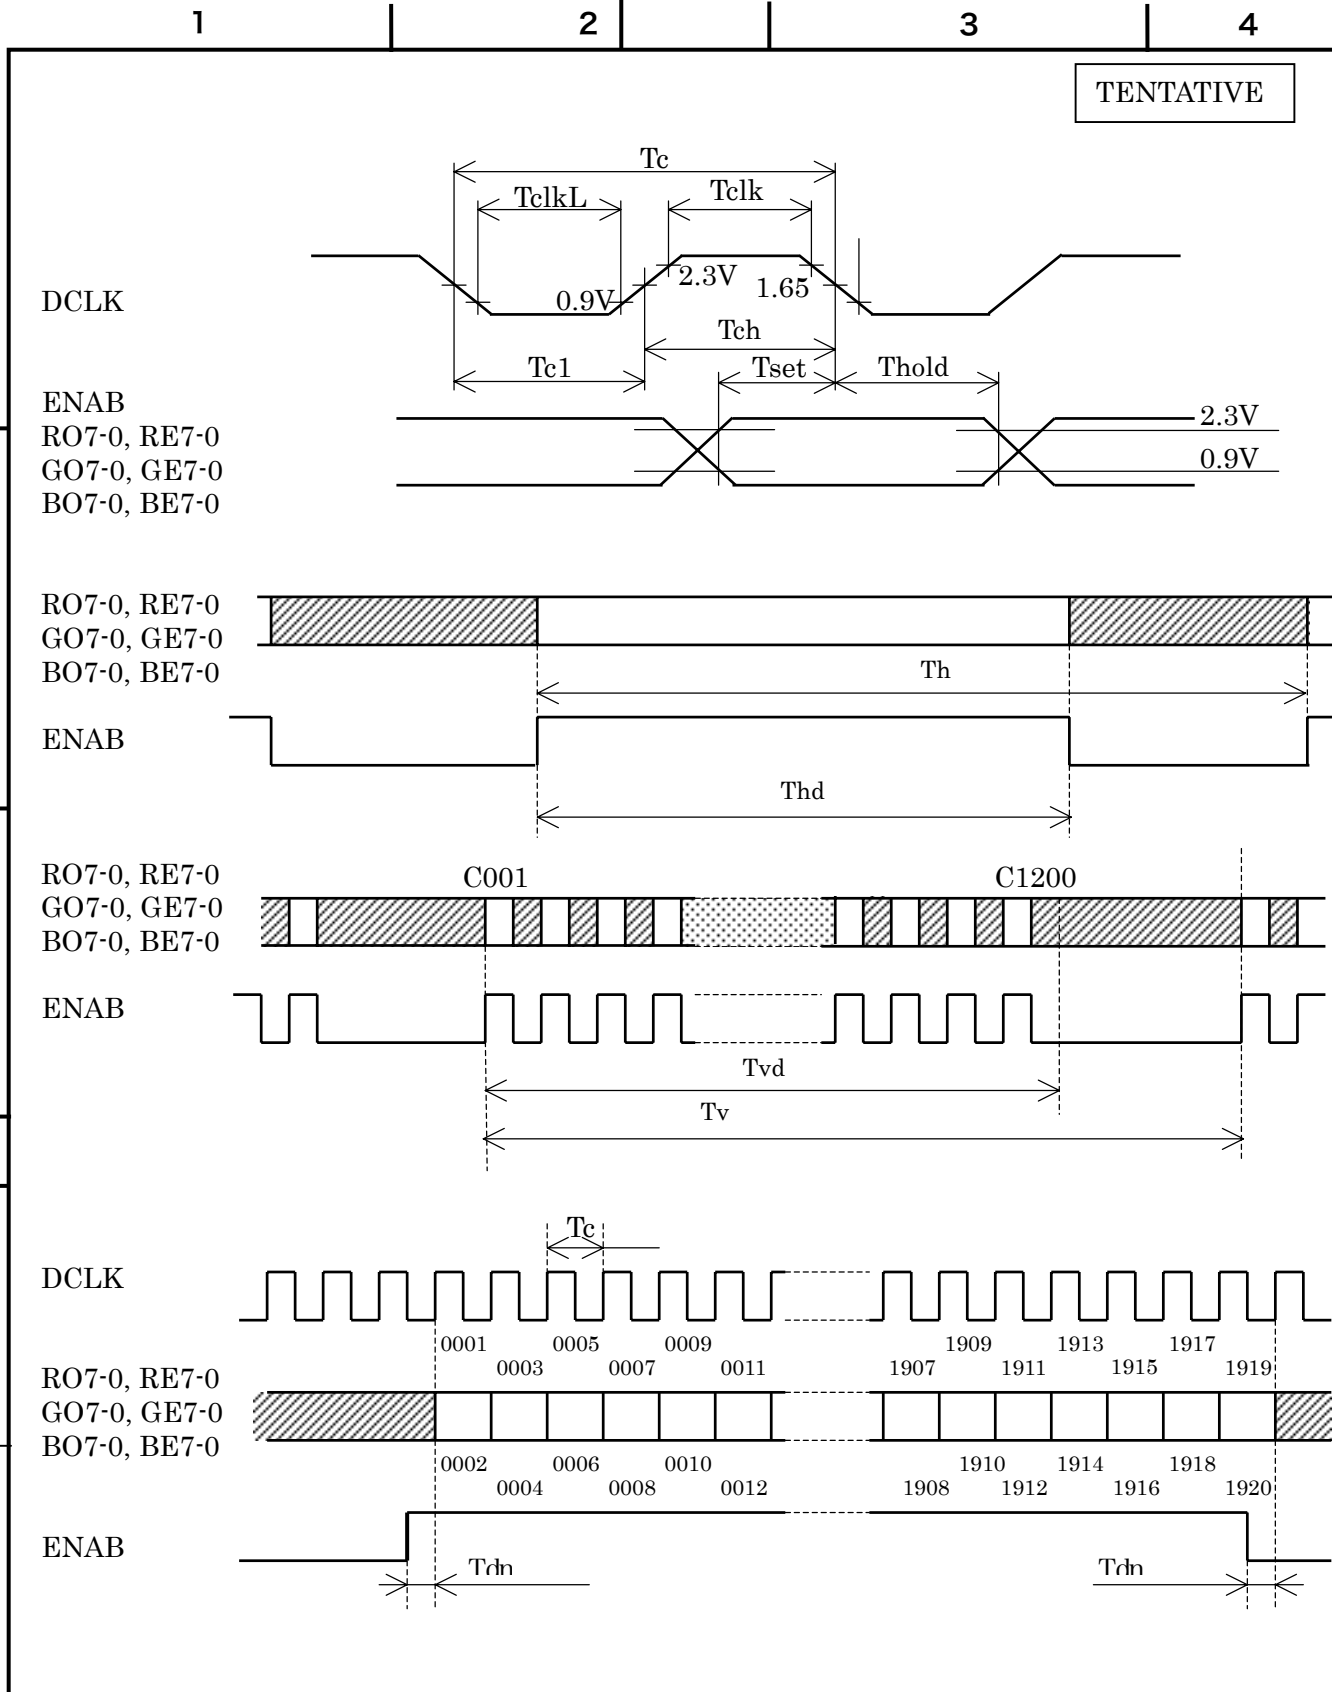

DOCUMENT CONTROL SECTION

DATE

						TITLE <b>FLC58UWC8V</b>	
						DRAW.NO. Tech Bes LCD-00274	
						16/	
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION	<b>FUJITSU DISPLAY TECHNOLOGIES CORPORATION</b>	
DESIG.			CHECK	APPR.			



10-5 Correspondence between Data and Display Position

TENTATIVE

Figure 10-2 shows the Correspondence between Data and Display Position.

S0001 S0002 S0003 S0004 S0005 S0006 S0007 S0008

S5759 S5760

A

C001	RO 0001	GO 0001	BO 0001	RE 0002	GE 0002	BE 0002	RO 0003	GO 0003											GE 1920	BE 1920
C1200	RO 0001	GO 0001	BO 0001	RE 0002	GE 0002	BE 0002	RO 0003	GO 0003											GE 1920	BE 1920

A

B

B


Figure 10-2 Correspondence Data and Display Position

10-6 Power Supply Sequence

The sequence of input signals and On/Off of the power supply of this LCD module should be in the specification shown in Figure 10-3 to prevent latch-up of the driver ICs and DC driving of the LCD panel.

C

C

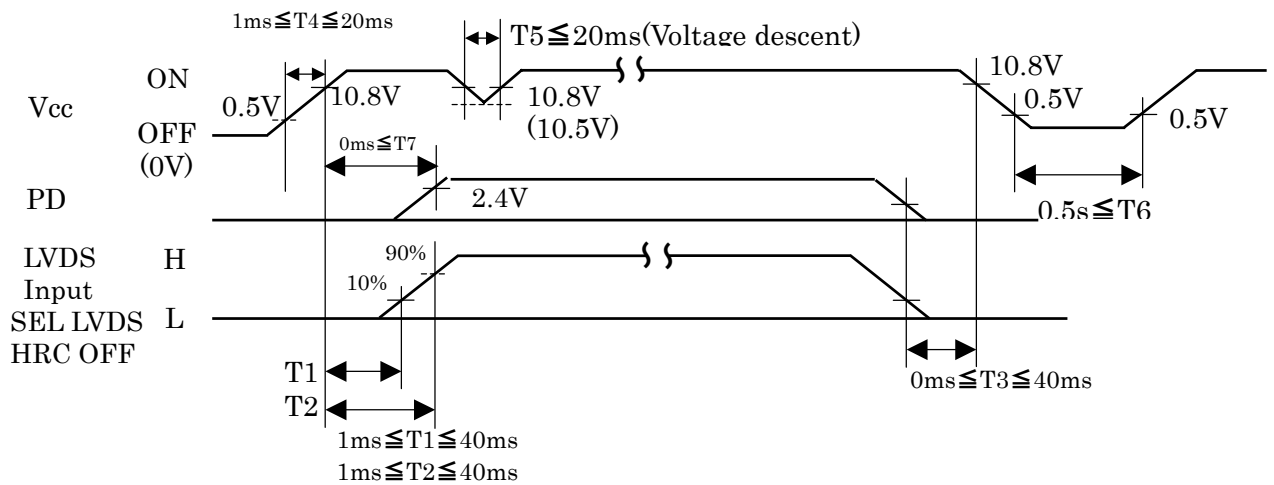

D

D

Figure 10-3 Power Supply Sequence(Logic)

Note) If Power Supply Sequence not followed, the CMOS-IC may cause a latch-up, or DC voltage may be applied to the liquid crystal, which cause a failure or serious deterioration in display quality.

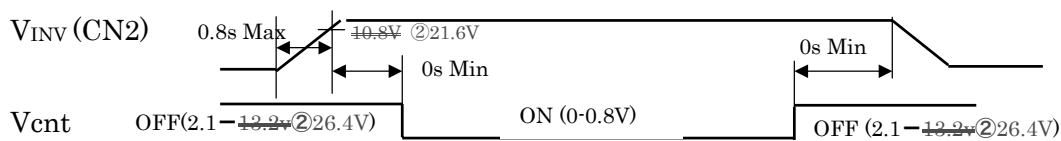


Figure 10-4 Power Supply Sequence(Inverter)

DOCUMENT CONTROL SECTION  
DATE

						TITLE FLC58UWC8V	
						DRAW.NO. Tech Bes LCD-00274	
02	20040705	Change inverter supply voltage				17/	
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION	FUJITSU DISPLAY TECHNOLOGIES CORPORATION	
DESIG.			CHECK	APPR.			

E

F

# 11. BACK-LIGHT SPECIFICATIONS

TENTATIVE

## 11-1 Pin configuration for Back-light

Table 11-1 shows the description and Pin assignment of the connectors (CN-2) for the Back-light of this LCD module.

② Table 11-1 Pin Assignment of CN-2

Pin No.	Signal	Function
1	V <sub>IN</sub>	Power supply (+24V)
2	V <sub>IN</sub>	Power supply (+24V)
3	V <sub>IN</sub>	Power supply (+24V)
4	V <sub>IN</sub>	Power supply (+24V)
5	V <sub>IN</sub>	Power supply (+24V)
6	GND	Ground (High voltage)
7	GND	Ground (High voltage)
8	GND	Ground (High voltage)
9	GND	Ground (High voltage)
10	GND	Ground (High voltage)
11	V <sub>VR</sub>	Brightness control
12	N.C.	N.C.
13	V <sub>ent</sub>	Lighting control
14	GND	Ground (low voltage)

Connector: ~~S10B-PH-SM3-TB~~  
 ②S14B-PH-SM3-TB  
 User's Connector: ~~PHR-10~~ ②PHR-12  
 Supplier:  
 Japan solderless terminal manufacturing Co.Ltd.

Note1) N.C terminal should keep open.

~~Table 11-2 Pin Assignment of CN-3~~

Pin No.	Signal	Function
1	V <sub>VR</sub>	Brightness control
2	N.C.	N.C.
3	N.C.	N.C.
4	V <sub>ent</sub>	Lighting control
5	N.C.	N.C.
6	GND	Ground (low voltage)

~~Connector: S6B-PH-SM3-TB  
 User's Connector: PHR-6  
 Supplier:  
 Japan solderless terminal manufacturing Co.Ltd.~~

~~Note1) N.C terminal should keep open.~~

Note2) V<sub>VR</sub> input: 0V=Max. Brightness , 3.5V=Min. brightness

Note3) V<sub>ent</sub> input: 0V=BL turn on, 2.1V or more = BL turn off

Note4) Keep the circuit GND (CN-3 pin ⑥ ⑩ ⑭) apart from high-voltage GND (CN-2 pin ⑥-⑩ pin ⑥-10pin). Otherwise, the screen may cause flickering.

## 11-2 CCFL

Supplier: SANKEN ELECTRONICS Co.LTD.

Part No.: TBD

## 11-3 Life

The life of the back-light is a minimum of 50,000 hours at the following conditions.

### (1) Working conditions

- (I) Ambient temperature : 25±5°C
- (II) Brightness control (V<sub>VR</sub>) : 0V

### (2) Definition of life

- (I) Brightness becomes 50% or less than the minimum brightness value shown in Table 9-1.
- (II) The lamp no longer lights
- (III) Lamp being flashing or flickering.

DOCUMENT CONTROL SECTION

DATE

						TITLE FLC58UWC8V	
						DRAW.NO. Tech Bes LCD-00274	
02	20040705				Revise the table 11-1	18/	
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION	FUJITSU DISPLAY TECHNOLOGIES CORPORATION	

1

2

3

4

# 12. APPEARANCE SPECIFICATIONS

TENTATIVE

12-1.Appearance

A

12-2.Dot defects (Bright spots, Dark spots)

TBD

B

C

D

DOCUMENT CONTROL SECTION	↑
DATE	

A

B

C

D

E

F

						TITLE	FLC58UWC8V		
						DRAW.NO.	Tech Bes LCD-00274	SCALE	19/
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION	FUJITSU DISPLAY TECHNOLOGIES CORPORATION			
	DESIG.		CHECK		APPR.				

### 13. ENVIRONMENTAL SPECIFICATIONS

TENTATIVE

Table 13-1 shows the environmental specifications.

A

Table 13-1 Environmental specifications

Item	Condition		Remark
Temperature	Operation	0~45°C	Note1
	Storage	-20~60°C	
Humidity	Operation	20~85%RH	Maximum wet-bulb temperature should not exceed 29°C. No condensation.
	Storage	5~85%RH	
Vibration	Non-operation	10~500Hz, 1 cycle/20minute, 2G, 1.5mm max, 2hour each X, Y and Z directions	For single module without package. (Note2)
Shock	Non-operation	(30G), 6ms, 1time each ±X, ±Y and ±Z directions.	

Note1: Temperature on surface of LCD panel should be under ( 54 )°C.

Note2: Table 13-2 and Figure 13-1 show the shock resistance standard when module is packaged.

C

Table 13-2 Shock resistance standard when module is packaged

Dropping location	Dropping height	Count
A~J	60cm	1 time

D

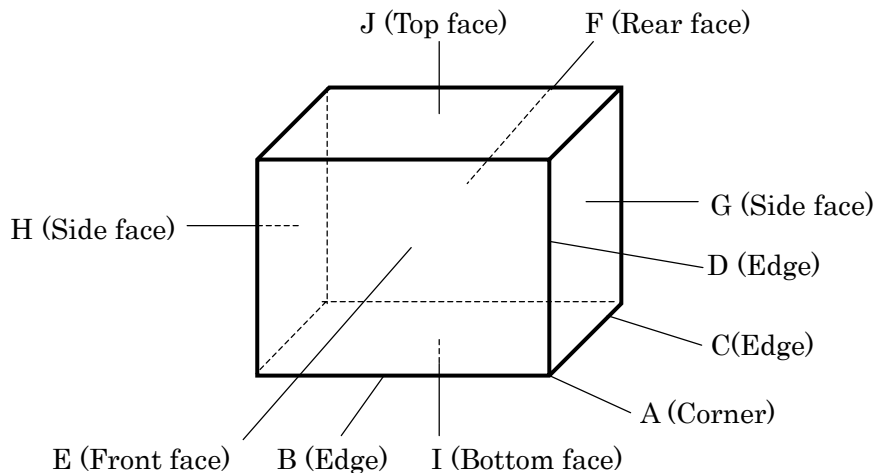


Figure 13-1 Direction to apply shock to package

DOCUMENT CONTROL SECTION

DATE

						TITLE FLC58UWC8V	
						DRAW.NO. Tech Bes LCD-00274	
						20/	
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION	FUJITSU DISPLAY TECHNOLOGIES CORPORATION	

TENTATIVE


### 14. INDICATIONS

This module has the following indications.

A

- (1) Product name : **LCD unit**
- (2) Model Number : **FLC58UWC8V**
- (3) Product Drawing Number : **NE19027-C251**
- (4) Manufacturing Number : **4 X 0 0 0 0 1**

B

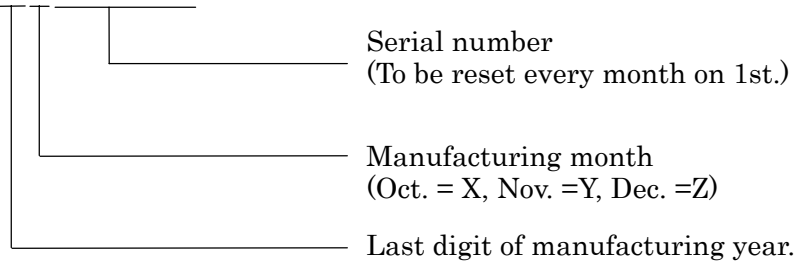

- (5) Version number : **01A** (Example)  
-1st 2 digits "01" means operational version.  
-3rd alphabet means functional version.

- (6) Country of origin : **MADE IN JAPAN**
- (7) Company Name : **FUJITSU DISPLAY TECHNOLOGIES CORP.**

C

- (8) Disposal method of cold-cathode tubes. (See Figure 14-1)
- (9) Caution when changing cold-cathode tubes. (See Figure 14-2)



Figure 14-1

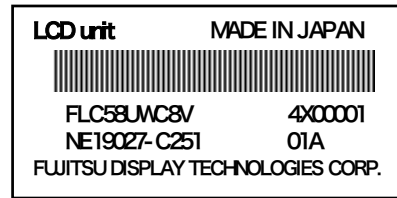


Figure 14-2

D

- (10) Warning (See Fig.14-3)

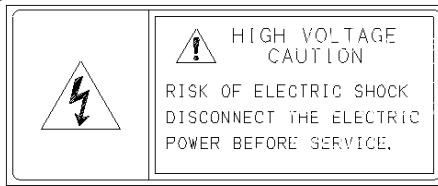


Figure 14-3

### 15. PACKAGING

- 15-1 Packing specifications      TBD
- 15-2 Packing method              TBD

DOCUMENT CONTROL SECTION

DATE

						TITLE		FLC58UWC8V	
						DRAW.NO.		Tech Bes LCD-00274	
								21/	
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION	FUJITSU DISPLAY TECHNOLOGIES CORPORATION			

TENTATIVE

16.WARRANTY

The warranty period is one year after shipping. Products which fail during this period are repaired or replaced without charge, unless the failure is caused by user.

A

17.PRECAUTIONS

Adhere to the following precautions to use this LCD module properly.

(1) Handling of LCD panel

(i) Do not apply any strong mechanical shock to the LCD panel.

Since the LCD panel is made of glass, excessive shock may damage the panel or cause a malfunction.

(ii) Do not press hard on the LCD panel surface.

In the LCD panel, the gap between two glass plates is kept perfectly even to maintain display properties and reliability. The hard pressure on the LCD panel may cause the following problems. If the pressure is over 2kg/cm<sup>2</sup>, the problem don't return to normal Condition.

- (a) Ununiformity of color
- (b) Disorder of orientation of liquid crystal

Problem (a) returns to normal condition after a while. Problem (b) returns to normal condition by turning the power off and turning on again.

However these operations should be avoided to insure reliability.

(iii) Do not scratch the polarizer film on the LCD panel surface.

- Do not press or rub the display surface with a hard tool, tweezers, etc.
- For handling, use cotton or conductive gloves so that the display surface is not soiled.
- If dust or dirt soils the display surface, clean it as follows with a soft cloth (deerskin, etc.)

[Dust] Wipe off with a soft cloth. (do not rub.)

[Dirt ] Apply clear water to a soft cloth and squeeze hard out of water drops, then lightly wipe off the specified parts. Only if the dirt is hardly wiped off, use isopropyl alcohol or ethanol.

Be careful not to splash the water or the solvents on the edge of polarizer and in the LCD unit.

The polarizer possibly exfoliates due to the solvent and water penetrated between the polarizer and the LCD panel.

Do not use unspecified solvent such as ketone (acetone, etc.) and aromatics (xylene, toluene, etc.)

(Caution) Be careful not to allow the water or solvent to enter the module.

- If saliva or water drops are left for a long period of time, the part may become deformed or discolored.

Wipe off immediately in the same way as for dirt.

- Do not allow oil to adhere to the module since excessive oil is hard to clean.

DOCUMENT CONTROL SECTION  
DATE

						TITLE FLC58UWC8V	
						DRAW.NO. Tech Bes LCD-00274	
						22/	
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION	FUJITSU DISPLAY TECHNOLOGIES CORPORATION	
DESIG.			CHECK	APPR.			

TENTATIVE

A

**(iv) Do not place or contact objects on the display surface for a long period of time.**

This may make some parts of the LCD module distorted and the quality of display may deteriorate.

**(2) Handling of LCD module**

**(i) Do not pull the cold-cathode tube cable strongly.**

If the cable is pulled with the strength of 2kg or more, the cable may be damaged or may lose reliability.

**(ii) Assemble the module into user's system in a dust free environment.**

Conductive foreign matter adheres to the module may cause failures.

**(iii) Take anti-electrostatic measures for assembling the module.**

Since the LCD module contains CMOS-ICs, the following points should be observed.

- For assembling the module, operator should be grounded and wear cotton or conductive gloves.
- Floor of work area and work table to assemble the LCD module should be covered with electrostatic shielding in order to discharge static electricity via an earth wire.
- If necessary, ground operation tools (soldering iron, radio pliers, tweezers, etc.).
- Do not take the module out of the conductive bag until the module is assembled.
- Do not assemble the module under low humidity (50%RH or less).

**(iv) Do not pull the connecting cable on the rear face of the LCD module strongly.**

**(v) Do not disassemble or remodel the LCD module.**

Disassembly or remodeling of the LCD module may result in malfunctions or deterioration of the display quality and reliability.

**(3) Precautions in regards of operating the LCD module**

**(i) Adhere to the specified power supply sequence.**

If not followed, the CMOS-IC may cause a latch-up, or DC voltage may be applied to the liquid crystal, which cause a failure or serious deterioration in display quality.

**(ii) Do not operate the LCD module when condensation occurs.**

If the LCD module is operated when condensation is on the terminals of the LCD panel, the terminals cause electrochemical reaction, and may reach disconnection. Condensation easily occurs especially when the module is moved from cold environment to warm environment.

B

C

D

DOCUMENT CONTROL SECTION	↑
DATE	

						TITLE FLC58UWC8V	
						DRAW.NO. Tech Bes LCD-00274	
						23/	
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION	FUJITSU DISPLAY TECHNOLOGIES CORPORATION	

TENTATIVE

A

(iii) The following troubles occur when the LCD module is not used under recommended temperature.

- Operation under high temperature(>50°C): Display colors shift to blue.
- Storage under high temperature(>60°C): The polarizer film deteriorates and contrast decreases.
- Operation under low temperature(< 0°C): The response speed decreases considerably.
- Storage under low temperature(<-20°C): The liquid crystal may solidify and become damaged.

B

(iv) Be sure to input the control signals at the correct timing.

If control signals (DCLK, ENAB) are not input, or if the timing is out of the specified timing, DC voltage may be applied to the liquid crystal and, as a result, cause image sticking or deterioration of contrast.

(4) Precautions in regards of designing module mounting

(i) Excessive force should not be applied to the screen or the rear side of the LCD module.

Excessive pressure on the screen caused by the installation of the LCD module may deteriorate display quality and reliability. Brightness uniformity and the reliability of CCFL may decrease if the pressure is applied to the backlight module.

(ii) Avoid twisting and bending the LCD module.

Excessive twist and bend may damage display quality and reliability.

(iii) Avoid extending the power cable between the LCD module and inverter.

This may cause the backlight to flicker or not to light.

(iv) Keep the backlight cable apart from the metal enclosure of the LCD module.

When frequency current for backlight driving leak to the metal enclosure, the desired brightness may not be assured.

(v) When Mounting LCD module with M3 screws (x6), tighten the screws with torque below ( 29.4Nm(3kgf) ).

C

D

(5) Storage method

(i) Do not store the LCD module in an atmosphere of organic solvent or corrosive gas.

In an organic solvent atmosphere, the polarizer film discolors and display quality deteriorates.

In a corrosive gas environment, various parts of the module may corrode or deteriorate.

(ii) Store the LCD module in a Fujitsu package.

At storing, Fujitsu packages can be stacked up to 3 boxes.

The LCD module is in an anti-static bag. Keep the module in that status.

E

DOCUMENT CONTROL SECTION	↑
DATE	

						TITLE	FLC58UWC8V	
						DRAW.NO.	Tech Bes LCD-00274	24/
EDIT	DATE	DESIG.	CHECK	APPR.		FUJITSU DISPLAY TECHNOLOGIES CORPORATION		
	DESIG.		CHECK	APPR.				

A

B

C

D

E

F



TENTATIVE

A

**(iii) The LCD module is recommended to be stored in humidity controlled, cool and dark locations.**

Recommended storage environment

- Place : Dark (avoid direct sunlight)
- Temperature : 10~35°C
- Humidity : 50~60%RH

Note) If the module is left in an environment of 60°C and above for a long period of time, optical characteristics may deteriorate.

A

B

**(6) Disposal Method**

**(i) LCD module**

The components of this LCD module can be grouped into metal, resin, glass and so on. As the backlight contains CCFL which includes mercury, it must be disposed according to the local ordinance or regulations.

**(ii) Package**

All the packages are made of recyclable papers except the anti-ESD bag.

B

C

**(7) Others**

**(i) If the LCD panel is damaged, do not inhale and do not swallow the liquid crystal.**

If the liquid crystal adhere to the body or cloths, wash it off with soap immediately. Follow regular precautions for electronic components.

**(ii) Flux residue on the printed circuit board is harmless to the quality and reliability of LCD module.**

Fujitsu has adopted non-wash technology on module assembly process.

C

D

D

DOCUMENT CONTROL SECTION	↑
DATE	

E

						TITLE	FLC58UWC8V		
						DRAW.NO.	Tech Bes LCD-00274	25/	
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION	FUJITSU DISPLAY TECHNOLOGIES CORPORATION			
DESIG.				CHECK		APPR.			

F

TENTATIVE


(8) Return method of the LCD unit requested for repair or analysis of the problem

A

- When the LCD unit is packaged and returned, adhere to the following procedures not to damage the LCD panel or the backlight cables. (Fig. 18-1(a)~(b))
- When the LCD unit is returned without following the specified packaging procedures, FDTC will not take responsibility for the damages caused by the failure of the packaging method.

( i )Attach protective sheet.

B

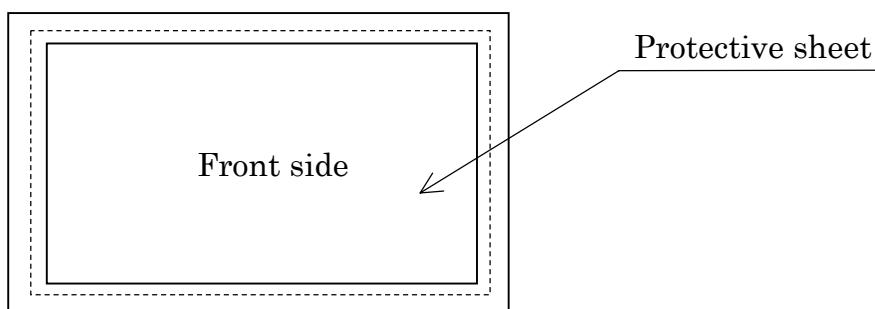

C

( ii )Put the LCD unit into the anti-electric bag

D

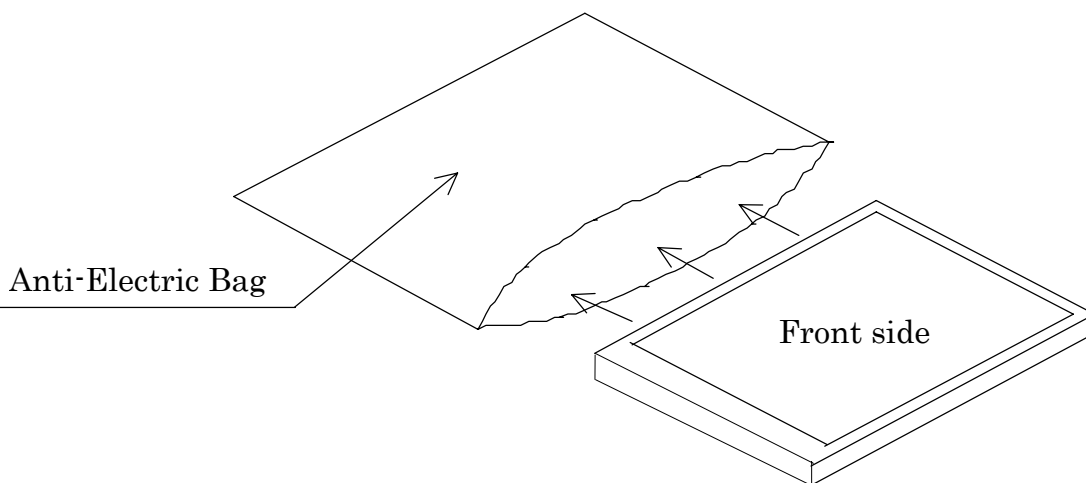


Fig. 17-1(a) Packaging method

DOCUMENT CONTROL SECTION	↑
DATE	

						TITLE FLC58UWC8V	
						DRAW.NO. Tech Bes LCD-00274	
						26/	
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION	FUJITSU DISPLAY TECHNOLOGIES CORPORATION	

TENTATIVE


(iii) Storage into the container box

• When using the container box manufactured by FDTC

A

Holder (bottom)

LCD unit

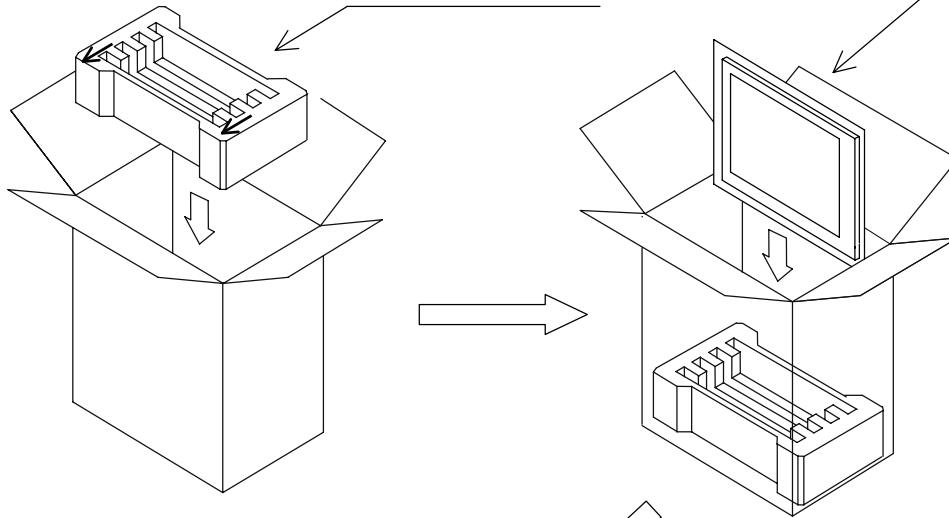


B

Holder (top-left)

Holder (top-right)

\* The front side of LCD units should face the direction of the arrowhead on holder(bottom).

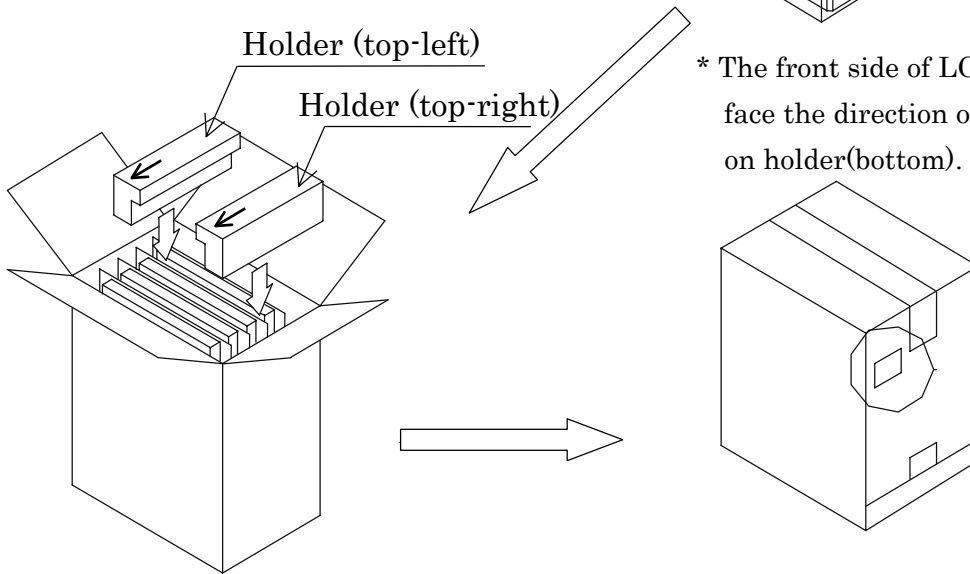

C

D

\* The direction of the arrowhead on holder (top) should face the front side of the LCD units.

\*\*The arrowheads are shown on the holders.\*\*

Fig. 17-1(b) Packaging method

• When not using the container box manufactured by FDTC

Please pack the LCD units one by one and make sure not to damage the LCD unit when transporting.

DOCUMENT CONTROL SECTION  
DATE

EDIT	DATE	DESIG.	CHECK	APPR.		DESCRIPTION			

TITLE	FLC58UWC8V		
DRAW.NO.	Tech Bes LCD-00274	27/	
FUJITSU DISPLAY TECHNOLOGIES CORPORATION			

TENTATIVE

### 18. MISCELLANEOUS

Specifications of the TFT-LCD panel and other components used in the LCD module are subject to change.

Both parties shall discuss together and make the best effort to reach agreement in case of the rising of any doubt to the contents of the specifications.

This LCD module is not designed for the purpose where high reliability is required, such as for aero-space equipment, control system of nuclear power and medical life-support equipment.

A

A

B

B

C

C

D

D


DOCUMENT CONTROL SECTION	↑
DATE	

E

						TITLE		FLC58UWC8V	
						DRAW.NO.		Tech Bes LCD-00274	
								28/	
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION				
DESIG.			CHECK	APPR.	FUJITSU DISPLAY TECHNOLOGIES CORPORATION				

F

TENTATIVE

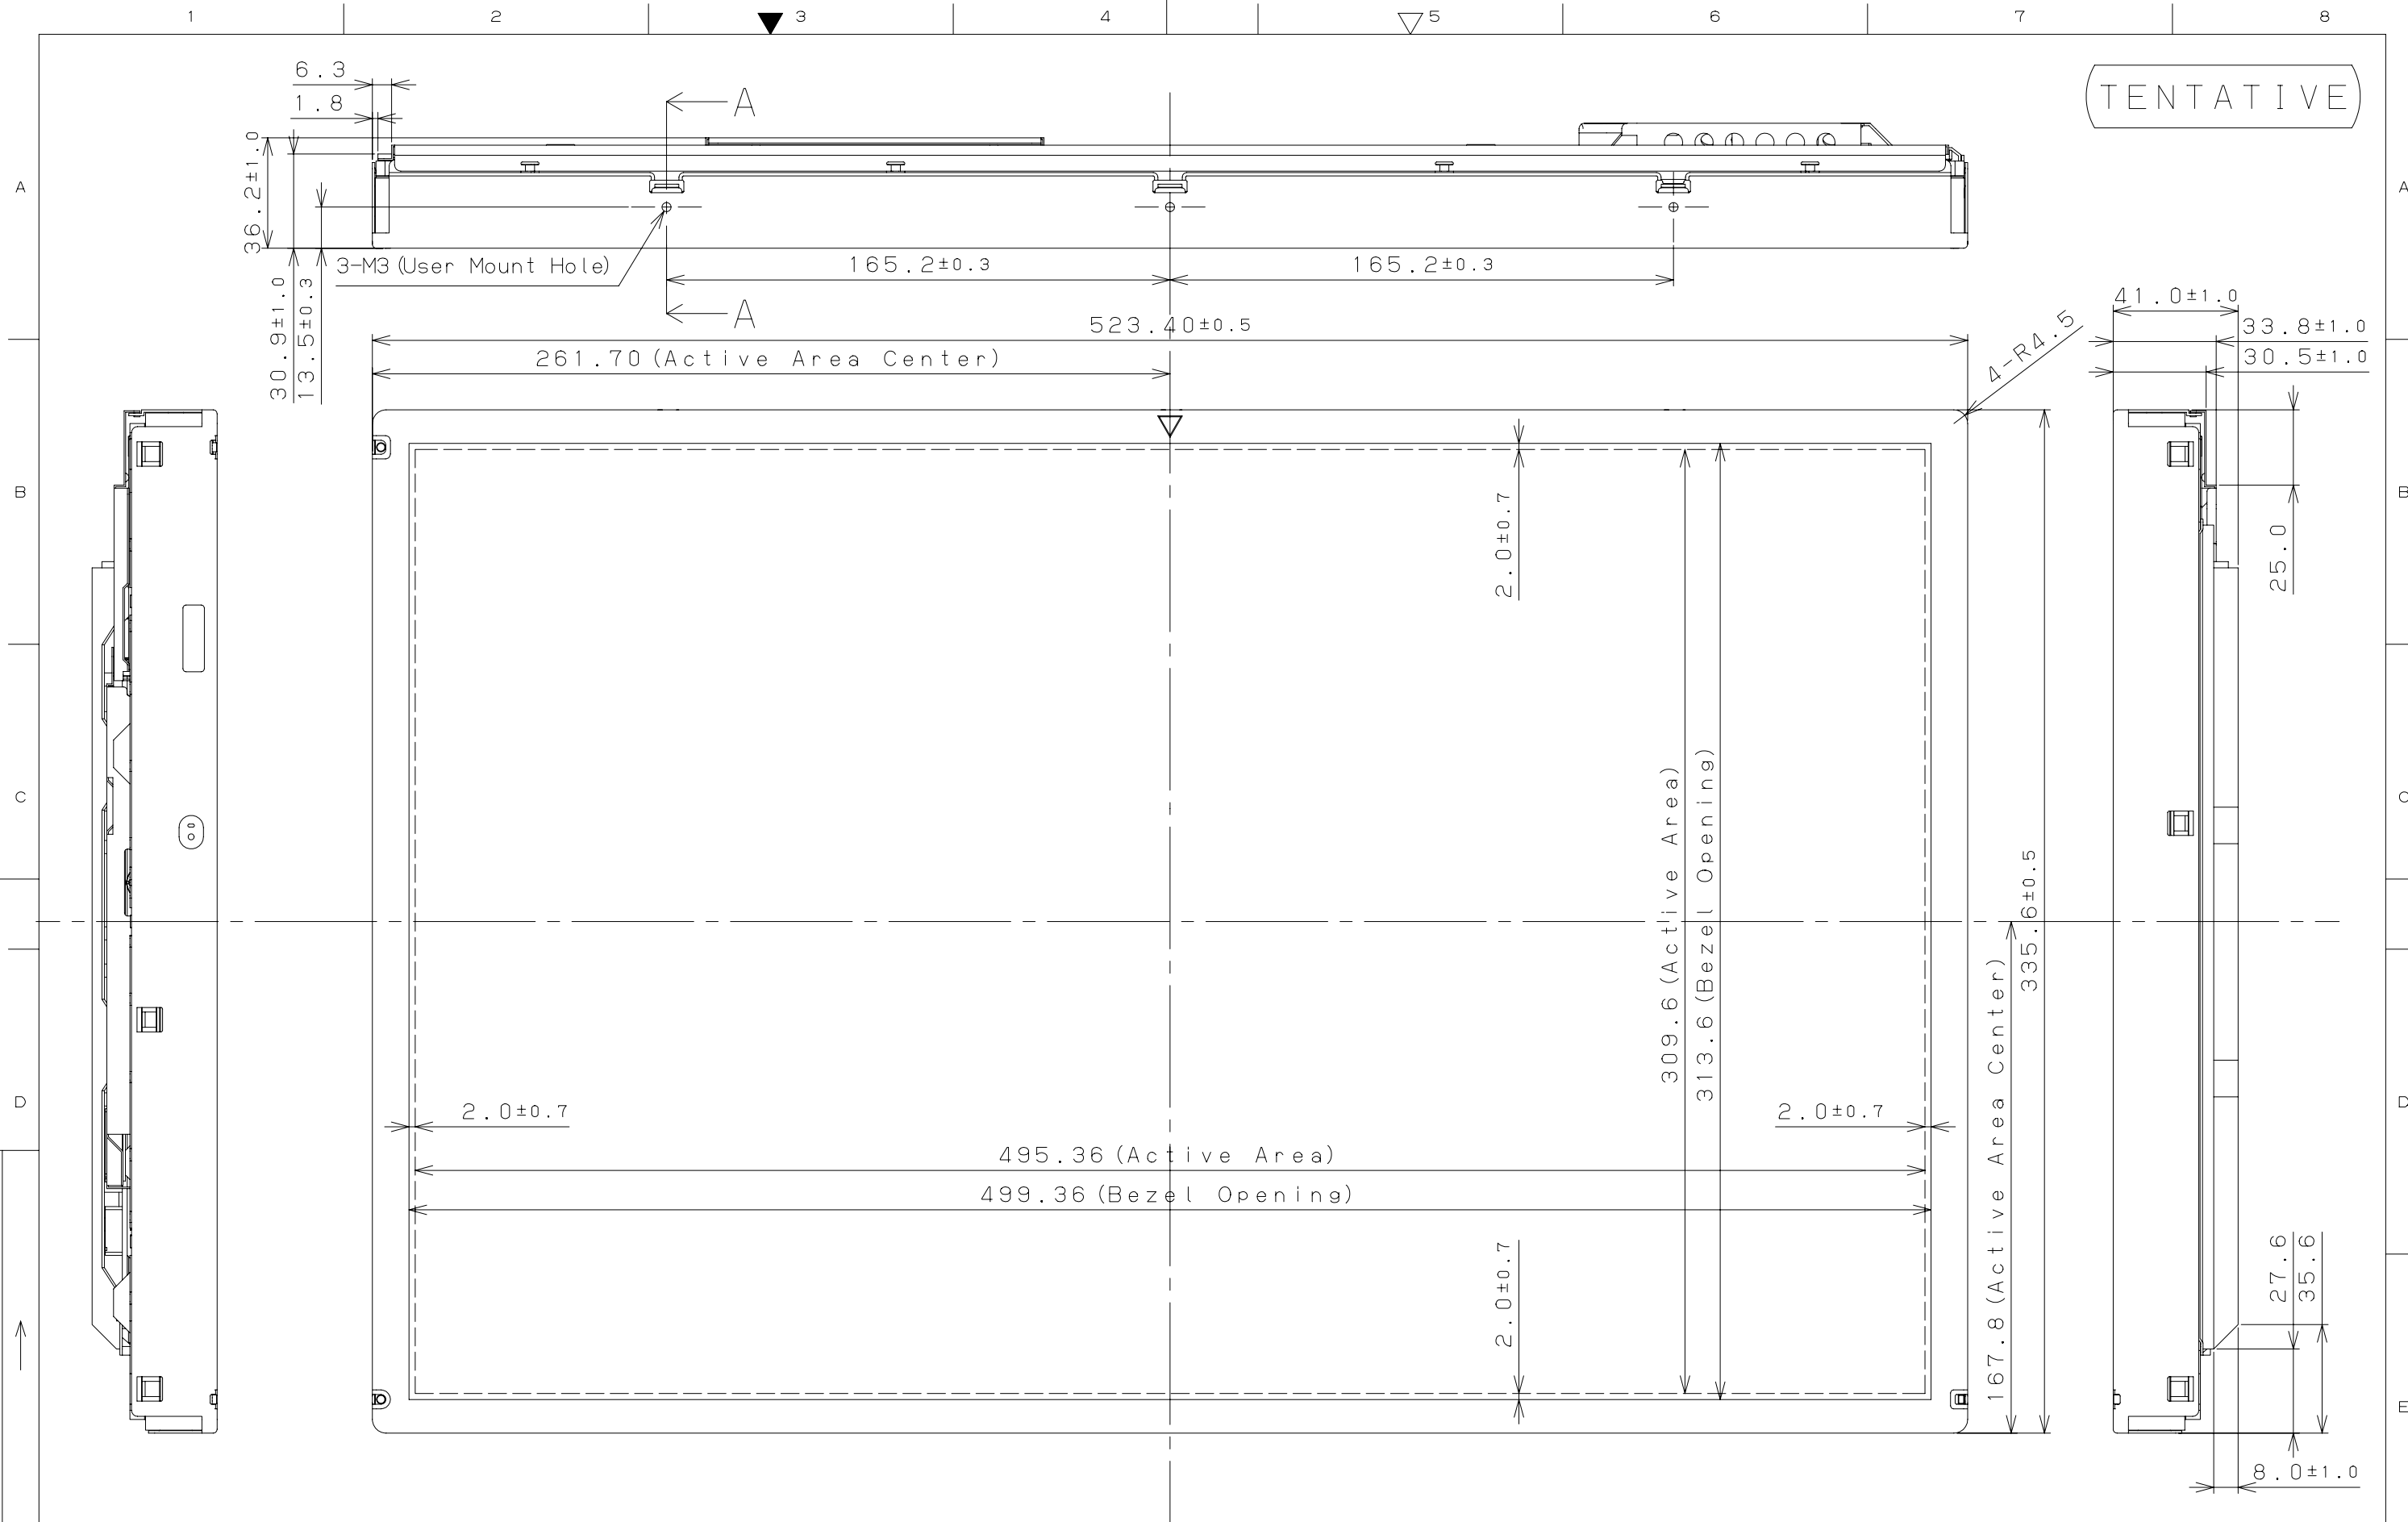


DOCUMENT CONTROL SECTION  
DATE


Figure 5-1 dimensional outline drawing

Note1) Unspecifild tollerrance to be ±0.5 .


							TITLE FLC58UWC8V	
							DRAW. NO. Tech Bes LCD-00274	
							CUST.	
EDIT.	DATE	DESIG.	CHECK	DESCRIPTION			FUJITSU DISPLAY TECHNOLOGIES CORPORATION	
DESIG.			CHECK		APPR.		29 /	

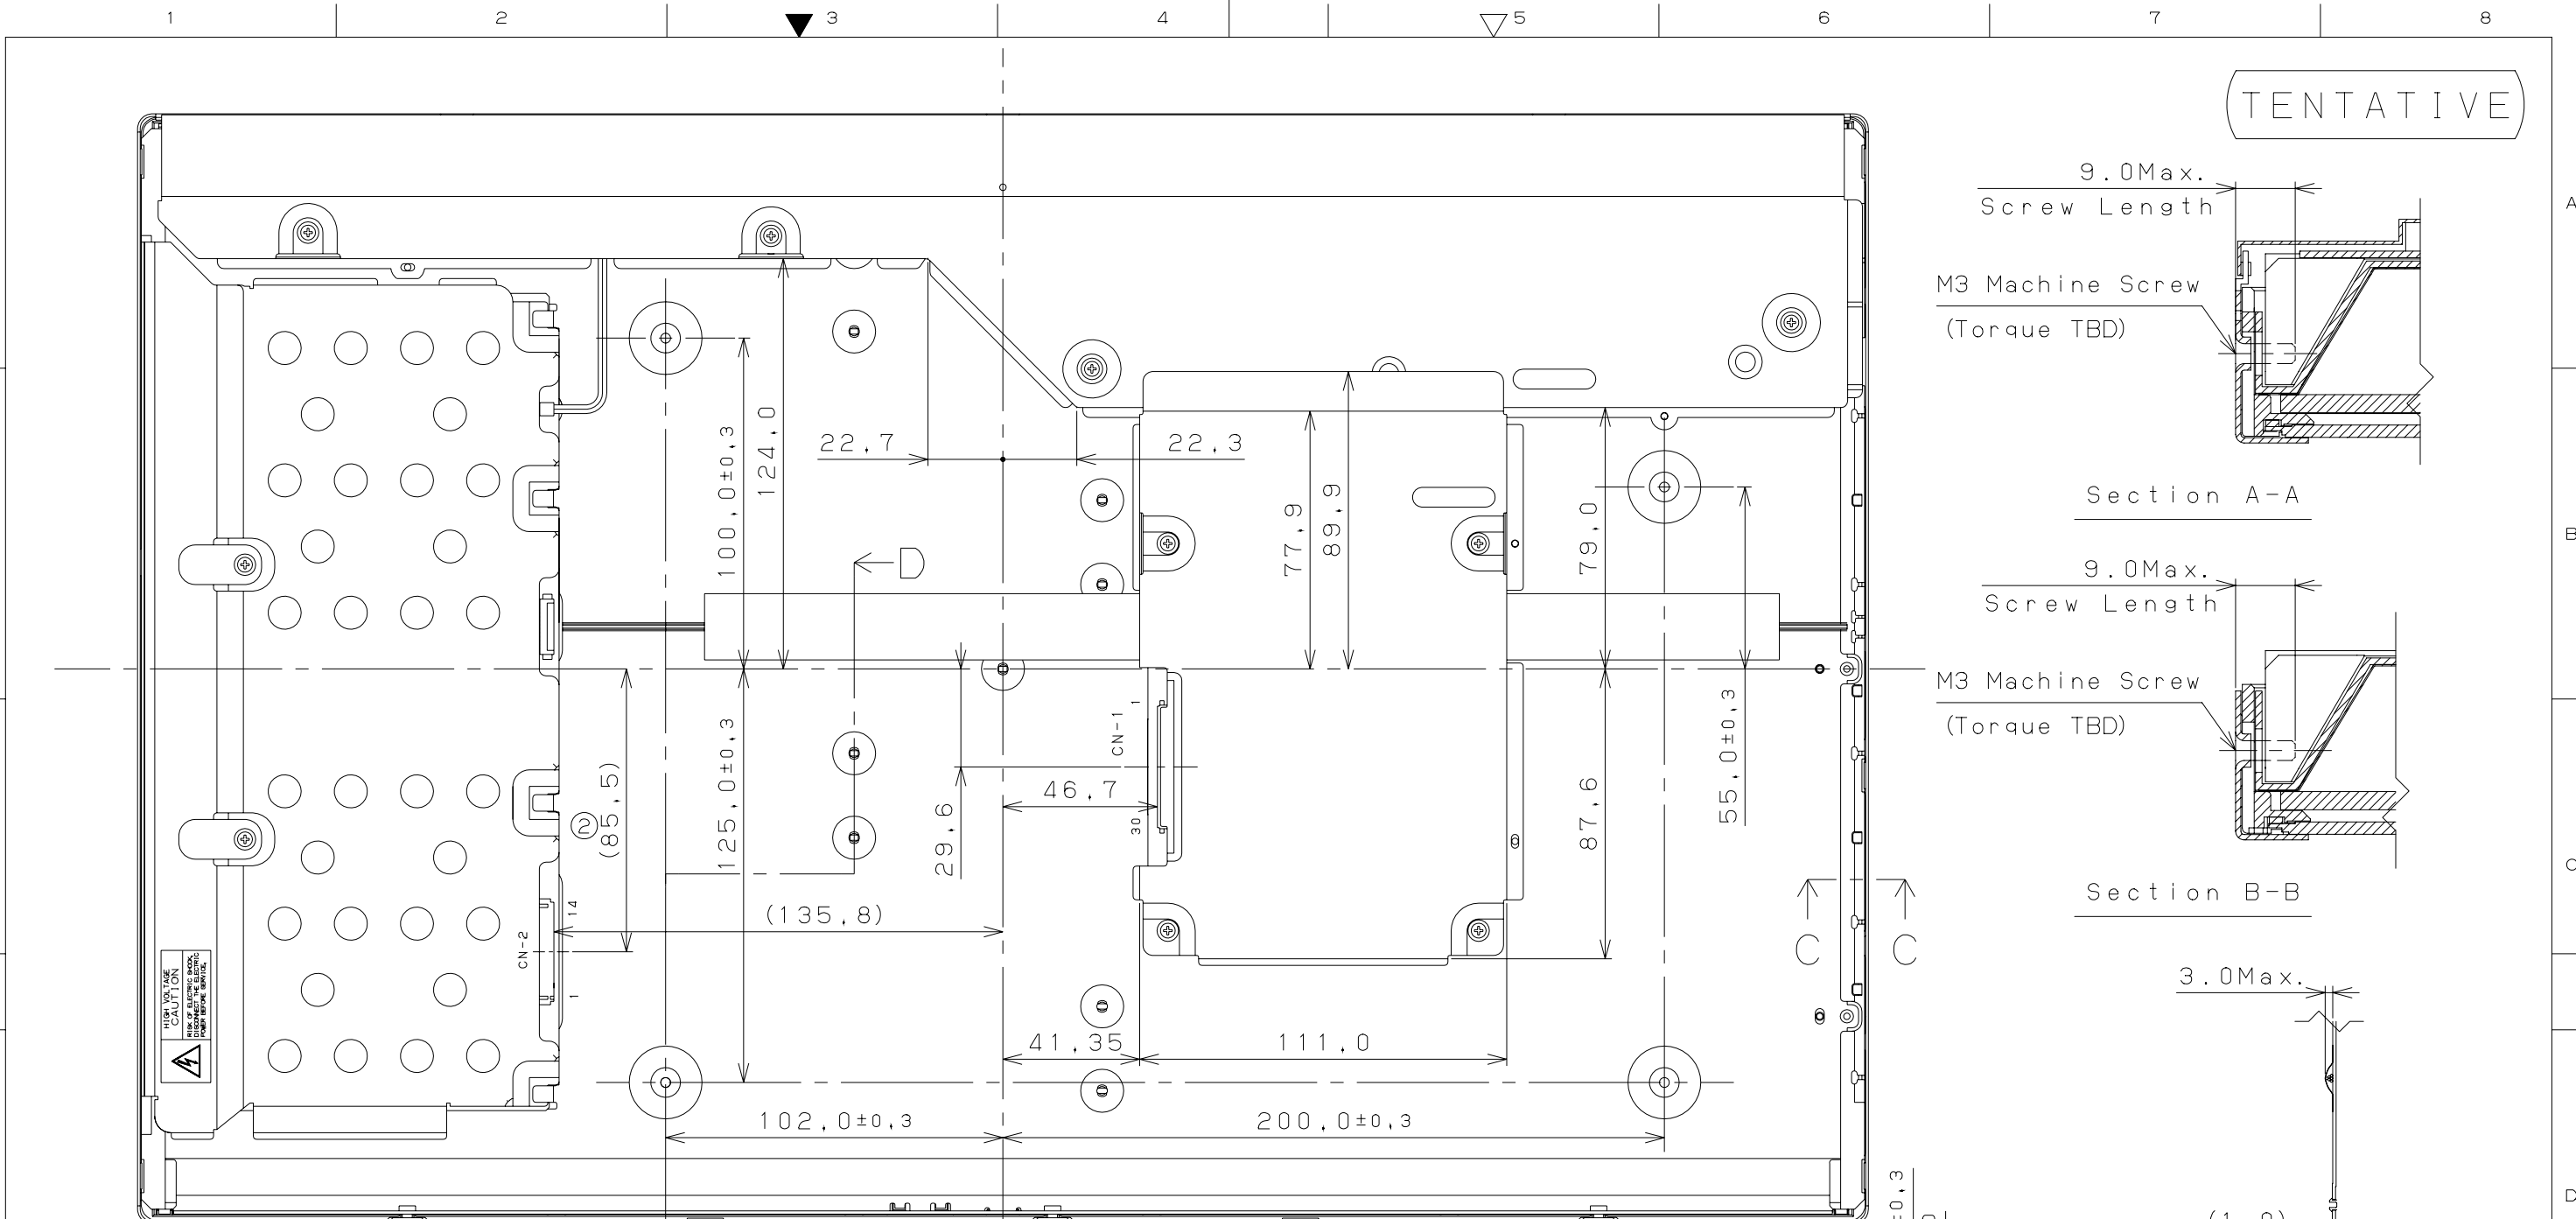


TENTATIVE

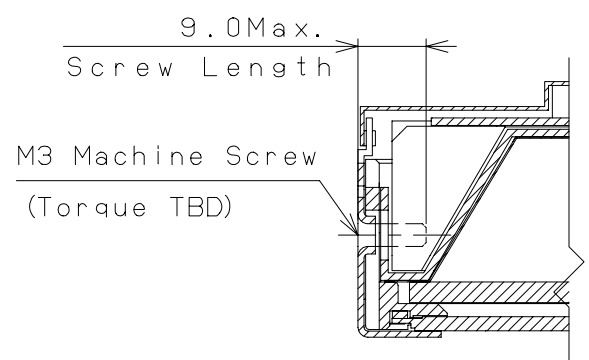



Section A-A

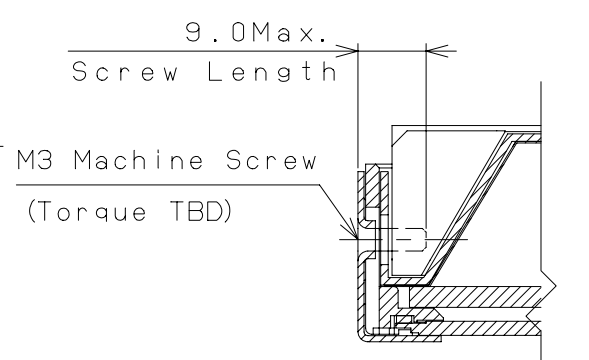

Section B-B

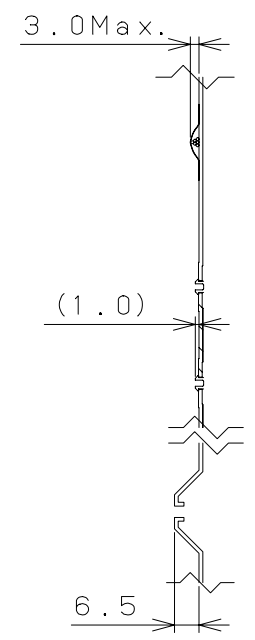

Section D-D

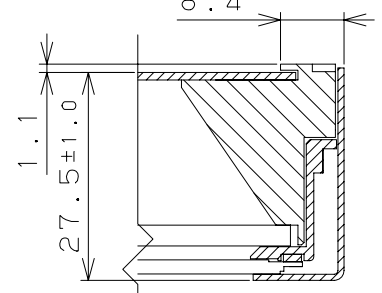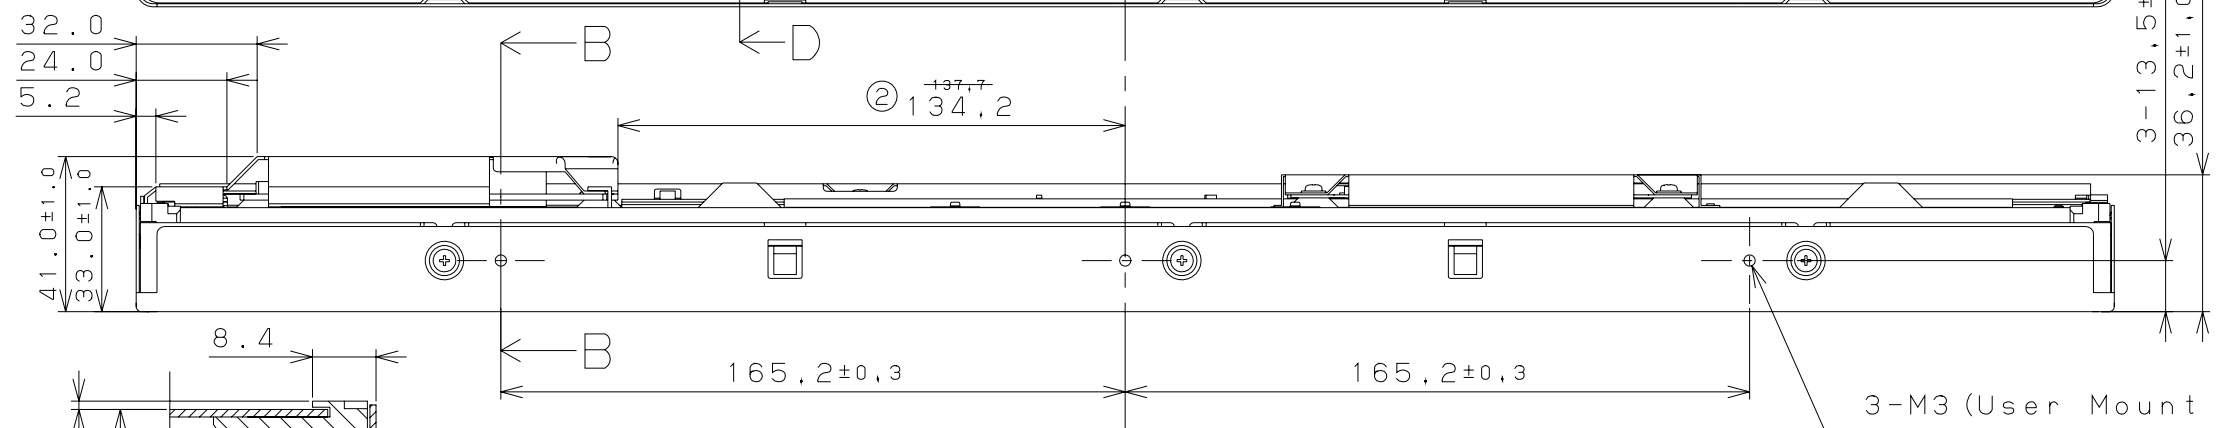

Section C-C

Note1) Unspecifild tollerrance to be ±0.5 .

Figure 5-2 dimensional outline drawing

DATE DOCUMENT CONTROL SECTION

						TITLE FLC58UWC8V	
						DRAW. NO. Tech Bes LCD-00274	
						CUST.	
02	20040705			change CN-2, dimension		FUJITSU DISPLAY TECHNOLOGIES CORPORATION	
DESIG.			CHECK		APPR.	30 / 30	
						93.04 FDNC3901-3	