

International  
**IR** Rectifier

15ETH03  
 15ETH03S  
 15ETH03-1

## Ultrafast Rectifier

### Features

- Ultrafast Recovery Time
- Low Forward Voltage Drop
- Low Leakage Current
- 175°C Operating Junction Temperature

|                            |
|----------------------------|
| $t_{rr} = 40\text{ns}$     |
| $I_{F(AV)} = 15\text{Amp}$ |
| $V_R = 300\text{V}$        |

### Description/ Applications

International Rectifier's 300V series are the state of the art Ultrafast recovery rectifiers designed with optimized performance of forward voltage drop and Ultrafast recovery time.

The planar structure and the platinum doped life time control guarantee the best overall performance, ruggedness and reliability characteristics.

These devices are intended for use in the output rectification stage of SMPS, UPS, DC-DC converters as well as freewheeling diodes in low voltage inverters and chopper motor drives.

Their extremely optimized stored charge and low recovery current minimize the switching losses and reduce over dissipation in the switching element and snubbers.

### Absolute Maximum Ratings

| Parameters  | Max         | Units            |
|---|-------------|------------------|
| $V_{RRM}$ Repetitive Peak Reverse Voltage                                 | 300         | V                |
| $I_{F(AV)}$ Average Rectified Forward Current @ $T_C = 142^\circ\text{C}$ | 15          | A                |
| $I_{FSM}$ Non Repetitive Peak Surge Current @ $T_J = 25^\circ\text{C}$    | 140         |                  |
| $T_J, T_{STG}$ Operating Junction and Storage Temperatures                | - 65 to 175 | $^\circ\text{C}$ |

| Case Styles  |   |  |
|--|---|--|
| <p>15ETH03</p>  <p>TO-220AC</p> | <p>15ETH03S</p>  <p>D<sup>2</sup>PAK</p> | <p>15ETH03-1</p>  <p>TO-262</p> |

**Electrical Characteristics @ T<sub>J</sub> = 25°C (unless otherwise specified)**

| Parameters   | Min | Typ  | Max  | Units | Test Conditions   |
|--|-----|------|------|-------|---|
| V <sub>BR</sub> , V <sub>F</sub> Breakdown Voltage, Blocking Voltage | 300 | -    | -    | V     | I <sub>R</sub> = 100μA  |
| V <sub>F</sub> Forward Voltage                                       | -   | 1.05 | 1.25 | V     | I <sub>F</sub> = 15A, T <sub>J</sub> = 25°C                   |
|  | -   | 0.85 | 1.00 | V     | I <sub>F</sub> = 15A, T <sub>J</sub> = 125°C                  |
| I <sub>R</sub> Reverse Leakage Current                               | -   | 0.05 | 40   | μA    | V <sub>R</sub> = V <sub>R</sub> Rated                         |
|  | -   | 12   | 400  | μA    | T <sub>J</sub> = 125°C, V <sub>R</sub> = V <sub>R</sub> Rated |
| C <sub>T</sub> Junction Capacitance                                  | -   | 45   | -    | pF    | V <sub>R</sub> = 300V   |
| L <sub>S</sub> Series Inductance                                     | -   | 8    | -    | nH    | Measured lead to lead 5mm from package body                   |

**Dynamic Recovery Characteristics @ T<sub>J</sub> = 25°C (unless otherwise specified)**

| Parameters                              | Min | Typ | Max | Units | Test Conditions   |
|---|-----|-----|-----|-------|---|
| t <sub>rr</sub> Reverse Recovery Time   | -   | -   | 40  | ns    | I <sub>F</sub> = 1.0A, di <sub>F</sub> /dt = 50A/μs, V <sub>R</sub> = 30V |
|   | -   | 32  | -   |       | T <sub>J</sub> = 25°C   |
|   | -   | 45  | -   |       | T <sub>J</sub> = 125°C  |
| I <sub>RRM</sub> Peak Recovery Current  | -   | 2.4 | -   | A     | T <sub>J</sub> = 25°C   |
|   | -   | 6.1 | -   |       | T <sub>J</sub> = 125°C  |
| Q <sub>rr</sub> Reverse Recovery Charge | -   | 38  | -   | nC    | T <sub>J</sub> = 25°C   |
|   | -   | 137 | -   |       | T <sub>J</sub> = 125°C  |

I<sub>F</sub> = 15A  
di<sub>F</sub>/dt = -200A/μs  
V<sub>R</sub> = 200V

**Thermal - Mechanical Characteristics**

| Parameters   | Min  | Typ  | Max | Units  |
|--|------|------|-----|--------|
| T <sub>J</sub> Max. Junction Temperature Range                                 | - 65 | -    | 175 | °C     |
| T <sub>Stg</sub> Max. Storage Temperature Range                                | - 65 | -    | 175 |        |
| R <sub>thJC</sub> Thermal Resistance, Junction to Case Per Leg                 | -    | 1.02 | 2.0 | °C/W   |
| R <sub>thJA</sub> <sup>①</sup> Thermal Resistance, Junction to Ambient Per Leg | -    | -    | 70  |        |
| R <sub>thCS</sub> <sup>②</sup> Thermal Resistance, Case to Heatsink            | -    | 0.2  | -   |        |
| Wt Weight  | -    | 2.0  | -   | g      |
|  | -    | 0.07 | -   | (oz)   |
| Mounting Torque  | 6.0  | -    | 12  | Kg-cm  |
|  | 5.0  | -    | 10  | lbf.in |

① Typical Socket Mount

② Mounting Surface, Flat, Smooth and Greased

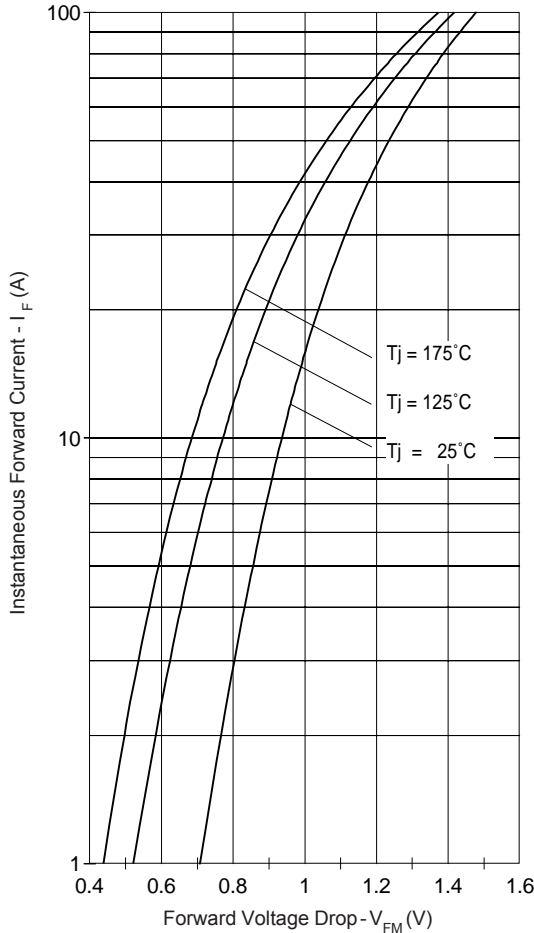


Fig. 1 - Typical Forward Voltage Drop Characteristics

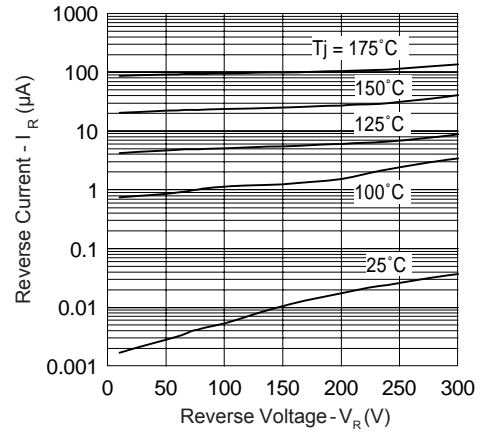


Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage

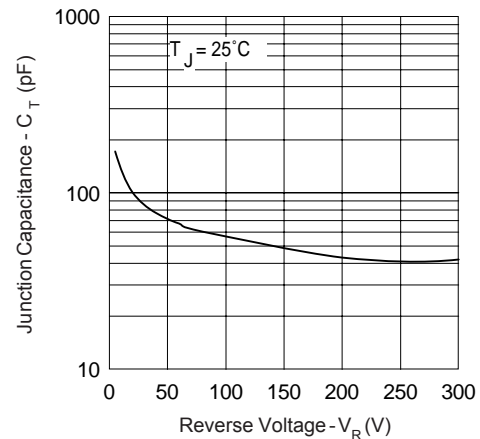


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage



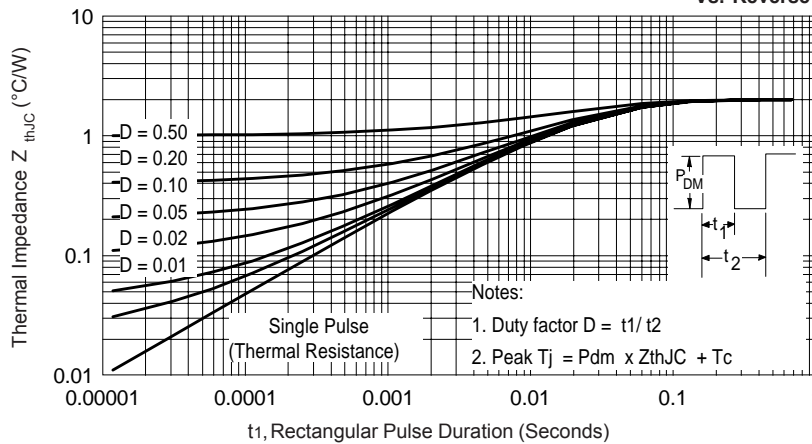



Fig. 4 - Max. Thermal Impedance  $Z_{thJC}$  Characteristics

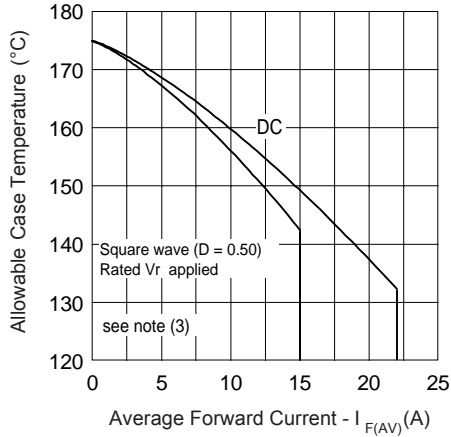


**Fig. 5 - Max. Allowable Case Temperature Vs. Average Forward Current**

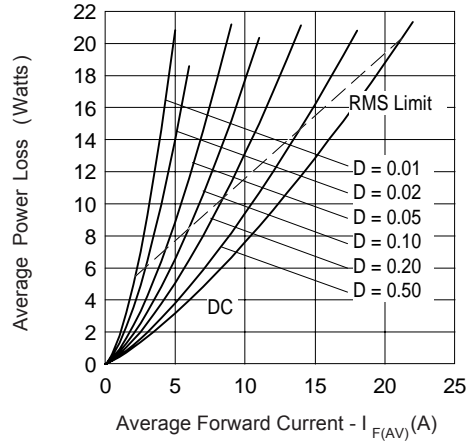

**Fig. 6 - Forward Power Loss Characteristics**

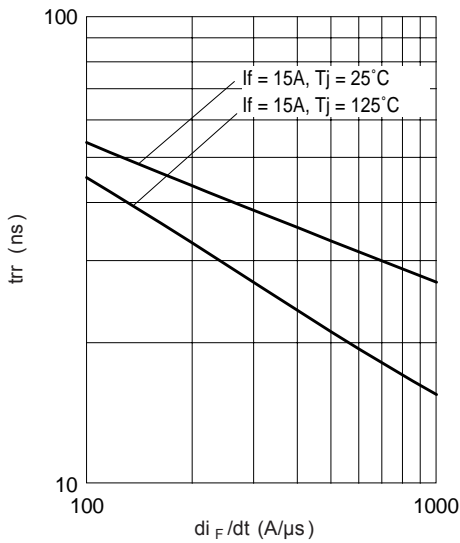

**Fig. 7 - Typical Reverse Recovery vs.  $di_F/dt$**

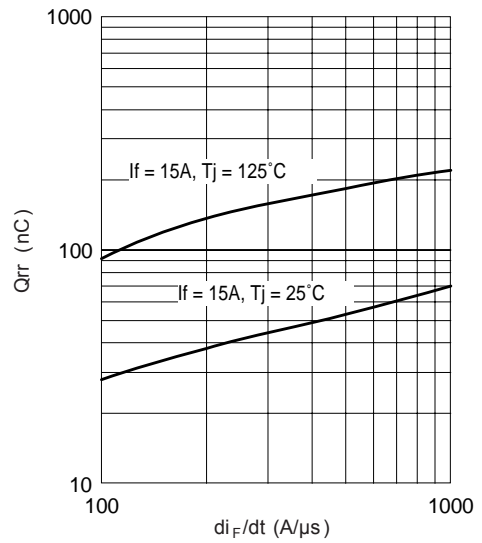

**Fig. 8 - Typical Stored Charge vs.  $di_F/dt$**

(3) Formula used:  $T_C = T_J - (Pd + Pd_{REV}) \times R_{thJC}$ ;

$Pd$  = Forward Power Loss =  $I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$  (see Fig. 6);

$Pd_{REV}$  = Inverse Power Loss =  $V_{R1} \times I_R (1 - D)$ ;  $I_R @ V_{R1}$  = rated  $V_R$

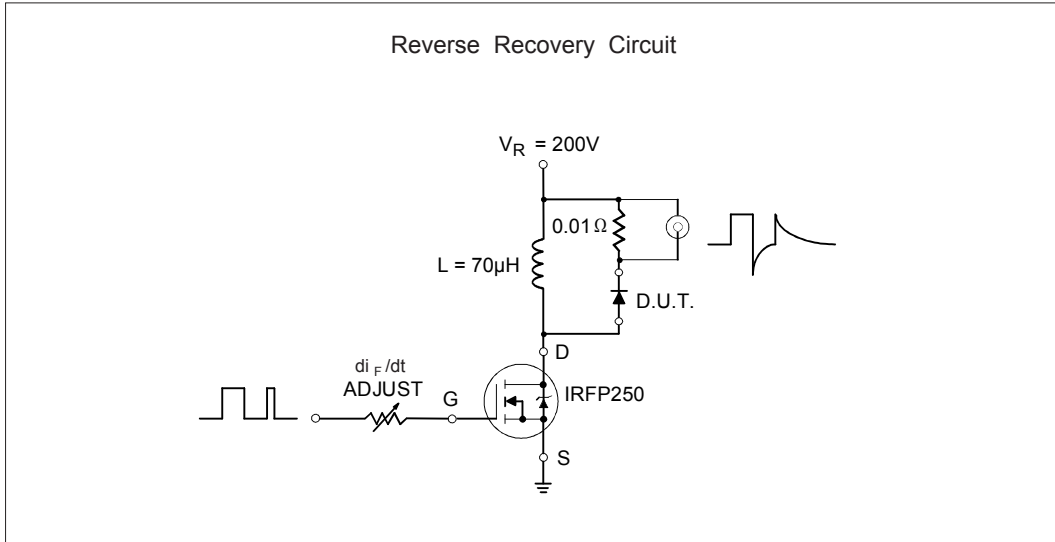


Fig. 9 - Reverse Recovery Parameter Test Circuit




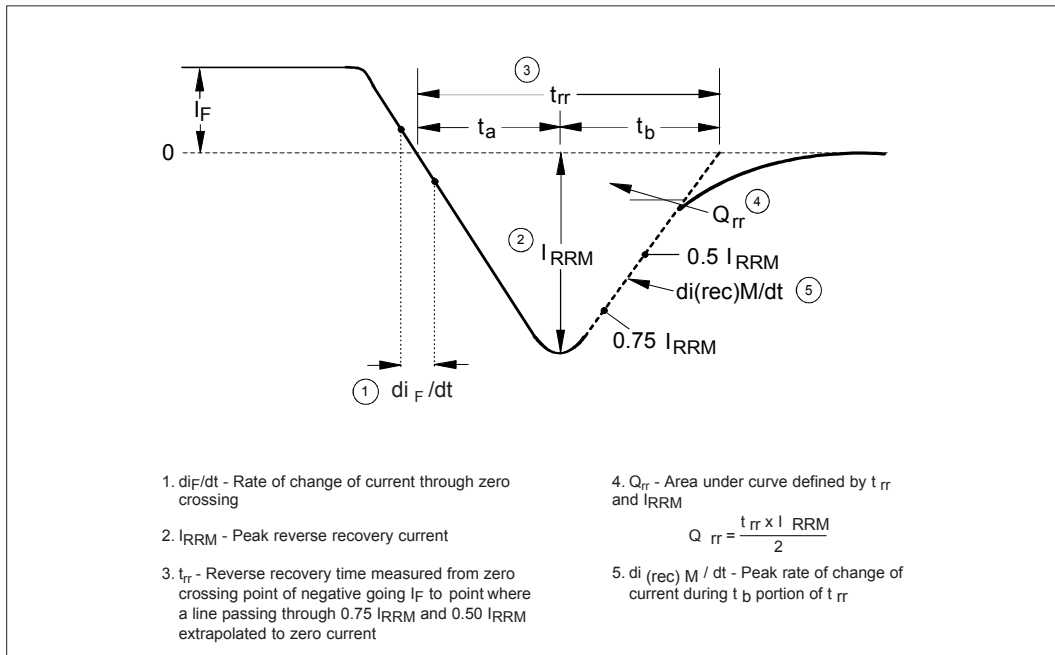


Fig. 10 - Reverse Recovery Waveform and Definitions


Outline Table

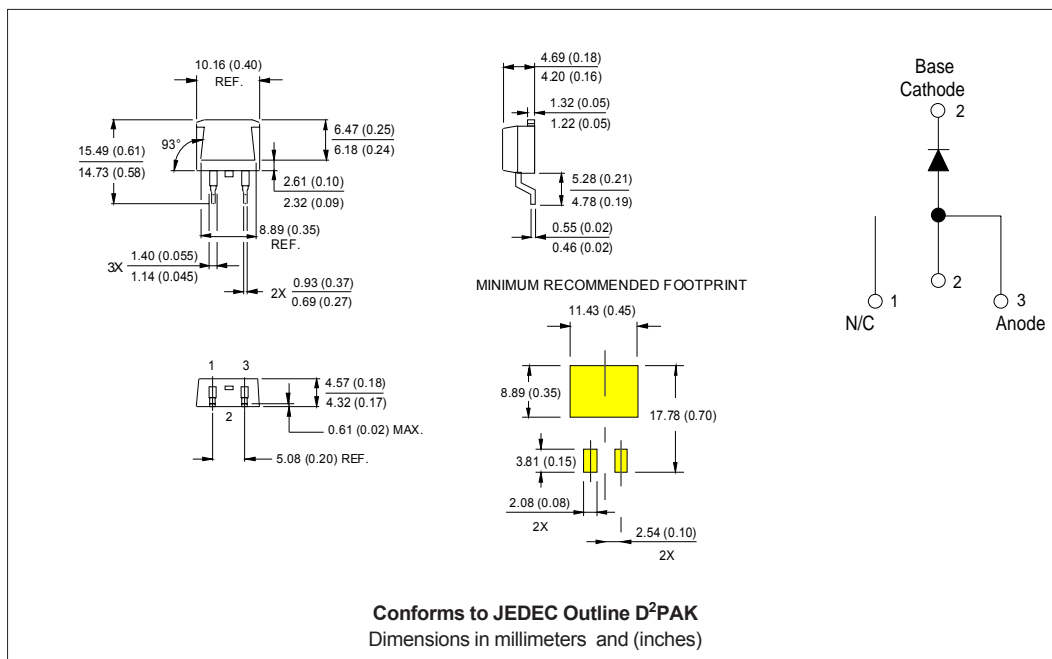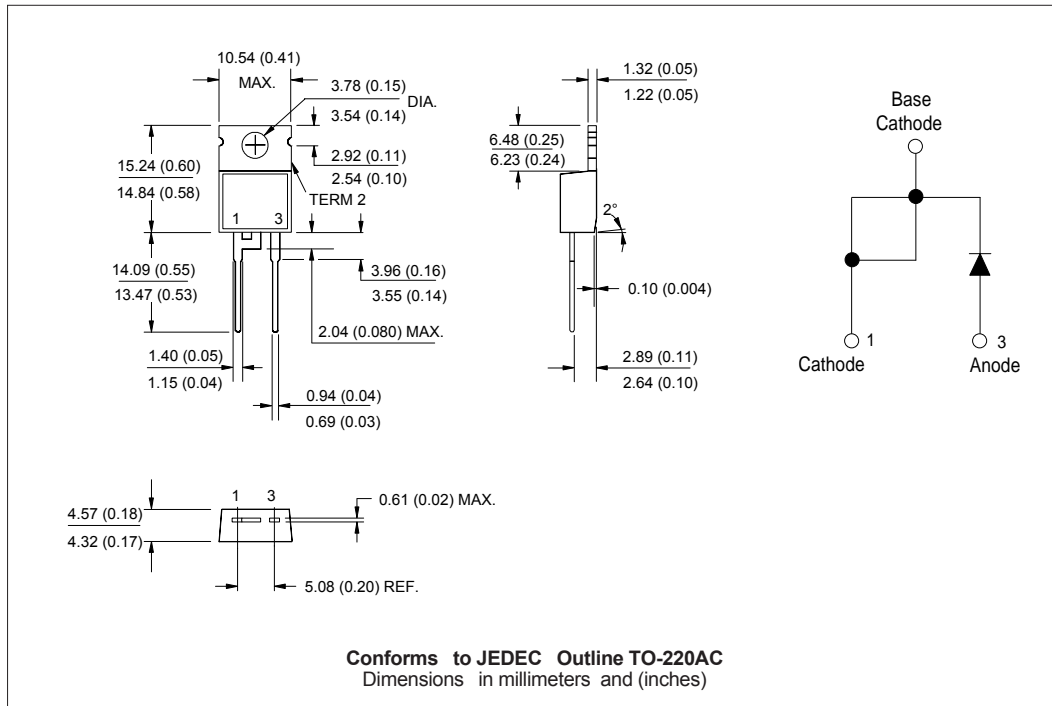

Outline Table

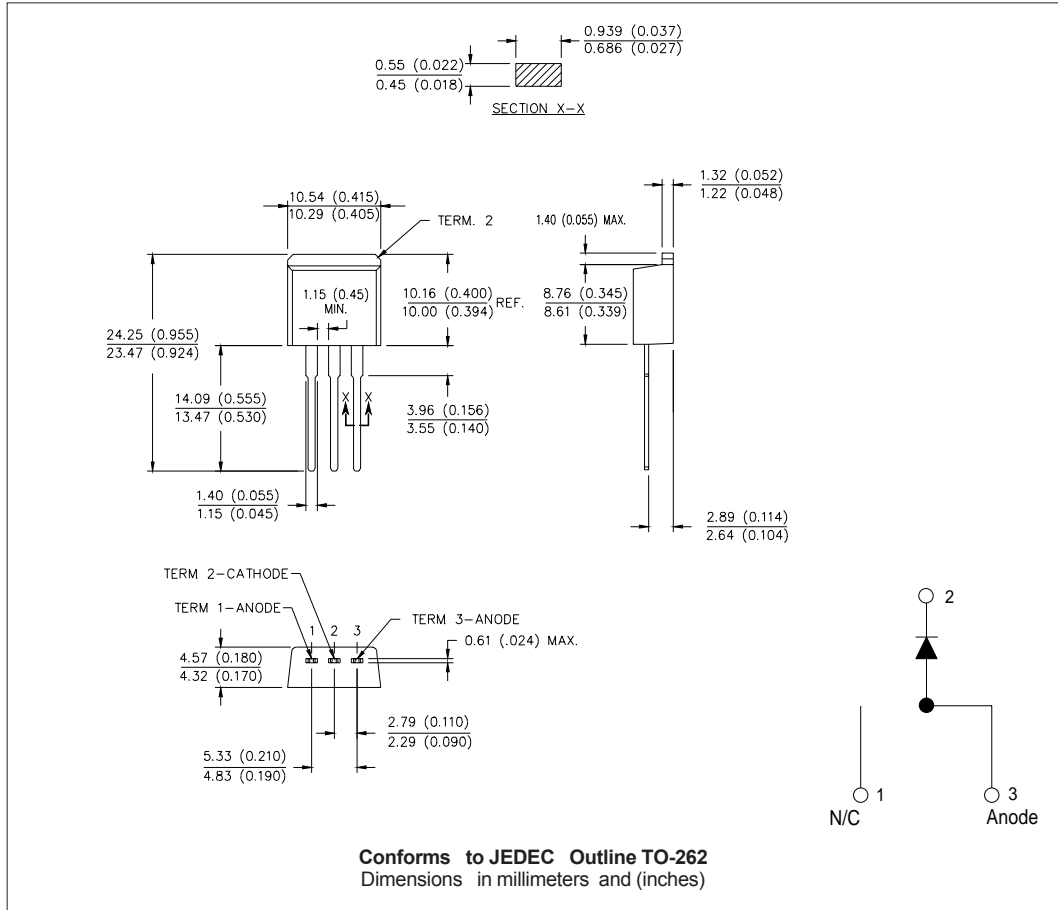


Marking Information

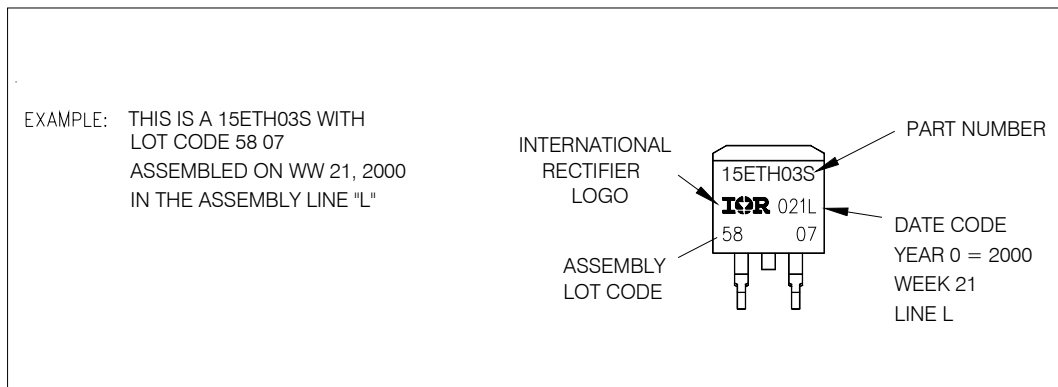


Part Marking Information

EXAMPLE: THIS IS A 15ETH03  
LOT CODE 1789  
ASSEMBLED ON WW 19, 1997  
IN THE ASSEMBLY LINE "C"

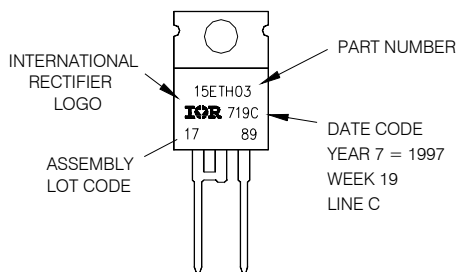


TO-220AC

EXAMPLE: THIS IS A 15ETH03S WITH  
LOT CODE 58 07  
ASSEMBLED ON WW 21, 2000  
IN THE ASSEMBLY LINE "L"

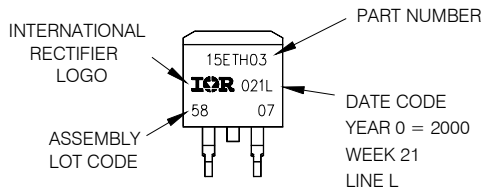

D2Pak

EXAMPLE: THIS IS A 15ETH03-1  
LOT CODE 1789  
ASSEMBLED ON WW 19, 1997  
IN THE ASSEMBLY LINE "C"

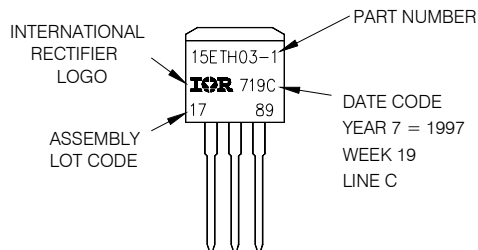

TO-262

Data and specifications subject to change without notice.  
This product has been designed and qualified for Industrial Level.  
Qualification Standards can be found on IR's Web site.