

GP1A08 High Sensitivity Type OPIC Photointerrupter

T-41-73


■ Features

1. Low threshold input current (I_{FLH} : MAX. 5mA)
2. A wide range of operating supply voltage (V_{CC} : 4.5~17V)
3. High sensing accuracy (Slit width: 0.5mm)
4. LSTTL and TTL compatible output

■ Applications

1. Copiers, printers, facsimiles
2. Optoelectronic switches, optoelectronic counters

■ Outline Dimensions (Unit : mm)

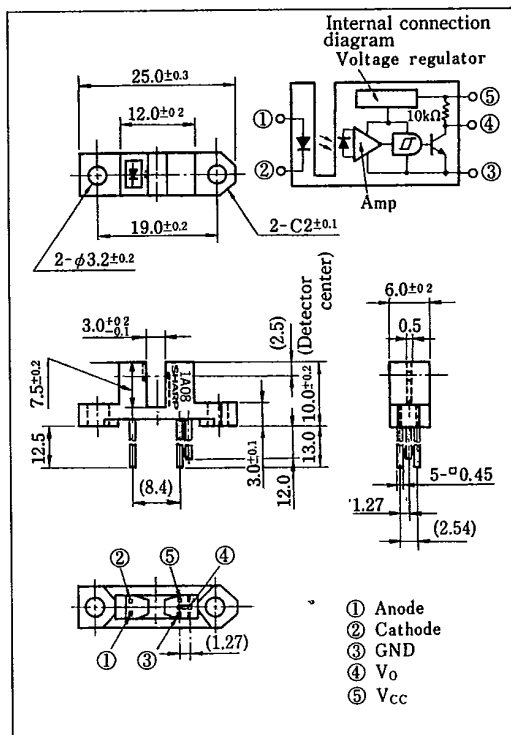

※ OPIC is a registered trademark of Sharp and stands for Optical IC. It has a light detecting element and signal processing circuitry integrated onto a single chip.

■ Absolute Maximum Ratings

(Ta=25°C)

Parameter		Symbol	Rating	Unit
Input	Forward current	I_F	50	mA
	*1Peak forward current	I_{FM}	1	A
	Reverse voltage	V_R	6	V
	Power dissipation	P	75	mW
Output	Supply voltage	V_{CC}	17	V
	Low level output current	I_{OL}	50	mA
	Power dissipation	P_O	250	mW
	Operating temperature	T_{opr}	-25 ~ +85	°C
	Storage temperature	T_{stg}	-40 ~ +100	°C
*2Soldering temperature		T_{sol}	260	°C

*1 Pulse width $\leq 100\mu s$, Duty ratio = 0.01

*2 For 5 seconds

T-41-73

(Ta=25°C)

■ Electro-optical Characteristics

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit	
Input	Forward voltage	V_F	$I_F = 5\text{mA}$	—	1.1	1.4	V	
	Reverse current	I_R	$V_R = 3\text{V}$	—	—	10	μA	
Output	Operating supply voltage	V_{CC}		4.5	—	17	V	
	Low level output voltage	V_{OL}	$I_{OL} = 16\text{mA}, V_{CC} = 5\text{V}$	—	0.15	0.4	V	
	High level output current	V_{OH}	$V_{CC} = 5\text{V}, I_F = 5\text{mA}$	4.9	—	—	V	
	Low level supply current	I_{CCL}	$V_{CC} = 5\text{V}, I_F = 0$	—	2.5	5	mA	
	High level supply current	I_{CCH}	$V_{CC} = 5\text{V}, I_F = 5\text{mA}$	—	1	3	mA	
Transfer characteristics	*3 "Low→High" threshold input current		I_{FLH}	$V_{CC} = 5\text{V}$	—	1	5	mA
	*4 Hysteresis		I_{FHL}/I_{FLH}	$V_{CC} = 5\text{V}$	0.55	0.75	0.95	—
	Response time	"Low→High" propagation time	t_{PLH}	$V_{CC} = 5\text{V}$ $I_F = 5\text{mA}$ $R_L = 280\Omega$	—	3	9	μs
		"High→Low" propagation time	t_{PHL}		—	5	15	
		Rise time	t_r		—	0.1	0.5	
Fall time		t_f	—		0.05	0.5		

*3 I_{FLH} represents forward current when output goes from low to high

*4 I_{FHL} represents forward current when output goes from high to low

(Precautions for Use)

In order to stabilize power supply line, connect a by-pass capacitor of more than $0.01\mu\text{F}$ between V_{CC} and GND near the device.

Fig. 1 Forward Current vs. Ambient Temperature

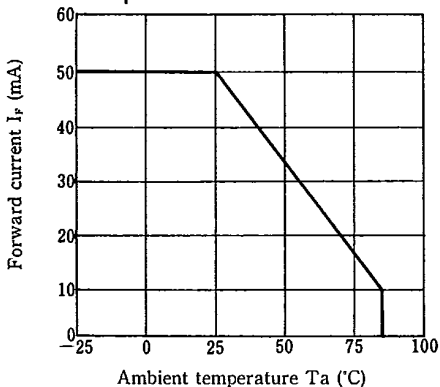


Fig. 2 Output Power Dissipation vs. Ambient Temperature

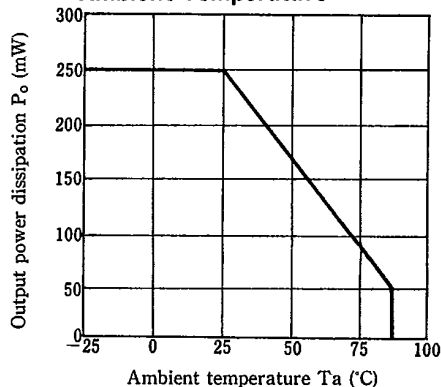


Fig. 3 Forward Current vs. Forward Voltage

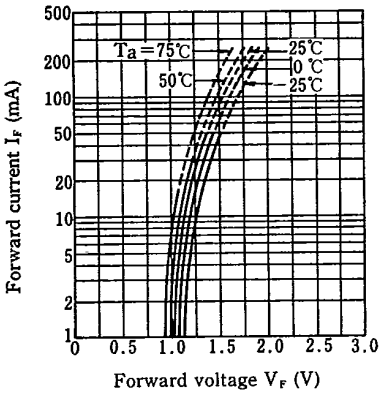


Fig. 4 Relative Threshold Input Current vs. Supply Voltage

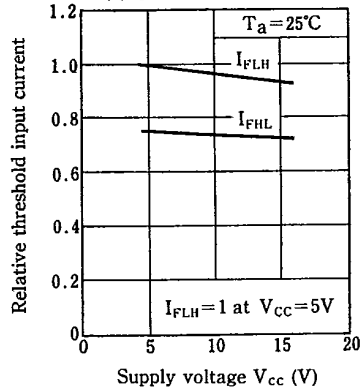


Fig. 5 Relative Threshold Input Current vs. Ambient Temperature

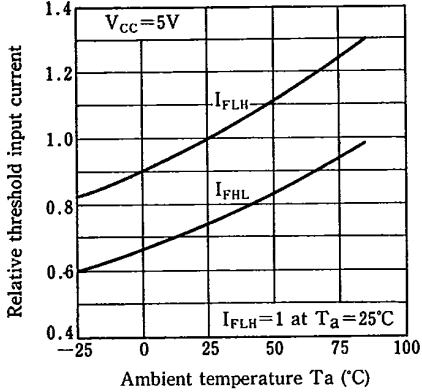


Fig. 6 Low Level Output Voltage vs. Low Level Output Current

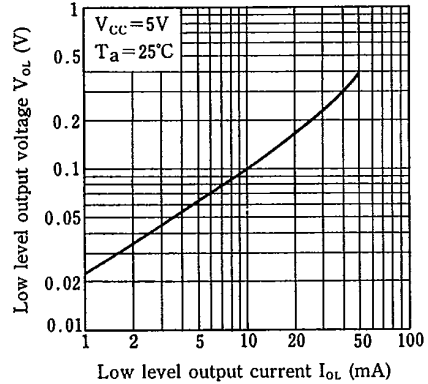


Fig. 7 Low Level Output Voltage vs. Ambient Temperature

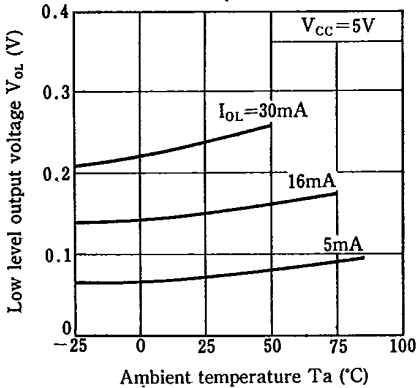


Fig. 8 Supply Current vs. Supply Voltage



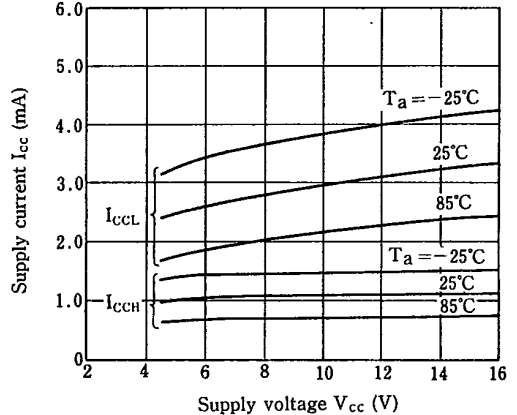


Fig. 9 Propagation Time vs. Forward Current

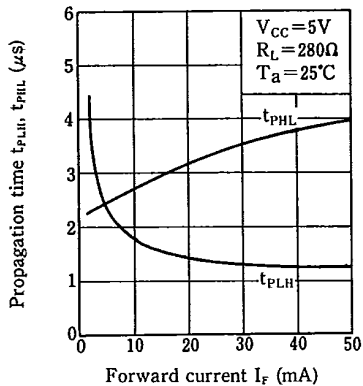

T-41-73
Fig. 10 Rise Time, Fall Time vs. Load Resistance

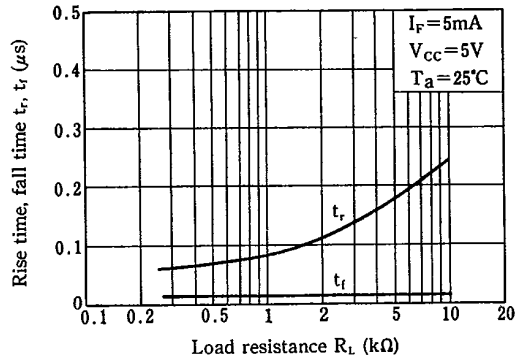

Test Circuit for Response Time

