



## **GPCE2048A**

---

### **16-bit Sound Controller with 24K X 16 ROM**

Jun 02, 2016

Version 1.2

## Table of Contents

	<u>PAGE</u>
<b>1 GENERAL DESCRIPTION</b> .....	<b>4</b>
<b>2 FEATURES</b> .....	<b>4</b>
<b>3 APPLICATION FIELD</b> .....	<b>4</b>
<b>4 BLOCK DIAGRAM</b> .....	<b>5</b>
<b>5 SIGNAL DESCRIPTIONS</b> .....	<b>6</b>
5.1 PIN MAP .....	7
<b>6 FUNCTION DESCRIPTIONS</b> .....	<b>8</b>
6.1 CPU .....	8
6.2 MEMORY .....	8
6.2.1 SRAM .....	8
6.2.2 ROM .....	8
6.3 PLL, CLOCK, POWER MODE .....	8
6.3.1 PLL (Phase Lock Loop) .....	8
6.4 STANDBY MODE .....	8
6.5 LOW VOLTAGE DETECTION AND LOW VOLTAGE RESET .....	9
6.5.1 Low voltage detection (LVD) .....	9
6.5.2 Low voltage reset .....	9
6.6 INTERRUPT .....	9
6.7 I/O .....	9
6.8 SPECIAL FUNCTION IN PORT .....	10
6.9 TIMER / COUNTER .....	10
6.9.1 IO PWM .....	11
6.9.2 Timebase .....	11
6.10 SLEEP MODE, WAKEUP, HALT MODE, AND WATCHDOG .....	11
6.10.1 Sleep and wakeup modes .....	11
6.10.2 Watchdog Reset .....	11
6.11 SOFT RESET PROTECTION .....	12
6.12 ADC (ANALOG TO DIGITAL CONVERTER) / DAC .....	12
6.13 SPI .....	12
6.14 AUDIO ALGORITHM .....	12
<b>7 ELECTRICAL SPECIFICATIONS</b> .....	<b>13</b>
7.1 ABSOLUTE MAXIMUM RATINGS .....	13
7.2 DC CHARACTERISTICS (VDD = 3.3V, VDDIO = 4.5V (PORTA & B), TA = 25°C) .....	13
7.3 DC CHARACTERISTICS (VDD = 3.3V, VDDIO = 3.3V (PORTA & B), TA = 25°C) .....	13
7.4 ADC CHARACTERISTICS (VDD = 3.3V, TA = 25°C) .....	14
7.5 DAC CHARACTERISTICS (V50_DAC = 5.0V, TA = 25°C) .....	14
7.6 REGULATOR CHARACTERISTICS (TA = 25°C) .....	15
7.7 PULL HIGH RESISTER AND VDDIO .....	15
7.8 PULL LOW RESISTER AND VDDIO (NORMAL PAD) .....	15
7.9 PULL LOW RESISTER AND VDDIO (IOB[3:0] PAD WITH INPUT HIGH) .....	15
7.10 I/O OUTPUT HIGH CURRENT I <sub>OH</sub> AND VDDIO .....	15
7.11 I/O OUTPUT LOW CURRENT I <sub>OL</sub> AND VDDIO (NORMAL PAD) .....	16
7.12 I/O OUTPUT LOW CURRENT I <sub>OL</sub> AND VDDIO (HIGH DRIVING PAD) .....	16
7.13 INTERNAL ROSC AND V33_REG .....	16
<b>8 APPLICATION CIRCUITS</b> .....	<b>17</b>
8.1 APPLICATION CIRCUIT WITH REGULATOR, XTAL32K SELECTED .....	17

---

8.2	APPLICATION CIRCUIT WITH REGULATOR, INTERNAL RO3C32K SELECTED .....	18
8.3	APPLICATION CIRCUIT WITHOUT REGULATOR, XTAL32K SELECTED.....	19
8.4	PUSH PULL DAC MIXED WITH ANOTHER DAC .....	20
<b>9</b>	<b>PACKAGE/PAD LOCATIONS .....</b>	<b>21</b>
9.1	ORDERING INFORMATION .....	21
9.2	PACKAGE INFORMATION.....	21
<b>10</b>	<b>DISCLAIMER.....</b>	<b>23</b>
<b>11</b>	<b>REVISION HISTORY .....</b>	<b>24</b>

## 16-BIT SOUND CONTROLLER WITH 24K X 16 ROM

### 1 GENERAL DESCRIPTION

GPCE2048A, a 16-bit architecture sound controller, features the 16-bit  $\mu'nSP^{\text{TM}}$  microprocessor developed by Sunplus Technology. This high processing speed assures the  $\mu'nSP^{\text{TM}}$  is capable of handling complex digital signal processing easily and rapidly. GPCE2048A is applicable to the areas of digital sound processing and voice recognition. The operating voltage of 2.4V through 5.5V and speed of 0.16MHz through 49.152MHz yield GPCE2048A to be utilized in varieties of applications. The memory capacity includes 24K-word ROM and a 2K-word working SRAM. Other features include 20 programmable multi-functional I/Os, three 16-bit timers/counters, 32768Hz Real Time Clock, Low Voltage Reset/Detection, four channels 12-bit ADC (one channel built-in MIC amplifier with auto gain controller), one 14-bit DAC with push-pull amplifier and many others.

### 2 FEATURES


- 16-bit  $\mu'nSP^{\text{TM}}$  microprocessor
- CPU Clock: 0.16MHz - 49.152MHz
- Operating Voltage: 2.4V - 5.5V
- Power regulator built-in with input voltage: 2.4~5.5V, output voltage: 2.4~3.3V
- IO PortA & B Operating Voltage: 2.4V - 5.5V
- 24K-word fast speed ROM
- 2K-word working SRAM
- Software-based audio processing
- Two sets of 14-bit software channel with noise filter, mixer and scalar to play high quality sound
- Standby mode for power saving

- Three 16-bit timers/counters
- One 14-bit DAC with push-pull amplifier. Supports cascade mode
- 20 general I/Os (bit programmable)
- Key wakeup function (IOA0 - 15)
- PLL feature for system clock
- 32768Hz Real Time Clock (RTC), crystal or internal resistor oscillator selected.
- Four channels of 12-bit AD converter
- ADC
- Built-in microphone amplifier and AGC or PGA function selected
- Low voltage reset and low voltage detection
- Watchdog Enable (option)
- One SPI serial interface I/O

### 3 APPLICATION FIELD

- Voice Recognition Product
- Intelligent Interactive Talking Toy
- Advanced Educational Toy
- Kids Learning Product
- Kids Storybook
- General Speech Synthesizer
- Long Duration Audio Product
- Recording / Playback Product

## 4 BLOCK DIAGRAM

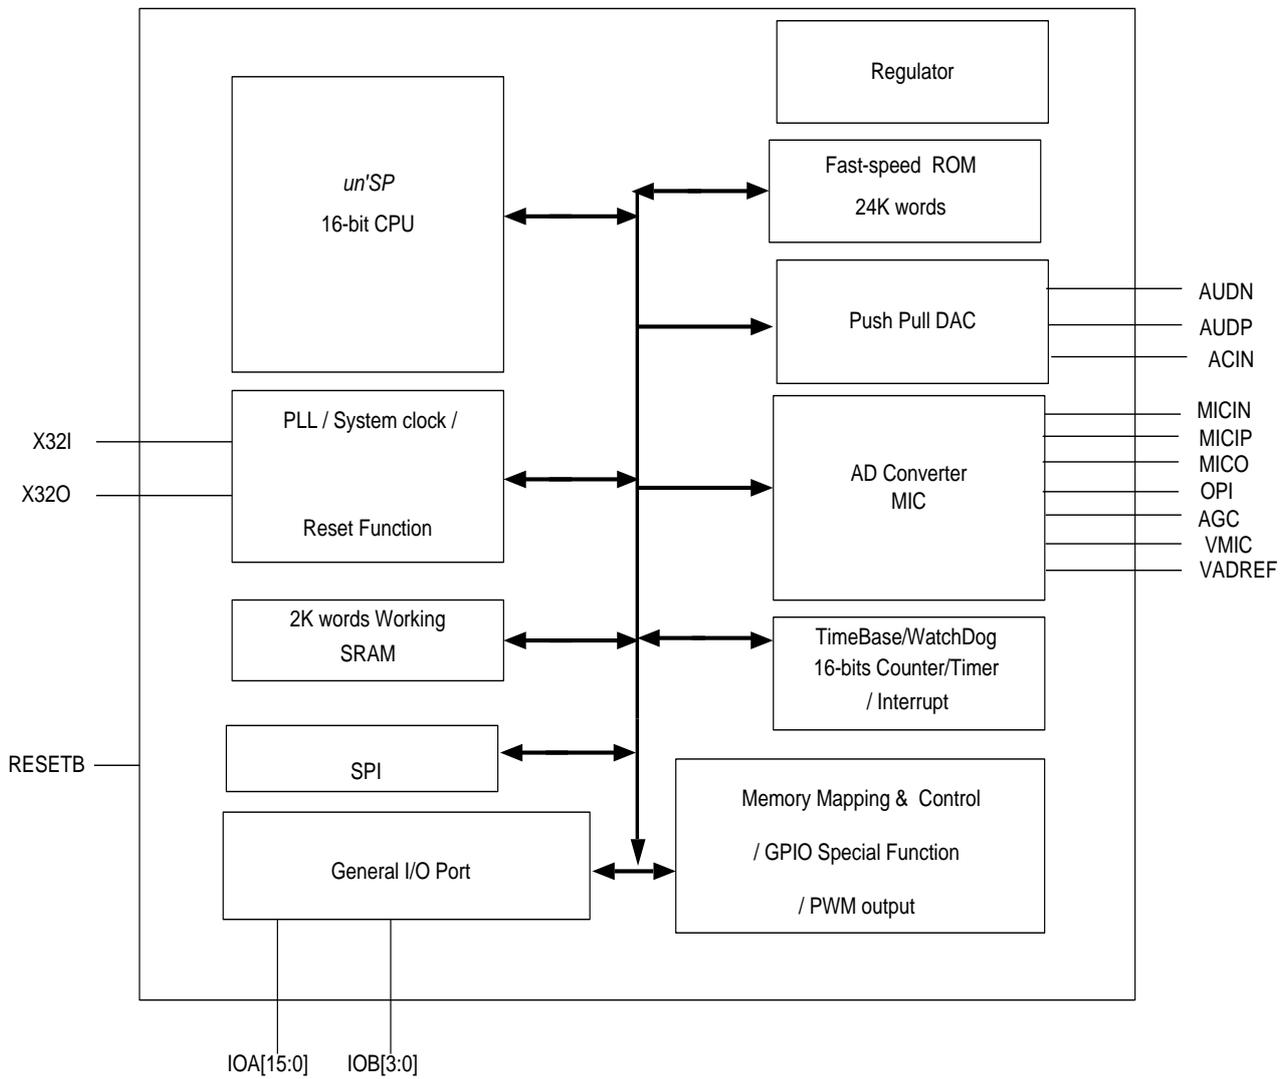


## 5 SIGNAL DESCRIPTIONS

Mnemonic	Type	Description
PORT A, Port B		
IOA[15:0]	I/O	IOA[15:0]: bi-directional I/O ports It can be programmed as wakeup I/O pins
IOB [3:0]	I/O	IOB [3:0]: bi-directional I/O ports
Power & GND		
VDD_IOA	P	Power VDD for Port A
VSS_IOA	G	Power GND for Port A
VDD_IOB	P	Power VDD for Port B
VSS_IOB	G	Power GND for Port B
V33_ADC	P	Power VDD for AD(3.3V)
VSS_ADC	G	Power GND for AD
V33_REG	P	3V power output from regulator
VDD_REG	P	Positive supply for regulator(2.4V~5.5V)
VSS_REG	G	Ground reference for regulator
VDD_DAC	P	Positive 5V supply for push-pull DAC
VDD_PDAC	P	Positive 5V supply for push-pull DAC post driver
VSS_DAC	I	Ground reference for push-pull DAC
VSS_PDAC	I	Ground reference for push-pull DAC post driver
CLK SYSTEM/ ICE INTERFACE		
XTI	I	32KHz Oscillator crystal input
XTO	O	32KHz Oscillator crystal output
OPTION		
TEST	I	TEST Mode selection pin, do not connect the pin
TEST2	I	TEST2 Mode selection pin, do not connect the pin
TEST3	I	TEST3 Mode selection pin, do not connect the pin
R32SEL	I	R32K or Xtal32K select. Connected to VSS when Xtal32K is selected, and connected to V33_REG when R32K is selected.
DAC		
AUDP	O	Audio output of push pull DAC
AUDN	O	Audio output of push pull DAC
ACIN	U	Audio analog mixer in
ADC		
MICP	I	MIC amplifier input positive (Internal Floating)
MICN	I	MIC amplifier input negative (refer to application circuit)
MICOUT	O	MIC amplifier output (refer to application circuit)
OPI	I	Audio amplifier negative input (refer to application circuit)
AGC	IO	AGC by pass filter (refer to application circuit)
VMIC	O	Microphone power supply
VADREF	O	AVREF_DA reference pin
PLL		
VCOIN	I	PLL low pass filter input
Other Signal		
RESETB	I	System reset pin (active low) (internal 47Kohm pull high resistor)

## 5.1 PIN Map

LQFP80

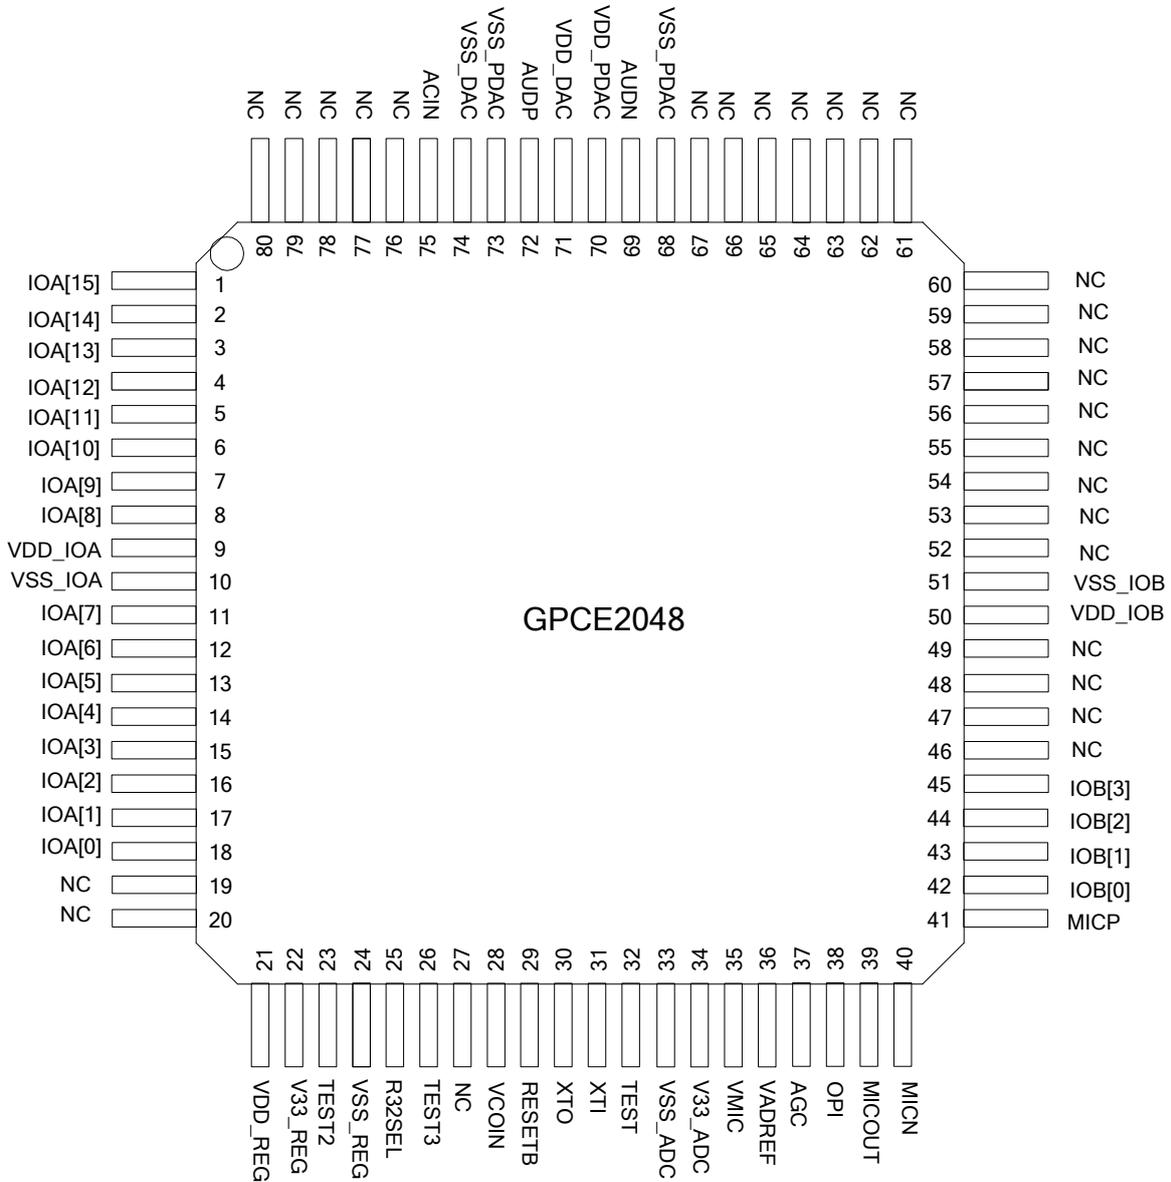

## 6 FUNCTION DESCRIPTIONS


### 6.1 CPU

The GPCE2048A is equipped with a 16-bit  $\mu$ nSP™ microprocessor developed by Sunplus. Eight registers are involved in  $\mu$ nSP™: R1 - R4 (General-purpose registers), PC (Program Counter), SP (Stack Pointer), Base Pointer (BP) and SR (Segment Register). The interrupts include three FIQs (Fast Interrupt Request) and eight IRQs (Interrupt Request), plus one software-interrupt, BREAK.

### 6.2 Memory

#### 6.2.1 SRAM

The amount of SRAM is 2K-word (including Stack), ranged from \$0000 through \$07FF with access speed of two CPU clock cycles.

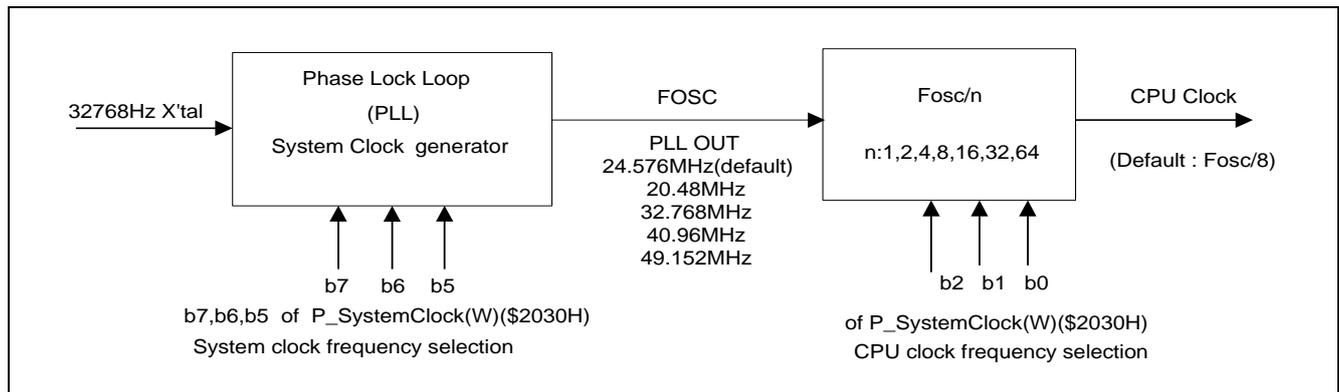

#### 6.2.2 ROM

GPCE2048A features a 24K-word high-speed memory with access speed of two CPU clock cycles.

### 6.3 PLL, Clock, Power Mode

#### 6.3.1 PLL (Phase Lock Loop)

The purpose of PLL is to provide a base frequency (32768Hz) and to pump the frequency from 20.48MHz to 49.152MHz for system clock ( $F_{osc}$ ). The default PLL frequency is 24.576MHz.

##### 6.3.1.1 System clock

Basically, the system clock is provided by PLL and programmed by the Port\_SystemClock (R/W) to determine the clock frequency for system. The default system clock  $F_{osc} = 24.576\text{MHz}$  and CPU clock is  $F_{osc}/8$  if not specified. The initial CPU clock is  $F_{osc}/8$  after system wakes up and adjusts to desired CPU clock via programming the Port\_SystemClock (R/W). This avoids ROM reading failure when system awakes.

##### 6.3.1.2 32768Hz RTC

The Real Time Clock (RTC) is normally used in watch, clock or other time related products. A 2Hz-RTC (0.5 seconds) function is loaded in GPCE2048A. The RTC counts the time as well as to wake CPU up whenever RTC occurs. Since the RTC is generated each 0.5 seconds, time can be traced by the number of RTC occurrences. In addition, GPCE2048A supports

32768Hz crystal oscillator in normal mode and auto-power-saving mode. In normal mode, 32768Hz OSC always runs at the highest power consumption. In auto-power-saving mode, however, it runs at normal mode for the first 7.5 seconds and switches back to power-saving mode automatically to save powers.

#### 6.4 Standby Mode

The GPCE2048A features a power savings mode (or called standby mode) for low power applications. To enter standby mode, the desired key wakeup port (IOA[15:0]) must be configured to input first. And read the Port\_IOA\_Data to latch the IOA state before entering the standby mode. Also remember to enable the corresponding interrupt source(s) for wakeup. After that, stop the CPU clock by writing \$5555 into Port\_System\_Sleep(W) to enter standby mode. In such mode, SRAM and I/Os remain in the previous states until CPU being awakened. The wakeup sources in GPCE2048A include KEY wakeup (IOA[15:0]), RTC wakeup, FIQ and IRQ0 - IRQ7. After GPCE2048A is awakened, CPU will continue to execute the program from where it slept. Programmer can also enable or disable the 32768Hz RTC when CPU is in standby mode.

## 6.5 Low Voltage Detection and Low Voltage Reset

### 6.5.1 Low voltage detection (LVD)

The Low Voltage Detection (LVD) reports the circumstance of present voltage. There are four LVD levels to be selected: 2.6V, 2.8V, 3.0V, and 3.2V. Those levels can be programmed via P\_LVD\_Ctrl. As an example, suppose LVD is given 2.8V. When the voltage drops below 2.8V, the b12 of P\_LVD\_Ctrl is read as HIGH. In such state, program can be designed to react this condition.

### 6.5.2 Low voltage reset

In addition to the LVD, the GPCE2048A has another important function, Low Voltage Reset (LVR). With the LVR function, a reset signal is generated to reset system when the operating voltage drops below LVR level. Without LVR, the CPU becomes unstable and malfunctions when the operating voltage drops below LVR level. The LVR will reset all functions to the initial operational (stable) states when the voltage drops below LVR level.


## 6.6 Interrupt

The GPCE2048A has 13 interrupt sources, grouped into two types: FIQ (Fast Interrupt Request) and IRQ (Interrupt request). The priority of FIQ is higher than IRQ. FIQ is a high-priority interrupt while IRQ is the low-priority one. An IRQ can be interrupted by a FIQ, but not by another IRQ. A FIQ cannot be interrupted by any other interrupt sources.

Interrupt Source	Interrupt Name / FIQ Name	IRQ Priority
Timer A	IRQ0_TMA/FIQ_TMA	1(High)
Timer B	IRQ1_TMB/FIQ_TMB	2
Timer C	IRQ2_TMC/FIQ_TMC	3
SPI	IRQ3_SPI/FIQ_SPI	4
Key wakeup	IRQ5_KEY/FIQ_KEY	5
EXT1	IRQ5_EXT1/FIQ_EXT1	6
EXT2	IRQ5_EXT2/FIQ_EXT2	7
4096Hz	IRQ6_4KHz/FIQ_4KHz	8
2048Hz	IRQ6_2KHz/FIQ_2KHz	9
512Hz	IRQ6_512Hz/FIQ_512Hz	10
64Hz	IRQ7_64Hz/FIQ_64Hz	11
16Hz	IRQ7_16Hz_FIQ_16Hz	12
2Hz	IRQ7_2Hz/FIQ_2Hz	13(Low)

## 6.7 I/O

Two I/O ports are built in GPCE2048A - PortA and PortB, total has 20 bit-programmable I/Os. The PortA is a general purpose I/O with programmable wakeup capability, i.e. IOA [15:0] is the key wakeup port. To activate key wakeup function, latch data on Port\_IOA\_Data and enable the key wakeup function. Wakeup is triggered when the PortA state is different from at the time latched. Furthermore, the I/O ports can be operated at 5V level, higher than the CPU core which is a 3V level system. Suppose system operating voltage is running at 3.3V, VDDIO (power for I/O) operates from 3.3V to 5.5V. In such condition, the I/O pad is capable of operating from 0V through VDDIO. The following diagram is an I/O schematic. Although data can be written into the same register through Port\_Data and Port\_Buffer, they can be read from different places, Buffer (R) and Data (R).

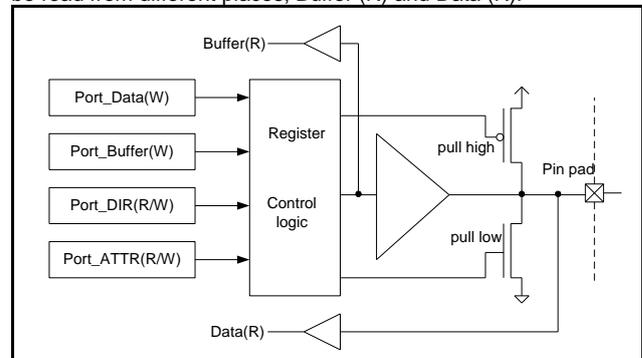

In addition to a general purpose I/O port function, PortA/B also shares/carries some special functions. A summary of PortA/B special functions is listed as follows:

## 6.8 Special Function in Port

Port	Special Function	Function Description	Note
IOA0	IO_PWM	IO_PWM Output	Refer to Timer section
IOA1	IROUT	IR Output	-
IOA2	-	-	-
IOA3	-	-	-
IOA4	High driving I/O	-	-
IOA5	High driving I/O	-	-
IOA6	High driving I/O	-	-
IOA7	High driving I/O	-	-
IOA8	Feedback Input1	-	Refer to below Example 1
	EXT1	External interrupt source 1 (negative edge triggered)	Set IOA8 as floating input mode
IOA9	Feedback Output1	Work with IOA8 by adding a RC circuit between them to get an OSC to EXT1 interrupt	Set IOA9 as inverted output
IOA10	Feedback Input2	-	Refer to below Example 1
	EXT2	External interrupt source 2 (negative edge triggered)	Set IOA10 as floating input mode
IOA11	Feedback Output2	Work with IOA10 by adding a RC circuit between them to get an OSC to EXT2 interrupts	Set IOA11 as inverted output
IOA12	SPI CS	SPI chip select	Refer to SPI section
IOA13	SPI CK	SPI clock	Refer to SPI section
IOA14	SPI TX	SPI data output	Refer to SPI section
IOA15	SPI RX	SPI data input	Refer to SPI section
IOB0	AN0	ADC Channel 0	Refer to ADC section
IOB1	AN1	ADC Channel 1	Refer to ADC section
IOB2	AN2	ADC Channel 2	Refer to ADC section
IOB3	AN3	ADC Channel 3	Refer to ADC section
IOA[15:0], IOB[3:0]	Io toggle	Io toggle function	Refer to IO Special Functions section

Refer to the above table, the configuration of IOA9, IOA10, IOA11, and IOA12 involves feedback function in which an OSC frequency can be obtained from EXT1 (EXT2) by simply adding a RC circuit between IOA8 (IOA10) and IOA9 (IOA11).

## 6.9 Timer / Counter

GPCE2048A provides three 16-bit timers/counters - TimerA, TimerB and TimerC or so called universal counters. The clock source of Timer A/B/C are from clock source Input 1 and clock source Input 2 (see below table) which perform AND operation to form the varieties of combinations. When timer overflows, a timeout signal (TAOUT) is sent to CPU interrupt module to generate a timer interrupt signal. In addition, Timer A/B/C hardware interrupt events can be used to latch the DAC audio output and trigger ADC conversion.

Example to Timer A, sending a write signal into TMA\_CNT, the value of TMA\_DATA (value=N) will reload into TMA\_CNT and set an appropriated clock source. Timer will up-count from N, N+1, N+2... 0xFFFF. An INT signal is generated at the moment of timer rolling over from "0xFFFF" to "0x0000", and an INT signal is processed by INT controller immediately. At the same time, N

will be reloaded into TMA\_CNT and start counting again.

In Timer A, the clock Input 1 is a high frequency source and clock Input 2 is a low frequency clock source. The combination of clock Input 1 and input 2 provides varieties of speeds to TimerA/CounterA - "1" representing pass signal (not gating), and "0" meaning timer deactivated. For instance, if Input 1="1", the clock is depending on Input 2. If Input 1="0", the TimerA is deactivated. The EXT1/ETX2 is the external clock source 1 and external clock source 2.


TMXSEL	Input 1	Input 2
0000	'0'	'0'
0001	'1'	'1'
0010	F <sub>RTC</sub>	EXT2

TMXSEL	Input 1	Input 2
0011	F <sub>PLL</sub>	EXT2
0100	EXT2	64Hz
0101	EXT2	16Hz
0110	EXT2	2Hz
0111	EXT2	'1'
1000	F <sub>RTC</sub>	64Hz
1001	F <sub>RTC</sub>	16Hz
1010	F <sub>RTC</sub>	2Hz
1011	F <sub>RTC</sub>	'1'
1100	F <sub>PLL</sub>	64Hz
1101	F <sub>PLL</sub>	16Hz
1110	F <sub>PLL</sub>	2Hz
1111	F <sub>PLL</sub>	'1'

The following clock source A/B/C means clock source for Timer A/B/C respectively. Generally speaking, the clock source A and C are fast clock sources and source B comes from RTC system (32768Hz). Therefore, clock source B can be utilized as a precise counter for time counting, e.g., the 2Hz clock can be used for real time counting.

### 6.9.1 IO PWM

One IO PWMs which duty is selected from 1/256 to 254/256. Example the below figure is a 3/256-duration cycle. The PWMO waveform is made by selecting a pulse width through Port\_PWM\_Ctrl. As a result, each 256 cycles will generate a pulse width defined in control port. These PWM signals can be applied for controlling the speed of motor or other devices.

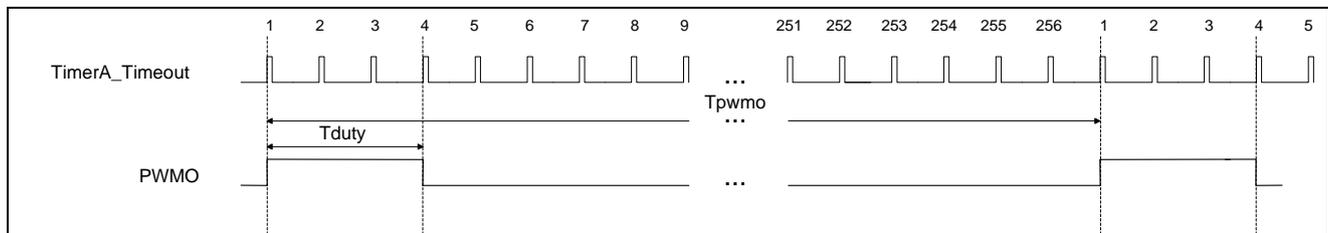

### 6.9.2 Timebase

Timebase, generated by 32768Hz crystal oscillator, is a combination of frequency selection. Furthermore, timebase generates 4KHz, 2KHz, 512Hz, 64Hz, 16Hz and 2Hz interrupt sources (FIQ6/IRQ6, FIQ7/IRQ7) for Real-Time-Clock

## 6.10 Sleep Mode, Wakeup, Halt Mode, and Watchdog

### 6.10.1 Sleep and wakeup modes

- 1) Sleep: After power-on reset, IC starts running until a sleep command is issued. When a sleep command is accepted, IC will turn the system clock (PLL) off. After all, it enters sleep mode.
- 2) Wakeup: CPU awaking from sleep mode requires a wakeup signal to turn the system clock (PLL) on. The FIQ/IRQ signal makes CPU to complete the wakeup process and initialization. The CPU wakeup source is given in the following table.

Wakeup Source
FIQ source
Timer A interrupt
Timer B interrupt
Timer C interrupt
SPI interrupt
EXT1/EXT2/KEY
RTC

### 6.10.2 Watchdog Reset

The GPCE2048A provides another important feature- watchdog reset. If the watchdog function is enabled, a reset signal is generated to reset system when watchdog counter is overflow.

The purpose of watchdog is to monitor whether the system operates normally. Within a certain period, watchdog register must be cleared. If it is not cleared, CPU assumes the program has been running in an abnormal condition. As a result, the CPU will reset the system to the initial state and start running the program all over again.

## 6.11 Soft Reset Protection

Software reset. Writes \$5555 into P\_System\_Reset will reset the whole system like hardware reset (pull low RESETB pin), except a flag will set on in P\_System\_LVD\_Ctrl(R/W).



## 6.12 ADC (Analog to Digital Converter) / DAC

The GPCE2048A has four channels 12-bit ADC (Analog to Digital Converter). The function of an ADC is to convert analog signal to digital signal, e.g. a voltage level into a digital word. The four channels of ADC can be four channels of line-in from IOB [3:0] or one channel microphone (MIC) input through amplifier PGA controller, and AGC controller. The MIC amplifier circuit is

capable of reducing common mode noise by transmitting signals through differential MIC Inputs (MICN, MICP). Moreover, an external resistor can be applied to adjust microphone gain and time of AGC operating. The AD needs to select source of line-in before conversion. The ADC takes pad (VDD\_ADC) as voltage reference.

## 6.13 SPI

A Serial Peripheral Interface (SPI) controller is built in GPCE2048A to facilitate communicating with other devices and components. There are four control signals on SPI - SPICK (IOA12), SPICK (IOA13), SDO (IOA14), and SDI (IOA15).

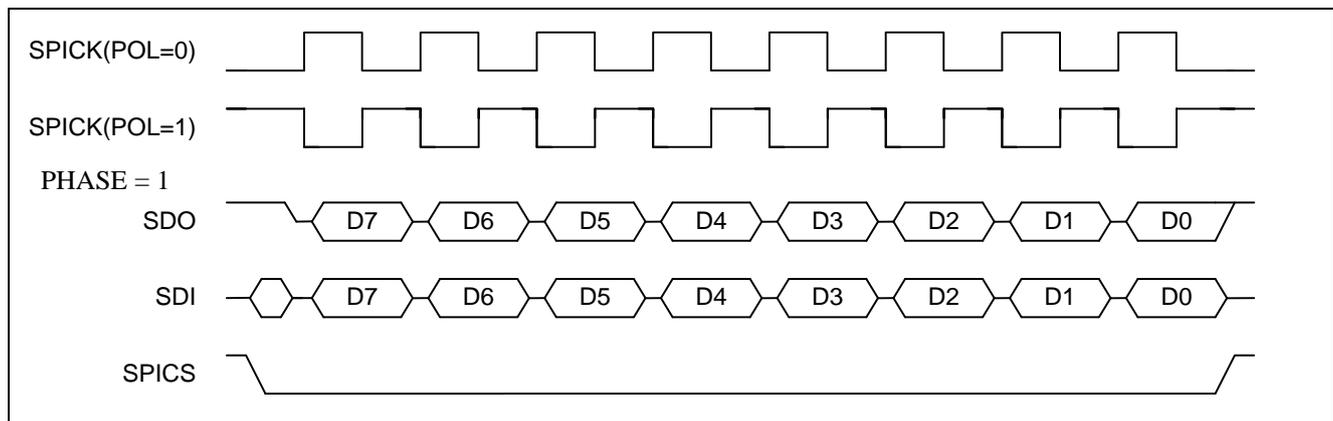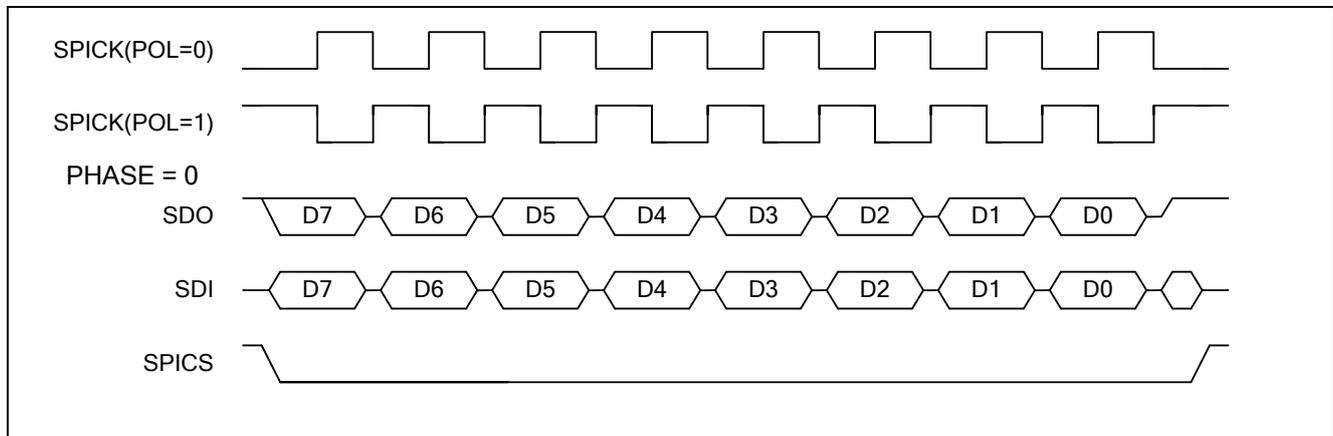

## 6.14 Audio Algorithm

The following speech types can be used in GPCE2048A: PCM, SACM\_S200, SACM\_S480, SACM\_S530, SACM\_A1600, SACM\_A1601, SACM\_A1800, SACM\_A3400pro, SACM\_A3600, SACM\_DVR520, SACM\_DVR1600, SACM\_DVR1800,

SACM\_DVR3200, and SACM\_DVR4800. For melody synthesis, the GPCE2048A supports SACM\_MS01 (FM) and SACM\_MS02 (wave-table) synthesizers.

## 7 ELECTRICAL SPECIFICATIONS

### 7.1 Absolute Maximum Ratings

Characteristics	Symbol	Ratings
DC Supply Voltage	$V_+$	< 4.0V
PortA/B Pad Supply Voltage	$V_{IO}$	< 7.0V
Input Voltage Range	$V_{IN}$	-0.5V to $V_+ + 0.5V$
Operating Temperature	$T_A$	0°C to +60°C
Storage Temperature	$T_{STO}$	-50°C to +150°C

**Note:** Stresses beyond those given in the Absolute Maximum Rating table may cause permanent damage to the device. For normal operational conditions see DC Electrical Characteristics.

### 7.2 DC Characteristics (VDD = 3.3V, VDDIO = 4.5V (PortA & B), TA = 25°C)

Characteristics	Symbol	Limit			Unit	Test Condition
		Min.	Typ.	Max.		
Operating Voltage	VDD	2.7	3.3	3.6	V	-
Operating Current	$I_{OP}$	-	13	-	mA	$F_{OSC} = 49.152MHz$ , AD, DAC disable, non-loading
Standby Current	$I_{STB}$	-	-	5	$\mu A$	Disable 32KHz crystal
				10	$\mu A$	Enable 32KHz, Disable PLL( $F_{OSC}$ )
Input High Level	$V_{IH}$	0.7VDD <sub>IO</sub>	-	-	V	-
Input Low Level	$V_{IL}$	-	-	0.3VDD <sub>IO</sub>	V	-
Output High Current	$I_{OH}$	-	-20	-	mA	$V_{OH} = 0.7VDD$
Output Low Current (PA[15:8], PA[3:0], PB[3:0])	$I_{OL}$	-	20	-	mA	$V_{OL} = 0.3VDD$
Output Low Current (PA[7:4])	$I_{OL}$	-	40	-	mA	$V_{OL} = 0.3VDD$
Input Pull-Low Resister (PA[15:0])	$R_{PL}$	-	120	-	K $\Omega$	$V_{IN} = VDD$
Input Pull-Low Resister (PB[3:0])	$R_{PL}$	-	1200	-	K $\Omega$	$V_{IN} = VDD$
Input Pull-High Resister (PA[15:0], PB[3:0])	$R_{PH}$	-	110	-	K $\Omega$	$V_{IN} = VSS$
Internal ROSC frequency deviation	$\Delta F/F$	-3%	32768	+3%	HZ	V33_REG = 3.3V

### 7.3 DC Characteristics (VDD = 3.3V, VDDIO = 3.3V (PortA & B), TA = 25°C)

Characteristics	Symbol	Limit			Unit	Test Condition
		Min.	Typ.	Max.		
Operating Voltage	VDD	2.7	3.3	3.6	V	-
Operating Current	$I_{OP}$	-	13	-	mA	$F_{OSC} = 49.152MHz$ , AD, DAC disable, non-loading
Standby Current	$I_{STB}$	-	-	3	$\mu A$	Disable 32KHz crystal
				6	$\mu A$	Enable 32KHz, Disable PLL( $F_{OSC}$ )
Input High Level	$V_{IH}$	0.7VDD <sub>IO</sub>	-	-	V	-
Input Low Level	$V_{IL}$	-	-	0.3VDD <sub>IO</sub>	V	-
Output High Current	$I_{OH}$	-	-11	-	mA	$V_{OH} = 0.7VDD$

Characteristics	Symbol	Limit			Unit	Test Condition
		Min.	Typ.	Max.		
Output Low Current (PA[15:8], PA[3:0], PB[3:0])	I <sub>OL</sub>	-	11	-	mA	V <sub>OL</sub> = 0.3VDD
Output Low Current (PA[7:4])	I <sub>OL</sub>	-	25	-	mA	V <sub>OL</sub> = 0.3VDD
Input Pull-Low Resister (PA[15:0])	R <sub>PL</sub>	-	120	-	KΩ	V <sub>IN</sub> = VDD
Input Pull-Low Resister (PB[3:0])	R <sub>PL</sub>	-	1200	-	KΩ	V <sub>IN</sub> = VDD
Input Pull-High Resister (PA[15:0], PB[3:0])	R <sub>PH</sub>	-	110	-	KΩ	V <sub>IN</sub> = VSS
Internal ROSC frequency deviation	ΔF/F	-3%	32768	+3%	HZ	V33_REG = 3.3V

#### 7.4 ADC Characteristics (VDD = 3.3V, TA = 25°C)

Characteristics	Symbol	Limit			Unit
		Min.	Typ.	Max.	
ADC LINE_IN Input Voltage Range from IOB[3:0]	VINL (Note 1)	VSS-0.3	-	VDD+0.3	V
ADC Microphone Input Voltage Range	VINM	VSS-0.3	-	VDD+0.3	V
Resolution of ADC	RESO	-	-	12	bits
Signal-to-Noise Plus Distortion of ADC from Line in	SINAD (Note 3)	-	55	-	dB
Effective Number of Bit	ENOB (Note 4)	8.0	9.0	-	bits
Integral Non-Linearity of ADC	INL	-	±8.0	-	LSB (Note 2)
Differential Non-Linearity of ADC	DNL (Note 6)	-	±3	-	LSB
AD Conversion Rate	F <sub>CONV</sub>	-	-	F <sub>CPU</sub> /256	Hz
Microphone Amplifier Gain	A <sub>MIC</sub>	-	-	42(Note 5)	dB

**Note1:** Internal protection diodes clamp the analog input to VDD and VSS. These diodes allow the analog input to swing from (VSS-0.3V) to (VDD+0.3V) without causing damage to the devices.

**Note2:** LSB means Least Significant Bit. With VINL = 2.6V, 1LSB = 2.6V/2<sup>12</sup> = 0.635mV.

**Note3:** The SINAD testing condition at VINLp-p = 0.8\*VDD, F<sub>CONV</sub> = F<sub>cpu</sub>/512 = 49MHz/256 = 192KHz, Fin=1.0KHz Sine waves at VDD = 3.0V from IOB [3:0] input.

**Note4:** ENOB = (SINAD-1.76)/6.02.

**Note5:** The microphone amplifier maximum gain = 15 \* (60K/(1.5K+REXT)) V/V. The REXT is external resistor between OPI and MICOUT. The gain is 132V/V (=42dB) when REXT is 5.1K.


#### 7.5 DAC Characteristics (V50\_DAC = 5.0V, TA = 25°C)

Characteristics	Symbol	Limit			Unit
		Min.	Typ.	Max.	
DAC Resolution	RESO	-	-	14	bit
THD+n (5V @0.6W)	-	-	1	-	%
Noise at No Signal	-	-	-97	-	dBr A
Dynamic Range(-60dB)	-	-	-82	-	dBr A


## 7.6 Regulator Characteristics ( $T_A = 25^\circ\text{C}$ )

Characteristics	Symbol	Limit			Unit	Test Condition
		Min.	Typ.	Max.		
Input Voltage	VREGI	2.3	4.5	5.5	V	
Maximum Current Output	IREGO	-	-	60	mA	VDD5V (Regulator in) = 4.5V, $\Delta$ VDD (Regulator out) < 100mV
Output Voltage	VREGO	2.3	3.3	3.3	V	
Standby Current	IRGES	-	2.5	-	uA	


## 7.7 Pull High Resistor and VDDIO

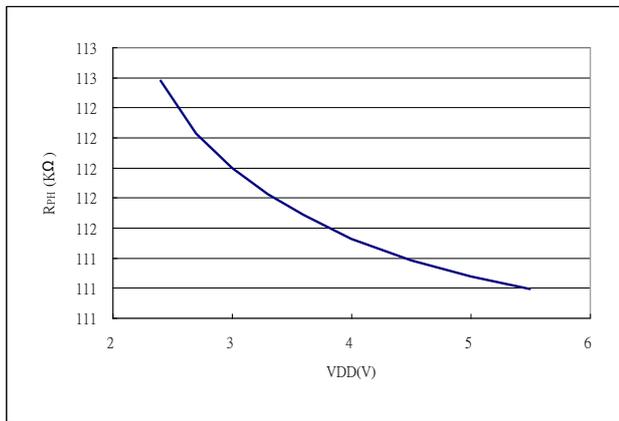

## 7.9 Pull Low Resistor and VDDIO (IOB[3:0] PAD with input high)

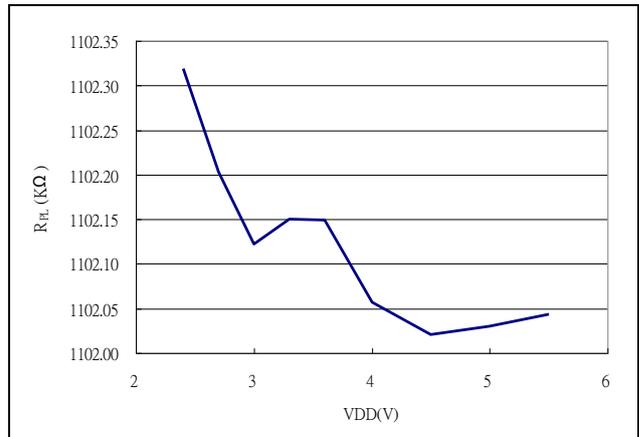


## 7.8 Pull Low Resistor and VDDIO (Normal PAD)

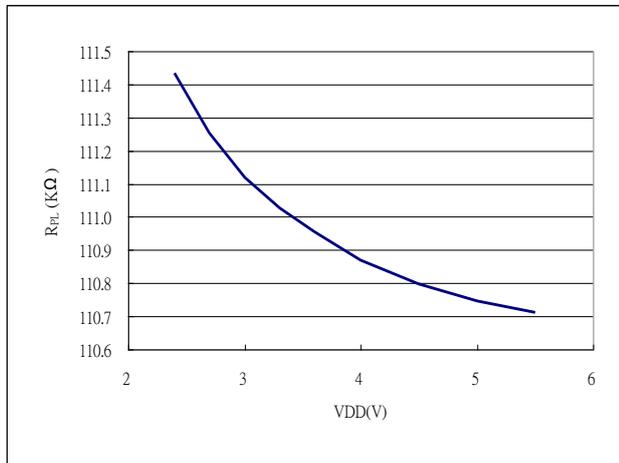


## 7.10 I/O Output High Current I<sub>OH</sub> and VDDIO

Test Condition:  $VOH = 0.7 * VDDIO$

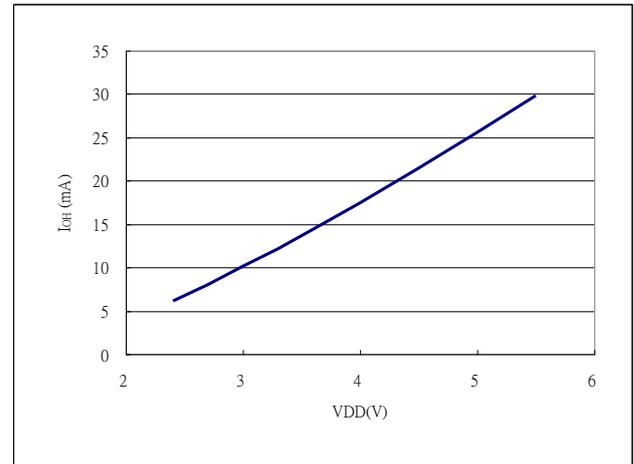


## 7.11 I/O Output Low Current $I_{OL}$ and VDDIO (Normal Pad)

Test Condition: VOL = 0.3 \* VDDIO (Normal PAD)

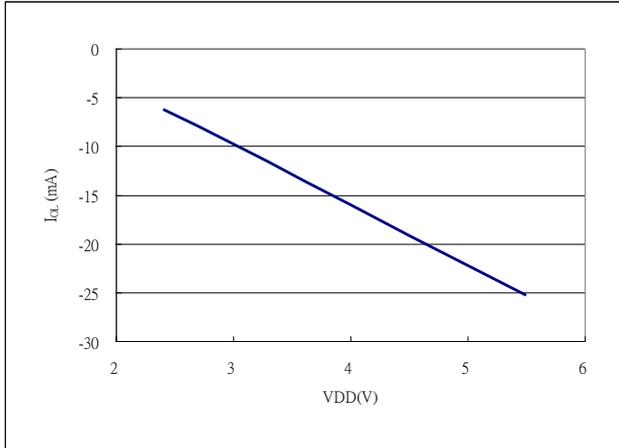


## 7.13 Internal ROSC and V33\_REG

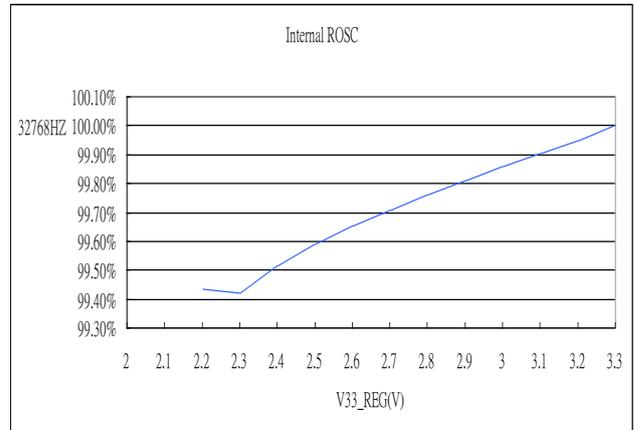


## 7.12 I/O Output Low Current $I_{OL}$ and VDDIO (High driving pad)

Test Condition: VOL = 0.3 \* VDDIO (High Driving PAD)

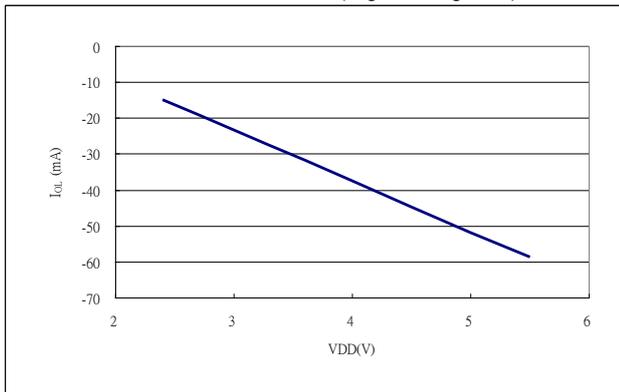

## 8 APPLICATION CIRCUITS


### 8.1 Application Circuit with Regulator, XTAL32K Selected

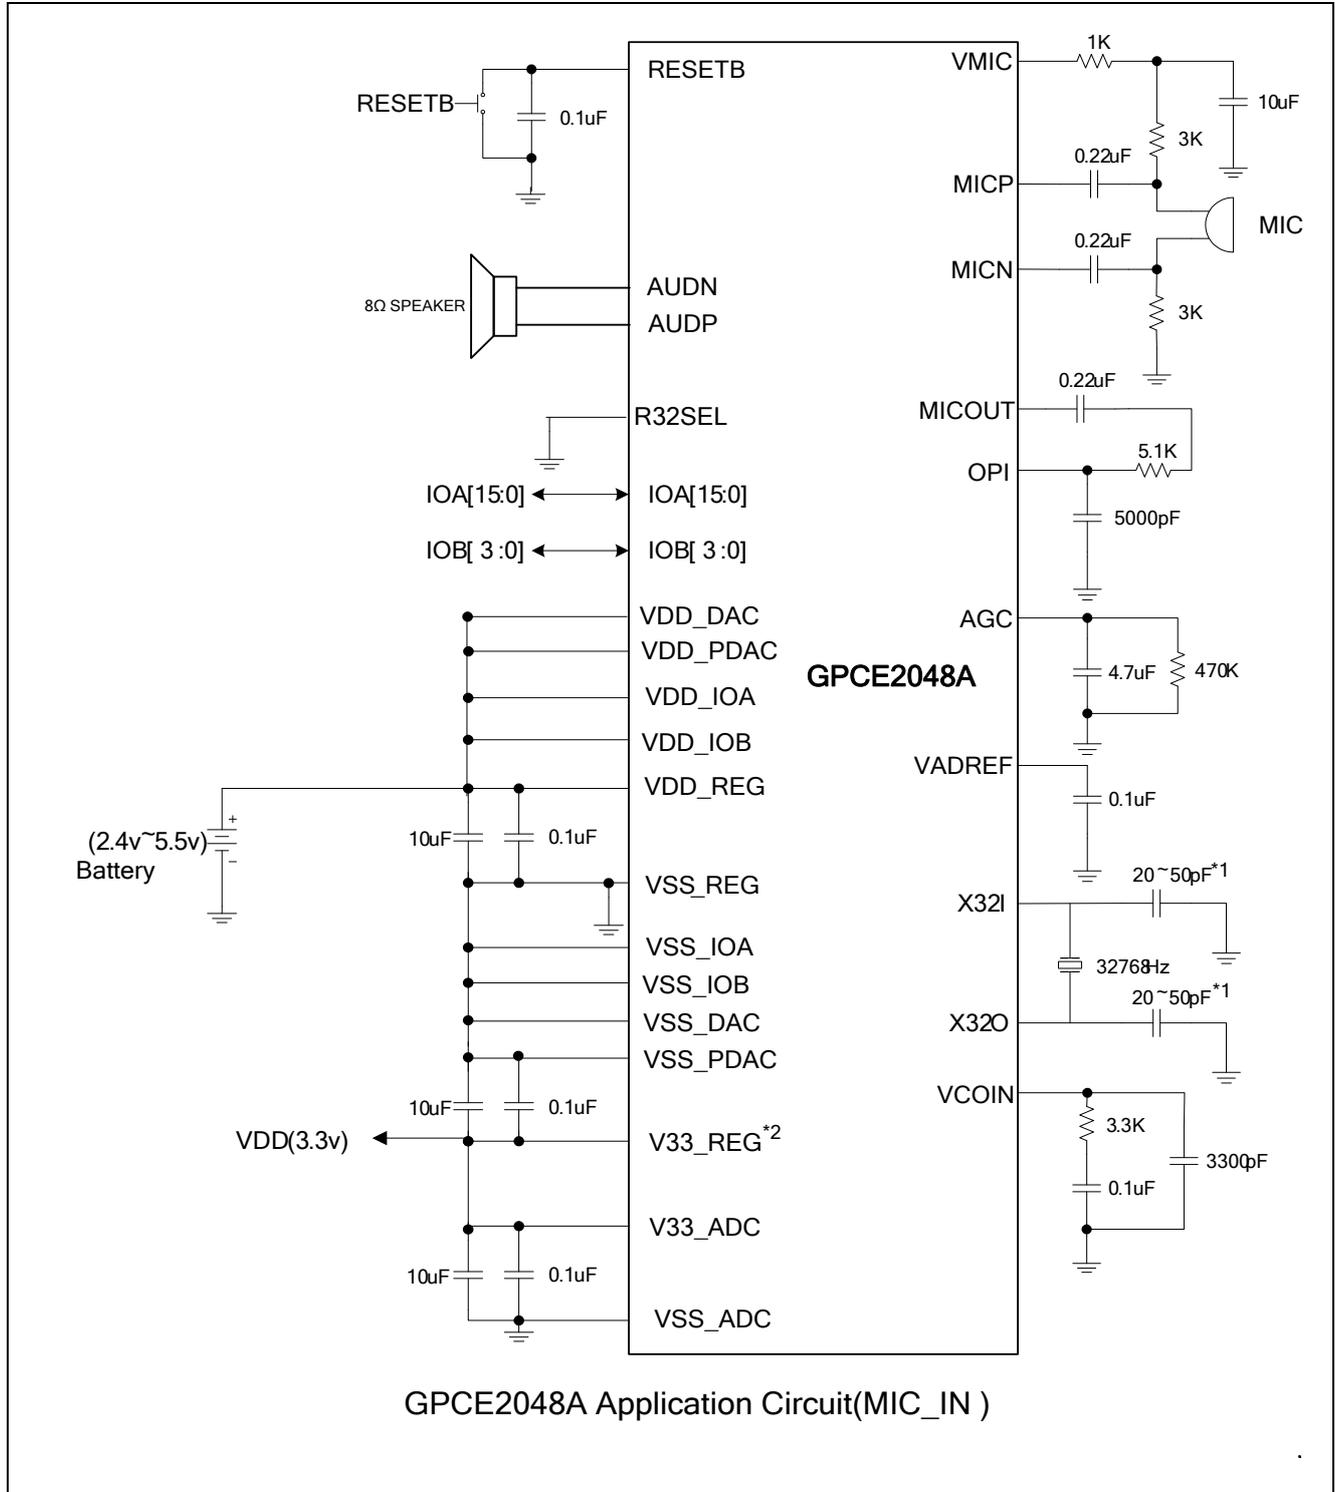

**Note1:** These capacitor values are for design guidance only. Different capacitor values may be required for different crystal/resonator used.

**Note2:** VDD33\_REG is output of built-in regulator with maximum current 60mA. It is recommended that only use it for internal power pad.


## 8.2 Application Circuit with Regulator, Internal ROOSC32K Selected

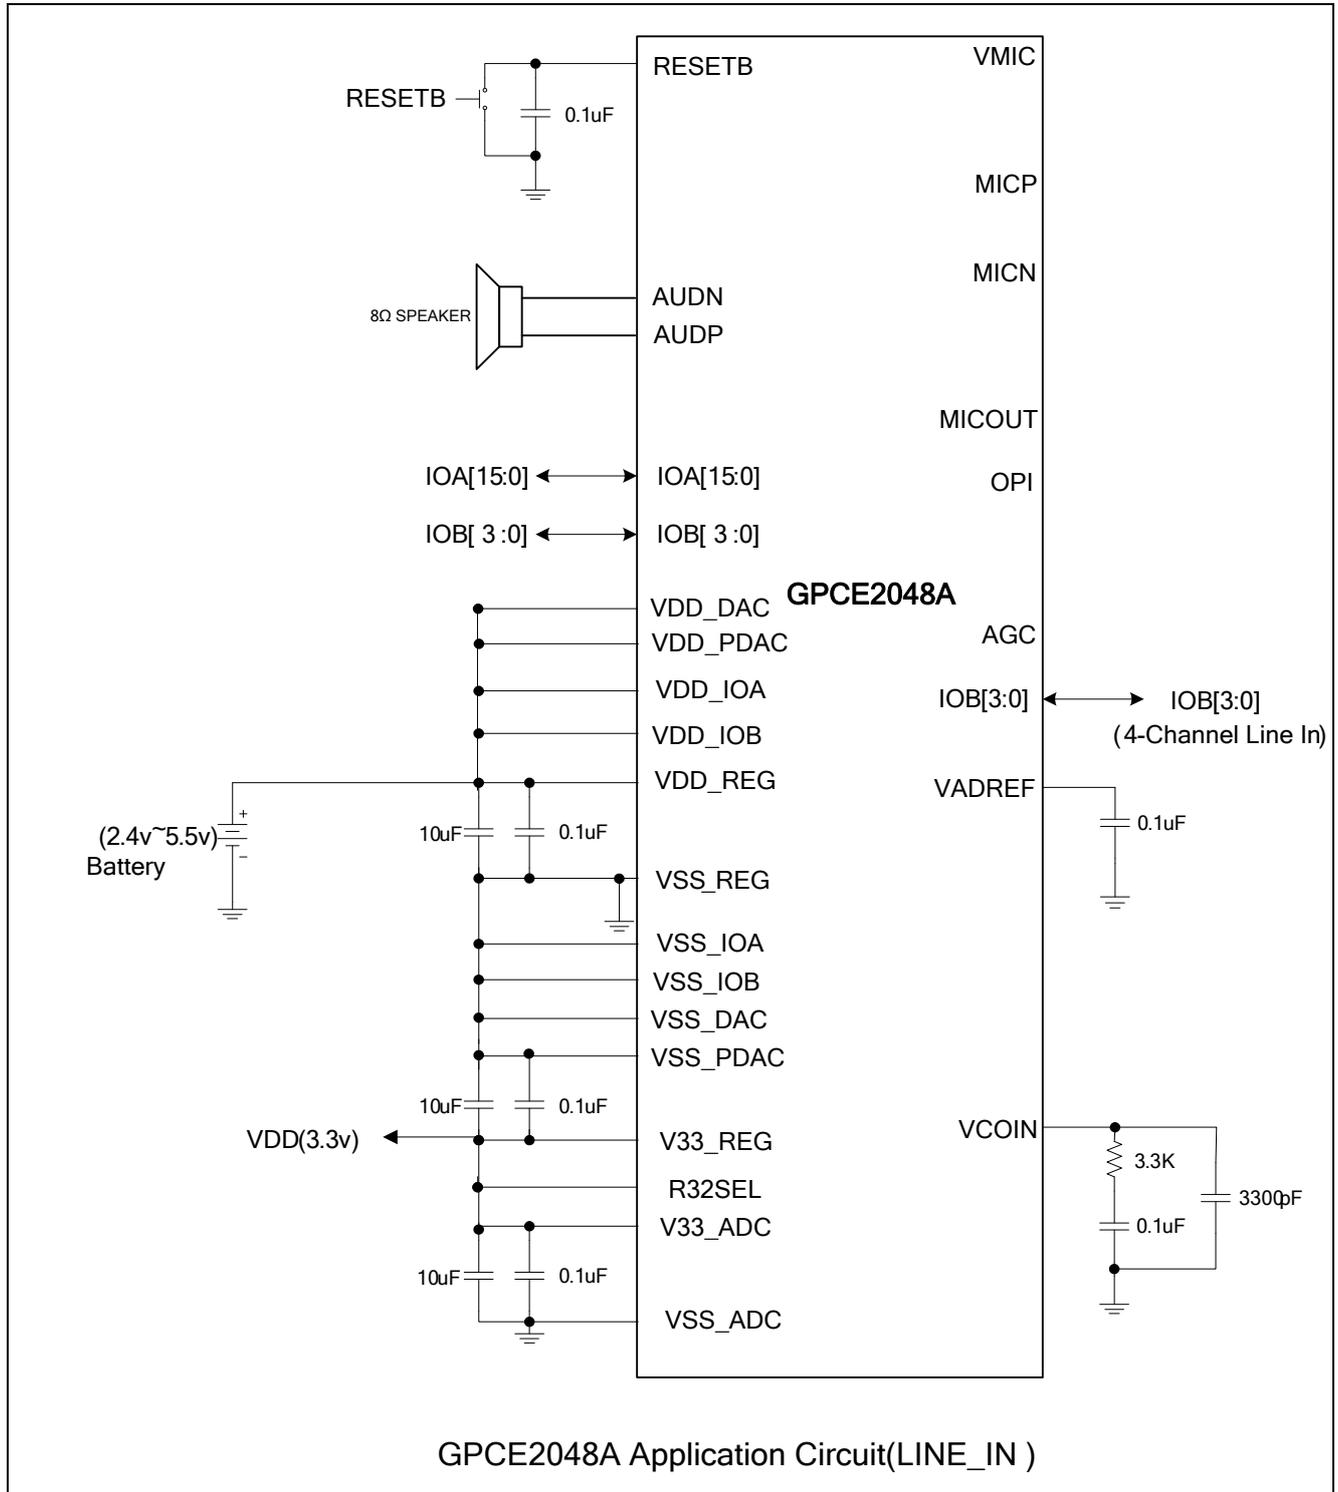


**Note1:** These capacitor values are for design guidance only. Different capacitor values may be required for different crystal/resonator used.

**Note2:** VDD33\_REG is output of built-in regulator with maximum current 60mA. It is recommended that only use it for internal power pad.

## 8.3 Application Circuit without Regulator, XTAL32K Selected

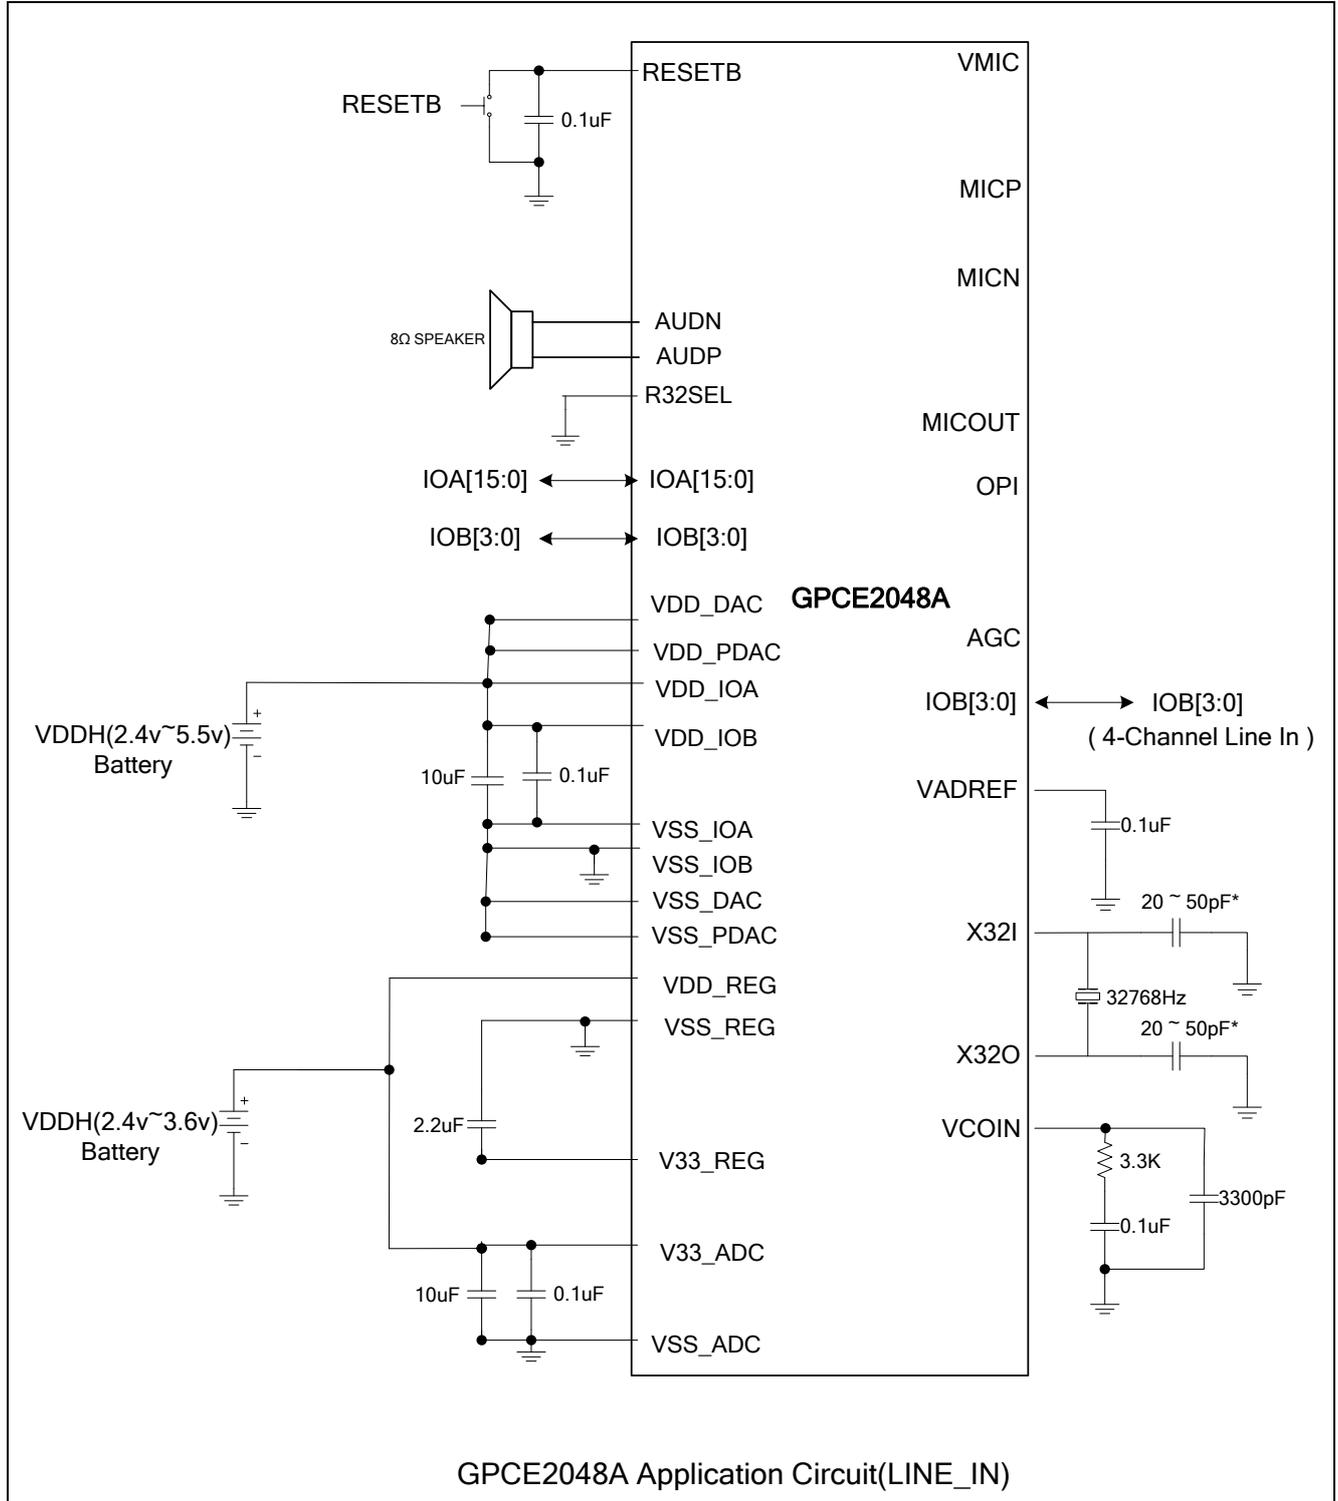

## 8.4 Push Pull DAC Mixed with another DAC

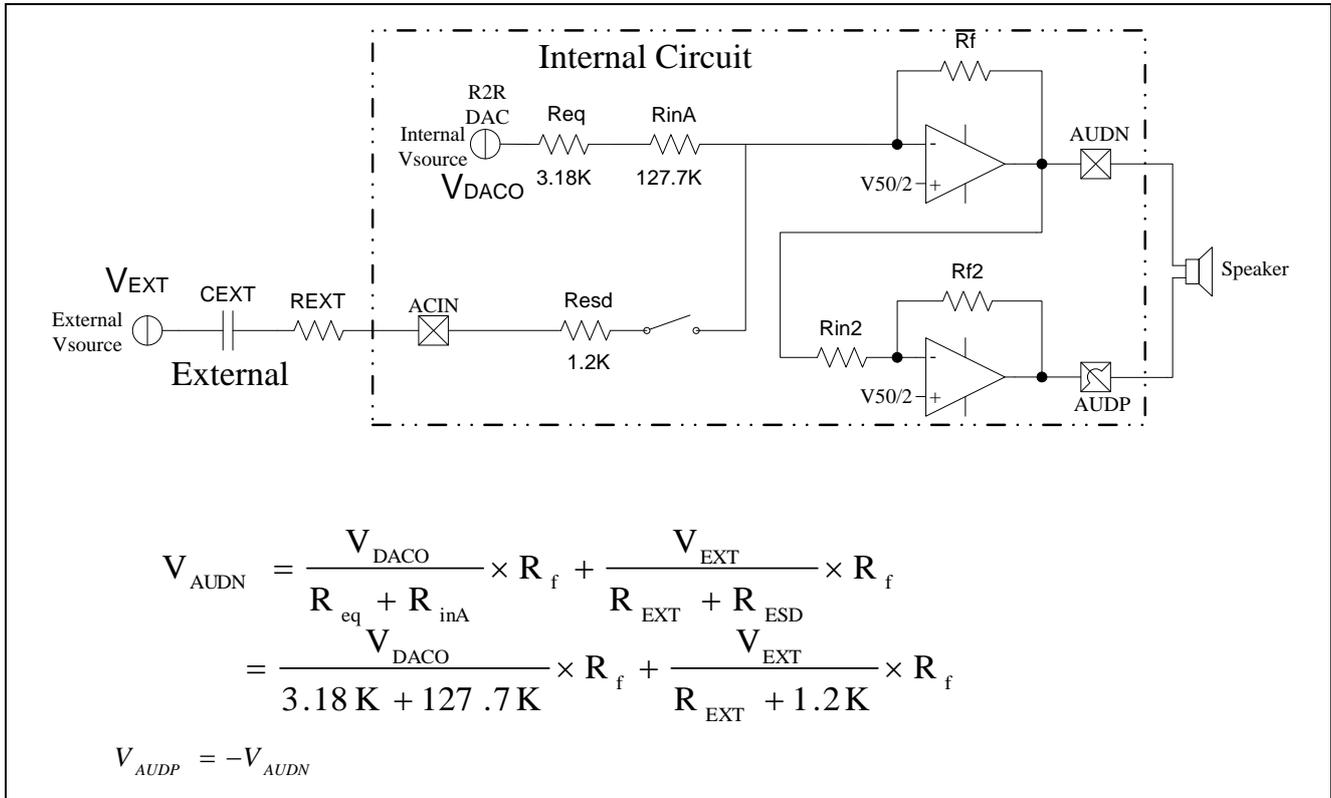



Symbol	Dimension in mm		
	Min.	Typ.	Max.
E		14.00 BSC	
E1		12.00 BSC	
e		0.50 BSC.	
L	0.45	-	0.75
L1		1 REF	

## 10 DISCLAIMER

The information appearing in this publication is believed to be accurate.

Integrated circuits sold by Generalplus Technology are covered by the warranty and patent indemnification provisions stipulated in the terms of sale only. GENERALPLUS makes no warranty, express, statutory implied or by description regarding the information in this publication or regarding the freedom of the described chip(s) from patent infringement. FURTHERMORE, GENERALPLUS MAKES NO WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PURPOSE. GENERALPLUS reserves the right to halt production or alter the specifications and prices at any time without notice. Accordingly, the reader is cautioned to verify that the data sheets and other information in this publication are current before placing orders. Products described herein are intended for use in normal commercial applications. Applications involving unusual environmental or reliability requirements, e.g. military equipment or medical life support equipment, are specifically not recommended without additional processing by GENERALPLUS for such applications. Please note that application circuits illustrated in this document are for reference purposes only.

## 11 REVISION HISTORY

Date	Revision #	Description	Page
Jun 02, 2016	1.2	Modify pin descriptions of chapter 5.	6
Jan 21, 2013	1.1	Correct the number of IOB and DAC channel.	24
Oct 30, 2012	1.0	Original	24