

# GSCLM393

## DUAL DIFFERENTIAL COMPARATOR


### Description

The GSCLM393 consists of two independent voltage comparators, designed specifically to operate from a single power over a wide voltage range.


### Features

- \*Single or dual supply operation.
- \*Wide operating supply range ( $V_{CC}=2V\sim 36V$  or  $\pm 1$  to  $\pm 18V$ ).
- \*Input common-mode voltage includes ground.
- \*Low supply current drain  $I_{CC}=0.8mA$  (Typical).
- \*Low input bias current  $I_{bias}=25nA$  (Typical)
- \*Output compatible with TTL, DTL, and CMOS logic system.

### Package Dimensions

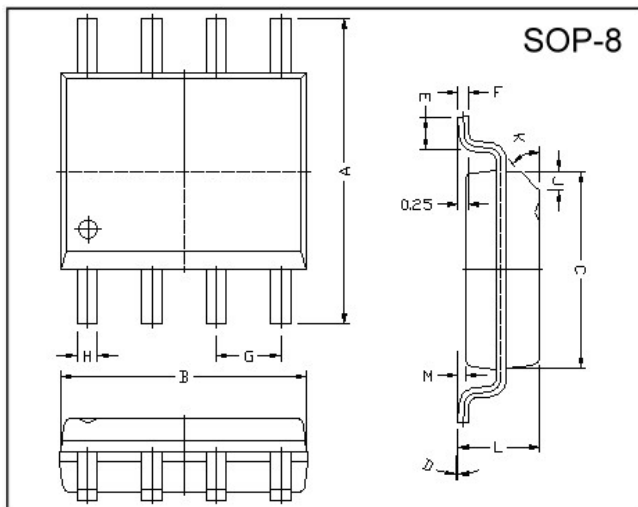


### Marking :




REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	5.80	6.20	M	0.10	0.25
B	4.80	5.00	H	0.35	0.49
C	3.80	4.00	L	1.35	1.75
D	0°	8°	J	0.375 REF.	
E	0.40	0.90	K	45°	
F	0.19	0.25	G	1.27 TYP.	

### Pin Configurations

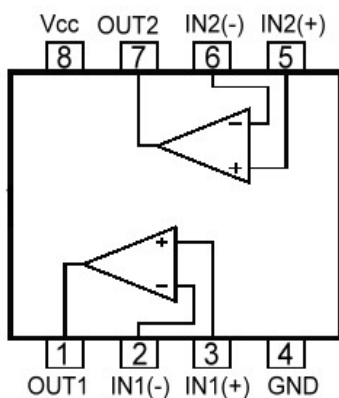

### Block Diagram

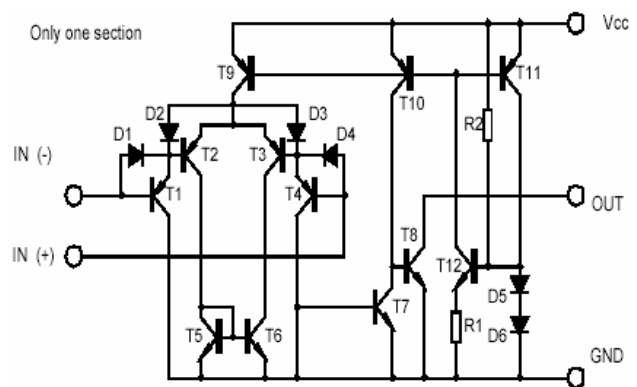

### Absolute Maximum Ratings at $T_a = 25^\circ C$

Parameter	Symbol	Value	Unit
Supply Voltage	$V_{CC}$	$\pm 18$ or 36	V
Differential Input Voltage	$V_{IDiff}$	36	V
Input voltage	$V_I$	-0.3~36	V
Power Dissipation	PD	570	mW
Operating Temperature	$T_{opr}$	0~+70	$^\circ C$
Storage Temperature	$T_{stg}$	-65 to 150	$^\circ C$

**Electrical Characteristics** ( $V_{CC}=5V$ ,  $T_a=25^\circ C$ ,  $R_T=10k$ , All voltage referenced to GND unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Input Offset Voltage	$V_{IO}$	$V_{CM}=0$ TO $V_{CC}-1.5$ $V_{O(p)} = 1.4V$ , $R_s=0$		$\pm 1.0$	$\pm 5.0$	mV
Input Offset Current	$I_{IO}$			$\pm 5$	$\pm 50$	nA
Input Bias Current	$I_b$			65	250	nA
Input Common-Mode Voltage Range	$V_{I(R)}$		0		$V_{CC}-1.5$	V
Supply Current	$I_{CC}$	$R_L=\infty$		0.6	1.0	mA
		$R_L=\infty, V_{CC}=30V$		0.8	2.5	mA
Large Signal Voltage Gain	$G_v$	$V_{CC}=15V$ , $R_L>15K\Omega$	50	200		V/mV
Large Signal Response Time	$t_{res}$	$V_i=TTL$ logic wing $V_{ref}=1.4V$ , $V_{RL}=5V$ , $R_L=5.1 K\Omega$		350		ns
Response Time	$t_{res}$	$V_{RL}=5V$ , $R_L=5.1K\Omega$		1400		ns
Output Sink Current	$I_{sink}$	$V_i(-)>1V$ , $V_i(+)=0V$ , $V_{O(p)}<1.5V$	6	18		mA
Output Saturation Voltage	$V_{sat}$	$V_i(-)>1V$ , $V_i(+)=0V$ , $I_{sink}=4mA$		160	400	mV
Output Leakage Current	$I_{leakage}$	$V_i(+)=1V$ , $V_i(-)=0$				
		$V_{O(p)}=5V$		0.1		nA
		$V_{O(p)}=30V$			1.0	$\mu A$

## Typical Performance Characteristics

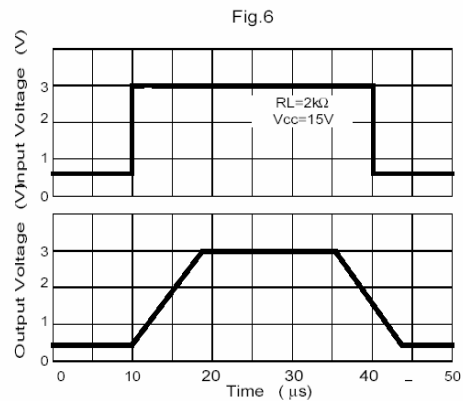
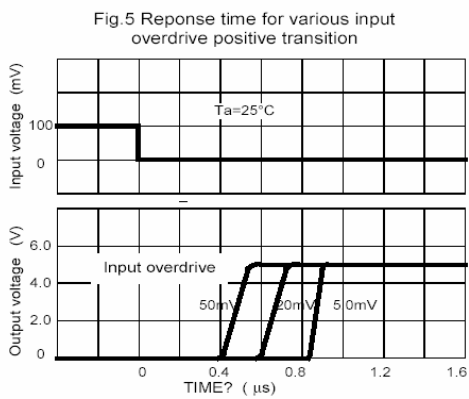
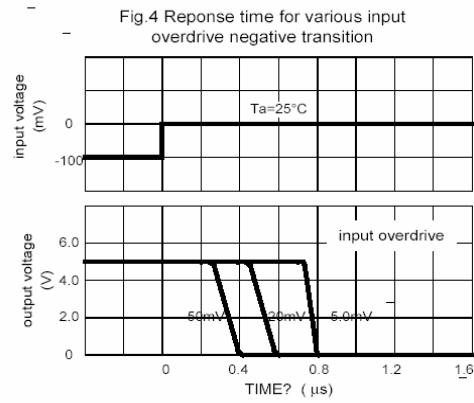
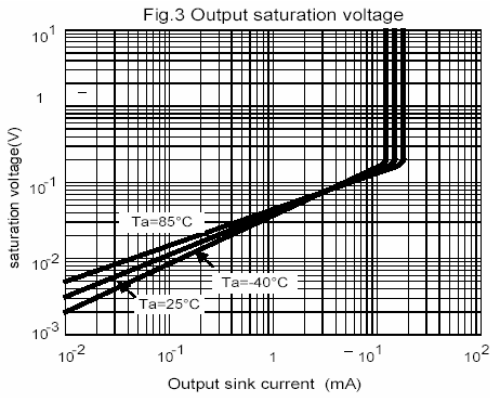
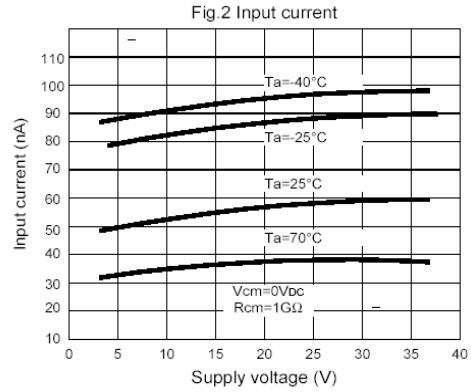
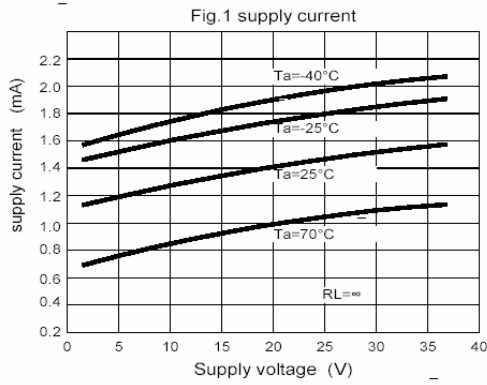


Fig.7 voltage Follower pulse response (small signal)

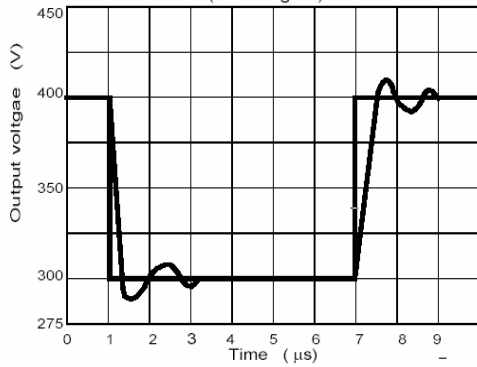


Fig.8 Large signal Frequency Response

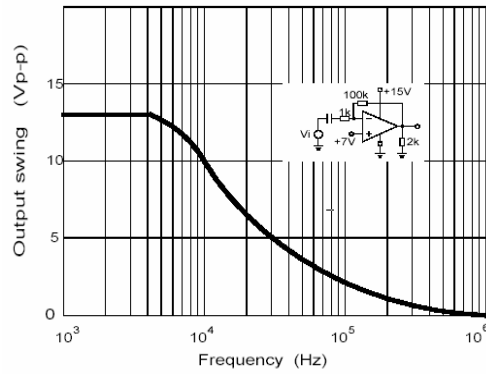


Fig.9 Output Characteristics current sourcing

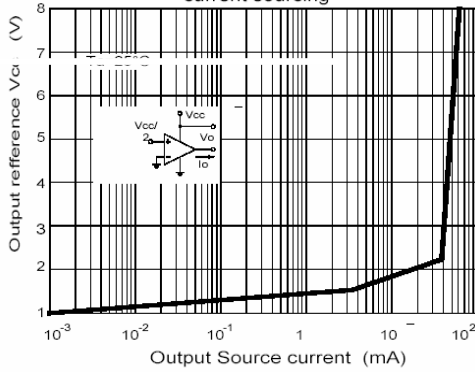


Fig.10 Output Characteristics Current sinking


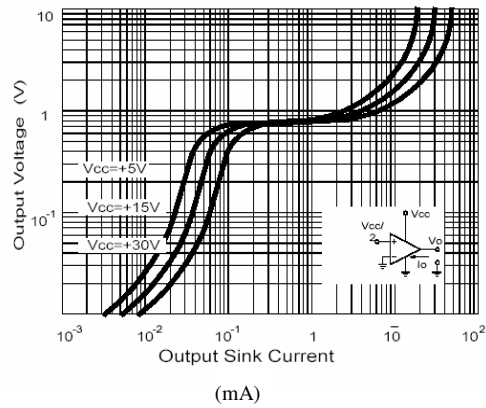


Fig.11 Current Limiting

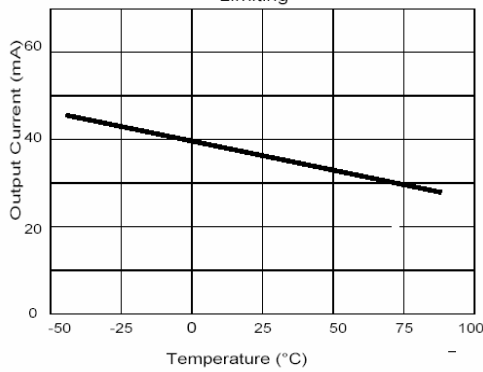

**Important Notice:**

- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of GTM.
- GTM reserves the right to make changes to its products without notice.
- GTM semiconductor products are not warranted to be suitable for use in life-support Applications, or systems.
- GTM assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.

**Head Office And Factory:**

- **Taiwan:** No. 17-1 Tatung Rd. Fu Kou Hsin-Chu Industrial Park, Hsin-Chu, Taiwan, R. O. C.
- TEL : 886-3-597-7061 FAX : 886-3-597-9220, 597-0785
- **China:** (201203) No.255, Jang-Jiang Tsai-Lueng RD. , Pu-Dung-Hsin District, Shang-Hai City, China
- TEL : 86-21-5895-7671 ~ 4 FAX : 86-21-38950165