

T1/CEPT(E1)/ISDN-PRI TRANSFORMER


Features:



- Single port T1/E1 solution
- Crosstalk:-60dB min.
- RoHS compliance and design for IR Reflow up to 260°C.
- Isolation voltage :1500 V.
- RoHS compliant.
- Storage temperature -25°C to +125°C.

Electrical Specification @ 25°C Operating Temperature 0°C to +70°C												
Part No	Turns Ratio (pri:Sec ± 2%)		OCL (mH min)		LL (uH max)		Cww (pF max)		DCR Max		Primary Pins	
	Transmit	Receive	Trans	REC	Trans	REC	Trans	REC	Trans	REC	Trans	REC
16ST1225CR	1CT:1CT	1CT:1CT	1.2	1.2	0.6	0.6	30	30	0.7&0.7	0.7&0.7	16-14	6/8

Dimension:mm(inch)Unless otherwise specified , all tolerance are +/-0.25(0.01)

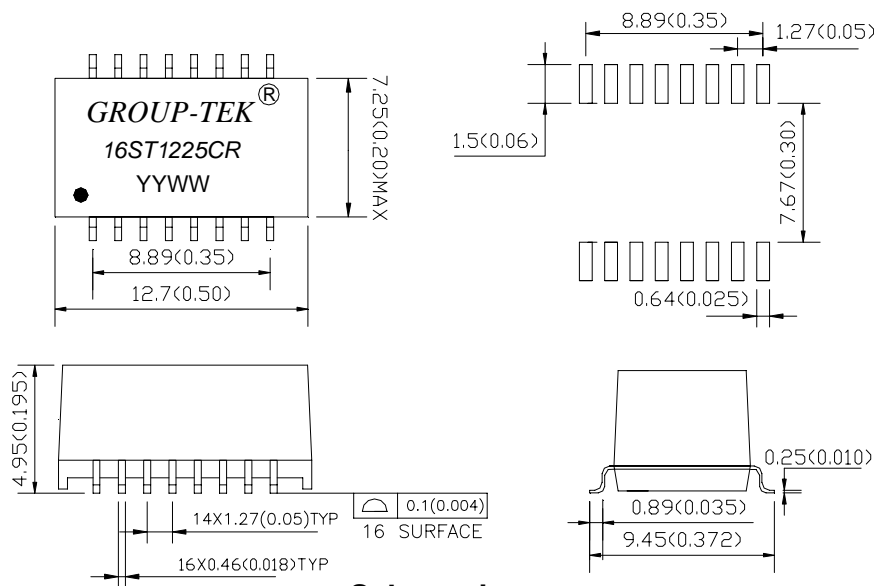

Schematic:

