

## GaAs MMIC 6-BIT DIGITAL PHASE SHIFTER, 4.8 - 6.2 GHz

### Typical Applications


The HMC1133LP5E is ideal for:

- EW Receivers
- Weather & Military Radar
- Satellite Communications
- Beamforming Modules
- Phase Cancellation

### Features

- Low RMS Phase Error: 2.8°
- Low Insertion Loss: 5 dB
- High Linearity: +46 dBm
- Positive Control Logic
- 360° Coverage, LSB = 5.625°
- 32 Lead 5x5mm SMT Package: 25mm<sup>2</sup>

### Functional Diagram

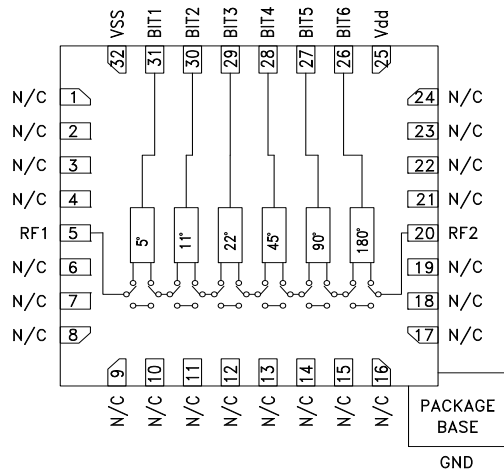

### General Description

The HMC1133LP5E is a 6-bit digital phase shifter which is rated from 4.0 to 7 GHz, providing 360 degrees of phase coverage, with a LSB of 5.625 degrees. The HMC1133LP5E features very low RMS phase error of 2.8 degrees and extremely low insertion loss variation of ±0.4 dB across all phase states. This high accuracy phase shifter is controlled with positive control logic of 0/+5V. The HMC1133LP5E is housed in a compact 5x5 mm plastic leadless SMT package and is internally matched to 50 Ohms with no external components.

### Electrical Specifications

$T_A = +25^\circ C$ ,  $V_{SS} = -5V$ ,  $V_{DD} = +5V$ , BIT1 to BIT6 = 0/ +5V, 50 Ohm System

| Parameter   | Min. | Typ.   | Max. | Units |
|---|------|--------|------|-------|
| Frequency Range   | 4.8  |        | 6.2  | GHz   |
| Insertion Loss*   | 3.5  |        | 6.8  | dB    |
| Input Return Loss*  |      | 13     |      | dB    |
| Output Return Loss*   |      | 15     |      | dB    |
| Phase Error*  |      | ±5.625 | ±10  | deg   |
| RMS Phase Error   |      | 2.8    |      | deg   |
| Amplitude Settling Time (50% cntl to +/- 0.1dB margin of final RFout) |      | 125    |      | nS    |
| Phase Settling Time (50% cntl to +/-1 degree margin of final RFout)   |      | 100    |      | nS    |
| Insertion Loss Variation*   |      | ±0.4   |      | dB    |
| Input Power for 1 dB Compression                                      |      | 30     |      | dBm   |
| Input Third Order Intercept   |      | 46     |      | dBm   |
| Control Voltage Current   |      | 10     |      | µA    |
| Bias Control Current  |      | 13.5   |      | mA    |

\*Note: Major States Shown

# HMC1133\* PRODUCT PAGE QUICK LINKS

Last Content Update: 02/23/2017

---

## COMPARABLE PARTS

View a parametric search of comparable parts.

## EVALUATION KITS

- EV1HMC1133LP5 Evaluation Board

## DOCUMENTATION

### Data Sheet

- HMC1133LP5E: GaAs MMIC 6-BIT Digital Phase Shifter, 4.8 - 6.2 GHz Data Sheet

## DESIGN RESOURCES

- HMC1133 Material Declaration
- PCN-PDN Information
- Quality And Reliability
- Symbols and Footprints

## DISCUSSIONS

View all HMC1133 EngineerZone Discussions.

## SAMPLE AND BUY

Visit the product page to see pricing options.

## TECHNICAL SUPPORT

Submit a technical question or find your regional support number.


## DOCUMENT FEEDBACK

Submit feedback for this data sheet.


---

**GaAs MMIC 6-BIT DIGITAL  
PHASE SHIFTER, 4.8 - 6.2 GHz**


**Insertion Loss, Major States Only**

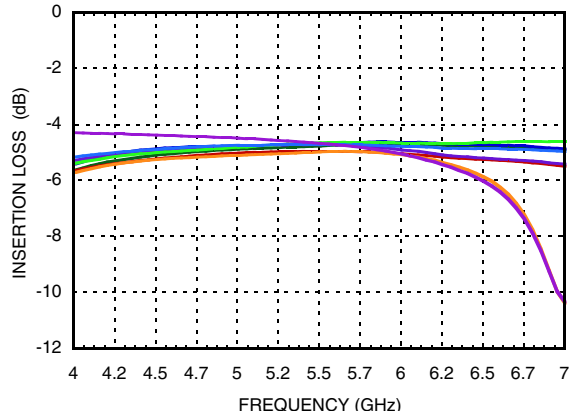


**Normalized Loss, Major States Only**

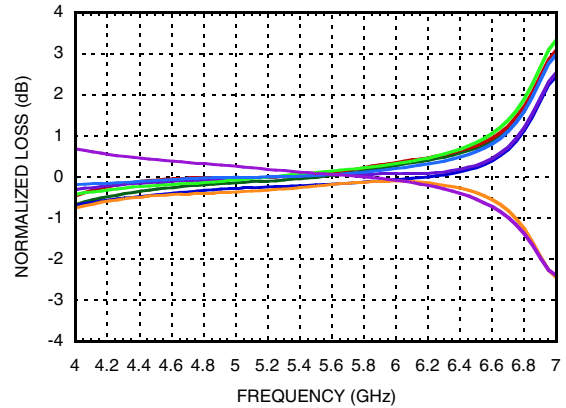


**Input Return Loss, Major States Only**

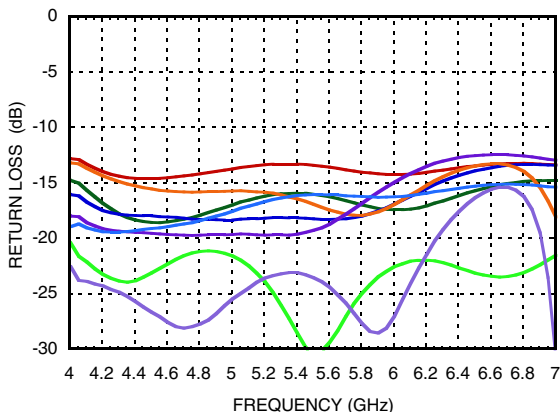


**Phase Error, Major States Only**

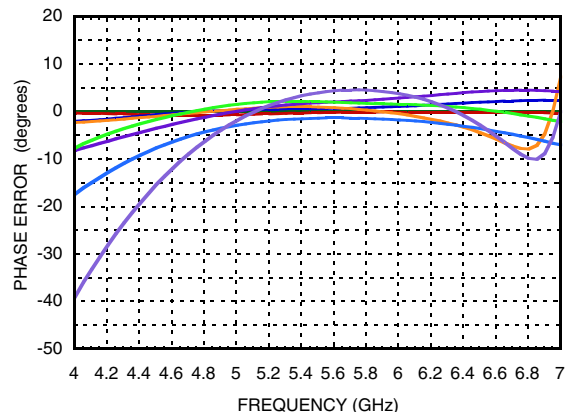

**Output Return Loss, Major States Only**

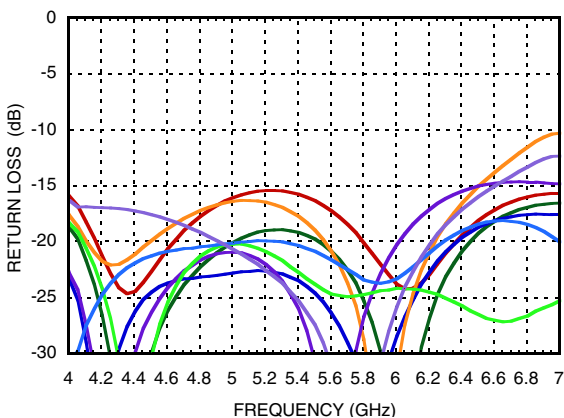


**Relative Phase Shift  
Major States Including All Bits**

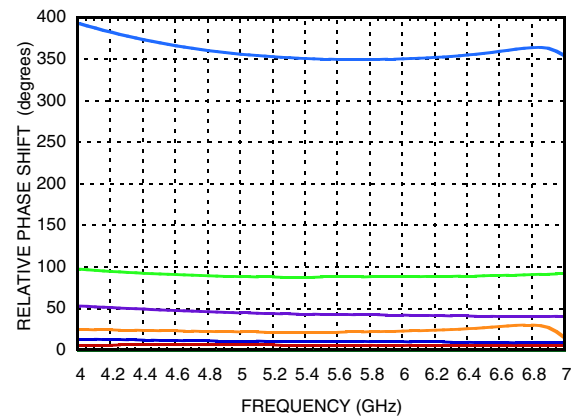


**GaAs MMIC 6-BIT DIGITAL  
PHASE SHIFTER, 4.8 - 6.2 GHz**


**Relative Phase Shift,  
RMS, Average, Max, All States**

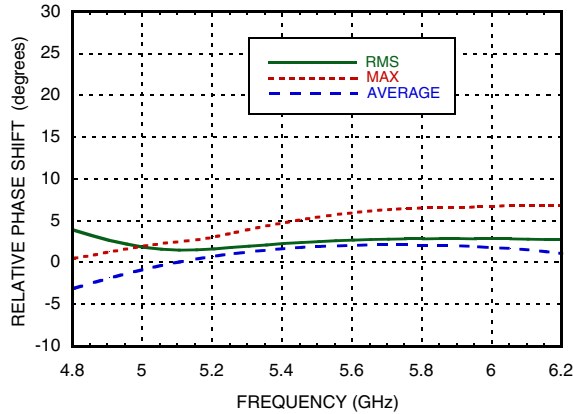


**Input IP3, Major States Only**

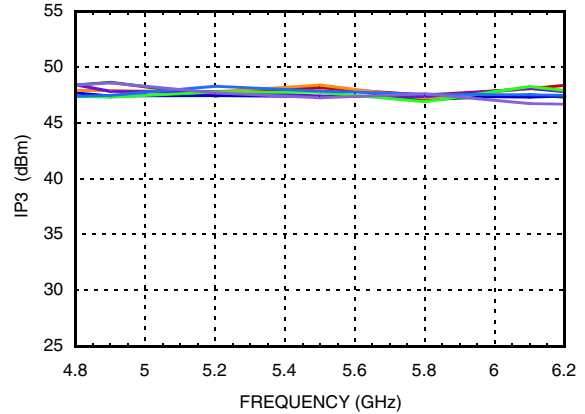


**Input IP2, Major States Only**

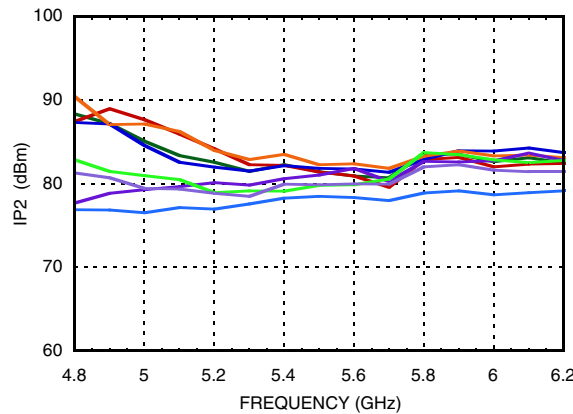


**Input P1dB, Major States Only**

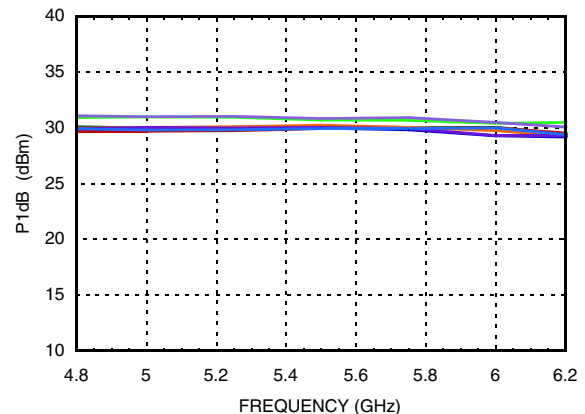

**RMS Phase Error vs. Temperature**

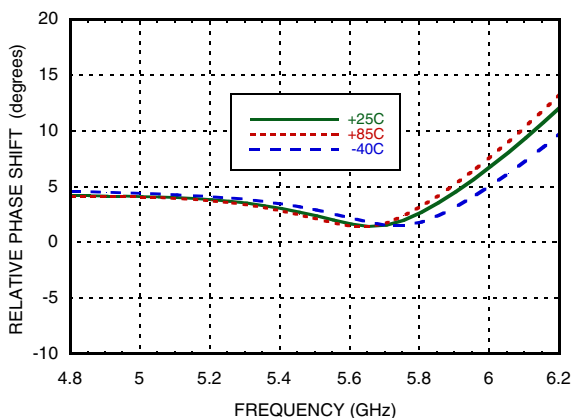


**Insertion Loss vs. Temperature,  
Major States Only**

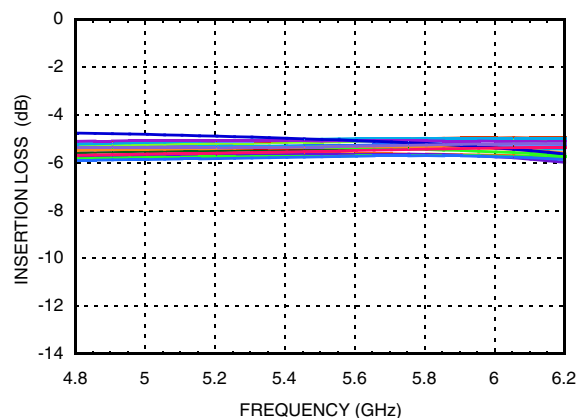

## GaAs MMIC 6-BIT DIGITAL PHASE SHIFTER, 4.8 - 6.2 GHz

### Phase Error vs. State

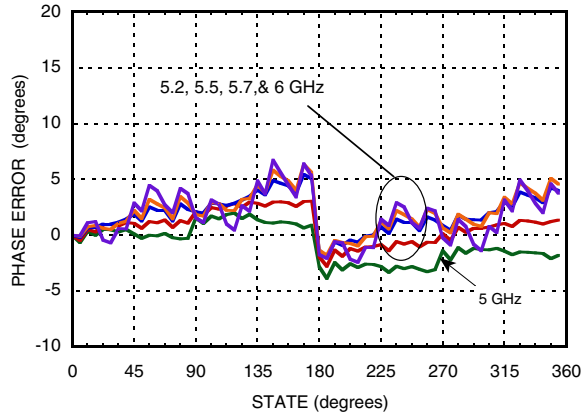

### Bias Voltage & Current

|      |       |
|------|-------|
| Vdd  | Idd   |
| 5.0  | 6mA   |
| Vss  | Iss   |
| -5.0 | 7.5mA |

### Control Voltage

| State    | Bias Condition            |
|----------|---------------------------|
| Low (0)  | 0 to 0.2 Vdc              |
| High (1) | Vdd ±0.2 Vdc @ 10 µA Typ. |

### Absolute Maximum Ratings

|   |                       |
|---|-----------------------|
| Input Power (RFIN)                            | 29 dBm (T= +85 °C)    |
| Bias Voltage Range (Vdd)                      | -0.2 to +7V           |
| Bias Voltage Range (Vss)                      | +0.2 to -7V           |
| Channel Temperature (Tc)                      | 150 °C                |
| Thermal Resistance (channel to ground paddle) | 109 °C/W              |
| Storage Temperature                           | -65 to +150 °C        |
| Operating Temperature                         | -40 to +85 °C         |
| ESD sensitivity (HBM)                         | Class1A (passed 250V) |



ELECTROSTATIC SENSITIVE DEVICE  
OBSERVE HANDLING PRECAUTIONS

### Truth Table


| Control Voltage Input |       |       |       |       |       | Phase Shift (Degrees)<br>RFIN - RFOUT |
|-----------------------|-------|-------|-------|-------|-------|---------------------------------------|
| Bit 1                 | Bit 2 | Bit 3 | Bit 4 | Bit 5 | Bit 6 |                                       |
| 0                     | 0     | 0     | 0     | 0     | 0     | Reference*                            |
| 1                     | 0     | 0     | 0     | 0     | 0     | 5.625                                 |
| 0                     | 1     | 0     | 0     | 0     | 0     | 11.25                                 |
| 0                     | 0     | 1     | 0     | 0     | 0     | 22.5                                  |
| 0                     | 0     | 0     | 1     | 0     | 0     | 45.0                                  |
| 0                     | 0     | 0     | 0     | 1     | 0     | 90.0                                  |
| 0                     | 0     | 0     | 0     | 0     | 1     | 180.0                                 |
| 1                     | 1     | 1     | 1     | 1     | 1     | 354.375                               |

Any combination of the above states will provide a phase shift approximately equal to the sum of the bits selected.  
\*Reference corresponds to monotonic setting



**GaAs MMIC 6-BIT DIGITAL  
PHASE SHIFTER, 4.8 - 6.2 GHz**

**Evaluation PCB**

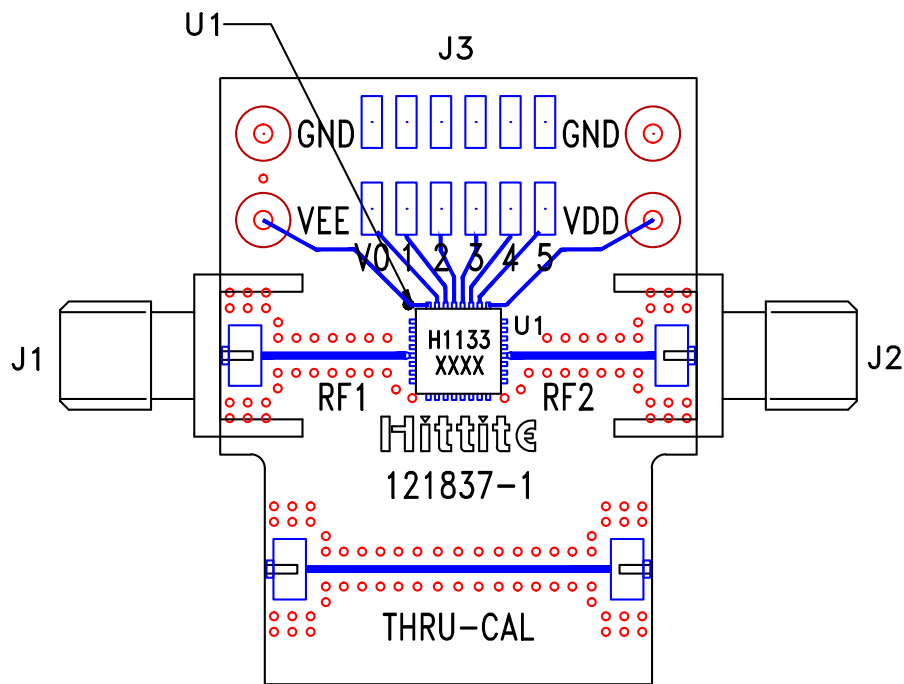

**List of Materials for Evaluation PCB EV1HMC1133LP5 [1][3]**

| Item    | Description                            |
|---------|--|
| J1 - J2 | PCB Mount SMA RF Connector             |
| J3 - J4 | Molex Header 2mm                       |
| U1      | HMC1133LP5 6-Bit Digital Phase Shifter |
| PCB [2] | 121837 Evaluation PCB                  |

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Rogers 4350 or Arlon 25FR

[3] Please refer to part's pin description and functional diagram for pin out assignments on evaluation board.

The circuit board used in the final application should use RF circuit design techniques. Signal lines should have 50 ohm impedance while the package ground leads and exposed paddle should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation board should be mounted to an appropriate heat sink. The evaluation circuit board shown is available from Analog Devices upon request.