



1A1G~1A7G

MINIATURE GLASS PASSIVATED JUNCTION PLASTIC RECTIFIER


Voltage Range 50 to 1000 Volts
Current 1.0 Amperes

Features

- * Plastic package has Underwriters Laboratories Flammability Classification 94V-O utilizing Flame Retardant Epoxy Molding Compound.
- * Glass passivated junction version of 1A1G thru 1A7G in R-1 package.
- * Exceeds environmental standards of MIL-S-19500/228
- * Pb free product are available : 99% Sn above can meet Rohs environment substance directive request

Mechanical Data

Case: Molded plastic, R-1
 Terminals: Axial leads, solderable to MIL-STD-202G, Method 208
 Polarity: Color Band denotes cathode end
 Mounting Position: Any
 Weight: 0.064 ounce, 0.181 gram

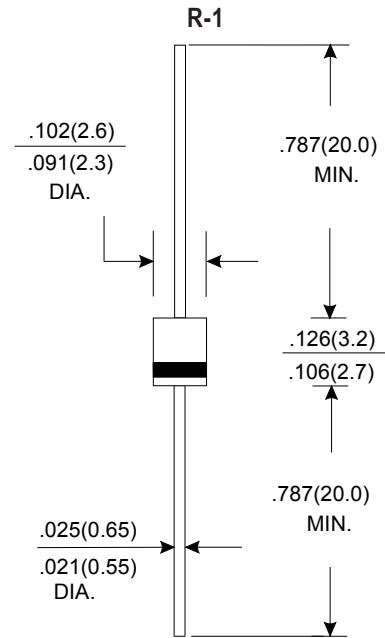

Dimensions in millimeters

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified. Resistive or inductive load, 60Hz

PARAMETER	SYMBOL	1A1G	1A2G	1A3G	1A4G	1A5G	1A6G	1A7G	UNITS
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Current .375" (9.5mm) lead length at TA=75°C	I _{AV}	1.0							A
Peak Forward Surge Current : 8.3ms single half sine-wave superimposed on rated load(JEDEC method)	I _{FSM}	30							A
Maximum Forward Voltage at 1.0A	V _F	1.1							V
Maximum DC Reverse Current at TA=25°C Rated DC Blocking Voltage TA=100°C	I _R	5.0 50							uA
Typical Junction capacitance (Note 1)	C _J	15							pF
Typical Thermal Resistance	R _{θJA}	50							°C / W
Operating Junction and Storage Temperature Range	T _J , T _{STG}	-55 TO +150							°C

NOTES:

1. Measured at 1MHz and applied reverse voltage of 4.0 VDC.
 *JEDEC Registered Value.



1F1G~1F7G

GLASS PASSIVATED JUNCTION FAST RECOVERY RECTIFIERS

Voltage Range 50 to 1000 Volts
Current 1.0 Amperes

Rating and Characteristic Curves

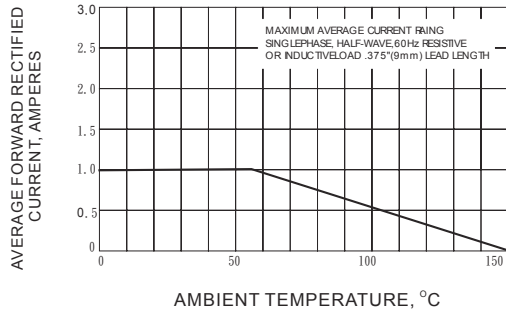


Fig. 1 FORWARD CURRENT DERATING CURVE

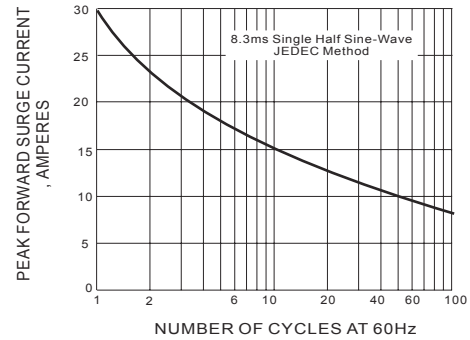


Fig. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

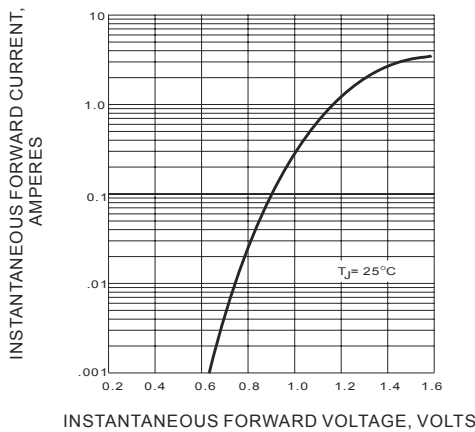


Fig. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

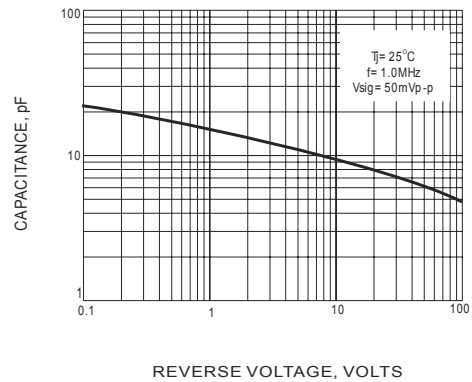


Fig. 4 TYPICAL JUNCTION CAPACITANCE