

LED Driver IC

IK6208

Description

The IK6208 are anode-grid LED display drives 5.0V~18.0V with output size – 8 digits x 9 segments and addition key scan function. Serial interface(UART) provides connection with microprocessor. PWM for Buzzer driving.

Features

- Operation voltage for digital part: 3.0V ~ 3.6V
- Operation voltage for output LEDs: 5.0V ~ 18.0V
- 7-step individual dimming control for each grid
- OSC: built in (with external resistor) 500kHz @ R=12.1kΩ
- Pulse segment current: 27mA-39mA @ 8 digits x 9 segments
- Key scanning: 7x2 matrix
- Serial Interface(UART). Up to 57,600bps
- 2 Channel PWM
- Operation Temperature : -40 ~ 85°C




Application

- Home Appliance : Washing machine, Refregerator, Bidet, Air Conditioner

ORDERING INFORMATION


Device	Operating Temperature Range	Package
IK6208LQ	T _A = -40° to 85° C	LQFP-32

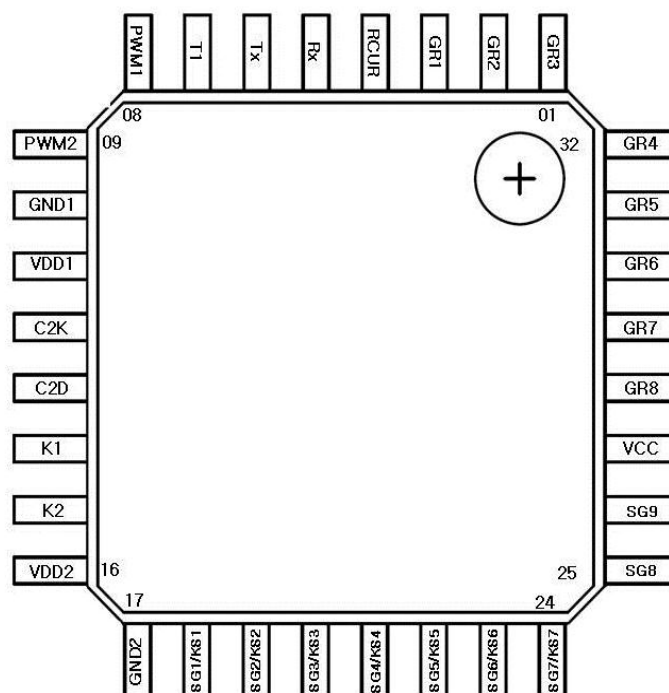

Pin Description IK6208

Pin Name	I/O	Description	Pin №
RCUR	I/O	A resistor is connected to this pin to determine the output currents and oscillation frequency.	4
TX	O	Data Output Pin This pin output serial data by UART	6
RX	I	Data Input Pin This pin receive serial data by UART.	5
PWM1/2	O	8/16 bit PWM out put.	8/9
K1/K2	I	Key Data Input Pins The data sent to these pins are latched at the end of the display cycle. (Internal Pull-Up Resistor)	14/15
VDD1/2	-	Power Supply for Digital Part	11/16
VCC	-	Power Supply for Output Part	27
SG1/KS1 to SG9	O	Segment Output Pins (N-channel open drain) Also acts as the Key Source	18-26
GR1 to GR8	O	Grid Output Pins (P-Channel, Open Drain)	1-3,28-32
GND1/2	-	Ground.	10/17
T1	-	Reserved.	7


BLOCK DIAGRAM

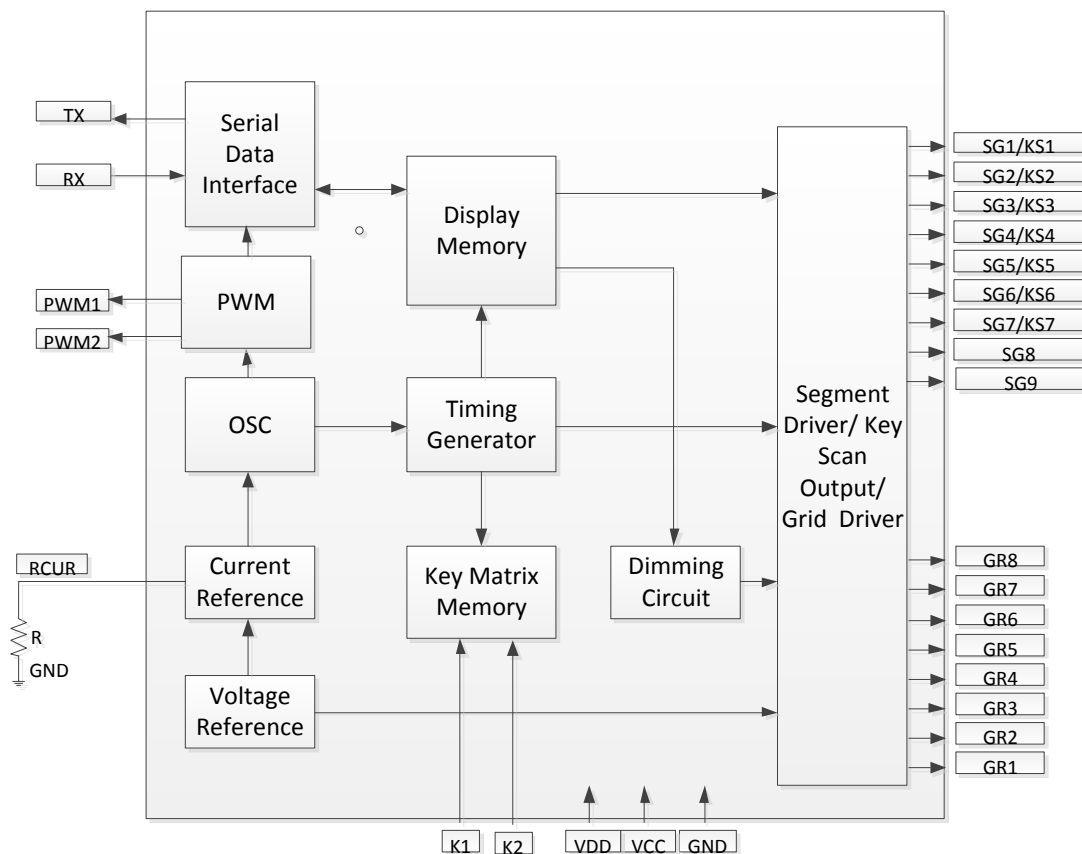


INPUT / OUTPUT CONFIGURATIONS

The schematic diagrams of the input and output circuits of the logic section are shown below.


Input Pins: K1/K2

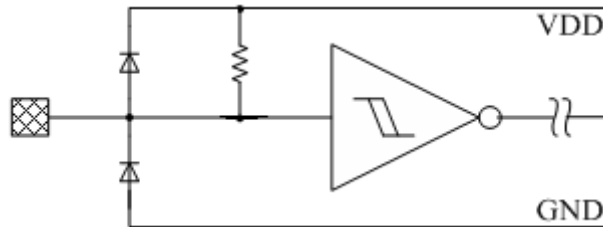

Output Pins: GR1 to GR8

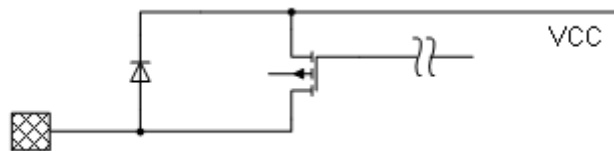


Output Pins: SG1/KS1 to SG9

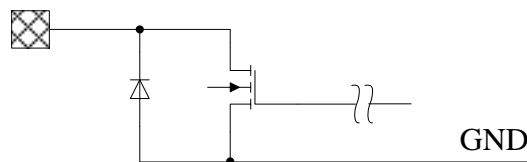

UART

UART uses a total of eleven bits per data byte: a start bit, 8 data bits (LSB first), a parity bit, and a stop bit.

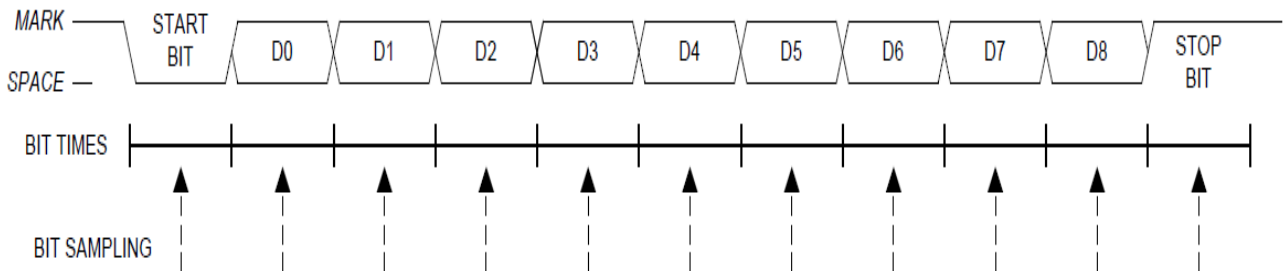

FUNCTIONAL DESCRIPTION

COMMANDS

A command is the first byte (b0 to b7) inputted to IK6208 via DI/O Pin after STB Pin has changed from "HIGH" to "LOW" state. If for some reason the STB Pin is set "HIGH" while data or commands are being transmitted, the serial communication is initialized, and the data commands being transmitted are considered invalid.


COMMAND 1: DISPLAY MODE SETTING COMMANDS

IK6208 provides 5 display modes setting as shown in the diagram below. As stated earlier a command is the first one byte (b0 to b7) transmitted to IK6208 via the DI/O Pin when STB is "LOW". However, for these commands, Bit 5 to Bit 8 (b4 to b7) are given a value of "0".

The Display Mode Setting Commands determine the number of segments and grids are used (9 segments, 8 grids). A display commands "ON" must be executed in order to resume display. If the same mode setting is selected, no command execution is take place, therefore, nothing happens.

The Display Mode Setting Commands are also used to turn ON or OFF the display. Please refer to the diagram below.

When the power is turned ON, the display is turned OFF (b3 is "0") and the mode 111 is selected (b2 to b0 are "1").

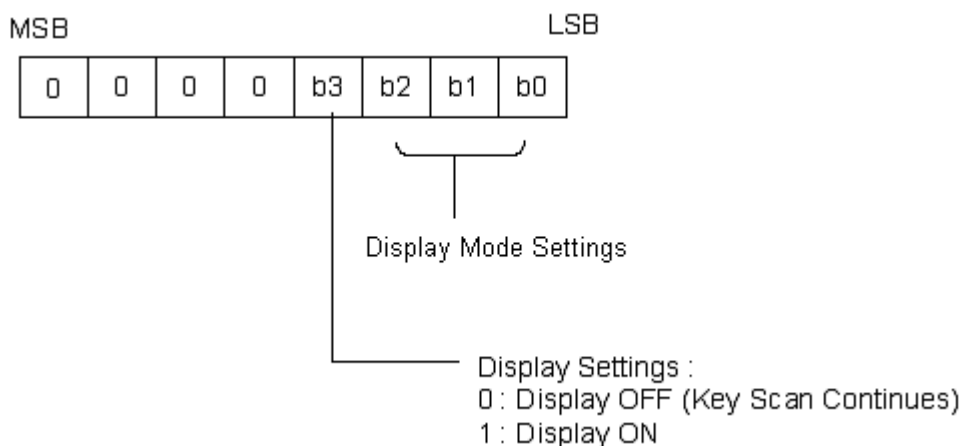


Display Mode Settings 111: 8 Grids (9 Segments)


COMMAND 2: DATA SETTING COMMANDS

The Data Setting Commands executes the Data Write Mode for IK6208. The Data Setting Command, the bits5 and 6 (b4, b5) are given the value of "0". , bit7 (b6) is given the value of "1" while bit8 (b7) is given the value of "0". Please refer to the diagram below.

When power is turned ON, bit 4 to bit 1 (b3 to b0) are given the value of "0".

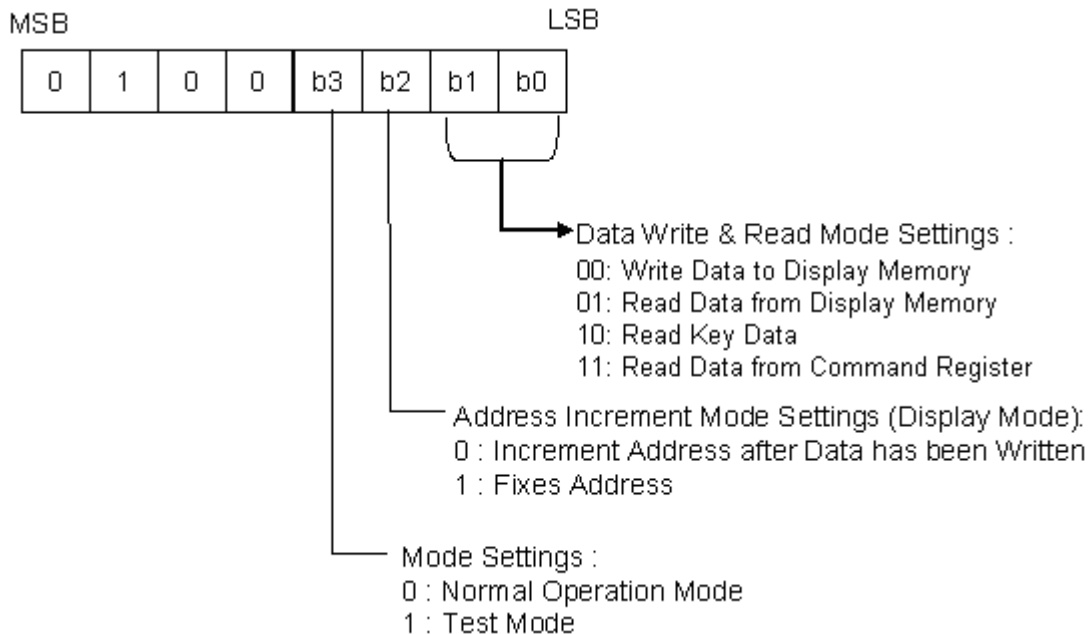


Read Data from Command Register:

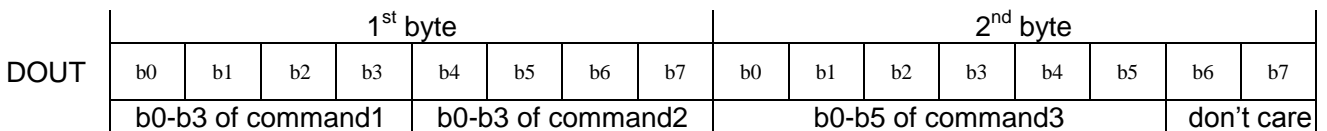

COMMAND 3: ADDRESS SETTING COMMANDS

Address Setting Commands are used to set the address of the display memory. The address is considered valid if it has a value of "00H" to 2FH". If the address is set to 30H or higher, the data is ignored until a valid address is set. When power is turned ON, the address is set at "00H".

Please refer to the diagram below.

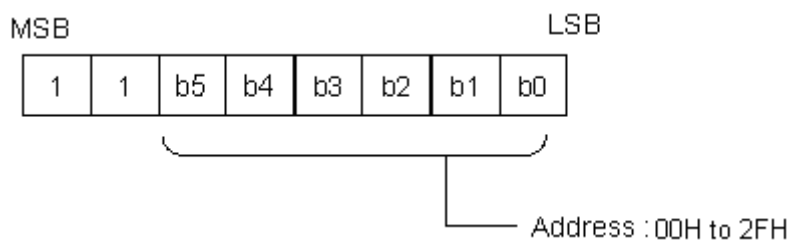

DISPLAY MODE AND RAM ADDRESS

Data transmitted from an external device to IK6208 via the serial interface are stored in the Display RAM and are assigned addresses. When the power is turned ON, the memory is set at "0". The RAM Addresses of IK6208 are given below in 8 bit unit.

	dimming		SG1	SG2	SG5	SG6	SG9	
GR1	00H _L	00H _U	01H _L	01H _U			02H _m	03
GR2	04H _L	04H _U	05H _L	05H _U			06H _m	07
GR3	08H _L	08H _U	09H _L	09H _U			0AH _m	0B
GR4	0CH _L	0CH _U	0DH _L	0DH _U			0EH _m	0F
GR5	10H _L	10H _U	11H _L	11H _U			12H _m	13
GR6	14H _L	14H _U	15H _L	15H _U			16H _m	17
GR7	18H _L	18H _U	19H _L	19H _U			1AH _m	1B
GR8	1CH _L	1CH _U	1DH _L	1DH _U			1EH _m	1F


b0	b3	b4	b7	b0	b3	b4	b7	b0	b3	b4	b7	b0	b7
xxH _L		xxH _U		xxH _L		xxH _U		xxH _m				xx	
Lower 4 bits		Higher 4 bits		Lower 4 bits		Higher 4 bits		Lower 4 bits		Higher 4 bits		8 bits	

DIN	1'st byte							2'nd byte							3'rd byte							4'th byte													
	b0	b1	b2	b3	b4	b5	b6	b7	b0	b1	b2	b3	b4	b5	b6	b7	b0	b1	b2	b3	b4	b5	b6	b7	b0	b1	b2	b3	b4	b5	b6	b7			
	dimming							don't care							data for SG1~5							data for SG6~9							don't care						

Dimming Quantity Settings:

b2	b1	b0	Pulse width
0	0	0	1/16
0	0	1	2/16
0	1	0	3/16
0	1	1	5/16
1	0	0	7/16
1	0	1	10/16
1	1	0	14/16
1	1	1	reserved


SCANNING AND DISPLAY TIMING

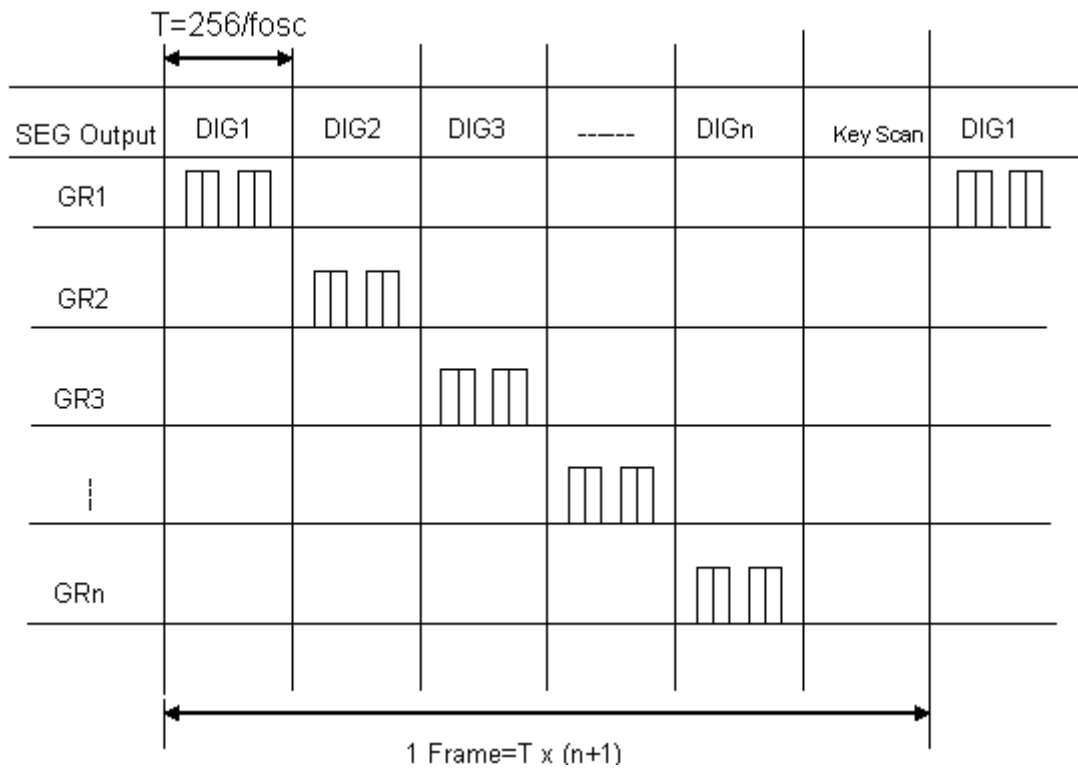


SERIAL COMMUNICATION FORMAT

The following diagram shows the serial communication format.

Reception (Data/Command Write)

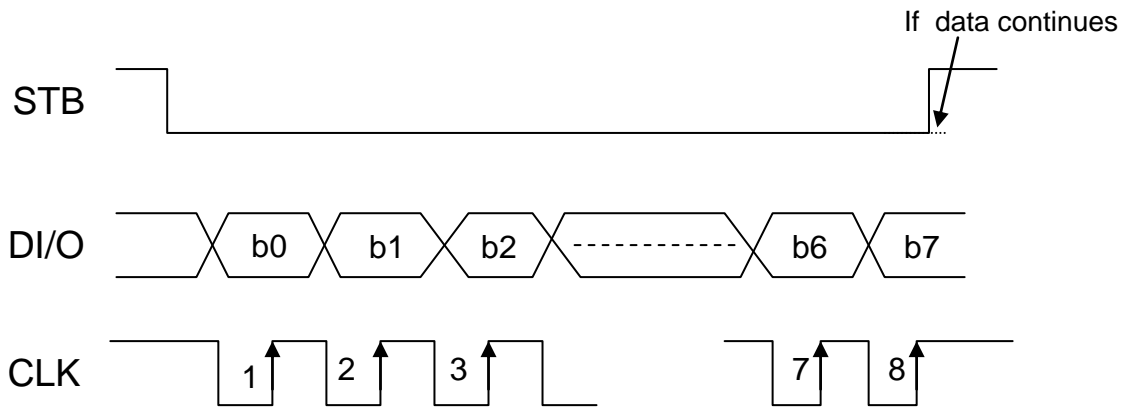


Transmission (Data Read)

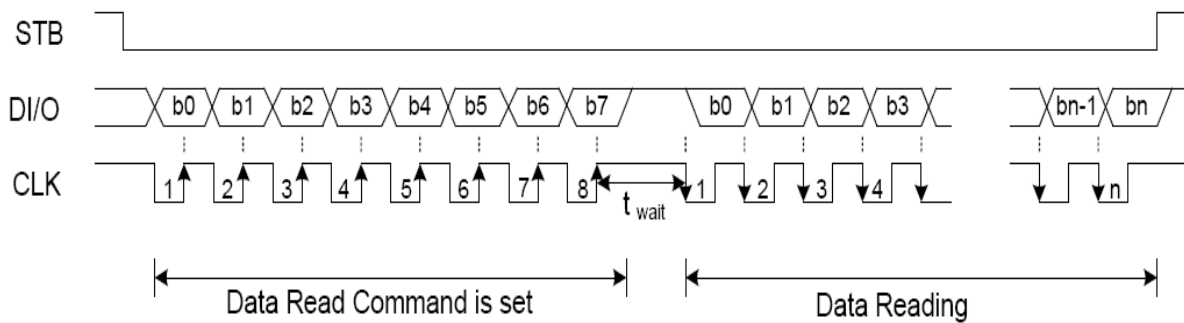

Where: t_{wait} (waiting time) $\geq 1\mu s$

SWITCHING CHARACTERISTIC WAVEFORM

Switching Characteristics Waveform is given below.

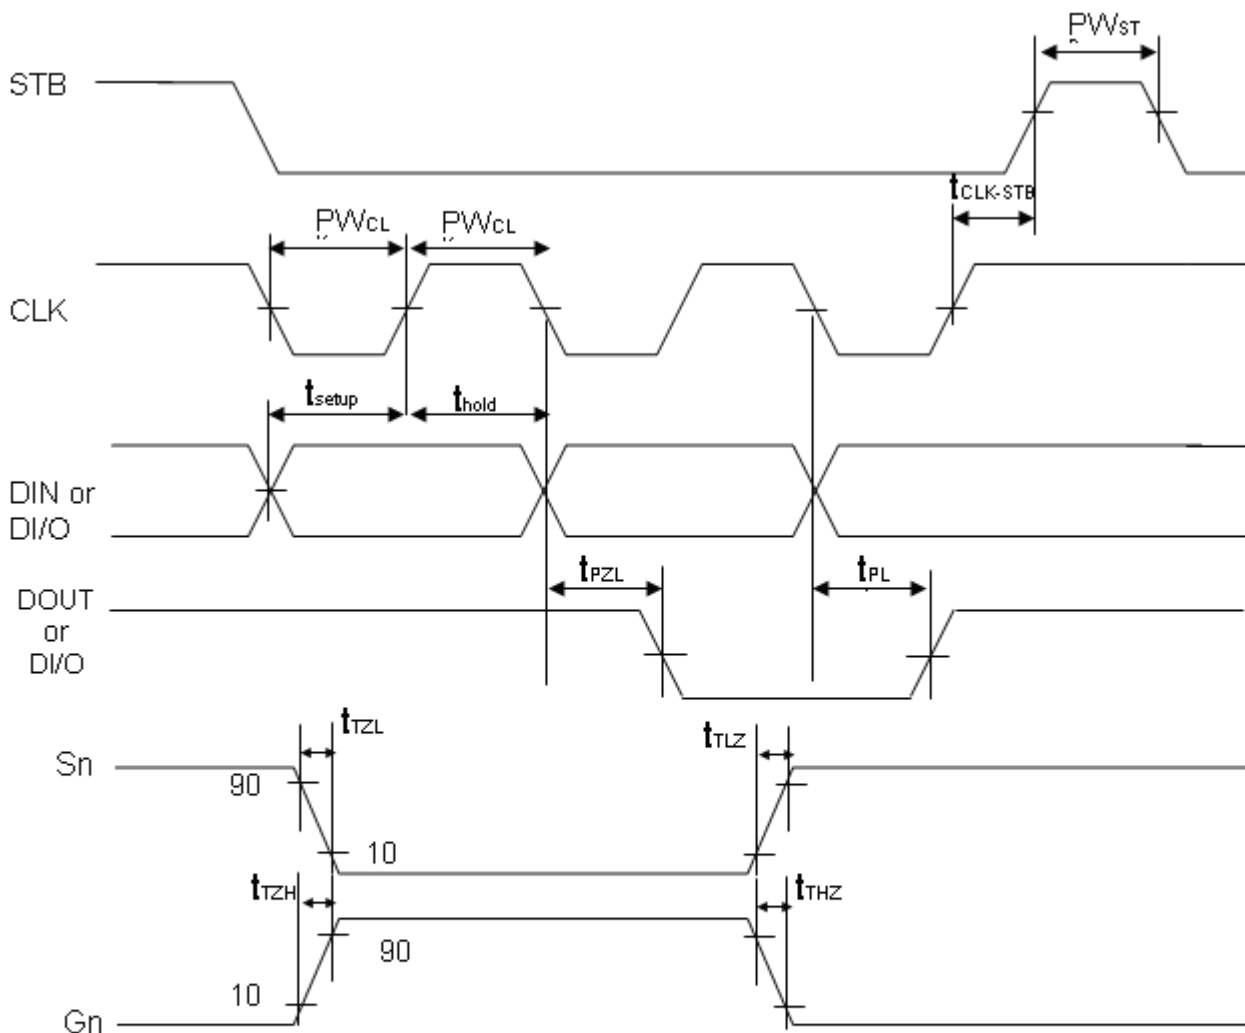


PW_{CLK} (Clock Pulse Width) $\geq 400ns$
 t_{setup} (Data Setup Time) $\geq 100ns$
 $t_{CLK-STB}$ (Clock - Strobe Time) $\geq 1\mu s$
 t_{TZH} (Rise Time) $\leq 1\mu s$
 $t_{TZL} < 1\mu s$

PW_{STB} (Strobe Pulse Width) $\geq 1\mu s$
 t_{hold} (Data Hold Time) $\geq 100ns$
 t_{THZ} (Fall Time) $\leq 10\mu s$
 f_{osc} = Oscillation Frequency
 $t_{TLZ} < 10\mu s$


APPLICATIONS

Display memory is updated by incrementing addresses. Please refer to the following diagram.

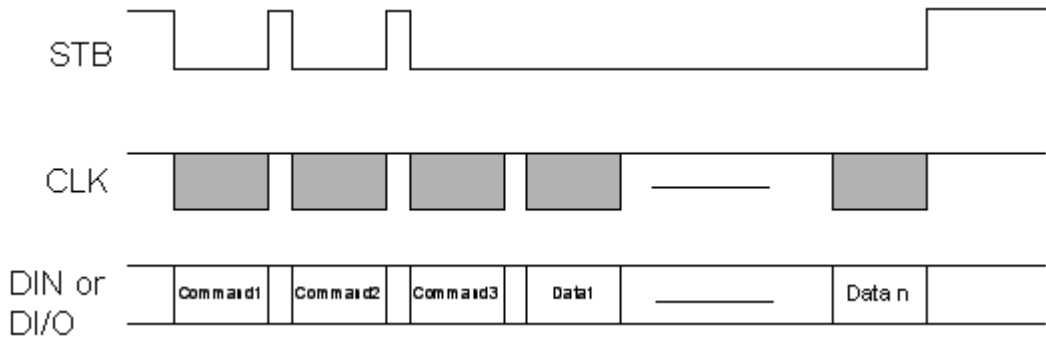


Where: Command 1: Display Mode Setting
 Command 2: Data Setting Command
 Command 3: Address Setting Command
 Data 1 to n : Transfer Display Data (48 Bytes max.)

The following diagram shows the waveforms when updating specific addresses.

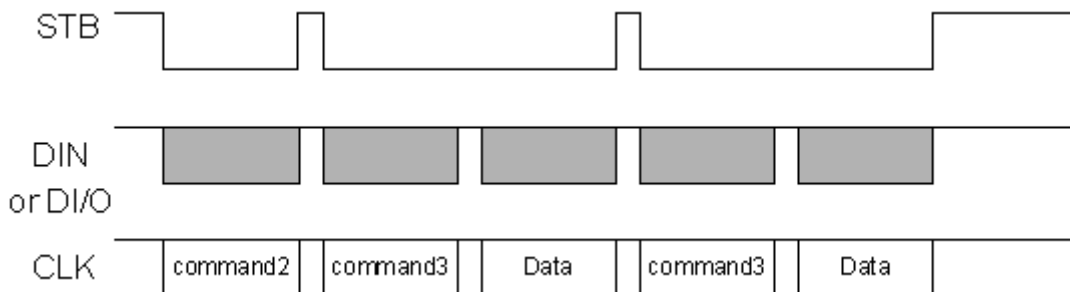

Where: Command 2 -- Data Setting Command
 Command 3 -- Address Setting Command
 Data -- Display Data

RECOMMENDED SOFTWARE PROGRAMMING FLOWCHART

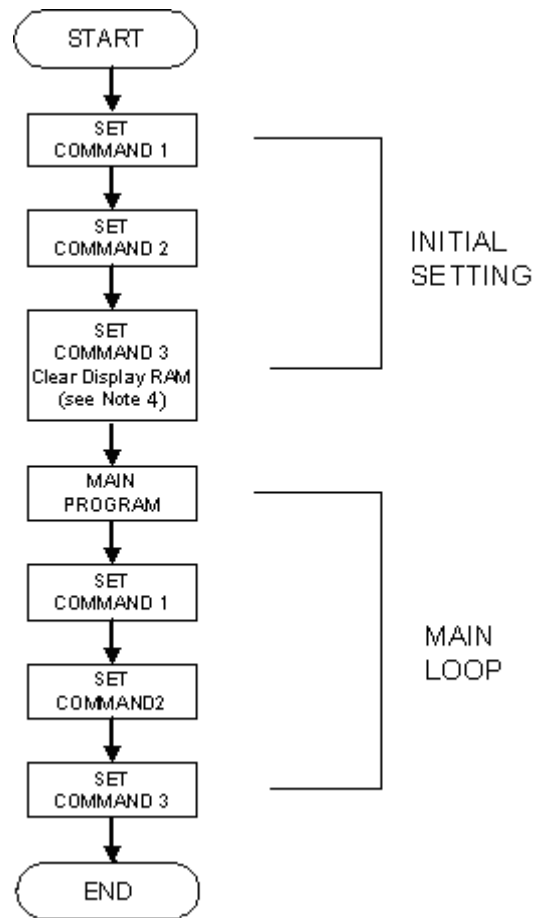

- Note: 1. Command 1: Display Mode Setting
2. Command 2: Data Setting Commands
3. Command 3: Address Setting Commands
4. When IC power is applied for the first time, the contents of the Display RAM are not defined: thus, it is strongly suggested that the contents of the Display RAM must be cleared during the initial setting.

ABSOLUTE MAXIMUM RATINGS

(Unless otherwise stated, Ta=25°C, GND=0V)

Parameter	Symbol	Rating	Units
Supply Voltage	V _{CC}	-0.5 to +18.0	V
Supply Voltage	V _{DD}	-0.5 to +4.0	V
Logic Input Voltage	V _I	-0.5 to V _{DD} +0.5	V
Driver Output Current/Pin	I _{OHGR}	-468	mA
	I _{OLSG}	46.8	mA
Maximum Driver Output Current/Total	I _{TOTAL}	470	mA
Operation Temperature	T _{opr}	-40 ~ +85	°C
Storage Temperature	T _{stg}	-65 ~ 150	°C

RECOMMENDED OPERATING RANGE

(Unless otherwise stated, Ta= -40 to +85°C, GND=0V)

Parameter	Symbol	Min	Typ	Max	Unit
Supply Voltage	V _{CC}	5.0	12.0	15.0	V
Logic Supply Voltage	V _{DD}	3.0	3.3	3.6	V
High-Level Input Voltage	V _{IH}	0.7V _{DD}	.	V _{DD}	V
Low-Level Input Voltage	V _{IL}	0	.	0.3 V _{DD}	V

ELECTRICAL CHARACTERISTICS(UART)

 V_{DD} = 2.7 to 3.6 V, -40 to +85 °C unless otherwise specified.


Parameters	Conditions	Min	Typ	Max	Units
Output High Voltage	I _{OH} = -3 mA, Port I/O push-pull	V _{DD} - 0.7	—	—	V
	I _{OH} = -10 μA, Port I/O push-pull	V _{DD} - 0.1	—	—	
	I _{OH} = -10 mA, Port I/O push-pull	—	V _{DD} - 0.8	—	
Output Low Voltage	I _{OL} = 8.5 mA	—	—	0.6	V
	I _{OL} = 10 μA	—	—	0.1	
	I _{OL} = 25 mA	—	1.0	—	
Input High Voltage		2.0	—	—	V
Input Low Voltage		—	—	0.8	V
Input Leakage Current	Weak Pullup Off	—	—	±1	μA
	Weak Pullup On, V _{IN} = 0 V	—	25	50	

ELECTRICAL CHARACTERISTICS(Unless otherwise stated, $V_{CC}=5.0\sim 18.0V$, $V_{DD}=3.3\sim 3.6V$, $GND=0V$, $T_a=-40\sim 85^\circ C$)


Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Low-Level Output Current	I_{OLSG}	$V_o=1.0V$ SG1/KS1 to SG9/KS9 display 8digitsx9segments	21.6	27	32.4	mA
		$V_o=0.9V$ SG1/KS1 to SG9/KS9 display 8digitsx9segments	31.2	39	46.8	
High-Level Output Current	I_{OHGR}	$V_o=V_{CC}-1.0V$ $R = 12.1K\Omega$ GR1 to GR8 display 8digitsx9segments	-302.4	-378	-453.6	mA
		$V_o=V_{CC}-1.1V$ $R = 12.1K\Omega$ GR1 to GR8 display 8digitsx9segments	-312	-390	-468	
Dynamic Current	I_{DDdyn}	-	-	-	1.2	mA
Digital Input Current	I_{DG}	-	-1	-	+1	μA
Low-Level Digital Output Current	I_{OLDOUT}	$V_o = 0.4V$ DOUT	4	-	-	mA
Segment Low-Level Output Current Tolerance	I_{TOLSG}	$V_o=1.0V$ SG1/KS1 to SG9/KS9 display 8digitsx9segments	-	-	± 5	%
		$V_o=0.9V$ SG1/KS1 to SG9/KS9 display 8digitsx9segments	-	-	± 5	
High-Level Input Voltage for DI/O	V_{IH}	-	$0.7V_{DD}$	-	V_{DD}	V
Low-Level Input Voltage for DI/O	V_{IL}	-	0	-	$0.3V_{DD}$	V
Oscillation Frequency	f_{OSC}	$(V_{DD}=3.3V)$ $R = 12.1k\Omega$	400	500	600	kHz
K1 to K2 Pull Up Resistor	R_{PU}	K1 to K2 $V_{DD} = 3.3V$	22.5	30.0	37.5	$K\Omega$

APPLICATION NOTE

IOLseg vs. Rcur

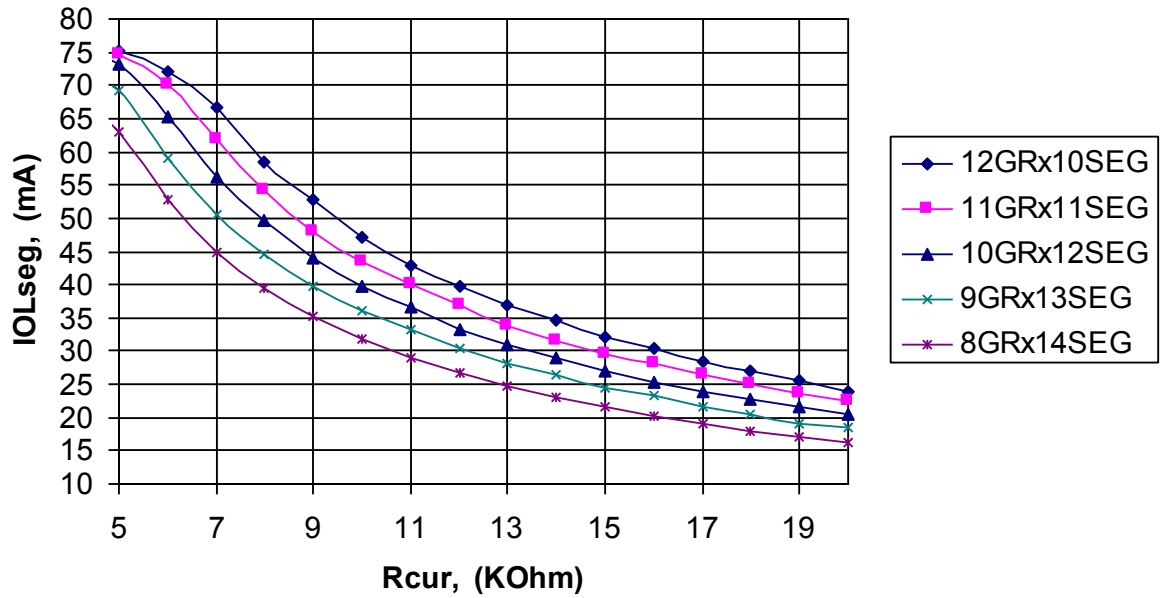

fosc vs. Rcur

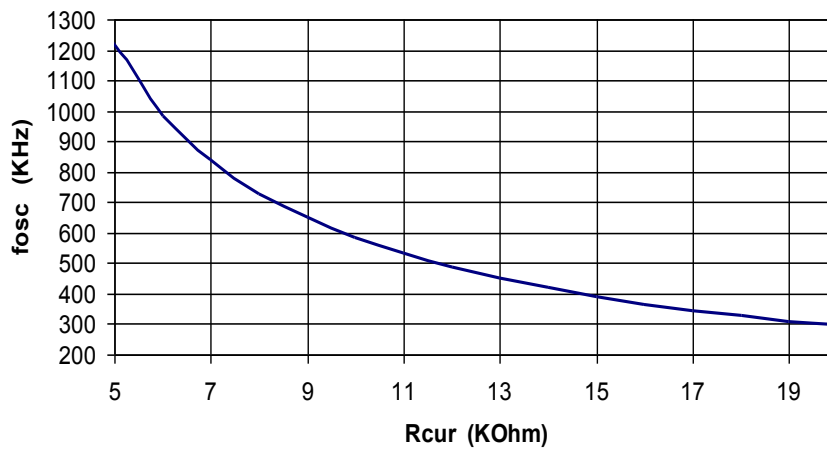

- The graph of I_{OLSG} vs. R_{CUR} is given for the case when only one segment is turn on. Choosing the external resistor R_{CUR} for the setting I_{OLSG} , make sure, that current

$$I_{OHGR} = (\text{number of segments}) * I_{OLSG} \leq 390\text{mA}$$

2. The cell of Display Memory has a dead time zone. If the software program is not correct, it is possible the blinking of display. The blinking frequency for the single segment is:

$$F_{BLINK}^{MAX} = \frac{F_{COMMAND2}}{256 * G} (1 + 0.5 * \frac{F_{OSC}}{F_{CLK}}), \text{ (less value is better),}$$

where $F_{COMMAND2}$ – frequency of the use of the command2 (Write Data to Display Memory);


G – number of grids in used mode;

F_{OSC} – frequency of internal OSC;

F_{CLK} – clock frequency.

So, main rule for update the Display Memory is do it if it really need. Don't do it continually with high speed, but if it something like movie you can. Or another way is turn off the display while the command of Write Data to Display Memory is executed.

APPLICATION CIRCUIT (FOR 8GRID x 9SEGMENT DISPLAY)

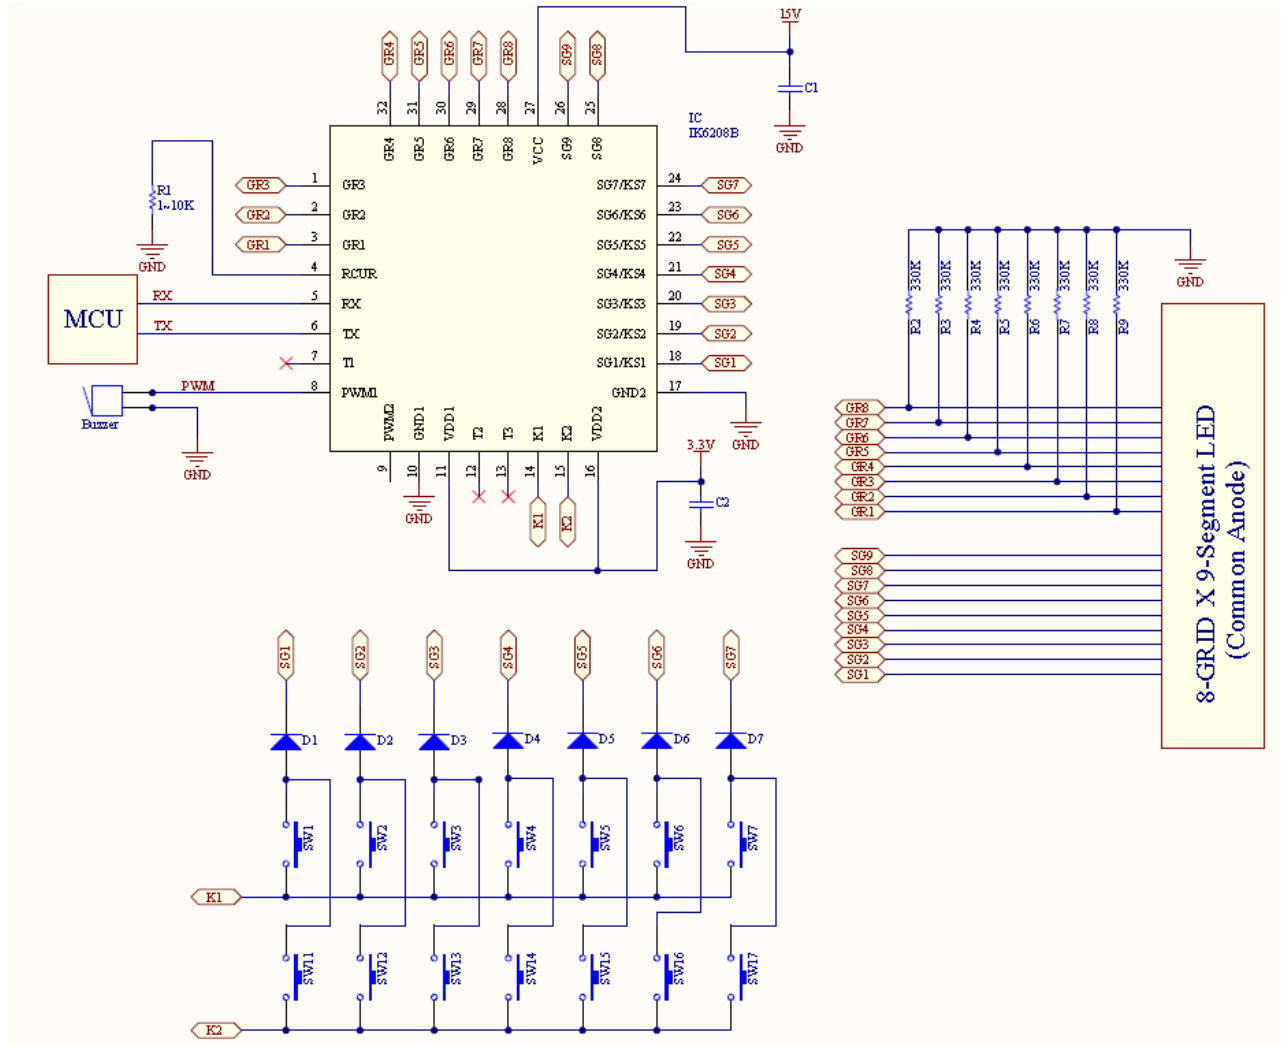


Recommend value:

C1&C2 0.1uF-ceramics


R 160Ohm 0.5W (if one diode is connected)

110Ohm 0.25W (if two diodes are connected)

COMMON ANODE TYPE LED PANEL

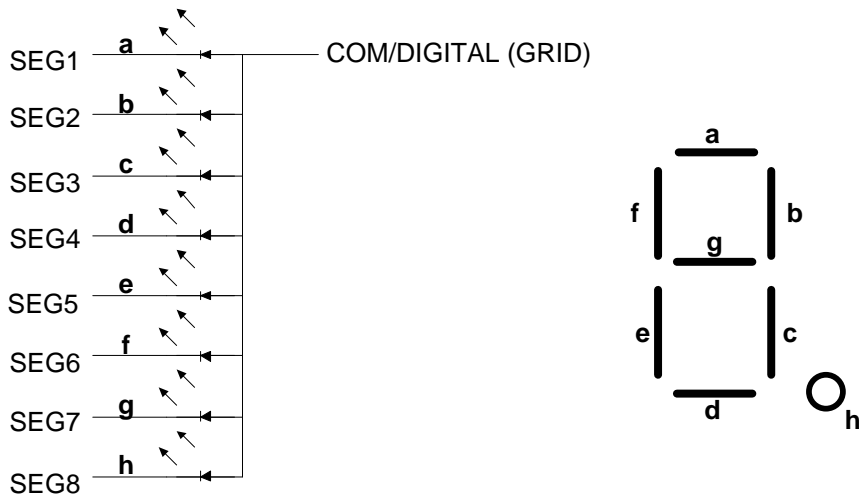

LQFP-32

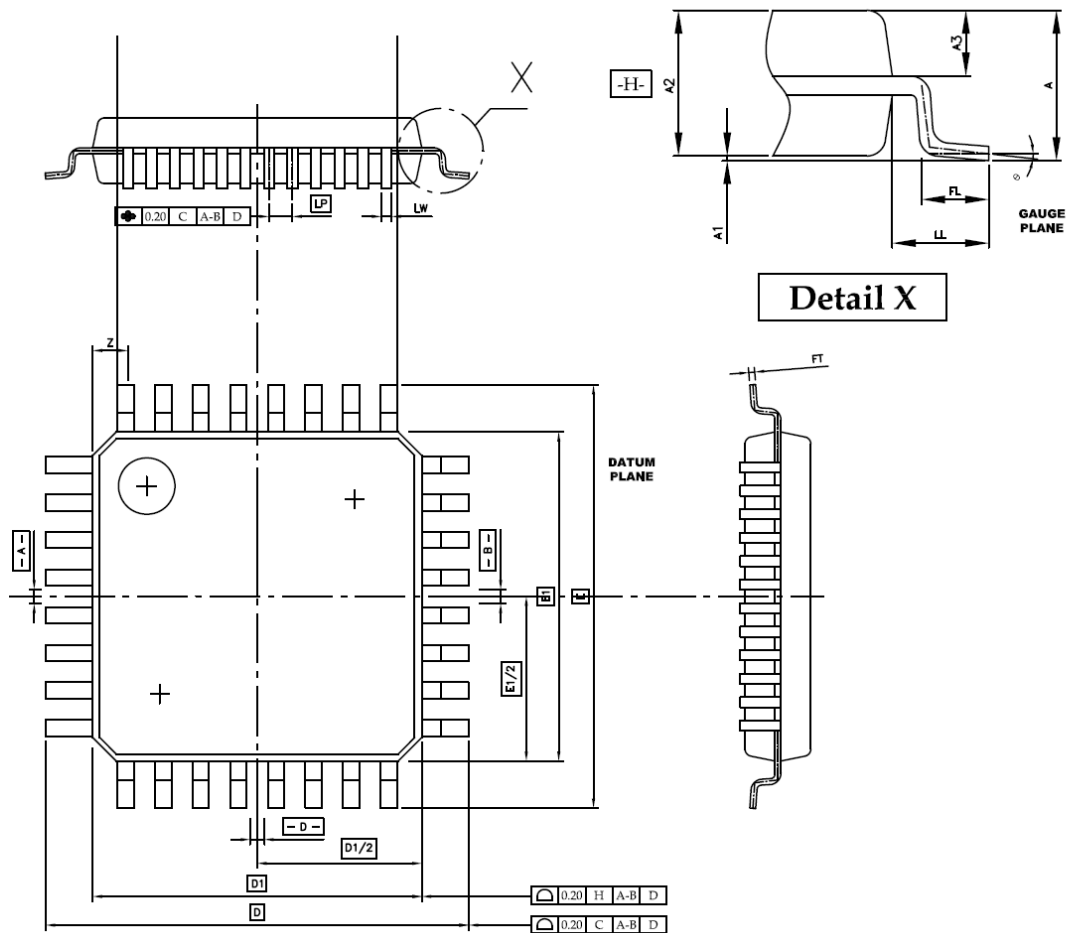

Dimensions

Unit	D1	E1	D/E [TL]	FT	LP	LW	A max.	A1	A2	A3	LL	FL	θ	Z
mm	7.10 6.90	7.10 6.90	9.20 8.80	0.127 BSC	0.80	0.390 0.310	1.60	0.15 0.05	1.45 1.35	(0.64)	1.00	0.75 0.45	8 0	0.75

Notes

1. All Dimensions are in Millimeters.
2. Dimensions Do Not include Burrs, Mold Flash, and Tie-bar Extrusions.
3. JEDEC References : MS-026