

Triple video output amplifier

GENERAL DESCRIPTION


The ILA6107Q includes three video output amplifiers in one plastic DIL-bent-SIL 9-pin medium power (DBS9MPF) package (SOT111-1), using high-voltage DMOS technology, and is intended to drive the three cathodes of a colour CRT directly. To obtain maximum performance, the amplifier should be used with black-current control

FEATURES

- Typical bandwidth of 5.5 MHz for an output signal of 60 V (p-p)
- High slew rate of 900 V/ μ s
- No external components required
- Very simple application
- Single supply voltage of 200 V
- Internal reference voltage of 2.5 V
- Fixed gain of 50
- Black-Current Stabilization (BCS) circuit
- Thermal protection.

PINNING

SIMBO	PIN	DESCRIPTION
$V_{i(1)}$	1	inverting input 1
$V_{i(2)}$	2	inverting input 2
$V_{i(3)}$	3	inverting input 3
GND	4	ground (fin)
I_{om}	5	black-current measurement output
V_{DD}	6	supply voltage
$V_{oc(3)}$	7	cathode output 3
$V_{oc(2)}$	8	cathode output 2
$V_{oc(1)}$	9	cathode output 1

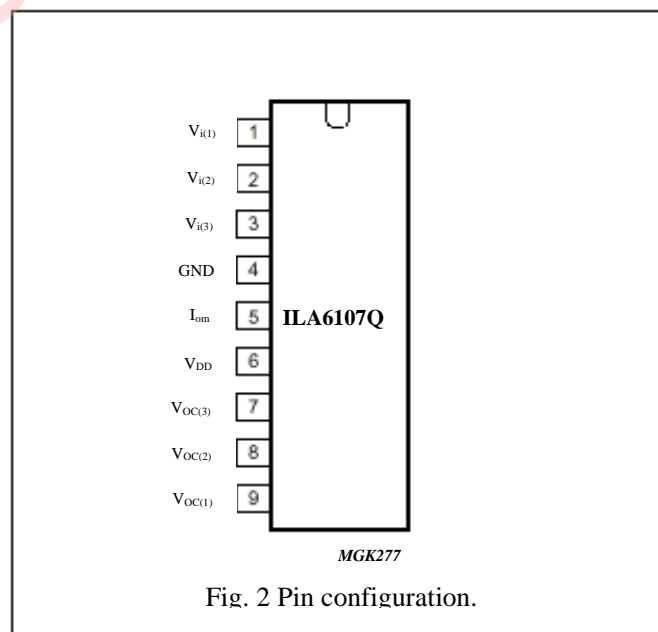

ORDERING INFORMATION

BLOCK DIAGRAM

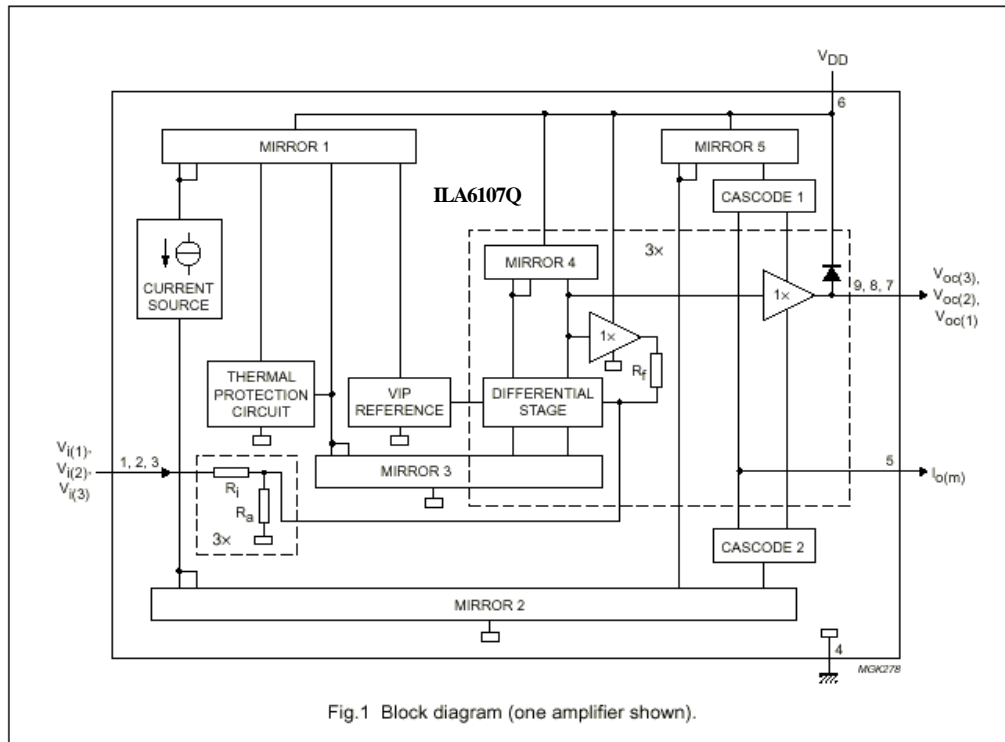


Fig.1 Block diagram (one amplifier shown).

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134); voltage measured with respect to pin 4 (ground); currents as specified in Fig. 1; unless otherwise specified.

SYMBOL	PARAMETER	MIN.	MAX.	UNIT
V_{DD}	supply voltage	0	250	
V_i	supply voltage at pins 1 to 3	0	12	
$V_{o(m)}$	measurement output voltage	0	6	
$V_{o(c)}$	cathode output voltage	0	V_{DD}	
T_{stg}	storage temperature	-55	+150	°C
T_j	junction temperature	-20	+150	°C
V_{es}	electrostatic handling			
	Human Body Model (HBM)	-	2000	V
	Machine Model (MM)	-	300	V

HANDLING

Inputs and outputs are protected against electrostatic discharge in normal handling. However, to be totally safe, it is desirable to take normal precautions appropriate to handling MOS devices (see “*Handling MOS Devices*”).

QUALITY SPECIFICATION


Quality specification “*SNW-FQ-611 part D*” is applicable and can be found in the “*Quality reference Handbook*”. The handbook can be ordered using the code (9397 750 00192).

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
$R_{th(j-a)}$	thermal resistance from junction to ambient		56	K/W
$R_{th(j-fin)}$	thermal resistance from junction to fin	note 1	11	K/W
$R_{th(h-a)}$	thermal resistance from heatsink to ambient		18	K/W


Note

1. An external heatsink is necessary.

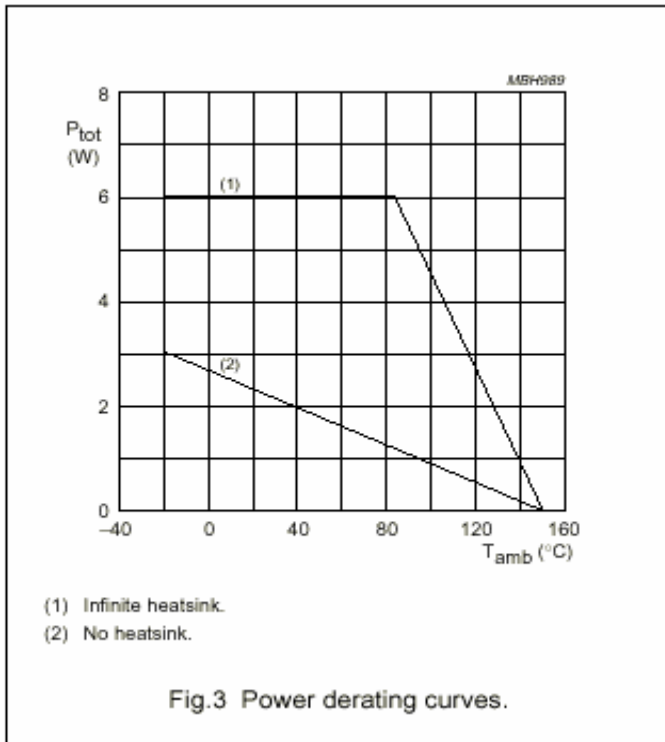

Thermal protection

The internal thermal protection circuit gives a decrease of the slew rate at high temperatures: 10% decrease at 130 °C and 30% decrease at 145 °C (typical values on the spot of the thermal protection circuit).

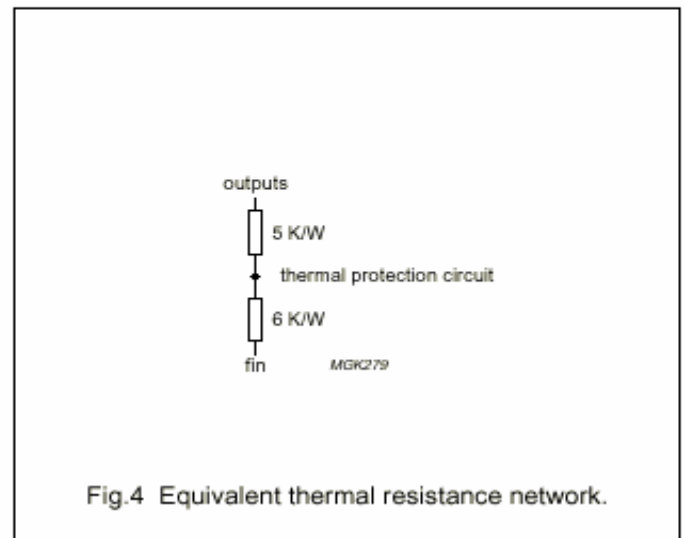

CHARACTERISTICS

Operating range: $T_j = -20$ to $+150$ °C; $V_{DD} = 180$ to 210 V. Test conditions: $T_{amb} = 25$ °C; $V_{DD} = 200$ V ; $V_{o(c1)} = V_{o(c2)} = V_{o(c3)} = \frac{1}{2} V_{DD}$; $C_L = 10$ pF (C_L consists of parasitic and cathode capacitance); $R_{th(h-a)} = 18$ KW; unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
I_q	quiescent supply current		5.9	6.9	7.9	mA
$V_{ref(int)}$	internal reference voltage		-	2.5	-	V
R_i	input resistance		-	3.6	-	k Ω
G	amplifier		47.5	51.0	55.0	
ΔG	gain difference		-2.5	0	+2.5	
$V_{o(c)}$	nominal output voltage at pins 7, 8 and 9 (DC value)	$I_i = 0 \mu A$	116	129	142	V
$\Delta V_{o(c)(offset)}$	differential nominal output offset voltage between pins 7 and 8, 8 and 9 and 9 and 7 (DC value)	$I_i = 0 \mu A$	-	0	5	V
$\Delta V_{o(c)(T)}$	output voltage temperature drift at pins 7, 8 and 9		-	-10	-	mV/K
$\Delta V_{o(c)(T)(offset)}$	differential output offset voltage temperature drift between pins 7 and 8, 8 and 9 and 7 and 9		-	0	-	mV/K
$I_{o(m)(offset)}$	offset current of measurement output	$I_{o(c)} = 0 \mu A$ $1.5 V < V_i < 5.5 V$ $3 V < V_{o(m)} < 6 V$	-50	-	+50	μA
$\Delta I_{o(m)} / \Delta I_{o(c)}$	linearity of current transfer	$-100 \mu A < I_{o(c)} < 100 \mu A$ $1.5 V < V_i < 5.5 V$ $3 V < V_{o(m)} < 6 V$	0.9	1.0	1.1	
		at CRT discharge; $I_{o(c)} = 1 mA$ $1.5 V < V_i < 5.5 V$ $3 V < V_{o(m)} < 5.4 V$	-	1.0	-	
$I_{o(c)(max)}$	maximum peak output current (pins 7, 8 and 9)	$50 V < V_{o(c)} < V_{DD} - 50 V$	-	20	-	mA
$V_{o(c)(min)}$	minimum output voltage (pins 7, 8 and 9)	$V_i = 7.0 V$	-	-	10	V
$V_{o(c)(max)}$	maximum output voltage (pins 7, 8 and 9)	$V_i = 1.0 V$	$V_{DD} - 15$	-	-	V
B_S	small signal bandwidth (pins 7, 8 and 9)	$V_{o(c)} = 60 V$ (p-p)	-	5.5	-	MHz
B_L	large signal bandwidth (pins 7, 8 and 9)	$V_{o(c)} = 100 V$ (p-p)	-	4.5	-	MHz
t_{Pco}	cathode output propagation time 50% input to 50% output (pins 7, 8 and 9)	$V_{o(c)} = 100 V$ (p-p) square wave; $f < 1$ MHz; $t_r = t_f = 40$ ns (pins 1, 2 and 3);	-	60	-	ns
Δt_{Pco}	difference in cathode output propagation time 50% input to 50% output (pins 7 and 8, 7 and 9 and 8 and 9)	$V_{o(c)} = 100 V$ (p-p) square wave; $f < 1$ MHz; $t_r = t_f = 40$ ns (pins 1, 2 and 3);	- 10	0	+ 10	ns

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
$t_{o(r)}$	cathode output rise time 10% output to 90% output (pins 7, 8 and 9)	$V_{o(c)} = 50$ to 150 V square wave; $f < 1$ MHz; $t_r = 40$ ns (pins 1, 2 and 3);	67	91	113	ns
$t_{o(f)}$	cathode output fall time 90% output to 10% output (pins 7, 8 and 9)	$V_{o(c)} = 50$ to 150 V square wave; $f < 1$ MHz; $t_f = 40$ ns (pins 1, 2 and 3);	67	91	113	ns
t_{st}	Setting time 50% input to 99% < output < 101% (pins 7, 8 and 9)	$V_{o(c)} = 100$ V (p-p) square wave; $f < 1$ MHz; $t_r = t_f = 40$ ns (pins 1, 2 and 3);	-	-	350	ns
SR	slew rate between 50 V to ($V_{DD} - 50$ V) (pins 7, 8 and 9)	$V_i = 4$ V (p-p) square wave; $f < 1$ MHz; $t_r = t_f = 40$ ns (pins 1, 2 and 3);	-	900	-	V/ μ s
O_v	cathode output voltage overshoot (pins 7, 8 and 9)	$V_i = 100$ V (p-p) square wave; $f < 1$ MHz; $t_r = t_f = 40$ ns (pins 1, 2 and 3);	-	2	-	%
PSRR	Power supply rejection ratio	$f < 50$ kHz; note 1	-	55	-	dB
$\alpha_{ct(DC)}$	DC crosstalk between channels		-	50	-	dB

Notes

1. The ratio of the change in supply voltage to the change in input voltage when there is no change in output voltage.

• 9-Pin Plastic Power Single-in-Line (SIL-9MPF, SOT 110-1)

