


**Microcircuit ILX3483N, ILX3485N, ILX3486 N** (functional equivalents of MAX3483/ MAX3485/ MAX3486 MAXIM (USA)) - interface transceiver of the serial data of the standard RS - 485/422.

Microcircuit is interface transceiver (transmitter-receiver) of serial data of RS - 485, RS – 422 standards with low supply voltage (3V).

Microcircuit is purposed for application in low power telecom systems, that correspond to RS – 485, RS – 422 standards, level translators, transceiver units & E-field sensitive automation systems of industrial devices.

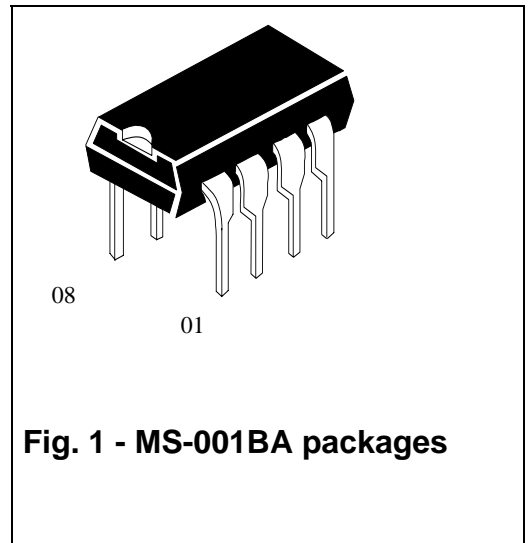

Functions and structure:

- Microcircuit contains 1 transmitter and 1 receivers of the serial data of the standards RS-485/422;
- Low dissipated power;
- One power supply voltage source  $U_{CC} = (3,0 - 3,6) V$ ;
- Maximum data transfer rate 0,25 Mbit/s (ILX3483N); 12 Mbit/s (ILX3485N); 2,5 Mbit/s (ILX3486N);
- Temperature range  $-40 \dots + 85 \text{ }^{\circ}\text{C}$ ;
- Permissible value of static electricity potential:
  - for inputs of the transmitter and outputs of the receiver 2000 V;
  - for inputs of the receiver and outputs of the transmitter 4000 V;
- Latch current not less than 300 mA for normal climatic conditions and supply voltage 3,3 V.

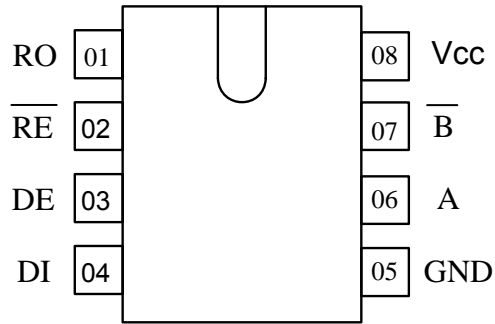


Fig. 2 – Pin configuration

Table 1 – Pin description

Pin number	Symbol	Description
01	RO	Receiver output
02	$\overline{RE}$	Receiver output enable pin
03	DE	Transmitter output enable pin
04	DI	Transmitter input
05	GND	Common pin
06	A	Receiver/transmitter uncomplemented I/O pin
07	$\overline{B}$	Receiver/transmitter complemented I/O pin
08	V <sub>CC</sub>	Supply voltage pin

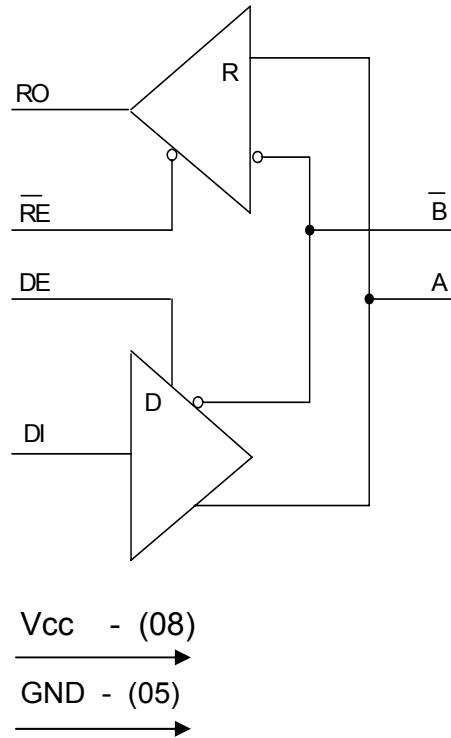


Fig. 3 – Block diagram

Table 2 – Transmitter truth table

Inputs			Outputs	
$\overline{RE}$	DE	DI	$\overline{B}$	A
H or L	H	H	L	H
H or L	H	L	H	L
L	L	H or L	«OFF» state	«OFF» state
H*	L*	H or L	«OFF» state	«OFF» state

Note - H – high level voltage;  
 L – low level voltage.

\* Shout-down mode

Table 3 – Receiver truth table

Inputs			Output
$\overline{RE}$	DE	A-B	RO
L	L	$\geq +0,2\text{ V}$	H
L	L	$\leq -0,2\text{ V}$	L
L	L	Input not used	H
H*	L*	H or L	«OFF» state

Note - H – high level voltage;  
 L – low level voltage.

\* Shout-down mode

Table 4 – Absolute maximum ratings

Symbol	Parameter	Norm		Unit
		Min	Max	
$U_{CC}$	Supply voltage	-	7,0	V
$U_i$	DI, DE, $\overline{RE}$ pins input voltage	-0,3	7,0	V
$U_{OD}$	Voltage applied to transmitter output	-7,5	12,5	V
$U_{RIN}$	Receiver input voltage	-7,5	12,5	V
$U_{OR}$	Voltage applied to receiver output	-0,3	$U_{CC}+0,3$	V

Table 5 – Recommended operating mode

Symbol	Parameter	Norm		Unit
		Min	Max	
$U_{CC}$	Supply voltage	3,0	3,6	V
$U_{IL}$	DI, DE, $\overline{RE}$ pins low level input voltage	0	0,8	V
$U_{IH}$	DI, DE, $\overline{RE}$ pins high level input voltage	2,0	$U_{CC}$	V
$U_{OD}$	Voltage applied to transmitter output	-7,0	12,0	V
$U_{RIN}$	Receiver input voltage	-7,0	12,0	V
$U_{OR}$	Voltage applied to receiver output	0	$U_{CC}$	V
$U_{TH}$	Receiver differential threshold voltage	-0,2	0,2	V

Table 6 – Electric parameters

Symbol	Parameter	Mode of measurement	Norm		T <sub>A</sub> , °C	Unit
			Min	Max		
I <sub>ILL</sub>	Low level input leakage current	U <sub>DE</sub> =U <sub>DI</sub> =U <sub>RE</sub> =0V U <sub>CC</sub> = 3,6 V	-	-0,2 -2,0	25 ± 10 -40; 85	uA
I <sub>ILH</sub>	High level input leakage current	U <sub>DE</sub> =U <sub>DI</sub> =U <sub>RE</sub> = U <sub>CC</sub> U <sub>CC</sub> = 3,6 V	-	0,2 2,0	25 ± 10 -40; 85	uA
I <sub>CC</sub>	Supply current	U <sub>RE</sub> = 0 V or U <sub>CC</sub> U <sub>DI</sub> = 0 V or U <sub>CC</sub> U <sub>DE</sub> = U <sub>CC</sub> U <sub>CC</sub> = 3,6 V	-	1,9 2,2	25 ± 10 -40; 85	mA
		U <sub>RE</sub> = 0 V U <sub>DI</sub> = 0 V or U <sub>CC</sub> U <sub>DE</sub> = 0 U <sub>CC</sub> = 3,6 V	-	1,6 1,9	25 ± 10 -40; 85	
I <sub>SHDN</sub>	Shutdown mode supply current	U <sub>DE</sub> = 0 U <sub>RE</sub> = U <sub>CC</sub> U <sub>DI</sub> = 0 V or U <sub>CC</sub> U <sub>CC</sub> = 3,6 V	-	0,7 1,0	25 ± 10 -40; 85	uA
t <sub>SHDN</sub>	Time of transition to low power consumption mode	U <sub>CC</sub> = 3,3 V	80	300	25 ± 10	ns
Receiver parameters						
U <sub>OL</sub>	Low level output voltage	U <sub>ID</sub> =U <sub>TH</sub> =-190 mV I <sub>OL</sub> = 2,5 mA	-	0,36	25 ± 10	V
		U <sub>ID</sub> =U <sub>TH</sub> =-200 mV I <sub>OL</sub> = 2,5 mA		0,40	-40; 85	
U <sub>OH</sub>	High level output voltage	U <sub>ID</sub> = U <sub>TH</sub> =190 mV I <sub>OH</sub> = - 1,5 mA	U <sub>CC</sub> -0,4	-	25 ± 10	V
		U <sub>ID</sub> = U <sub>TH</sub> =200 mV I <sub>OH</sub> = - 1,5 mA			-40; 85	
R <sub>IN</sub>	Receiver input resistance	- 7 V ≤ U <sub>RIN</sub> ≤ 12 V	12	-	25±10; -40; 85	kΩ
I <sub>IN2</sub>	Input current	U <sub>DE</sub> =0V U <sub>CC</sub> =3,6V	-	0,95	25 ± 10	mA
				-0,7		
				1,0	-40; 85	
				-0,8		
I <sub>OZLR</sub>	Low level output current for "OFF" state	U <sub>OR</sub> = 0 V U <sub>CC</sub> =3,6 V	-	-0,5 -1,0	25 ± 10 -40; 85	uA
I <sub>OZHR</sub>	High level output current for "OFF" state	U <sub>OR</sub> = U <sub>CC</sub> U <sub>CC</sub> =3,6 V	-	0,5 1,0	25 ± 10 -40; 85	uA
I <sub>OSHR</sub>	High level short circuit output current	U <sub>IH</sub> = 3,0 V; U <sub>IL</sub> = 0 V U <sub>OR</sub> =3,6V; U <sub>CC</sub> =3,6V	9,0	50	25 ± 10	mA
			8,0	60	-40; 85	
I <sub>OSLR</sub>	Low level short circuit output current	U <sub>IH</sub> = 3,0 V; U <sub>IL</sub> = 0 V U <sub>OR</sub> = 0 V; U <sub>CC</sub> = 3,6 V	-9,0	-50	25 ± 10	mA
			-8,0	-60	-40; 85	

Table 6 continued

Symbol	Parameter	Mode of measurement	Norm		T <sub>A</sub> , °C	Unit
			Min	Max		
<b>Receiver parameters</b>						
t <sub>PHLR</sub> (t <sub>PLHR</sub> )	OFF-ON switching propagation delay, ILX3483N	U <sub>IH</sub> = 3,0 V; U <sub>IL</sub> = 0 V t <sub>LH</sub> =t <sub>HL</sub> ≤ 6 ns C <sub>L</sub> = 15 pF	25	120	25 ± 10	ns
	ILX3485N, ILX3486N	U <sub>CC</sub> = 3,3 V	25	90		
t <sub>PZHR</sub> (t <sub>PZLR</sub> )	Propagation delay time of transition from "OFF" state to high (low) level	U <sub>IH</sub> = 3,0 V; U <sub>IL</sub> = 0 V C <sub>L</sub> = 15 pF R <sub>L</sub> = 1 kΩ U <sub>CC</sub> = 3,3 V	-	50	25 ± 10	ns
t <sub>PHZR</sub> (t <sub>PLZR</sub> )	Receiver output disable time for transition from high (low) level state to "OFF" state	U <sub>IH</sub> = 3,0 V; U <sub>IL</sub> = 0 V C <sub>L</sub> = 15 pF R <sub>L</sub> = 1 kΩ U <sub>CC</sub> = 3,3 V	-	45	25 ± 10	ns
t <sub>SKD</sub>	OFF-ON switching propagation delays difference ILX3483N	U <sub>IH</sub> = 3,0 V; U <sub>IL</sub> = 0 V C <sub>L</sub> = 15 pF; U <sub>CC</sub> = 3,3V	-	20	25 ± 10	ns
	ILX3485N, ILX3486N			10		
t <sub>PSLR</sub>	Receiver transition time from shutdown to low level	U <sub>IH</sub> = 3,0 V; U <sub>IL</sub> = 0V C <sub>L</sub> = 15 pF, R <sub>L</sub> = 1kΩ U <sub>CC</sub> = 3,3 V	-	1400	25 ± 10	us
t <sub>PSHR</sub>	Receiver transition time from shutdown to high level	U <sub>IH</sub> = 3,0 V; U <sub>IL</sub> = 0V C <sub>L</sub> = 15 pF, R <sub>L</sub> = 1 kΩ U <sub>CC</sub> = 3,3 V	-	1400	25 ± 10	us
<b>Transmitter parameters</b>						
U <sub>OD</sub>	Low level differential output voltage	R <sub>L1</sub> = 54 Ω (RS-485) U <sub>CC</sub> =3,0; 3,6 V	1,56	-	25 ± 10	V
			1,50		-40; 85	
		R <sub>L1</sub> = 100 Ω (RS-422) U <sub>CC</sub> =3,0; 3,6 V	2,08		25 ± 10	
			2,00		-40; 85	
		R <sub>L2</sub> = 60 Ω (RS-485) U <sub>CC</sub> =3,3 V	1,56		25 ± 10	
			1,50		-40; 85	
δU <sub>OD</sub>	Change in value of differential output voltage for complementary output states	R <sub>L</sub> = 54; 100 Ω U <sub>CC</sub> =3,0 V; 3,6 V	-	0,18 0,20	25 ± 10 -40; 85	V
U <sub>OC</sub>	Output bias voltage refer to common pin, V	R <sub>L</sub> = 54; 100 Ω U <sub>CC</sub> =3,0 V; 3,6 V	-	2,9	25 ± 10	V
				3,0	-40; 85	
δU <sub>OC</sub>	Change in value of bias output voltage for complementary output states	R <sub>L</sub> = 54; 100 Ω U <sub>CC</sub> =3,0 V; 3,6 V	-	0,18	25 ± 10	V
				0,20	-40; 85	

Table 6 continued

Symbol	Parameter	Mode of measurement	Norm		T <sub>A</sub> , °C	Unit
			Min	Max		
Transmitter parameters						
I <sub>OSLD</sub>	Low level receiver short circuit output current	U <sub>OD</sub> = 12 V; U <sub>IL</sub> = 0V U <sub>IH</sub> = 3,0V; U <sub>CC</sub> =3,6V	-	240 250	25 ± 10 -40; 85	mA
I <sub>OSHD</sub>	High level receiver short circuit output current	U <sub>OD</sub> = -7 V; U <sub>IL</sub> = 0 V U <sub>IH</sub> =3,0V; U <sub>CC</sub> = 3,6V	-	-240 -250	25 ± 10 -40; 85	mA
t <sub>PHL</sub> (t <sub>PLH</sub> )	ON/OFF switching propagation delay  ILX3483N ILX3485N ILX3486N	C <sub>L</sub> = 15 pF R <sub>L</sub> = 27 Ω U <sub>IL</sub> = 0 V U <sub>IH</sub> = 3,0 V U <sub>CC</sub> = 3,3 V	700 7 20	1500 35 70	25 ± 10	ns
t <sub>SKEW</sub>	OFF-ON switching propagation delays difference, ILX3483N ILX3485N ILX3486N	C <sub>L</sub> = 15 pF R <sub>L</sub> = 27 Ω U <sub>IL</sub> = 0 V U <sub>IH</sub> = 3,0 V U <sub>CC</sub> = 3,3 V	-	100 8 11	25 ± 10	ns
t <sub>PZH</sub>	Output transition time OFF state to high level, ILX3483N ILX3485N ILX3486N	C <sub>L</sub> = 50 pF R <sub>L</sub> = 110 Ω U <sub>CC</sub> = 3,3 V	-	800 90 100	25 ± 10	ns
t <sub>PZL</sub>	Output enable time for transition transition from "OFF" state to low level, ILX3483N ILX3485N ILX3486N	C <sub>L</sub> = 50 pF R <sub>L</sub> = 110 Ω U <sub>CC</sub> = 3,3 V	-	1300 90 100	25 ± 10	ns
t <sub>PHZ</sub> (t <sub>PLZ</sub> )	Output disable time for transition high (low) level to "OFF" state	C <sub>L</sub> = 50 pF R <sub>L</sub> = 110 Ω U <sub>CC</sub> = 3,3 V	-	80	25 ± 10	ns
t <sub>TD</sub>	Differential output transition (fall/rise) time ILX3483N ILX3485N ILX3486N	C <sub>L</sub> = 15 pF R <sub>L</sub> = 60 Ω U <sub>CC</sub> = 3,3 V	400 3,0 15	1200 25 60	25 ± 10	ns
ST	Maximum data transfer rate, ILX3483N ILX3485N ILX3486N	C <sub>L</sub> = 15 pF R <sub>L</sub> = 27 Ω U <sub>IL</sub> = 0 V U <sub>IH</sub> = 3,0 V Q ≥ 2; U <sub>CC</sub> = 3,3 V	0,25 12 2,5	-	25 ± 10	Mbit/s

Table 6 continued

Symbol	Parameter	Mode of measurement	Norm		T <sub>A</sub> , °C	Unit
			Min	Max		
Transmitter parameters						
t <sub>DD</sub>	Differential output delay time, ILX3483N	C <sub>L</sub> = 15 pF R <sub>L</sub> = 60 Ω U <sub>CC</sub> = 3,3 V	600	1400	25 ± 10	ns
	ILX3485N		1,0	35		
	ILX3486N		24	70		
t <sub>PSL</sub>	Output enable time from shut-down to low level, ILX3483N	C <sub>L</sub> = 50 pF R <sub>L</sub> = 110 Ω U <sub>CC</sub> = 3,3 V	–	2700	25 ± 10	ns
	ILX3485N			900		
	ILX3486N			1000		
t <sub>PSH</sub>	Output enable time from shut-down to high level, ILX3483N	C <sub>L</sub> = 50 pF R <sub>L</sub> = 110 Ω U <sub>CC</sub> = 3,3 V	–	3000	25 ± 10	ns
	ILX3485N			900		
	ILX3486N			1000		





## Operation description

The microcircuit consist of two main units: transmitter and receiver. Inputs of the receiver are connected to outputs of the transmitter that provides a half-duplex mode data transfer. The microcircuit provide function of switching to shutdown mode with consumption current not more 1  $\mu$ A.

Switching to shutdown mode performed at simultaneous transition of the receiver and the transmitter to the third state after certain hold time which provides dynamic noise immunity.

### *RS-485/422 transmitter*


CMOS/TTL levels signals come to transmitter input DI, splited inside the microcircuit on complement and uncomplemented, converted to RS-485/422 standard levels, after that signals transmitted in a long line through output ports with high load capacity. The differential signal has high level of noise immunity on background of common-mode interference that provides high reliability in a mode of signal transmitting in a long line. The microcircuit has some levels of protection against a overload of the power output stage for case of occurrence of a strong disturbance in a line. At voltage increase in a line load capacity of the output stage of the transmitter is reduced.

### *RS-485/422 receiver*

The receiver processes reverse conversion of RS-485/422 levels to CMOS/TTL levels. The minimum differential input voltage of the receiver is + 200 mV for bias voltage range -7 ... +12V, simulating an in-phase component of a noise in a line. In a limiting (extrime) mode the level of an inphase noise changes in a range -8 ... +12,5 V. Operation stability of the microcircuit in case of receiving from a line signals with flat fronts is provided by a 40 - 70 mV hysteresis. According to requirements of standard RS-485/422 the input impedance of the receiver is not more than 12 k $\Omega$ . At absence of a signal on a differential input of the receiver the output of the receiver is switched in the state corresponding to a level of logical one.

Fig. 4, 5 display time diagrams of the microcircuit operating.



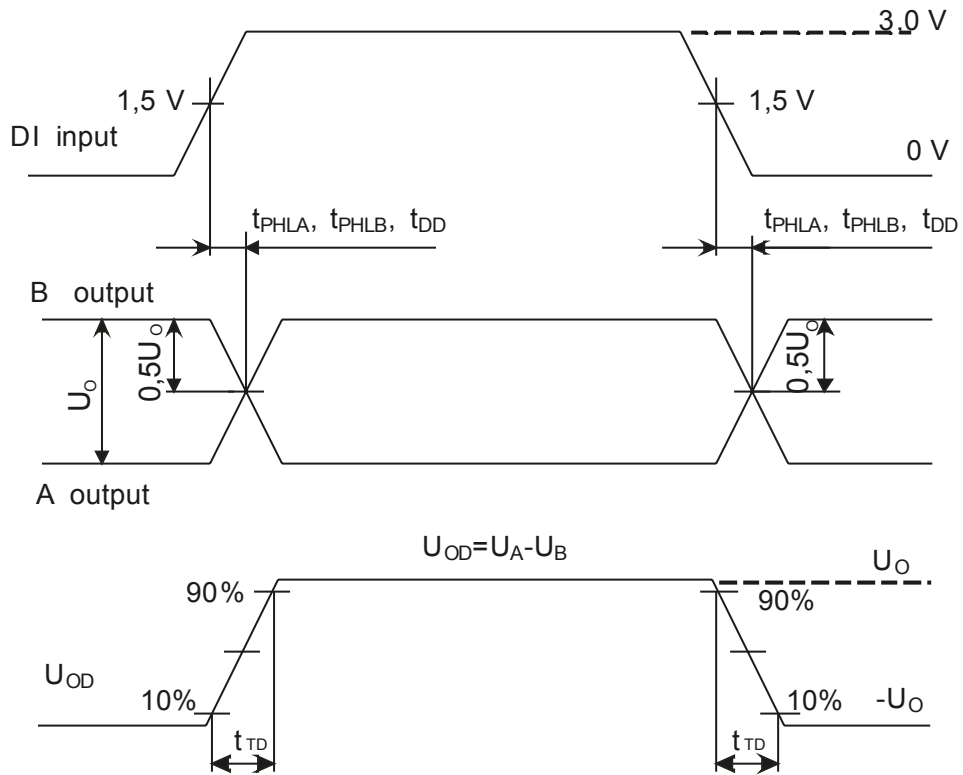

$U_O$  – differential output voltage on condition UA low level  
 $-U_O$  – differential output voltage on condition UA high level

Fig. 4 – Transmitter I/O signals time diagram


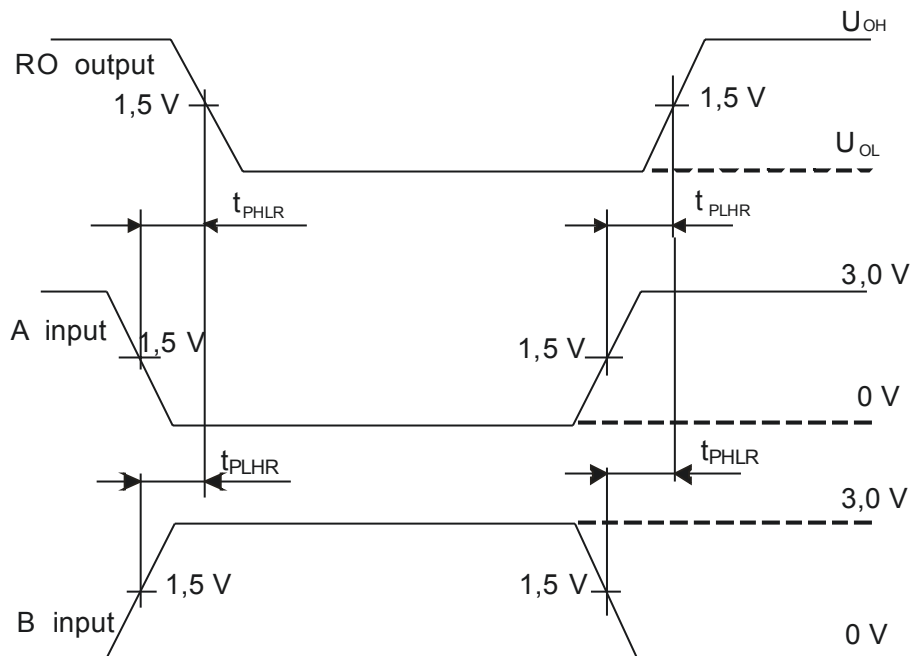



Fig. 5 – Receiver I/O signals time diagram

PLASTIC DIP-8 (MS-001BA)

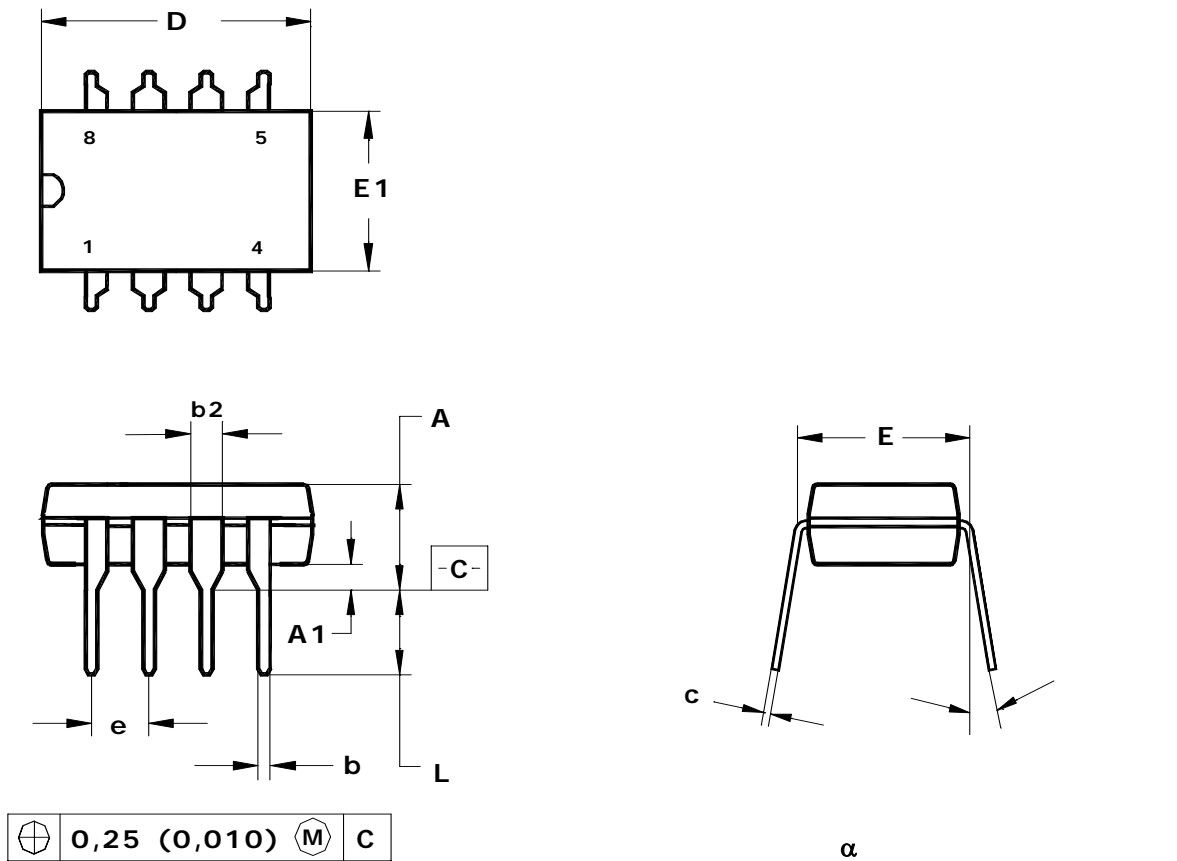

	D	E1	A	b	b2	e	$\alpha$	L	E	c	A1
mm											
min	9.02	6.07	—	0.36	1.14		0°	2.93	7.62	0.20	0.38
max	10.16	7.11	5.33	0.56	1.78	2.54	15°	3.81	8.26	0.36	—
inches											
min	0.355	0.240	—	0.014	0.045		0°	0.115	0.300	0.008	0.015
max	0.400	0.280	0.210	0.022	0.070	0.1	15°	0.150	0.325	0.014	—

Fig. 6 –DIP-package (MS-001BA) overall dimensions

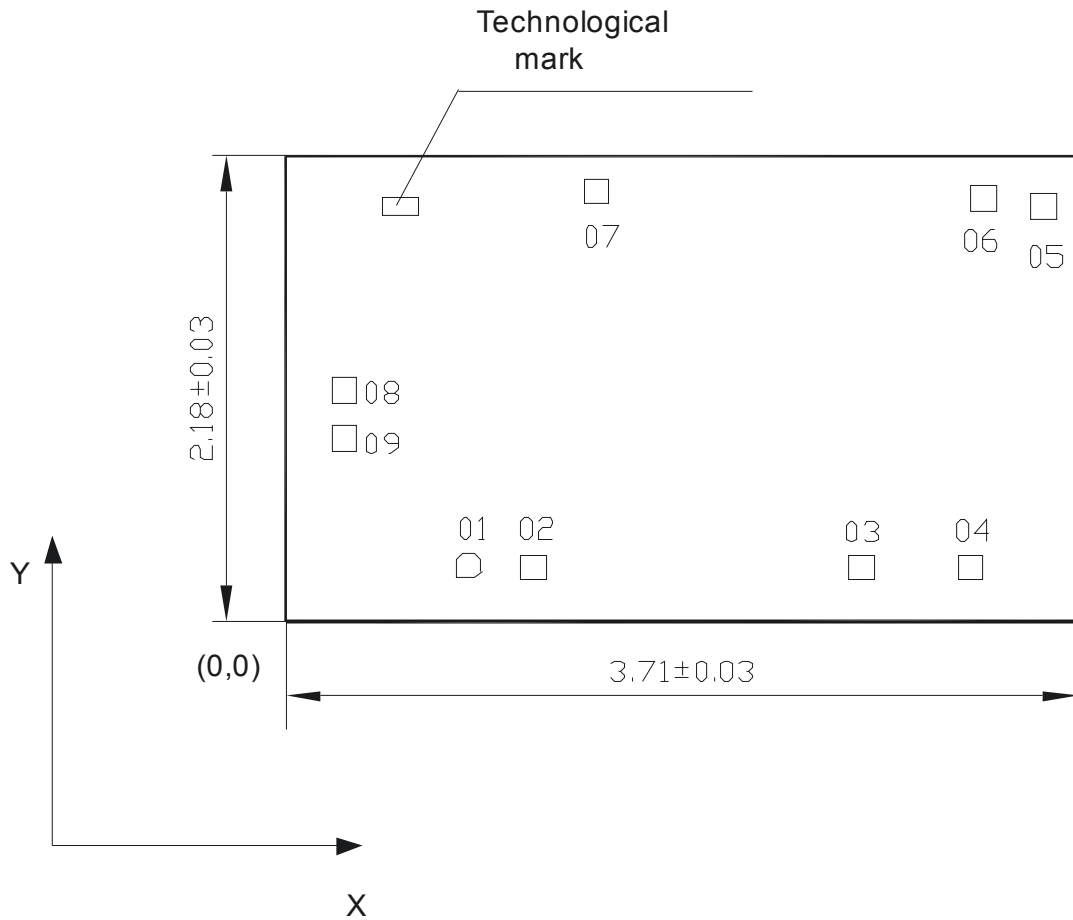

Technological mark coordinates ILX3483 / ILX3485 / ILX3486 (mm):  
 left bottom corner  $x = 0,45$ ;  $y = 1,91$ .  
 Die thickness  $0,46 \pm 0,02$  mm.

Contact pad number	Coordinates (left bottom corner), um		Contact pad dimension, um
	X	Y	
01	0,797	0,205	0,120 x 0,120
02	1,100	0,195	0,120 x 0,120
03	2,635	0,195	0,120 x 0,120
04	3,145	0,195	0,120 x 0,120
05	3,485	1,885	0,120 x 0,120
06	3,205	1,925	0,120 x 0,120
07	1,395	1,955	0,120 x 0,120
08	0,215	1,023	0,120 x 0,120
09	0,215	0,800	0,120 x 0,120

Note - Contact pad coordinates are indicated under "metal" layer

Fig. 7 – Die diagram and contact pad coordinates