

Parameters Subject to Change Without Notice

DESCRIPTION

The JW[®]5223 is a current mode monolithic buck switching regulator. Operating with an input range of 2.5V-6V, the JW5223 delivers 2A of continuous output current with integrated P-Channel and N-Channel MOSFETs. The internal synchronous power switches provide high efficiency. At light loads, the regulator operate in low frequency to maintain high efficiency and low output ripples. Current mode control provides tight load transient response and cycle-by-cycle current limit.

The JW5223 guarantees robustness with hiccup output short-circuit protection, start-up current run-away protection, input under voltage lockout protection, hot-plug in protection, and thermal protection.

The JW5223 provides output power good indication which is only available in SOT23-6 package.

The JW5223 is available in 5-pin SOT23-5 or 6-pin SOT23-6 package, which provides a compact solution with minimal external components.

Company's Logo is Protected, "JW" and "JOULWATT" are Registered Trademarks of JoulWatt technology Inc.


FEATURES

- 2.5V to 6V operating input range
- Up to 2A output current
- Up to 94% peak efficiency
- High efficiency (>85%) at light load
- Internal Soft-Start
- 1.5MHz switching frequency
- Input under voltage lockout
- Short circuit protection
- Thermal protection
- Hot-plug in protection
- Output POK indication (available in SOT23-6 package)
- Available in SOT23-5/SOT23-6 package

APPLICATIONS

- 5V or 3.3V Point of Load Conversion
- Set Top Boxes
- Telecom/Networking Systems
- Storage Equipment
- GPU/DDR Power Supply



TYPICAL APPLICATION

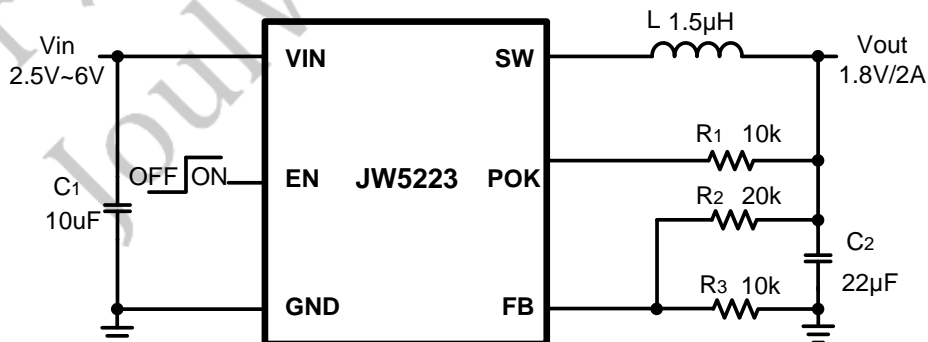


ORDER INFORMATION

DEVICE ¹⁾	PACKAGE	TOP MARKING ²⁾
JW5223SOTA #TRPBF	SOT23-5	JWF5X YWLLL
JW5223SOTB #TRPBF	SOT23-6	JWF4X YWLLL

Notes:



PIN CONFIGURATION

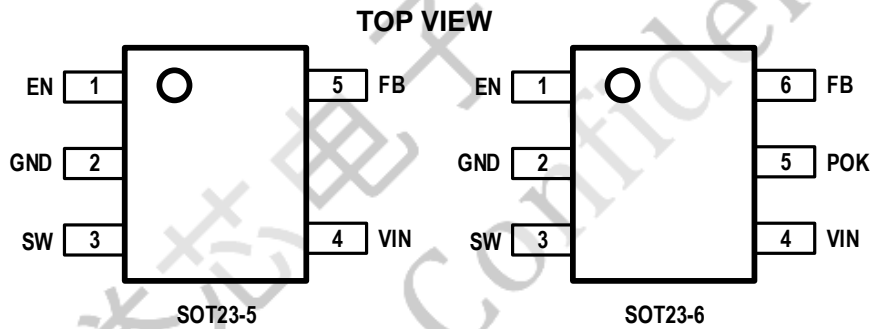

ABSOLUTE MAXIMUM RATING¹⁾

All Pins	-0.3V to 7.2V
Junction Temperature. ^{2) 3)}	150°C
Lead Temperature.....	260°C
Storage Temperature.....	-65°C to +150°C
ESD Susceptibility (Human Body Model)	2kV
Dynamic Vin and SW Voltage.....	-1.7V for 40ns to 8.5V for 70ns

RECOMMENDED OPERATING CONDITIONS

Input Voltage VIN	2.5V to 6V
Output Voltage Vout.....	0.6V to VIN
Operating Junction Temperature.....	-40°C to 125°C

THERMAL PERFORMANCE⁴⁾

θ_{JA} θ_{Jc}

SOT23-5220...130°C/W
SOT23-6220...130°C/W

Note:

- 1) Exceeding these ratings may damage the device.
- 2) The JW5223 guarantees robust performance from -40°C to 150°C junction temperature. The junction temperature range specification is assured by design, characterization and correlation with statistical process controls.
- 3) The JW5223 includes thermal protection that is intended to protect the device in overload conditions. Thermal protection is active when junction temperature exceeds the maximum operating junction temperature. Continuous operation over the specified absolute maximum operating junction temperature may damage the device.
- 4) Measured on JESD51-7, 4-layer PCB.

For 航睿芯电子 Use Only
JoulWatt Confidential

ELECTRICAL CHARACTERISTICS

<i>V_{IN}=5V, T_A=25 °C, unless otherwise stated.</i>						
Item	Symbol	Condition	Min.	Typ.	Max.	Units
V _{IN} Under Voltage Lockout Threshold	V _{IN_UVLO}	V _{IN} rising	2.25	2.4	2.55	V
V _{IN} Under Voltage Lockout Hysteresis ⁵⁾	V _{IN_UVLO_HYST}	V _{IN} falling		180		mV
V _{IN} Over Voltage Protection Threshold	V _{IN_OVP}	V _{IN} rising	6.5	7	7.5	V
V _{IN} Over Voltage Protection Hysteresis ⁵⁾	V _{IN_OVP_HYST}	V _{IN} falling		400		mV
Shutdown Current	I _{SHDN}	V _{EN} =0V		0.1	1	μA
Quiescent Current	I _Q	V _{EN} =2V, V _{FB} =V _{REF} *105%		40	60	μA
Regulated Feedback Voltage	V _{FB}	2.5V<V _{IN} <6V	0.582	0.6	0.618	V
PFET On Resistance ⁵⁾	R _{DSON_P}	V _{IN} =3.6V, I _{SW} =200mA		150		mΩ
NFET On Resistance ⁵⁾	R _{DSON_N}	V _{IN} =3.6V, I _{SW} =-200mA		130		mΩ
PFET Leakage Current	I _{LEAK_P}	V _{IN} =5.5V, V _{EN} =0V, V _{SW} =0V			1	uA
NFET Leakage Current	I _{LEAK_N}	V _{IN} =5.5V, V _{EN} =0V, V _{SW} =5.5V			1	uA
PFET Current Limit ⁵⁾	I _{LIM_TOP}	Duty Cycle=100%		2.4		A
Switch Frequency	F _{SW}	I _{OUT} =2A	1.2	1.5	1.8	MHz
Minimum On Time ⁵⁾	T _{ON_MIN}			100		ns
Maximum Duty Cycle ⁵⁾	D _{MAX}			91		%
EN Rising Threshold	V _{EN_TH}	V _{EN} rising, FB=0.4V	1.5			V
EN Falling Threshold	V _{EN_HYST}	V _{EN} falling, FB=0.4V			0.4	V
Thermal Shutdown Threshold ⁵⁾	T _{SHDN}			150		°C
Temperature Hysteresis ⁵⁾	T _{HYS}			15		°C

Note:


5) Guaranteed by design.

TYPICAL PERFORMANCE CHARACTERISTICS

Vin = 5V, Vout = 1.8V, L = 1.5μH, Cout = 22μF, TA = +25°C, unless otherwise noted


Steady State Test

VIN=5V, Vout=1.8V
Iout=2A

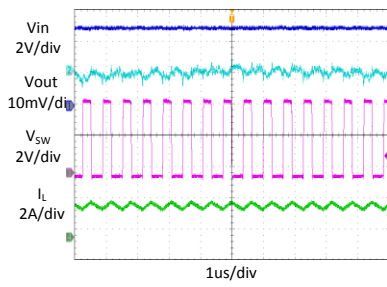


Startup through Enable

VIN=5V, Vout=1.8V
Iout=2A(Resistive load)

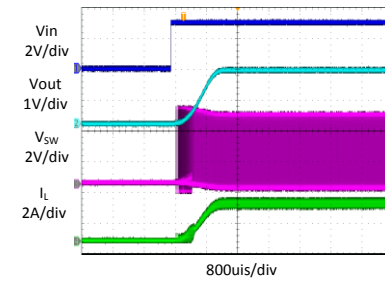


Shutdown through Enable

VIN=5V, Vout=1.8V
Iout=2A(Resistive load)

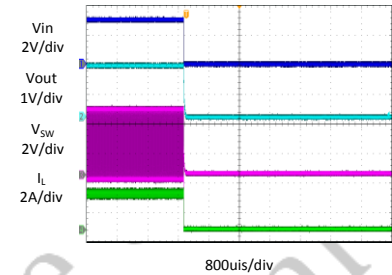


Heavy Load Operation

2A LOAD

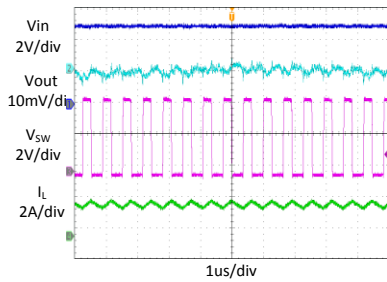


Medium Load Operation

1A LOAD

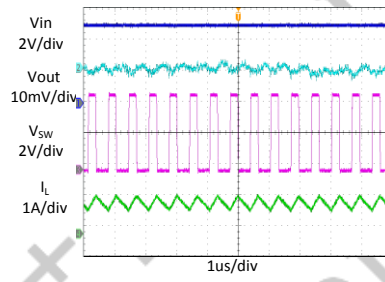


Light Load Operation

0 A LOAD

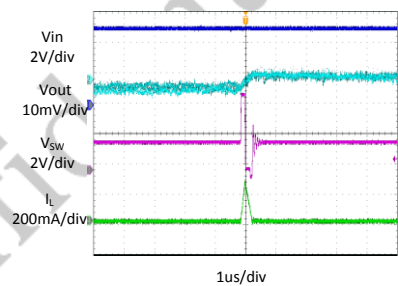


Short Circuit Protection

VIN=5V, Vout=1.8V
Iout=2A- Short

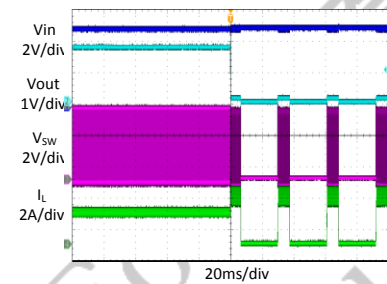


Short Circuit Protection

VIN=5V, Vout=1.8V
Iout= Short-2A

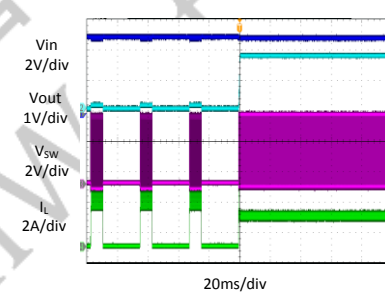

Load Transient


1A LOAD → 2A LOAD → 1A LOAD

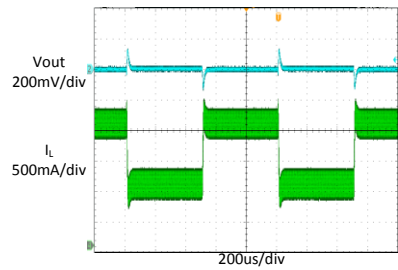


TYPICAL PERFORMANCE CHARACTERISTICS (continued)

Vin = 5V, Vout = 1.8V, L = 1.5μH, Cout = 22μF, TA = +25°C, unless otherwise noted


Quiescent Current Vs. Input Voltage
VIN=2.5V ~ 6.5V, VEN=2.5V, VFB=0.8V

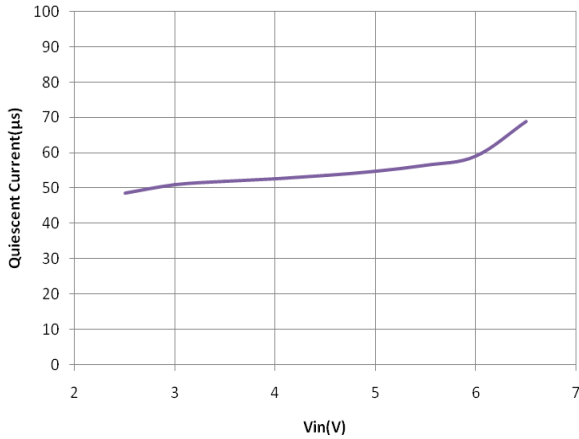


Shutdown Current Vs. Input Voltage
VIN=2.5V ~ 6.5V, VEN=0V, VFB=0.5V

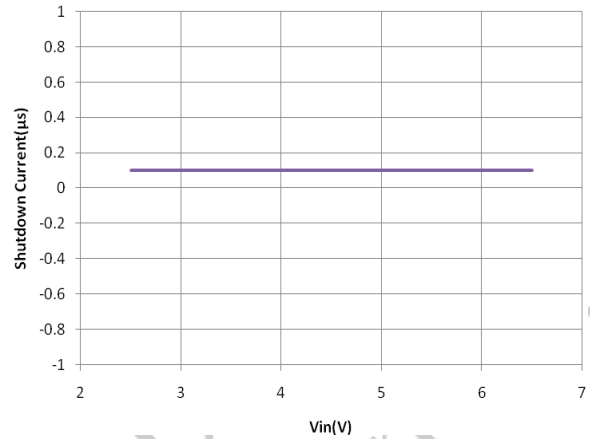


Efficiency @ Vout=3.3V

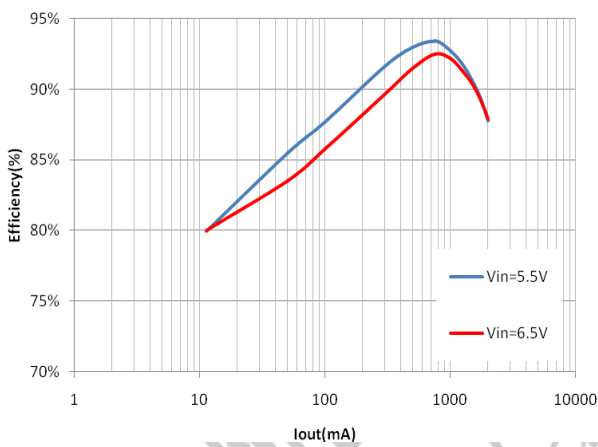


Efficiency @ Vout=2.5V

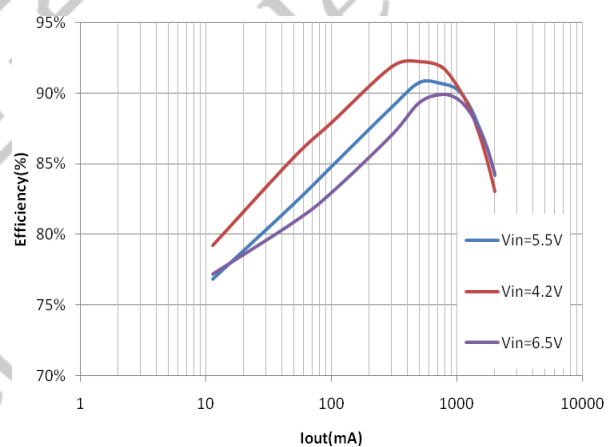

Efficiency @ Vout=1.8V

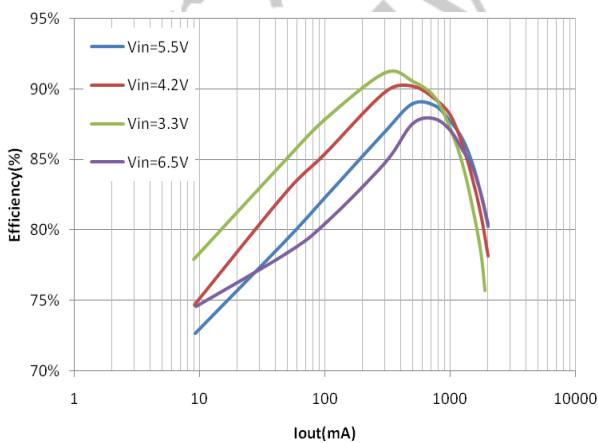

Load regulation @ Vout=1.8V

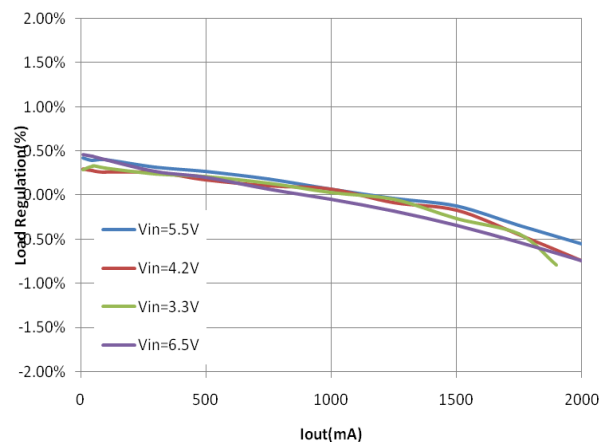

FUNCTIONAL DESCRIPTION

The JW5223 is a synchronous, current-mode, step-down regulator. It regulates input voltages from 2.5V~6V down to an output voltage as low as 0.6V, and is capable of supplying up to 2A of load current.

Current-Mode Control

The JW5223 utilizes current-mode control to regulate the output voltage. The output voltage is measured at the FB pin through a resistive voltage divider and the error is amplified by the internal transconductance error amplifier. Output of the internal error amplifier is compared with the switch current measured internally to control the output current limit.

PFM Mode

The JW5223 operates in PFM mode at light load. In PFM mode, switch frequency is continuously controlled in proportion to the load current, i.e. switch frequency decreases when load current drops to boost power efficiency at light load by reducing switch-loss, while switch frequency increases when load current rises, minimizing output voltage ripples.

Shut-Down Mode

The JW5223 operates in shut-down mode when voltage at EN pin is driven below 0.4V. In shut-down mode, the entire regulator is off and the supply current consumed by the JW5223 drops below 1 μ A.

Power Switches

P-channel and N-channel MOSFET switches are integrated on the JW5223 to down convert the input voltage to the regulated output voltage.

Hot-Plug in Protection

If the VIN voltage exceeds 6.85V, IC will turn off power switch, entering over-voltage protection. It will remain in this state until VIN voltage is less than 6.5V.

Output Current Run-Away Protection

At start-up, due to the high voltage at input and low voltage at output, current inertia of the output inductance can be easily built up, resulting in a large start-up output current. A valley current limit is designed in the JW5223 so that only when output current drops below the valley current limit can the bottom power switch be turned off. By such control mechanism, the output current at start-up is well controlled.

Short Circuit Protection

When output is shorted to ground, the switching frequency is reduced to prevent the inductor current from increasing beyond PFET current limit. If short circuit condition holds for more than 1024 cycles, both PFET and NFET are forced off and can be enabled again after 8ms. This procedure is repeated as long as short circuit condition is not removed.

Thermal Protection

When the temperature of the JW5223 rises above 150°C, it is forced into thermal shut-down.

Only when core temperature drops below 135°C can the regulator becomes active again.

APPLICATION INFORMATION

Output Voltage Set

The output voltage is determined by the resistor divider connected at the FB pin, and the voltage ratio is:

$$V_{FB} = V_{OUT} \cdot \frac{R_3}{R_2 + R_3}$$

where V_{FB} is the feedback voltage and V_{OUT} is the output voltage.

Choose R_3 around 10K ω , and then R_2 can be calculated by:

$$R_2 = R_3 \cdot \left(\frac{V_{OUT}}{0.6V} - 1 \right)$$

The following table lists the recommended values.

Vout(V)	R2(K Ω)	R3(K Ω)
1.2	10	10
1.8	20	10
2.5	31.6	10
3.3	49.9	11

Input Capacitor

The input capacitor is used to supply the AC input current to the step-down converter and maintaining the DC input voltage. The ripple current through the input capacitor can be calculated by:

$$I_{C1} = I_{LOAD} \cdot \sqrt{\frac{V_{OUT}}{V_{IN}} \cdot \left(1 - \frac{V_{OUT}}{V_{IN}} \right)}$$

where I_{LOAD} is the load current, V_{OUT} is the output voltage, V_{IN} is the input voltage.

Thus the input capacitor can be calculated by the following equation when the input ripple voltage is determined.

$$C_1 = \frac{I_{LOAD}}{f_s \cdot \Delta V_{IN}} \cdot \frac{V_{OUT}}{V_{IN}} \cdot \left(1 - \frac{V_{OUT}}{V_{IN}} \right)$$

where C_1 is the input capacitance value, f_s is the switching frequency, ΔV_{IN} is the input ripple current.

The input capacitor can be electrolytic, tantalum or ceramic. To minimizing the potential noise, a small X5R or X7R ceramic capacitor, i.e. 0.1 μ F, should be placed as close to the IC as possible when using electrolytic capacitors.

A 10 μ F ceramic capacitor is recommended in typical application.

Output Capacitor

The output capacitor is required to maintain the DC output voltage, and the capacitance value determines the output ripple voltage. The output voltage ripple can be calculated by:

$$\Delta V_{OUT} = \frac{V_{OUT}}{f_s \cdot L} \cdot \left(1 - \frac{V_{OUT}}{V_{IN}} \right) \cdot \left(R_{ESR} + \frac{1}{8 \cdot f_s \cdot C_2} \right)$$

where C_2 is the output capacitance value and R_{ESR} is the equivalent series resistance value of the output capacitor.

The output capacitor can be low ESR electrolytic, tantalum or ceramic, which lower ESR capacitors get lower output ripple voltage.

The output capacitors also affect the system stability and transient response, and a 22 μ F ceramic capacitor is recommended in typical application.

Inductor

The inductor is used to supply constant current to the output load, and the value determines the ripple current which affect the efficiency and the output voltage ripple. The ripple current is typically allowed to be 30% of the maximum

switch current limit, thus the inductance value can be calculated by:

$$L = \frac{V_{OUT}}{f_s \cdot \Delta I_L} \cdot \left(1 - \frac{V_{OUT}}{V_{IN}}\right)$$




where V_{IN} is the input voltage, V_{OUT} is the output voltage, f_s is the switching frequency, and ΔI_L is the peak-to-peak inductor ripple current.

PCB Layout Note

For minimum noise problem and best operating performance, the PCB is preferred to following the guidelines as reference.

1. Place the input decoupling capacitor as close to JW5223 (V_{IN} pin and PGND) as possible to eliminate noise at the input pin. The loop area formed by input capacitor and GND must be minimized.
2. Put the feedback trace as far away from the inductor and noisy power traces as possible.

3. The ground plane on the PCB should be as large as possible for better heat dissipation.

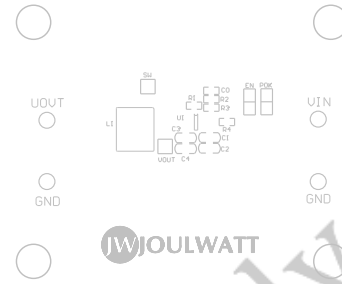


REFERENCE DESIGN

Reference 1:

V_{IN} : 2.5V ~ 6V

V_{OUT} : 1.8V

I_{OUT} : 0~2A

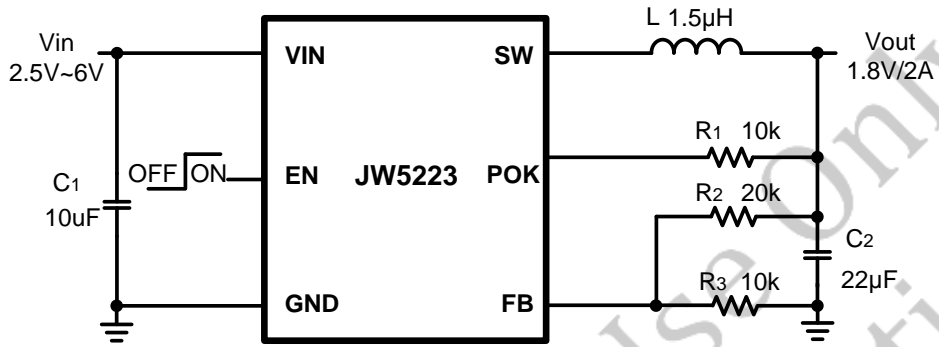


Reference 2:


V_{IN} : 4.2V ~ 6V

V_{OUT} : 3.3V

I_{OUT} : 0~2A



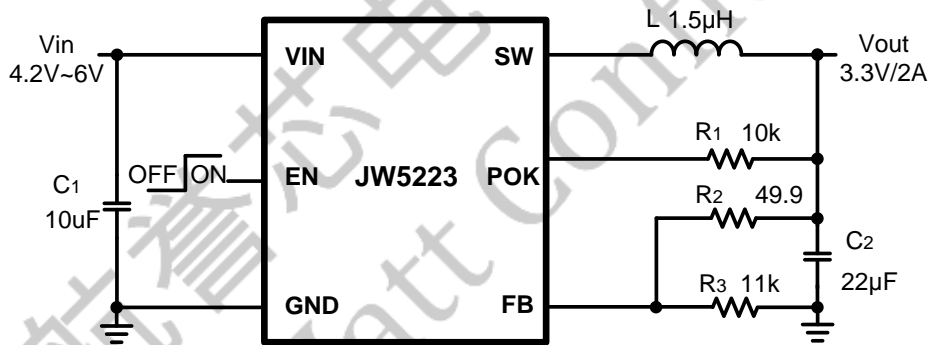


PACKAGE OUTLINE

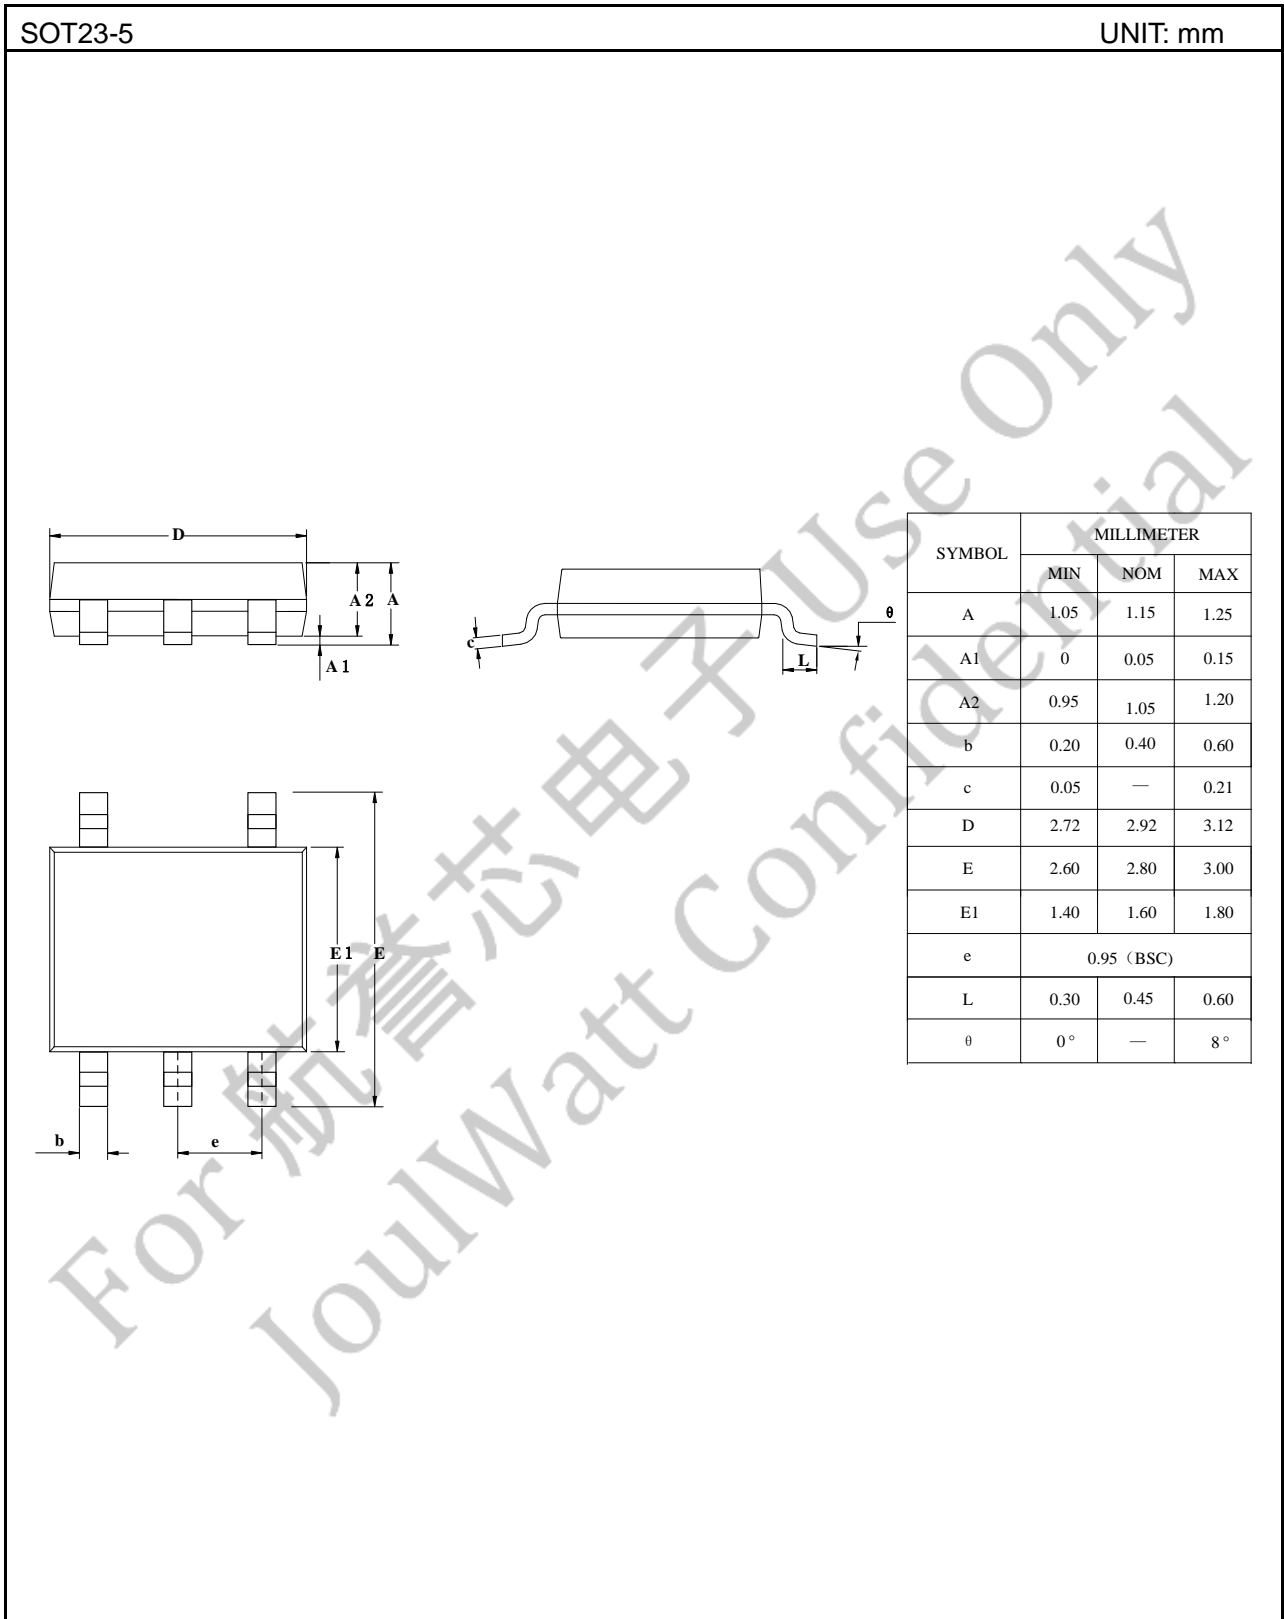

SOT23-6

UNIT: mm

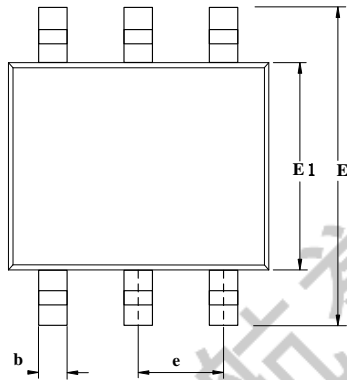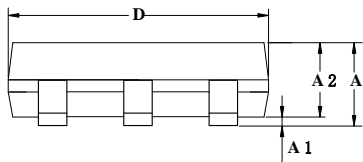

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
A	1.05	1.15	1.25
A1	0	0.05	0.15
A2	0.95	1.05	1.20
b	0.20	0.40	0.60
c	0.05	—	0.21
D	2.72	2.92	3.12
E	2.60	2.80	3.00
E1	1.40	1.60	1.80
e	0.95 (BSC)		
L	0.30	0.45	0.60
θ	0°	—	8°

IMPORTANT NOTICE

- Joulwatt Technology Inc. reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein.
- Any unauthorized redistribution or copy of this document for any purpose is strictly forbidden.
- Joulwatt Technology Inc. does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel.

For 航睿芯电子 Use Only
JoulWatt Confidential

Copyright © 2017 JW5223 Incorporated.

All rights are reserved by Joulwatt Technology Inc.