

Parameters Subject to Change Without Notice

DESCRIPTION

JW[®]B19818 is a single channel Linear LED driver with 500V MOSFET integrated, and the output current is set by the external resistor. Patented current control strategy ensures high output current accuracy while the system is simple with few external components and very low BOM cost.

JWB19818 provides over temperature protection. When temperature inside chip exceeds OTP_{CHIP} , JWB19818 decreases LED current, which can help chip cooling.

Company's Logo is Protected, "JW" and "JOULWATT" are Registered Trademarks of JoulWatt technology Inc.


FEATURES

- 800V Bridge Rectifier Integrated
- 500V MOSFET Integrated
- High-accuracy output current.
- Over temperature protection.
- No EMI issues.
- Low BOM cost.
- Meet the IEC61000-3-2_2018 standard
- Meet the requirements of SVM <0.4, Pst_LM <1, DF> 0.7
- No TVS/MOV to pass 550V combined wave
- HSOP-8 packages

APPLICATIONS

- T5/T8 series LED Lighting
- LED Bulb lamp, Floor Lamp


TYPICAL APPLICATION

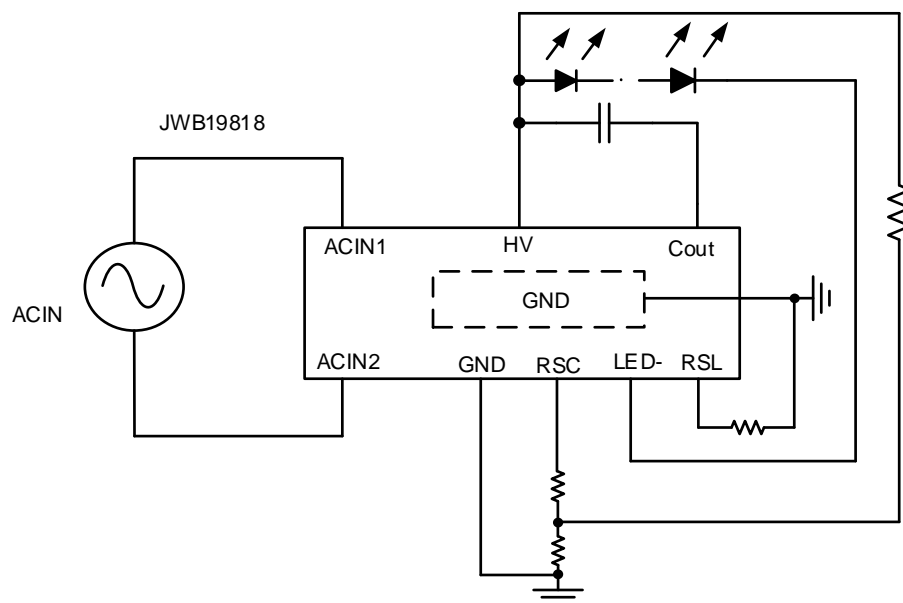

ORDER INFORMATION


DEVICE ¹⁾	PACKAGE	TOP MARKING ²⁾
JWB19818HSOPD#TRPBF	HSOP-8	JWB19818 YW□□□□□

Notes:

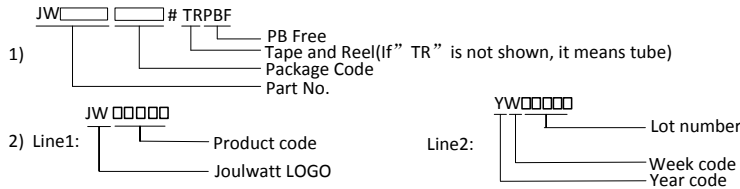

PIN CONFIGURATION

TOP VIEW

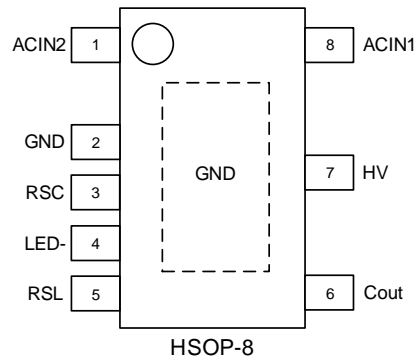

ABSOLUTE MAXIMUM RATING¹⁾

LED-, Cout.....	500V
RSL,RSC.....	-0.3V to 1V
$I_{LED_max@ Ta= 25\text{ }^\circ\text{C}}$	100mA
$I_{Cout_max@ Ta= 25\text{ }^\circ\text{C}}$	150mA
Junction Temperature ²⁾³⁾	150°C
Lead Temperature	260°C
Storage Temperature	-65°C to +150°C

RECOMMENDED OPERATING CONDITIONS

LED-, Cout.....	8.5V~400V
Junction Temperature (T_J)	-40°C to 125°C
$I_{LED_@220Vac}$	<40mA
$I_{LED_@110Vac}$	<60mA

Note:

- 1) Exceeding these ratings may damage the device.
- 2) The JWB19818 guarantees robust performance from -40°C to 150°C junction temperature. The junction temperature range specification is assured by design, characterization and correlation with statistical process controls.
- 3) Continuous operation over the specified absolute maximum operating junction temperature may damage the device.

ELECTRICAL CHARACTERISTICS

$T_a = 25\text{ }^\circ\text{C}$, unless otherwise stated.

Item	Symbol	Condition	Min.	Typ.	Max.	Unit.
COUT Minimum Input Voltage	V_{out_min}	$I_{OUT}=30\text{mA}$		5.6	6.0	V
COUT Maximum Voltage	V_{out_BV}	$I_{OUT}=0\text{mA}$	450	500		V
Cout Quiescent Current	I_Q	$V_{OUT}=10\text{V}$, $V_{EXT}=3.3\text{V}$		36	67	μA
Reference Voltage	V_{REF}	$V_{OUT}=10\text{V}$	0.484	0.5	0.516	V
LED- Minimum Input Voltage	V_{out_min}	$I_{OUT}=30\text{mA}$			7.7	V
LED- Maximum Voltage	V_{out_BV}	$I_{OUT}=0\text{mA}$	450	500		V
LED- Quiescent Current	I_Q	$V_{OUT}=50\text{V}$, $V_{RS}=1\text{V}$	60	75	100	μA
Reference Voltage	V_{REF}	$V_{OUT}=10\text{V}$	565	585	605	mV
Bridge Diode BV Voltage ⁴⁾	V_{BR_BD}		800			V
Bridge Diode Forward Voltage Drop ⁴⁾	V_{F_BD}	$I_F=1\text{A}$			1.1	V
Bridge Diode Average Forward Current ⁴⁾	$I_{F(AV)}$				0.5	A
Bridge Diode Peak Forward Surge Current 1ms Single Half Sine Wave	I_{FSM}				30	A
Thermal Protection Threshold ⁴⁾	OTP_{CHIP}			150		$^\circ\text{C}$


Note

4) Guaranteed by design

PIN DESCRIPTION

Pin HSOP-8	Name	Description
1	ACIN2	AC Input
2	GND	Chip ground
3	RSC	Cap current setup pin
4	LED-	The power supply and shall be connected to cathode of the LED string
5	RSL	LED current setup pin
6	Cout	Cap current output pin
7	HV	High Voltage Pin
8	ACIN1	AC Input

BLOCK DIAGRAM

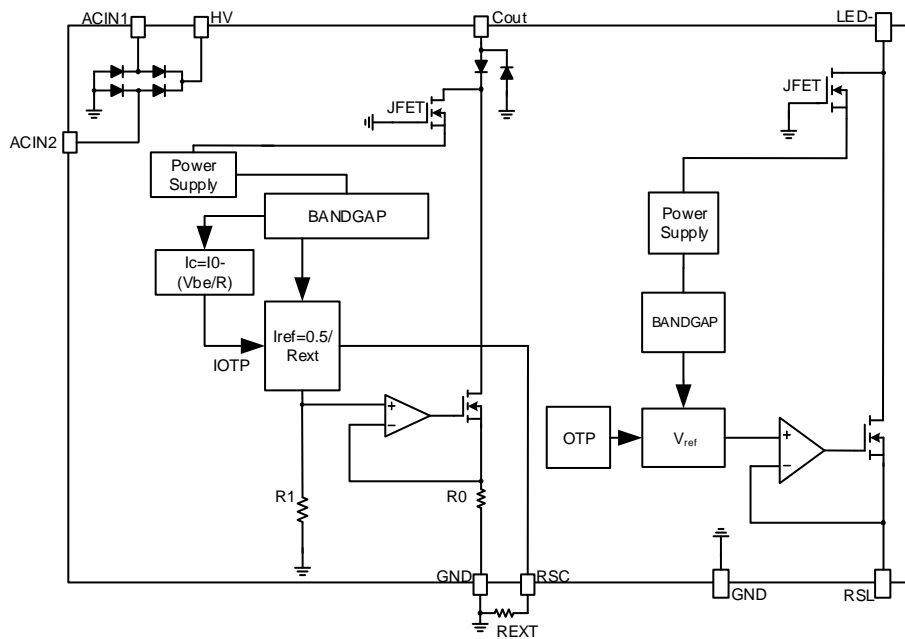


FUNCTIONAL DESCRIPTION

JWB19818 is a single channel Linear LED driver for direct line operation.

Theory of Operation

The input is the rectified voltage from AC line by the internal bridge rectifier. When HV pin is higher than the forward voltage (VF) of the LEDs, the current of LEDs begins to increase, and I_{LED} reaches its maximum value when the voltage of the OUT pin is higher than V_{out_min} .

The Electrolytic capacitor(E-cap) charging block works when HV pin is higher than the voltage of E-cap. The E-cap supplies current when the AC mains voltage is lower than the LED VF to eliminate the LED current ripple. The current of E-cap and LED string are showed below.

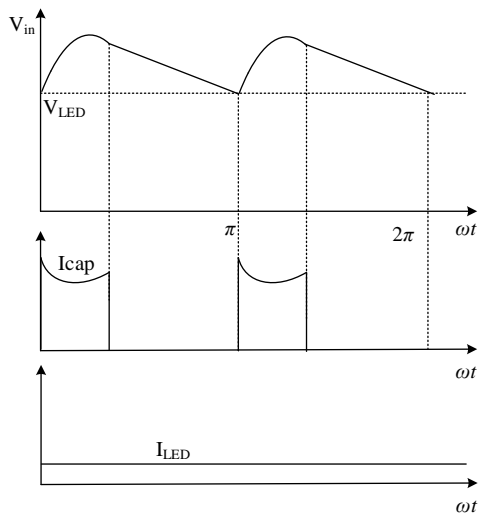

Constant peak current control

JWB19818 controls the LED peak current from the information of the current sensing resistor. The output LED peak current can be calculated as:

$$I_{peak} = V_{REF} / R_{cs}$$

Where

V_{REF} is the reference voltage;

R_{cs} is the current sensing resistor connected between RS and chip ground.

Over Temperature Protection

When the junction temperature of JWB19818 is higher than OTP_{CHIP} , LED current reduces.

REFERENCE DESIGN

This reference design is suitable for 5W non-isolated LED driver, using JWB19818, with few external components.


Reference 1:

V_{IN} : 207VAC~253VAC

V_{OUT} : 260V

I_{OUT} : 23mA


PF: >0.7

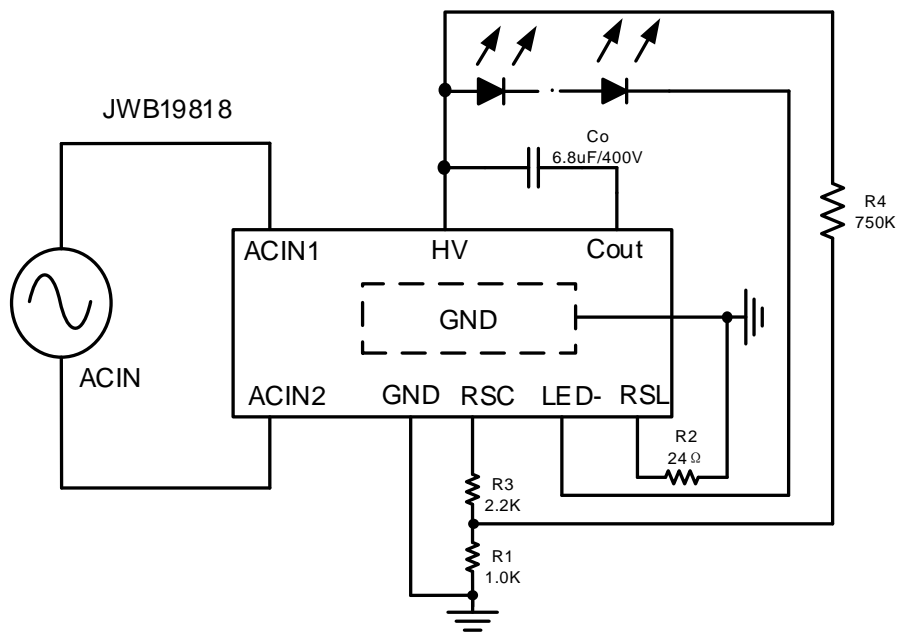

PACKAGE OUTLINE

HSOP-8

UNIT: mm

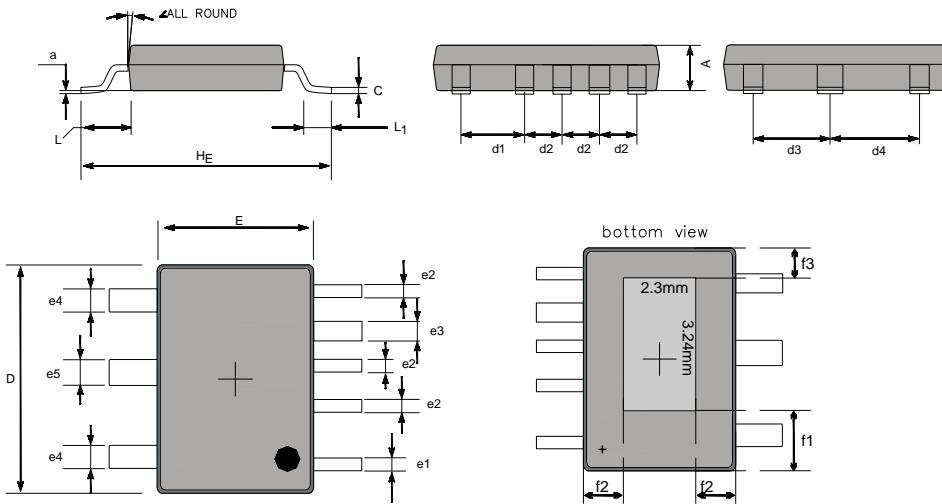

UNIT		A	C	D	E	H _E	d ₁	d ₂	d ₃	d ₄	e ₁	e ₂	e ₃	e ₄	e ₅	L	L ₁	a	∠	f ₁	f ₂	f ₃
mm	max	1.25	0.22	6.3	4.0	6.1	2.1	0.75	1.65	2.15	0.45	0.4	0.5	0.7	0.9	1.15	0.8	0.2 (ref.)	12°	2.3 (ref.)	0.80 (ref.)	0.66 (ref.)
	min	1.05	0.15	6.1	3.8	5.9	1.9	0.55	1.45	1.95	0.25	0.2	0.3	0.5	0.7	0.95	0.4					

IMPORTANT NOTICE

- Joulwatt Technology Inc. reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein.
- Any unauthorized redistribution or copy of this document for any purpose is strictly forbidden.
- Joulwatt Technology Inc. does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel.

Copyright © 2020 JWB19818 Incorporated.

All rights are reserved by Joulwatt Technology Inc.