


# KLV-32M1

## SERVICE MANUAL

*US Model*  
*Canadian Model*

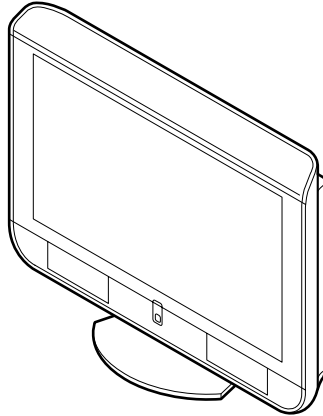

## AT2 CHASSIS

### SPECIFICATIONS

**Television system:**

American TV standard

**Channel coverage:**

VHF: 2-13/UHF: 14-69/CATV: 1-125

**Antenna:**

75-ohm external terminal for VHF/UHF

**Screen size (measured diagonally):**

32 inches

**Panel System:**

LCD (Liquid Crystal Display) Panel

**Display resolution:**

1,366 dots (horizontal) × 768 lines (vertical)

**VIDEO 1/2/3 IN:**

S VIDEO (4-pin mini DIN):

Y: 1.0 Vp-p, 75 ohms unbalanced,  
sync negative

C: 0.286 Vp-p (Burst signal),  
75 ohms

VIDEO: 1 Vp-p, 75 ohms unbalanced,  
sync negative

AUDIO: 500 mVrms (100% modulation)  
Impedance: 47 kilohm

**HD/DVD 4 IN:**

Y, P<sub>B</sub>, P<sub>R</sub> (Component Video):

Y: 1.0 Vp-p, 75 ohms  
unbalanced, sync negative

P<sub>B</sub>: 0.7 Vp-p, 75 ohms

P<sub>R</sub>: 0.7 Vp-p, 75 ohms

Signal format:

480i, 480p, 720p, 1080i

AUDIO: 500 mVrms (100% modulation)  
Impedance: 47 kilohms

**HDMI 5 IN:**

HDMI:

Video: 480i, 480p, 720p, 1080i

Audio: Two channel linear PCM  
32, 44.1 and 48kHz, 16, 20 and  
24 bits

AUDIO: 500 mVrms (100% modulation)  
Impedance: 47 kilohms

**CENTER SPEAKER IN:**

Max 180 W (6 Ω), 1 kHz

Sensitivity 30 Vp-p

LCD Color TV

**SONY**®

**AUDIO OUT:**

500 mVrms (100% modulation)

More than 1 Vrms at the maximum volume setting  
(Variable)

More than 500 mVrms (Fixed)

**Headphones:**

Stereo mini jack

Impedance: 16 ohms

**Speaker:**

Full range:  $\phi 7$  cm  
( $2 \frac{7}{8}$  inches) (2)

Woofers:  $\phi 7$  cm  
( $2 \frac{7}{8}$  inches) (2)

**Speaker output:**

10 W + 10 W

**Power requirement:**

120 V AC, 60 Hz

**Power consumption:**

In use: 155 W

In standby: Less than 1 W

**Dimensions (W/H/D):**

Including TV stand:  $835 \times 670.5 \times 287.5$  mm  
( $32 \frac{7}{8} \times 26 \frac{1}{2} \times 11 \frac{3}{8}$  inches)

Without TV stand:  $835 \times 603.5 \times 110$  mm  
( $32 \frac{7}{8} \times 23 \frac{7}{8} \times 4 \frac{3}{8}$  inches)

**Mass:**

Including TV stand: 19.7 kg (43 lb. 7 oz.)

Without TV stand: 17.4 kg (38 lb. 6 oz.)

**Supplied accessories:**

Remote control RM-Y1107 (1)

Size AA batteries (2)

75-ohm coaxial cable (1)

AC power cord (1)

Clamp screws (2)

Operating Instructions (1)

Quick Setup Guide (1)

Warranty Card (1)

**Optional accessories:**

Headphones plug adaptor

Connecting cables

Wall-Mount Bracket SU-LW1

**Note**

Some optional accessories may be out of stock.

Design and specifications are subject to change without notice.

## SAFETY CHECK-OUT

After correcting the original service problem, perform the following safety checks before releasing the set to the customer:

1. Check the area of your repair for unsoldered or poorly-soldered connections. Check the entire board surface for solder splashes and bridges.
2. Check the interboard wiring to ensure that no wires are “pinched” or contact high-wattage resistors.
3. Check that all control knobs, shields, covers, ground straps, and mounting hardware have been replaced. Be absolutely certain that you have replaced all the insulators.
4. Look for unauthorized replacement parts, particularly transistors, that were installed during a previous repair. Point them out to the customer and recommend their replacement.
5. Look for parts which, though functioning, show obvious signs of deterioration. Point them out to the customer and recommend their replacement.
6. Check the line cords for cracks and abrasion. Recommend the replacement of any such line cord to the customer.
7. Check the antenna terminals, metal trim, “metallized” knobs, screws, and all other exposed metal parts for AC Leakage. Check leakage as described right.

### LEAKAGE TEST

The AC leakage from any exposed metal part to earth ground and from all exposed metal parts to any exposed metal part having a return to chassis, must not exceed 0.5 mA (500 microamperes).

Leakage current can be measured by any one of three methods.

1. A commercial leakage tester, such as the Simpson 229 or RCA WT-540A. Follow the manufacturers' instructions to use these instruments.
2. A battery-operated AC milliammeter. The Data Precision 245 digital multimeter is suitable for this job.
3. Measuring the voltage drop across a resistor by means of a VOM or battery-operated AC voltmeter. The “limit” indication is 0.75 V, so analog meters must have an accurate low-voltage scale. The Simpson 250 and Sanwa SH-63Trd are examples of a passive VOMs that are suitable. Nearly all battery operated digital multimeters that have a 2 V AC range are suitable. (See Fig. A)

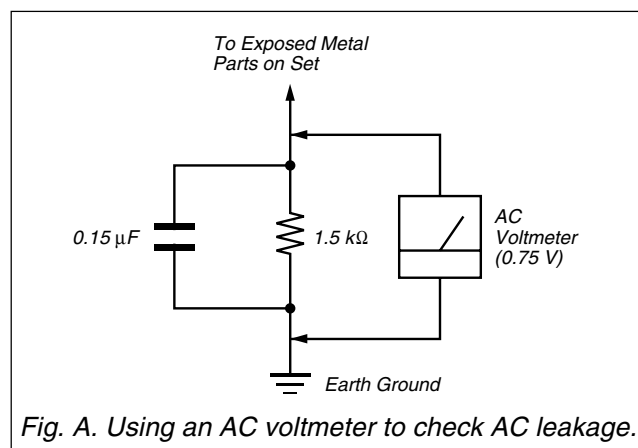


Fig. A. Using an AC voltmeter to check AC leakage.

### WARNING!!

**SAFETY-RELATED COMPONENT WARNING!!**  
**COMPONENTS IDENTIFIED BY SHADING AND MARK  $\triangle$  ON THE SCHEMATIC DIAGRAMS, EXPLODED VIEWS AND IN THE PARTS LIST ARE CRITICAL FOR SAFE OPERATION. REPLACE THESE COMPONENTS WITH SONY PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL OR IN SUPPLEMENTS PUBLISHED BY SONY. CIRCUIT ADJUSTMENTS THAT ARE CRITICAL FOR SAFE OPERATION ARE IDENTIFIED IN THIS MANUAL. FOLLOW THESE PROCEDURES WHENEVER CRITICAL COMPONENTS ARE REPLACED OR IMPROPER OPERATION IS SUSPECTED.**

### AVERTISSEMENT!!

**ATTENTION AUX COMPOSANTS RELATIFS À LA SÉCURITÉ!!**  
**LES COMPOSANTS IDENTIFIÉS PAR UNE TRAME ET UNE MARQUE  $\triangle$  SONT CRITIQUES POUR LA SÉCURITÉ. NE LES REMPLACER QUE PAR UNE PIÈCE PORTANT LE NUMÉRO SPECIFIÉ. LES RÉGLAGES DE CIRCUIT DONT L'IMPORTANCE EST CRITIQUE POUR LA SÉCURITÉ DU FONCTIONNEMENT SONT IDENTIFIÉS DANS LE PRÉSENT MANUEL. SUIVRE CES PROCÉDURES LORS DE CHAQUE REMPLACEMENT DE COMPOSANTS CRITIQUES, OU LORSQU'UN MAUVAIS FONCTIONNEMENT EST SUSPECTÉ.**


# TABLE OF CONTENTS

<b>1. DISASSEMBLY .....</b>	<b>1-1</b>
1-1. STAND REMOVAL .....	1-1
1-2. REAR CABINET ASSY REMOVAL .....	1-1
1-3. BL BOARD REMOVAL .....	1-2
1-4. GL BOARD REMOVAL .....	1-2
1-5. ULU BOARD REMOVAL .....	1-3
1-6. AU AND P BOARDS REMOVAL .....	1-3
1-7. LCD PANEL REMOVAL .....	1-4
1-8. H1 AND H3 BOARDS REMOVAL .....	1-5
1-9. H2 BOARD REMOVAL .....	1-5
<b>2. ADJUSTMENT .....</b>	<b>2-1</b>
2-1. AGING .....	2-1
2-1-1. Aging setting .....	2-1
2-1-2. Aging conditions .....	2-1
2-2. Measurement equipment .....	2-1
2-3. ADJUSTMENT OF SIGNAL LEVEL .....	2-1
2-3-1. Check AD calibration registration items .....	2-1
2-3-2. Y Level/COLOR adjustment of component input .....	2-1
2-3-3. Y Level/COLOR adjustment of HDMI input .....	2-2
2-3-4. Y Level/COLOR adjustment of Video input (by using a jig) .....	2-2
2-3-5. Y Level/COLOR adjustment of RF input .....	2-2
2-4. WHITE BALANCE ADJUSTMENT .....	2-2
2-4-1. White balance adjustment of color temperature “Cool” .....	2-2
2-4-2. White balance adjustment of color temperature “Neutral” .....	2-3
2-4-3. White balance adjustment of color temperature “Warm” .....	2-3
<b>3. DIAGRAMS .....</b>	<b>3-1</b>
3-1. BLOCK DIAGRAMS .....	3-1
3-2. FRAME DIAGRAMS .....	3-6
3-3. CIRCUIT BOARDS LOCATION .....	3-7
3-4. SCHEMATIC DIAGRAMS .....	3-7
(1) Schematic Diagrams of AU Board .....	3-8
(2) Schematic Diagrams of BL Board .....	3-13
(3) Schematic Diagrams of GL Board .....	3-19
(4) Schematic Diagram of H1 and H2 Boards .....	3-21
(5) Schematic Diagrams of H3 Board .....	3-22
(6) Schematic Diagrams of P Board .....	3-23
(7) Schematic Diagrams of ULU Board .....	3-25
3-5. SEMICONDUCTORS .....	3-28
<b>4. EXPLODED VIEWS .....</b>	<b>4-1</b>
4-1. CABINET ASSY AND STAND .....	4-2
4-2. CHASSIS-1 .....	4-3
4-3. CHASSIS-2 .....	4-4
4-4. BEZEL ASSY .....	4-5
4-5. PACKING MATERIALS .....	4-6
<b>5. ELECTRICAL PARTS LIST .....</b>	<b>5-1</b>




# SECTION 1 DISASSEMBLY


## 1-1. STAND REMOVAL

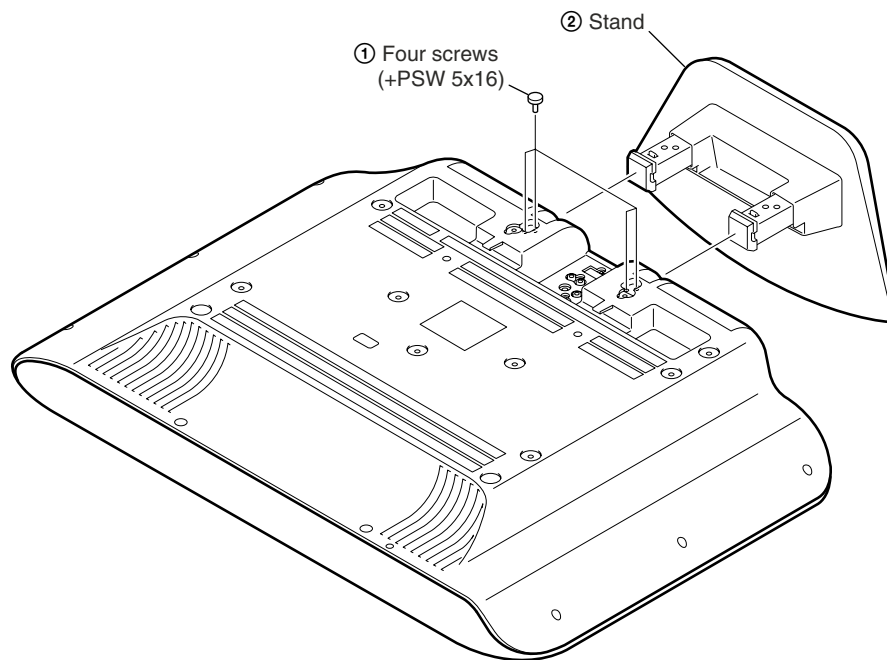


## 1-2. REAR CABINET ASSY REMOVAL

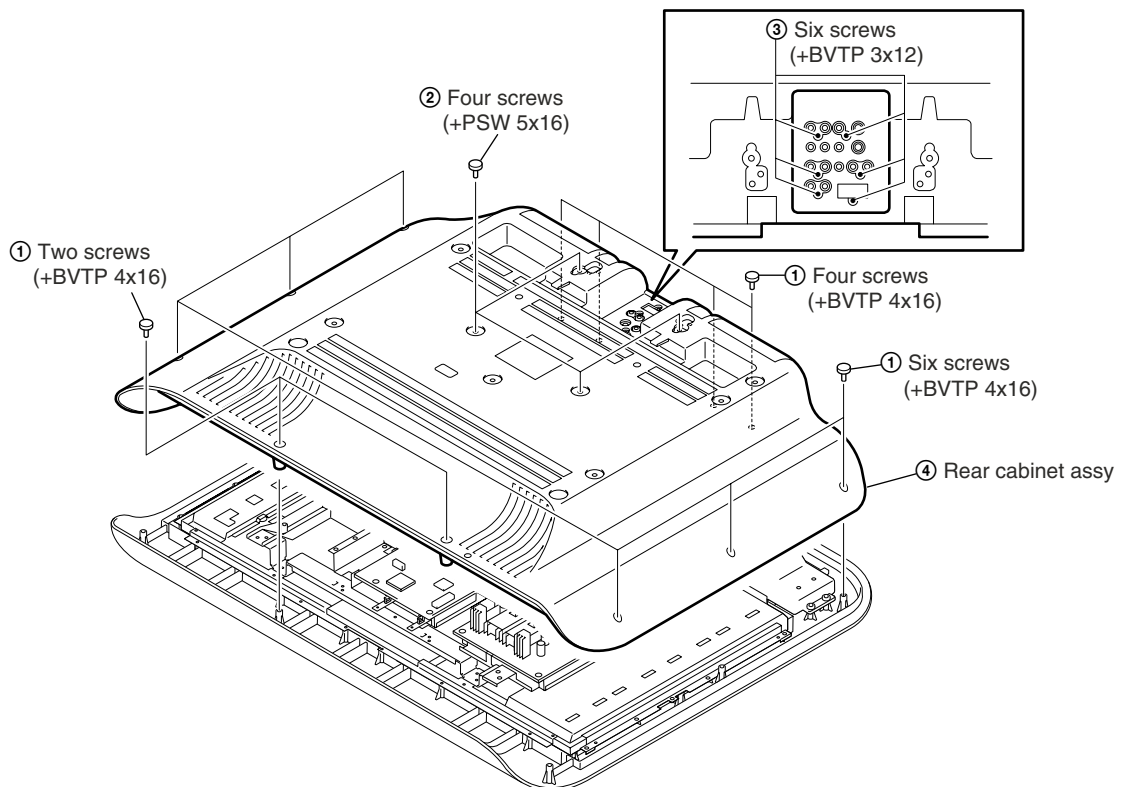


**1-3. BL BOARD REMOVAL**

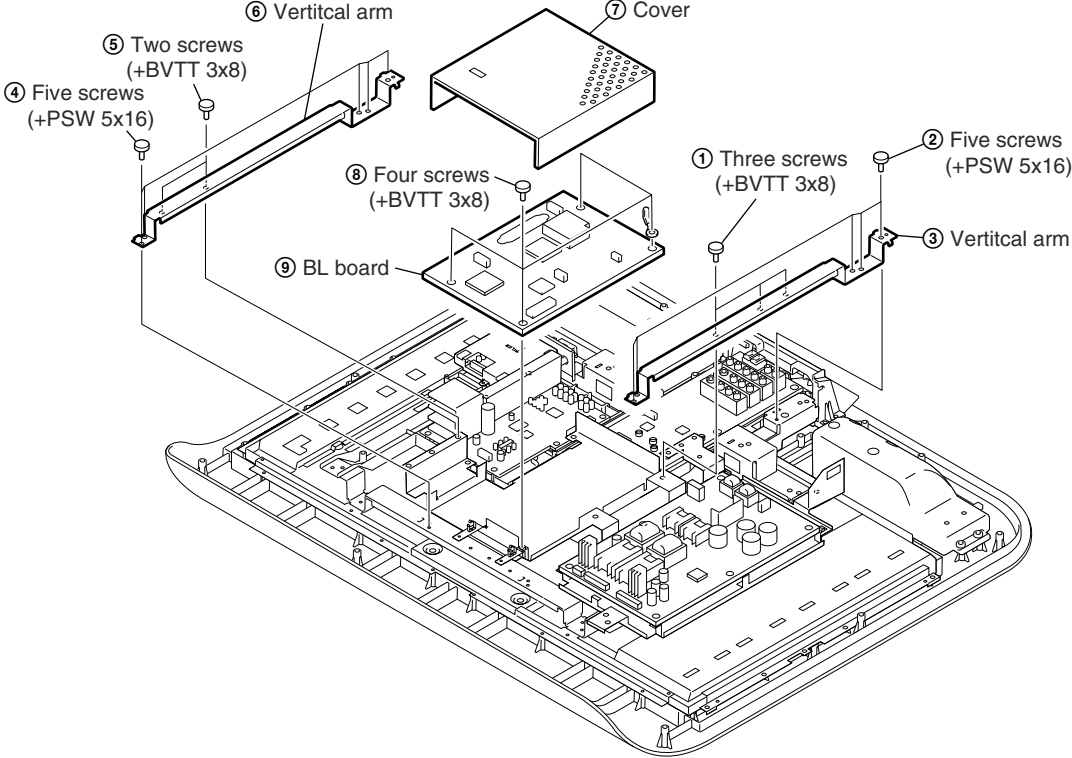


**1-4. GL BOARD REMOVAL**

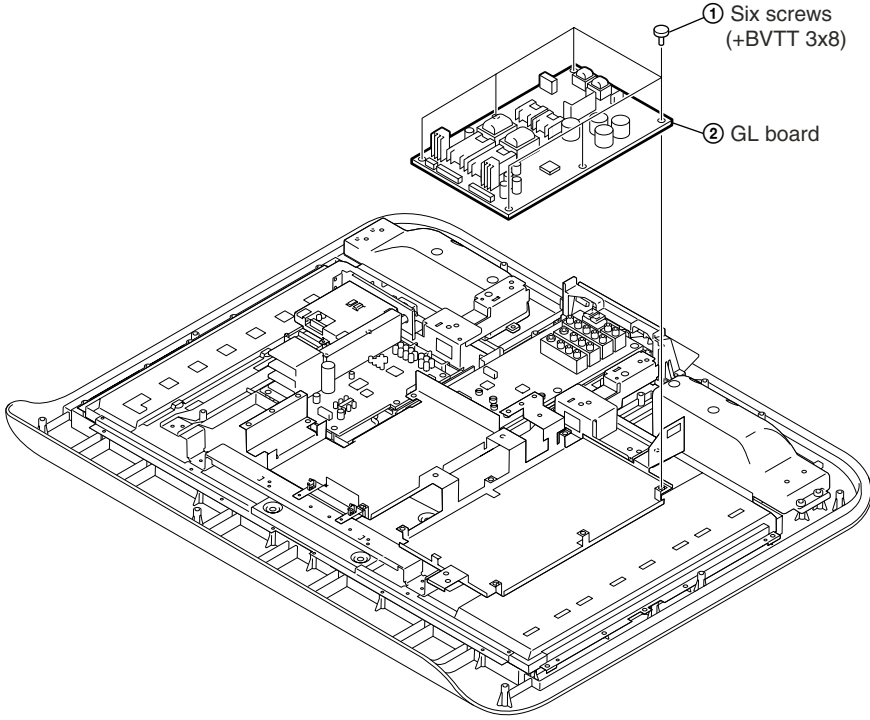


## 1-5. ULU BOARD REMOVAL

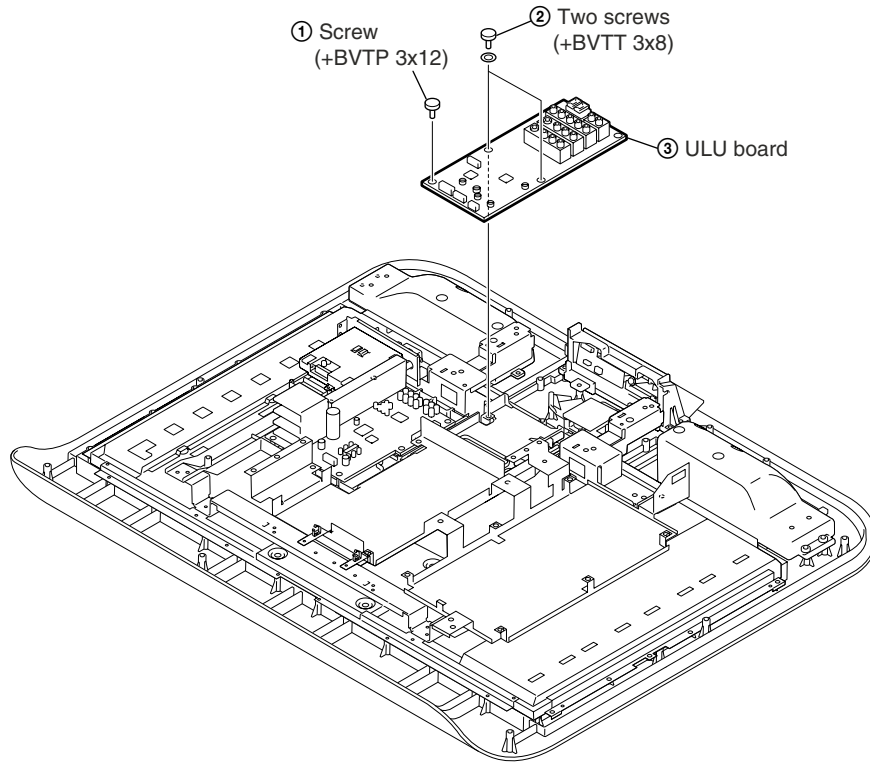


## 1-6. AU AND P BOARDS REMOVAL

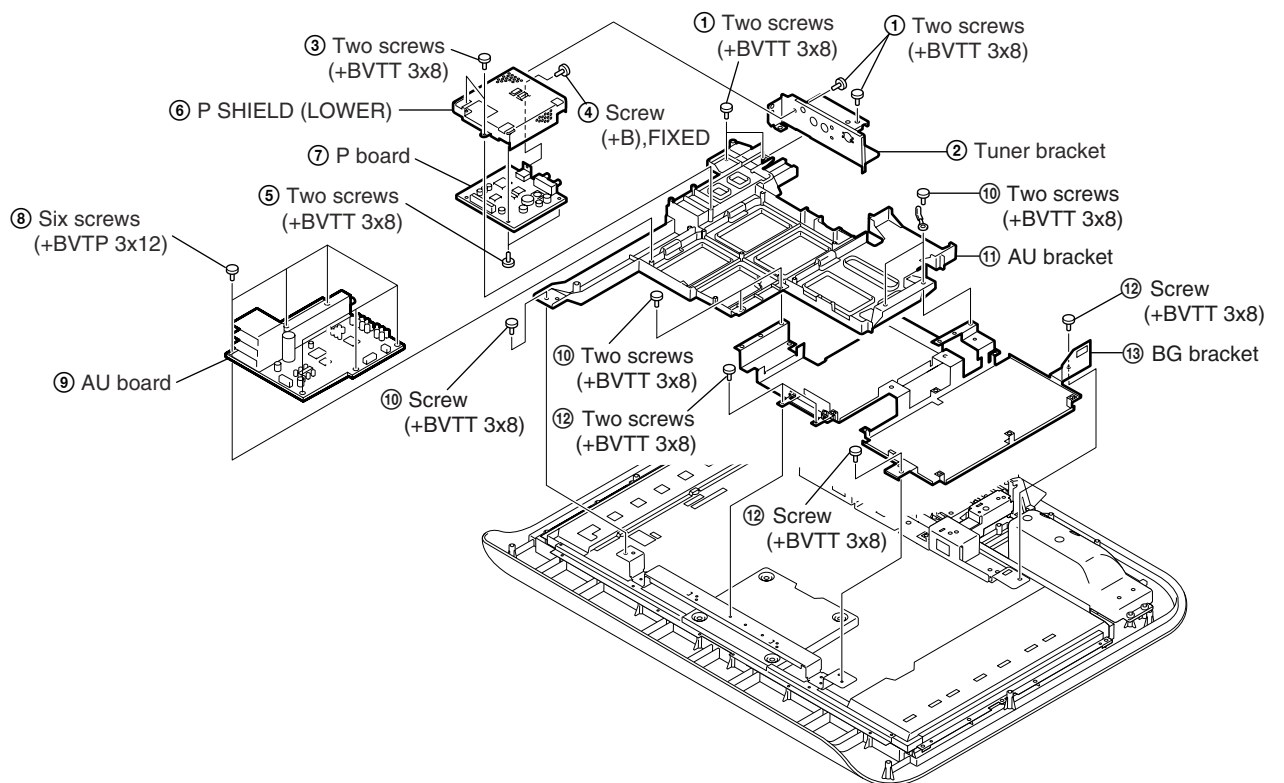


# 1-7. LCD PANEL REMOVAL

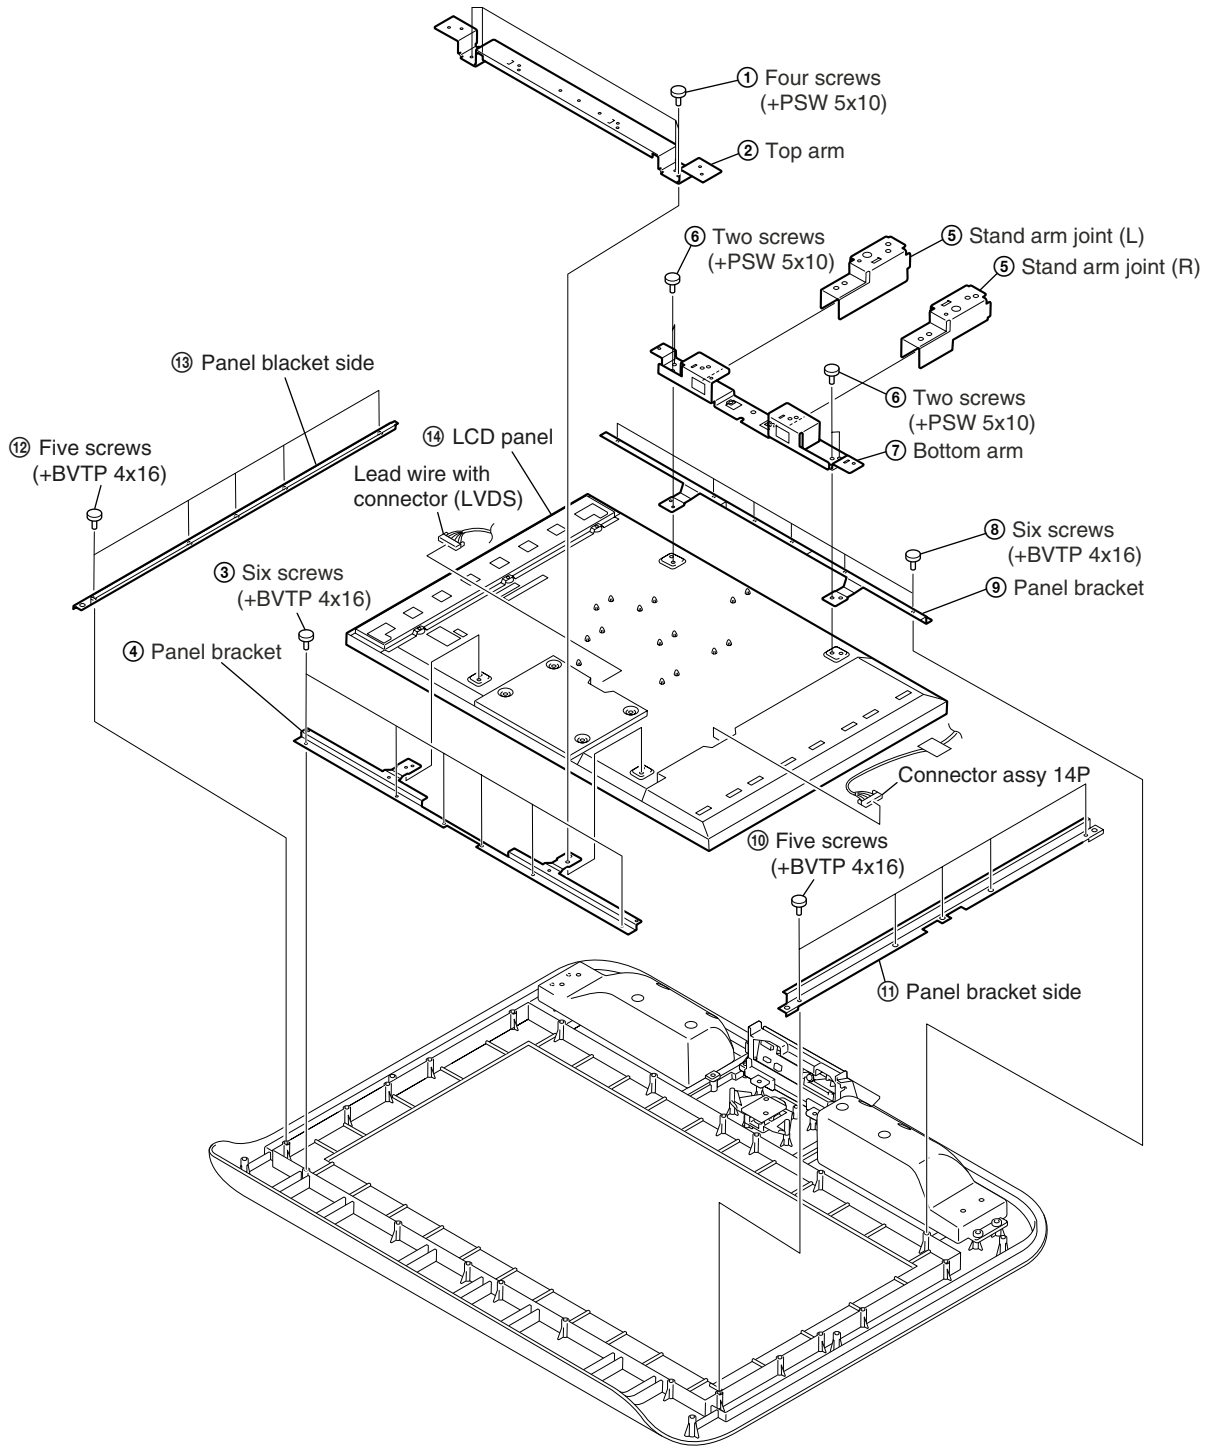

**1-8. H1 AND H3 BOARDS REMOVAL**

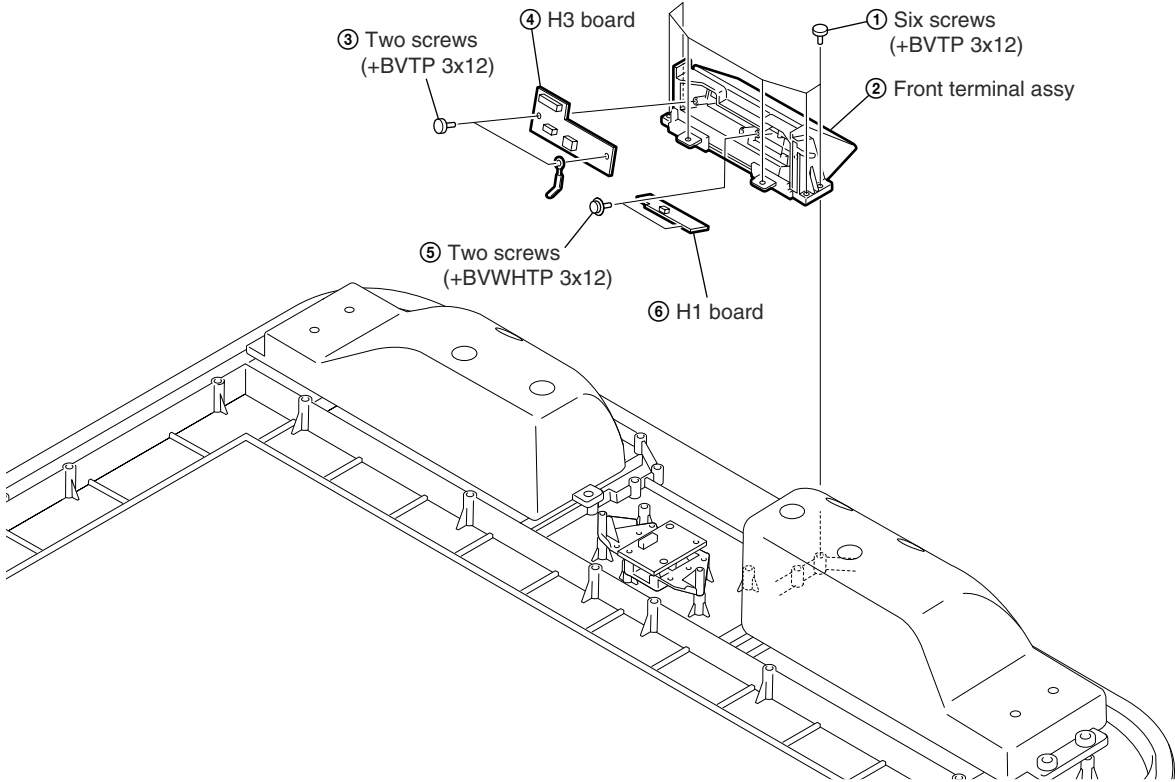

**1-9. H2 BOARD REMOVAL**

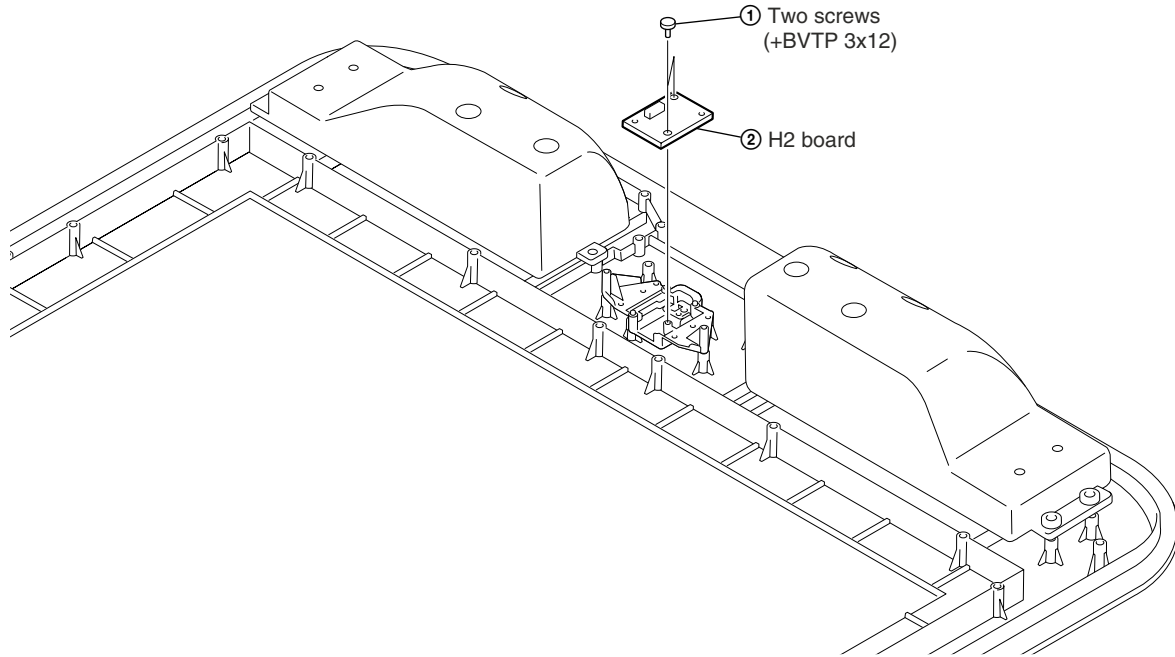

## SECTION 2 ADJUSTMENTS

### 2-1. AGING

#### 2-1-1. Aging setting

- To set aging mode on no input signal, change the register.  
And do the "service mode".

[AginIg setting]  
"MON\_CON\_REG\_2"=217

#### 2-1-2. Aging conditions

Applied voltage : Rated  
Interval of time : Over 30 min  
Ambient temperature : 22°C to 28°C  
Pattern : All-white is set by aging mode

[Transition of LED indication during aging]  
When AGING\_TIMER > 0  
Green (0.5sec) -> Off (0.5sec) -> Green (0.5sec) -> Off (0.5sec)  
When AGING\_TIMER = 0  
Green (3.0sec) -> Off (3.0sec) -> Green (3.0sec) -> Off (3.0sec)

#### Note:

After aging, if power was shut down until W/B adjustment, shall be adjusted W/B after aging more than 30 second.

### 2-2. Measurement equipment

- Color analyzer (CA-210) manufactured by MINOLUTA.
- Signal generator.
  - Use the NTSC Video signals with 7.5IRE SETUP.
  - When the HDMI signal (1080i, 720p) generated by VG-828 is used, be careful that the H center position deviates by 44 dots.

### 2-3. ADJUSTMENT OF SIGNAL LEVEL

#### 2-3-1. Check AD calibration registration items

- Set following items.

Item	Default value
AD_Y_FSET_TV	128
AD_Y_OFSET_V	128
AD_Y_OFSET_S	128
AD_Y_OFSET_D1	128
AD_Y_OFSET_D2	128
AD_Y_OFSET_D3	128
AD_Y_OFSET_D4	128
AD_Y_OFST_HDMI_D1	128
AD_Y_OFST_HDMI_D1	128
AD_Y_OFST_HDMI_D3	128
AD_Y_OFST_HDMI_D4	128
AD_Y_OFST_HDMI_VGA	128
AD_C_OFSET_TV	128
AD_C_OFSET_V	128
AD_C_OFSET_S	128
AD_C_OFSET_D1	128
AD_C_OFSET_D2	128
AD_C_OFSET_D3	128

AD_C_OFSET_D4	128
AD_C_OFST_HDMI_D1	128
AD_C_OFST_HDMI_D2	128
AD_C_OFST_HDMI_D3	128
AD_C_OFST_HDMI_D4	128
AD_C_OFST_HDMI_VGA	128
ADJ_TARGET_BL_IN_Y	3328
ADJ_Y_DEADBAND	16
ADJ_Y_LOOPATTEN	16
ADJ_C_LOOPATTEN	16
AD_ADJ_TIME_OUT	100
ADJ_AREA_H2_VB1	140
ADJ_AREA_H2_VB2	140
ADJ_AREA_H2_VB3	1020
ADJ_AREA_H2_VB4	1020
ADJ_AREA_H2_OFFSET	10
ADJ_AREA_V2	380

#### 2-3-2. Y Level/COLOR adjustment of component input

- Set "PICTURE\_MODE" = 2 (Pro) and change the register setting to the following values.


Format	Item	Data
Picture Save	PICTURE	100 (max)
	BRIGHTNESS	50 (center)
	Color	25 (center)
	USER_CTRL	0 (all off)

- Set "THUNDER\_ENABLE" = 0 and set BOLT to "through" mode.
- Input the D3 (1080i) all-white signal (100IRE) .
- Adjust CCP's Y\_LEVEL to set the value of BOLT's G OUT as follows.

Item	Standard
Video_g	3328/4080 ±16

- Input the D3 (1080i) color-bar signal (100IRE) .
- Adjust CCP's C\_LEVEL to set the value of BOLT's B OUT as follows.

Item	Standard
Video_b	VB1=VB4 ±16



- Save the adjustment values in the D3 EEPROM.
- Add the following offsets to the values of step 7 and copy the obtained values to the EEPROMs for D1, D2, and D4 respectively.

Item	Standard		
	D1	D2	D3
Y_LEVEL OFFSET	±0	±0	±0
C_LEVEL OFFSET	-2	±0	±0

### 2-3-3. Y Level/COLOR adjustment of HDMI input

- Copy the Y Level/COLOR adjustment values of component input to the EEPROMs for HDMI D1, D2, D3, D4, and VGA respectively.  
Copy the D2 adjustment values for VGA.

### 2-3-4. Y Level/COLOR adjustment of Video input (by using a jig)

- Set PICTURE\_MODE = 2 (Pro), and then change the register setting to the following values.

Format	Item	Data
Picture Save	PICTURE	100 (max)
	BRIGHTNESS	50 (center)
	Color	25 (center)
	Hue	25 (center)
	USER_CTRL	0 (all off)

Copy the D2 adjustment values for VGA.


- Set THUNDER\_ENABLE = 0 and set BOLT to “through” mode.
- Input the Video 1 (composite) all-white signal (100IRE) .
- Adjust CCP’s Y\_LEVEL to set the value of BOLT’s G OUT

Item	Standard
Video_g	3328/4080 ±16

as follows.

- Input the Video 1 (composite) color-bar signal (75IRE) .
- Adjust CCP’s C\_LEVEL to set the value of BOLT’s B OUT

Item	Standard
Video_b	VB1=VB4 ±16



as follows.

- Write the adjustment values in the VIDEO EEPROM.
- Add the following offsets to the values of step 7, and then

Item	S-VIDEO
Y_LEVEL OFFSET	±0
C_LEVEL OFFSET	±0

copy the obtained values to the Svideo EEPROM.

### 2-3-5. Y Level/COLOR adjustment of RF input

- Set PICTURE\_MODE = 2 (Pro) and change the register

Format	Item	Data
Picture Save	PICTURE	100 (max)
	BRIGHTNESS	50 (center)
	Color	25 (center)
	Hue	25 (center)
	USER_CTRL	0 (all off)

- Set THUNDER\_ENABLE = 0 and set BOLT to “through” mode.
- Input the RF all-white signal (J-12) .


- Adjust CCP’s Y\_LEVEL to set the value of BOLT’s G OUT as follows.

Item	Standard
Video_g	3328/4080 ±16

setting to the following values.

- Input the RF color-bar signal (J-10) .
- Adjust CCP’s C\_LEVEL to set the value of BOLT’s B OUT

Item	Standard
Video_b	VB1=VB4 ±16



as follows.

- Write the adjustment values in the RF EEPROM.

## 2-4. WHITE BALANCE ADJUSTMENT

This adjustment shall be used ECS

### 2-4-1. White balance adjustment of color temperature “Cool”

- Set PICTURE\_MODE = 2 (Pro) and change the register

Item	Data
PICTURE	100 (max)
BRIGHTNESS	50 (center)
Color	25 (center)
Hue	25 (center)
COLOR_INDEX	1 (high)
USER_CTRL	0 (all off)
SCALER_MODE	3 (full)

setting to the following values.

- Input the 1080i 80% all-gray signal from the Video 4 input.
- Adjust W/B in the R\_DRIVE and B\_DRIVE modes to the

Format	Item	Setting		
		Cool	Neutral	Warm
Color Save	R_DRV	134	137	142
	G_DRV	128	128	128
	B_DRV	139	133	120
	R_BKG	110	110	110
	G_BKG	128	128	128
	B_BKG	110	110	115

specified highlight adjustment values below.

- Input the 1080i 20% all-gray signal from the Video 4 input. Control and adjust the SG level so that Y becomes 10Nit.
- Adjust W/B in the R\_BKG and B\_BKG modes to the specified background adjustment values below (when Y =

32”			Tolerance
	H/L	C/O	
x	0.269	0.269	H/L 1.0JND
y	0.268	0.268	C/O 1.5JND
Y	Not specified	20	C/O 1

- Adjust W/B while tracking steps 1 to 5 so that the above specifications are completely satisfied.
- Perform Color Save.

10Nit).

### 2-4-2. White balance adjustment of color temperature “Neutral”

1. Set COLOR\_INDEX = 2 (Neutral) .
2. Adjust the value of R\_DRIVE, B\_DRIVE, R\_BKG and B\_BKG to the specification below in the same steps as color

	32”		Tolerance
	H/L	C/O	
x	0.277	0.277	H/L 1.0JND
y	0.278	0.278	C/O 1.5JND
Y	Not specified	20	C/O 1

temperature “Cool” of 2-3-1.

3. Perform Color Save.

### 2-4-3. White balance adjustment of color temperature “Warm”

1. Set COLOR\_INDEX = 3 (Warm) .
2. Adjust the value of R\_DRIVE, B\_DRIVE, R\_BKG and B\_BKG to the specification below in the same steps as color

	32”		Tolerance
	H/L	C/O	
x	0.277	0.296	H/L 1.0JND
y	0.278	0.300	C/O 1.5JND
Y	Not specified	20	C/O 1


temperature “Cool” of 2-3-1.


3. Perform Color Save.
4. After adjustment, restore the setting of the registers that are not saved by Color Save to their default setting.



# SECTION 3 DIAGRAMS


## 3-1. BLOCK DIAGRAMS

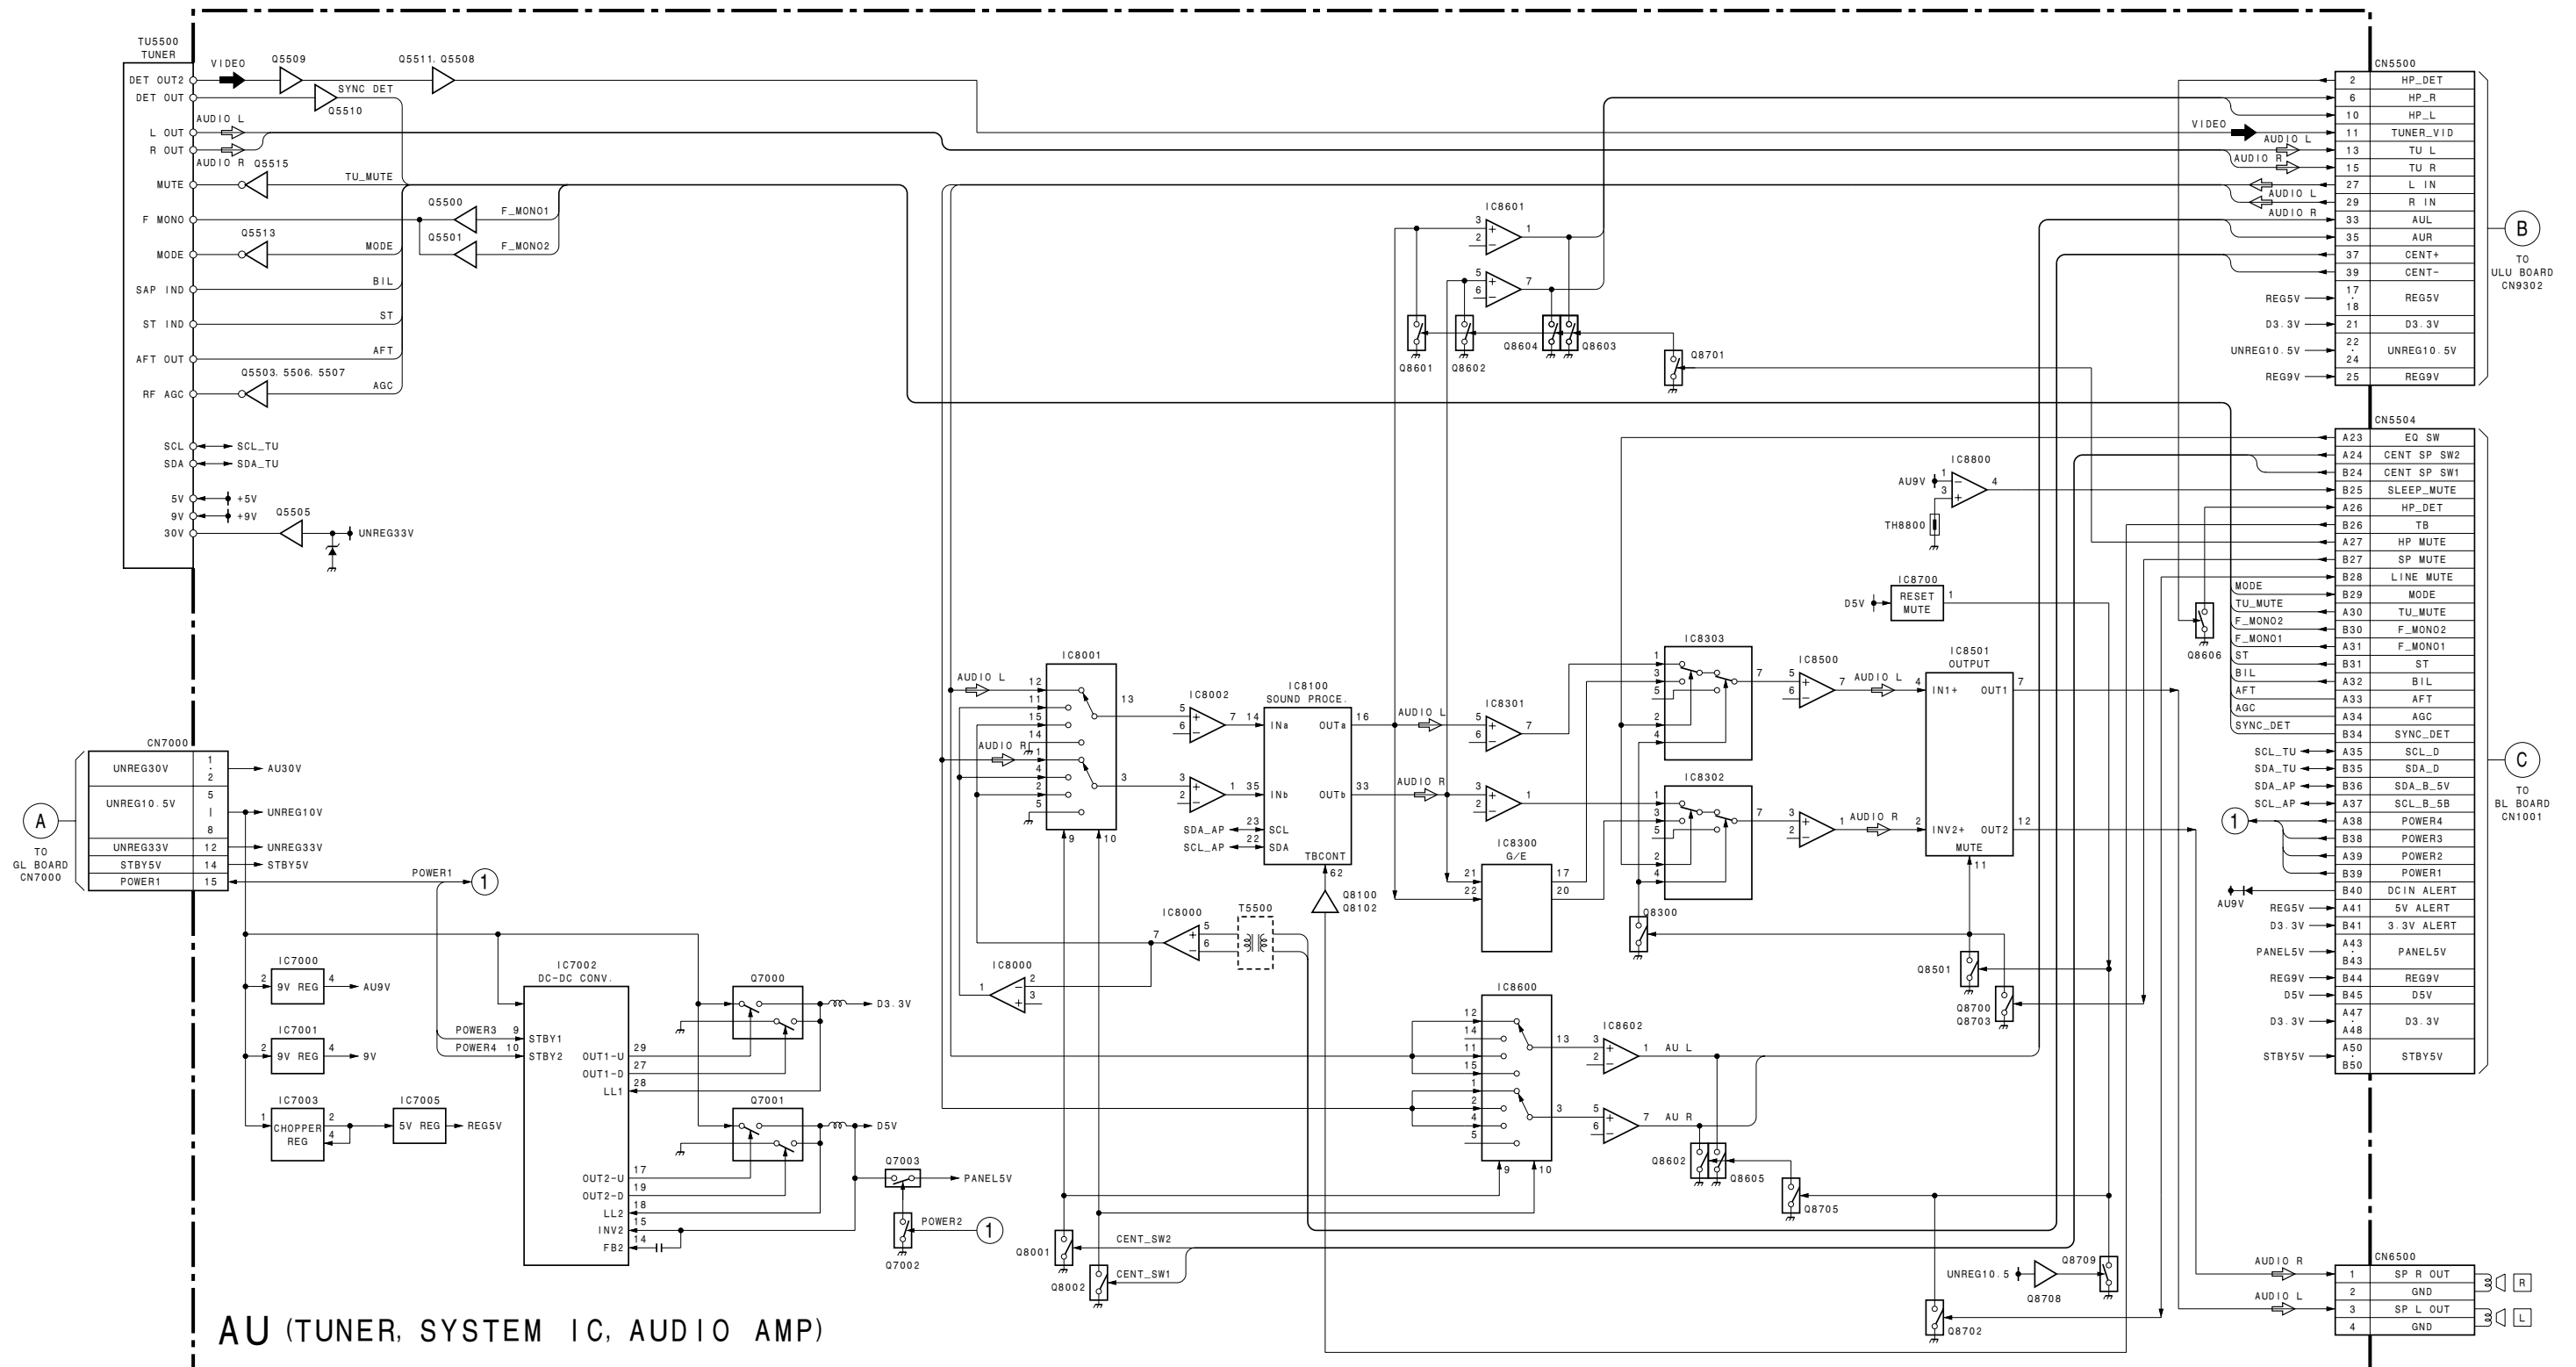


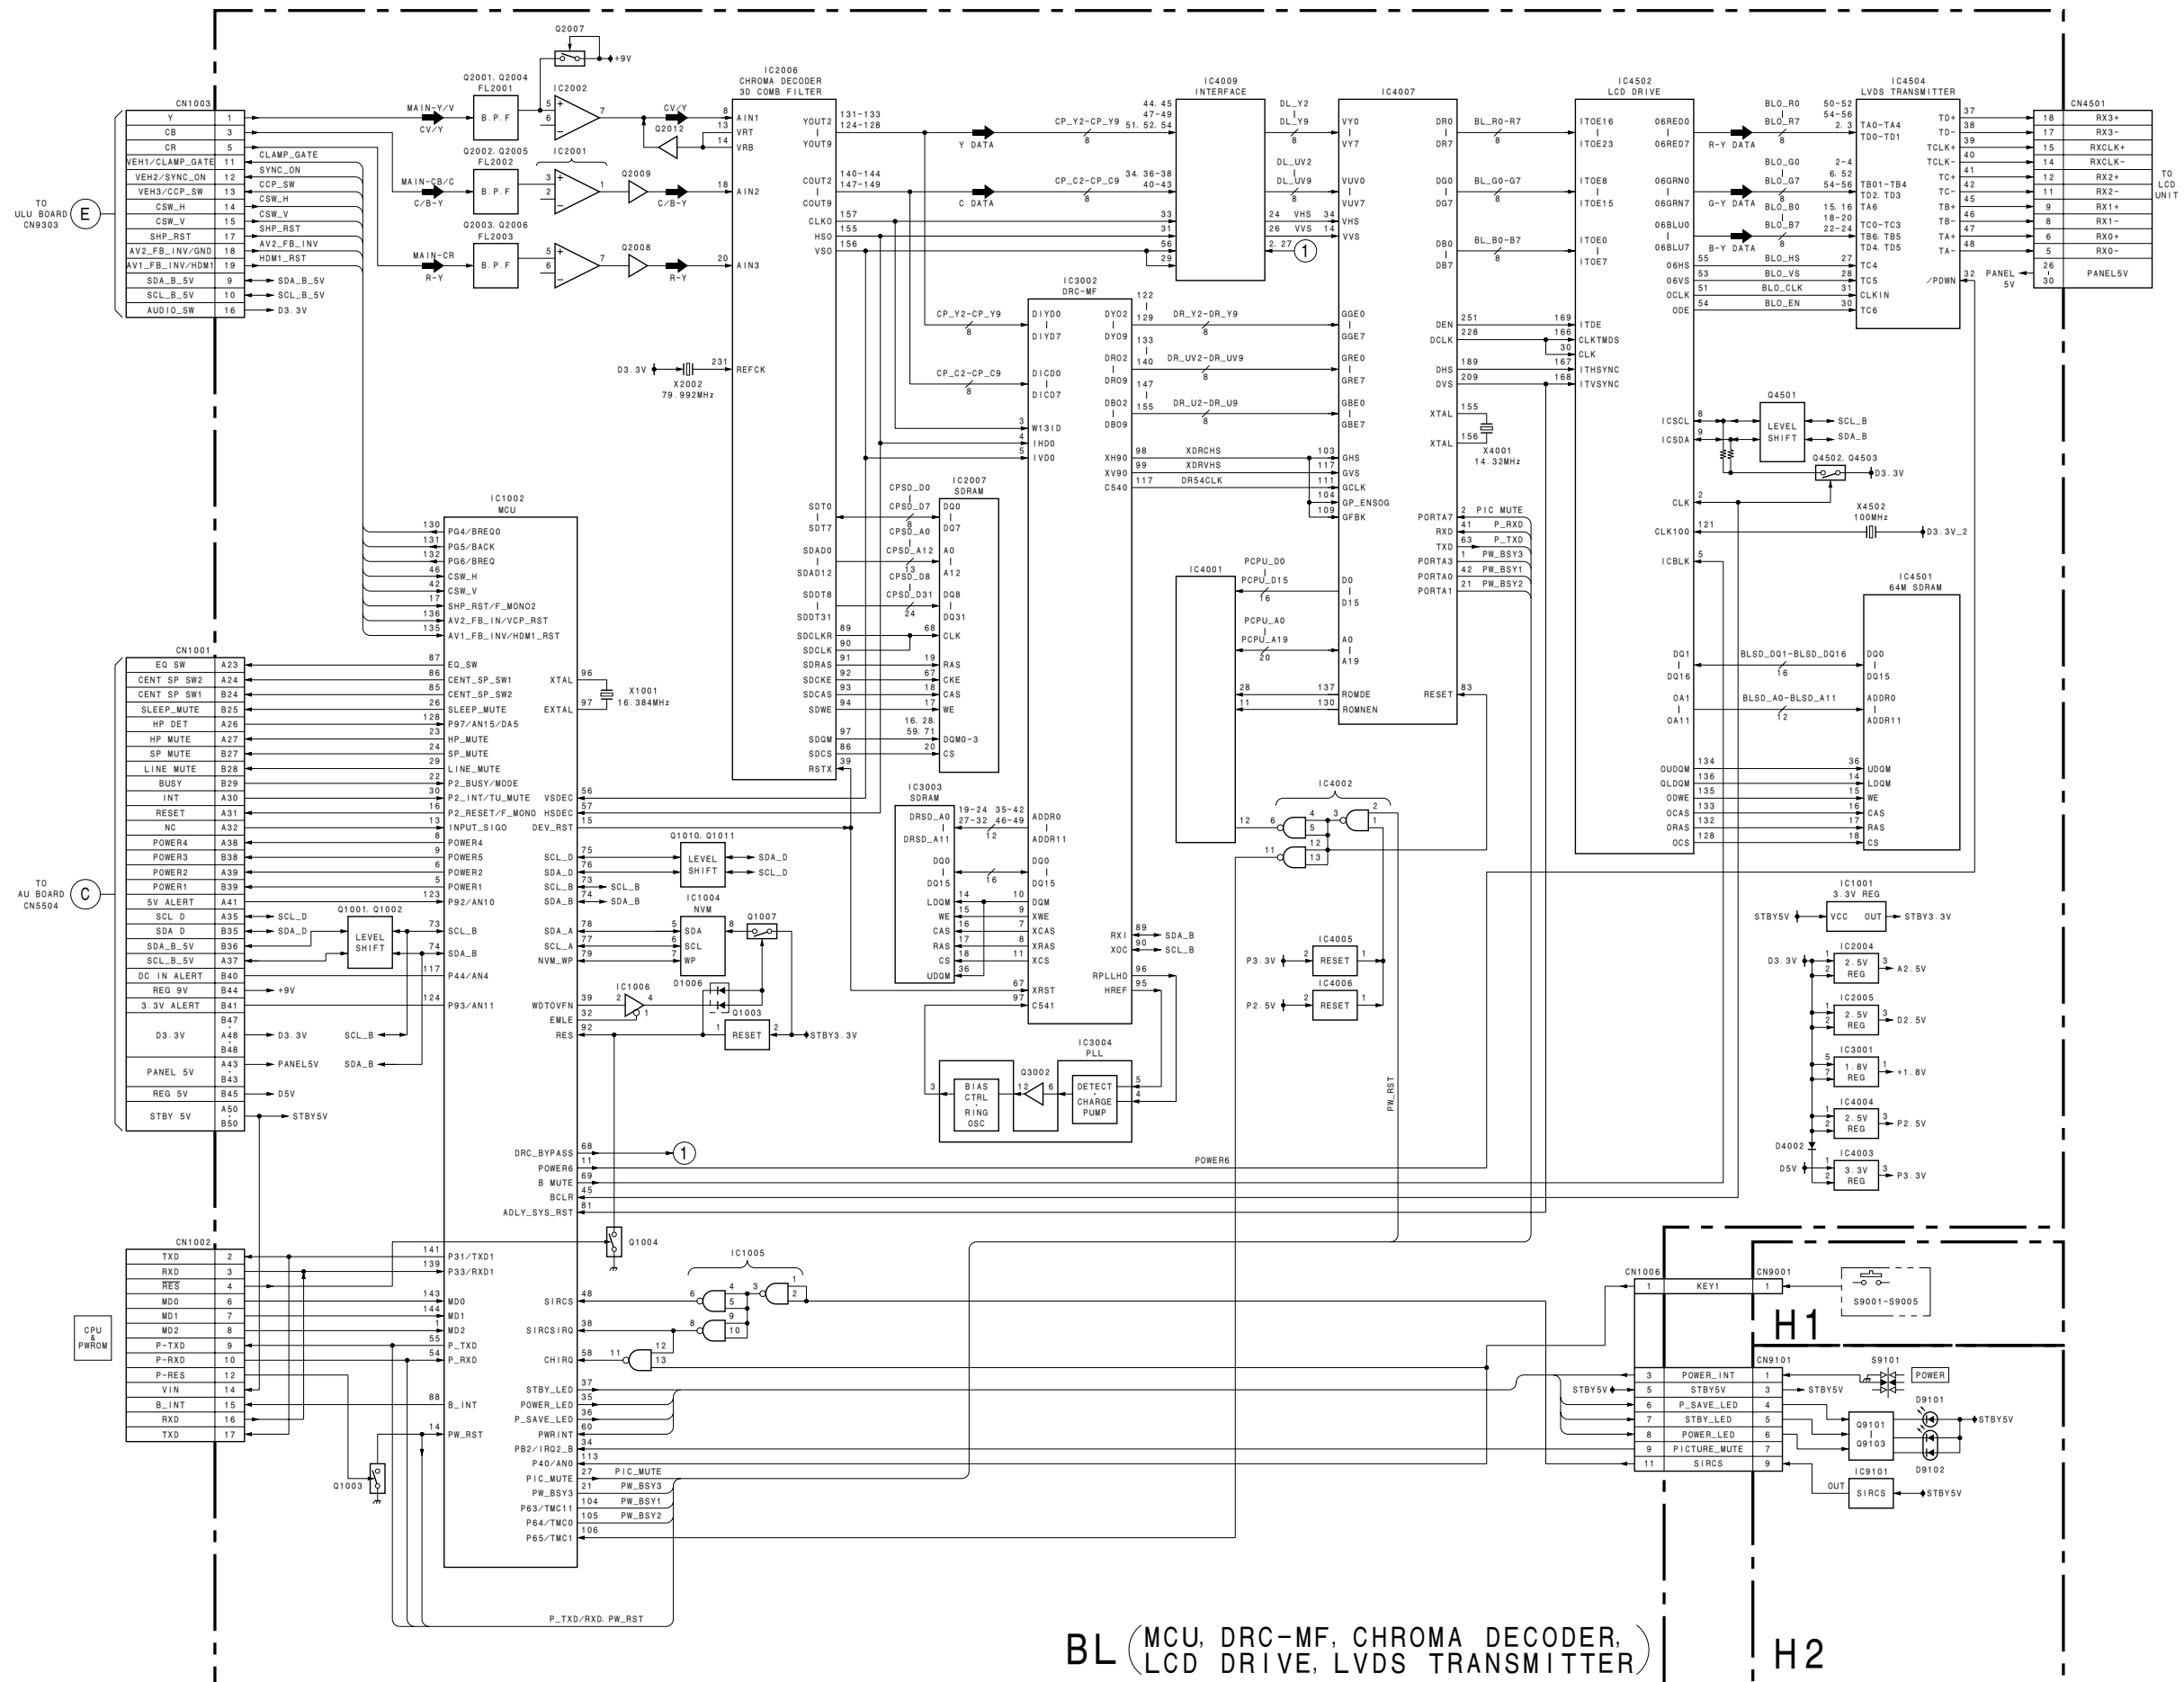


BL (MCU, DRC-MF, CHROMA DECODER, LCD DRIVE, LVDS TRANSMITTER)


H2

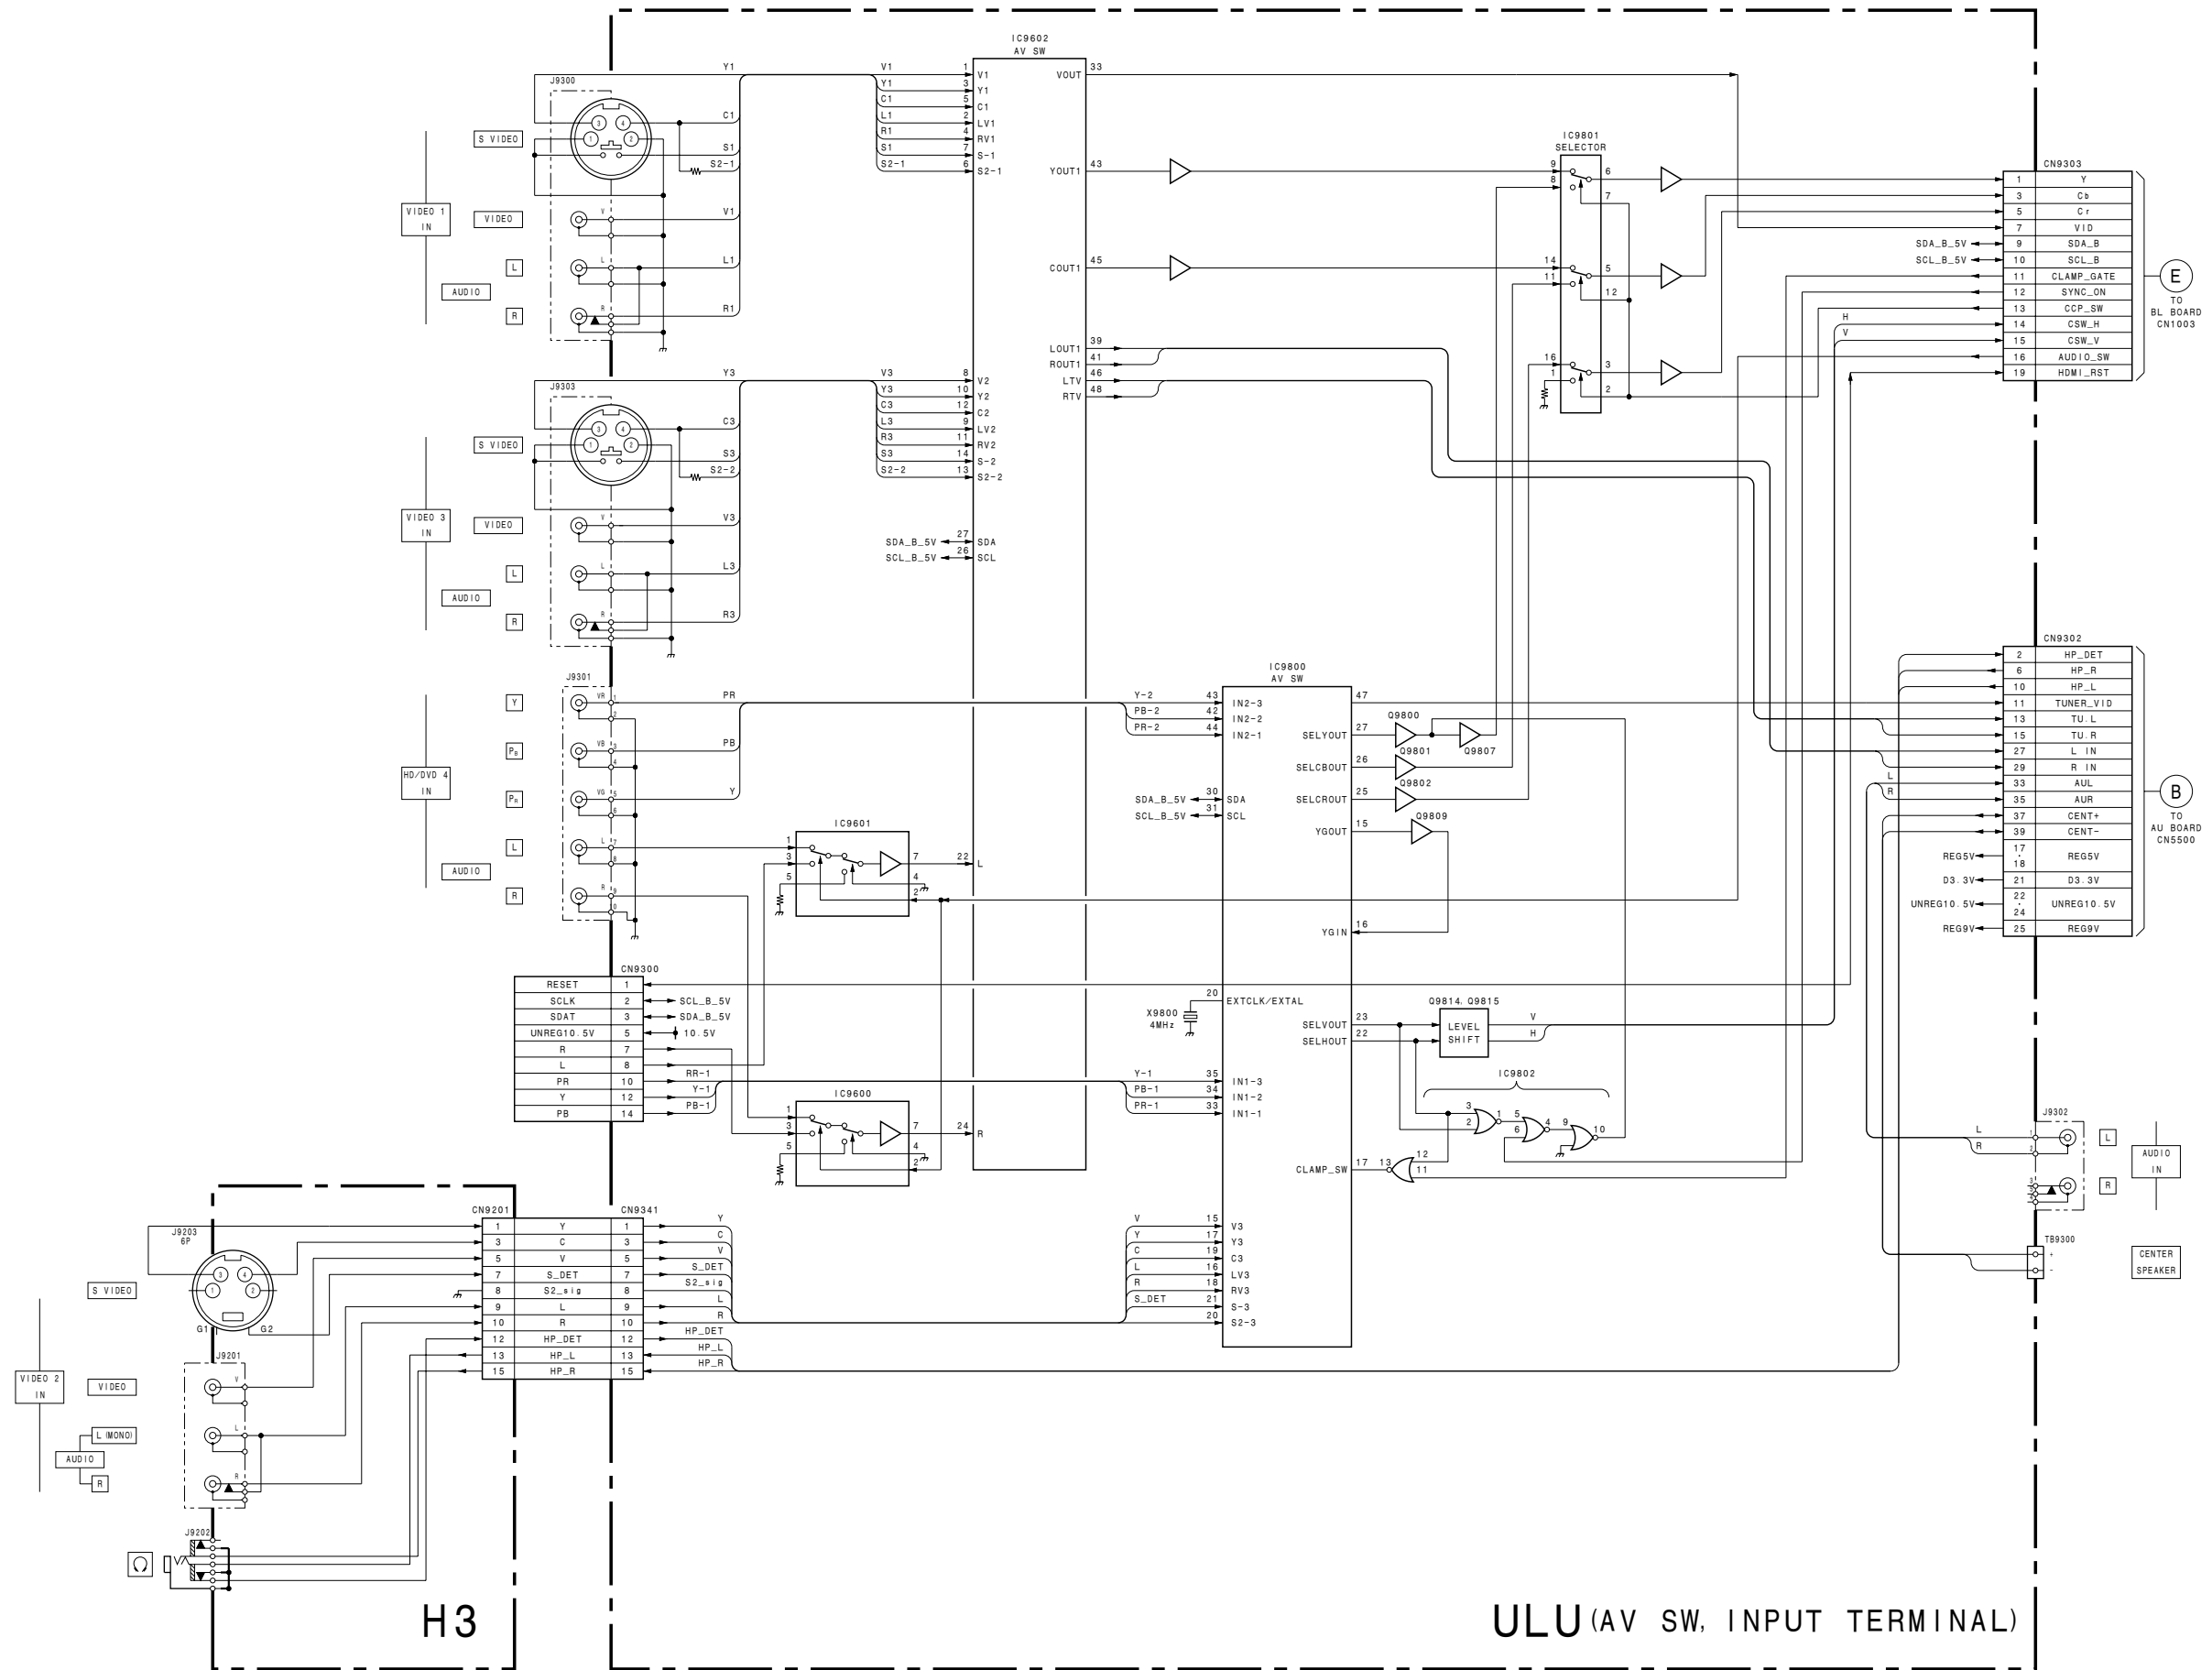

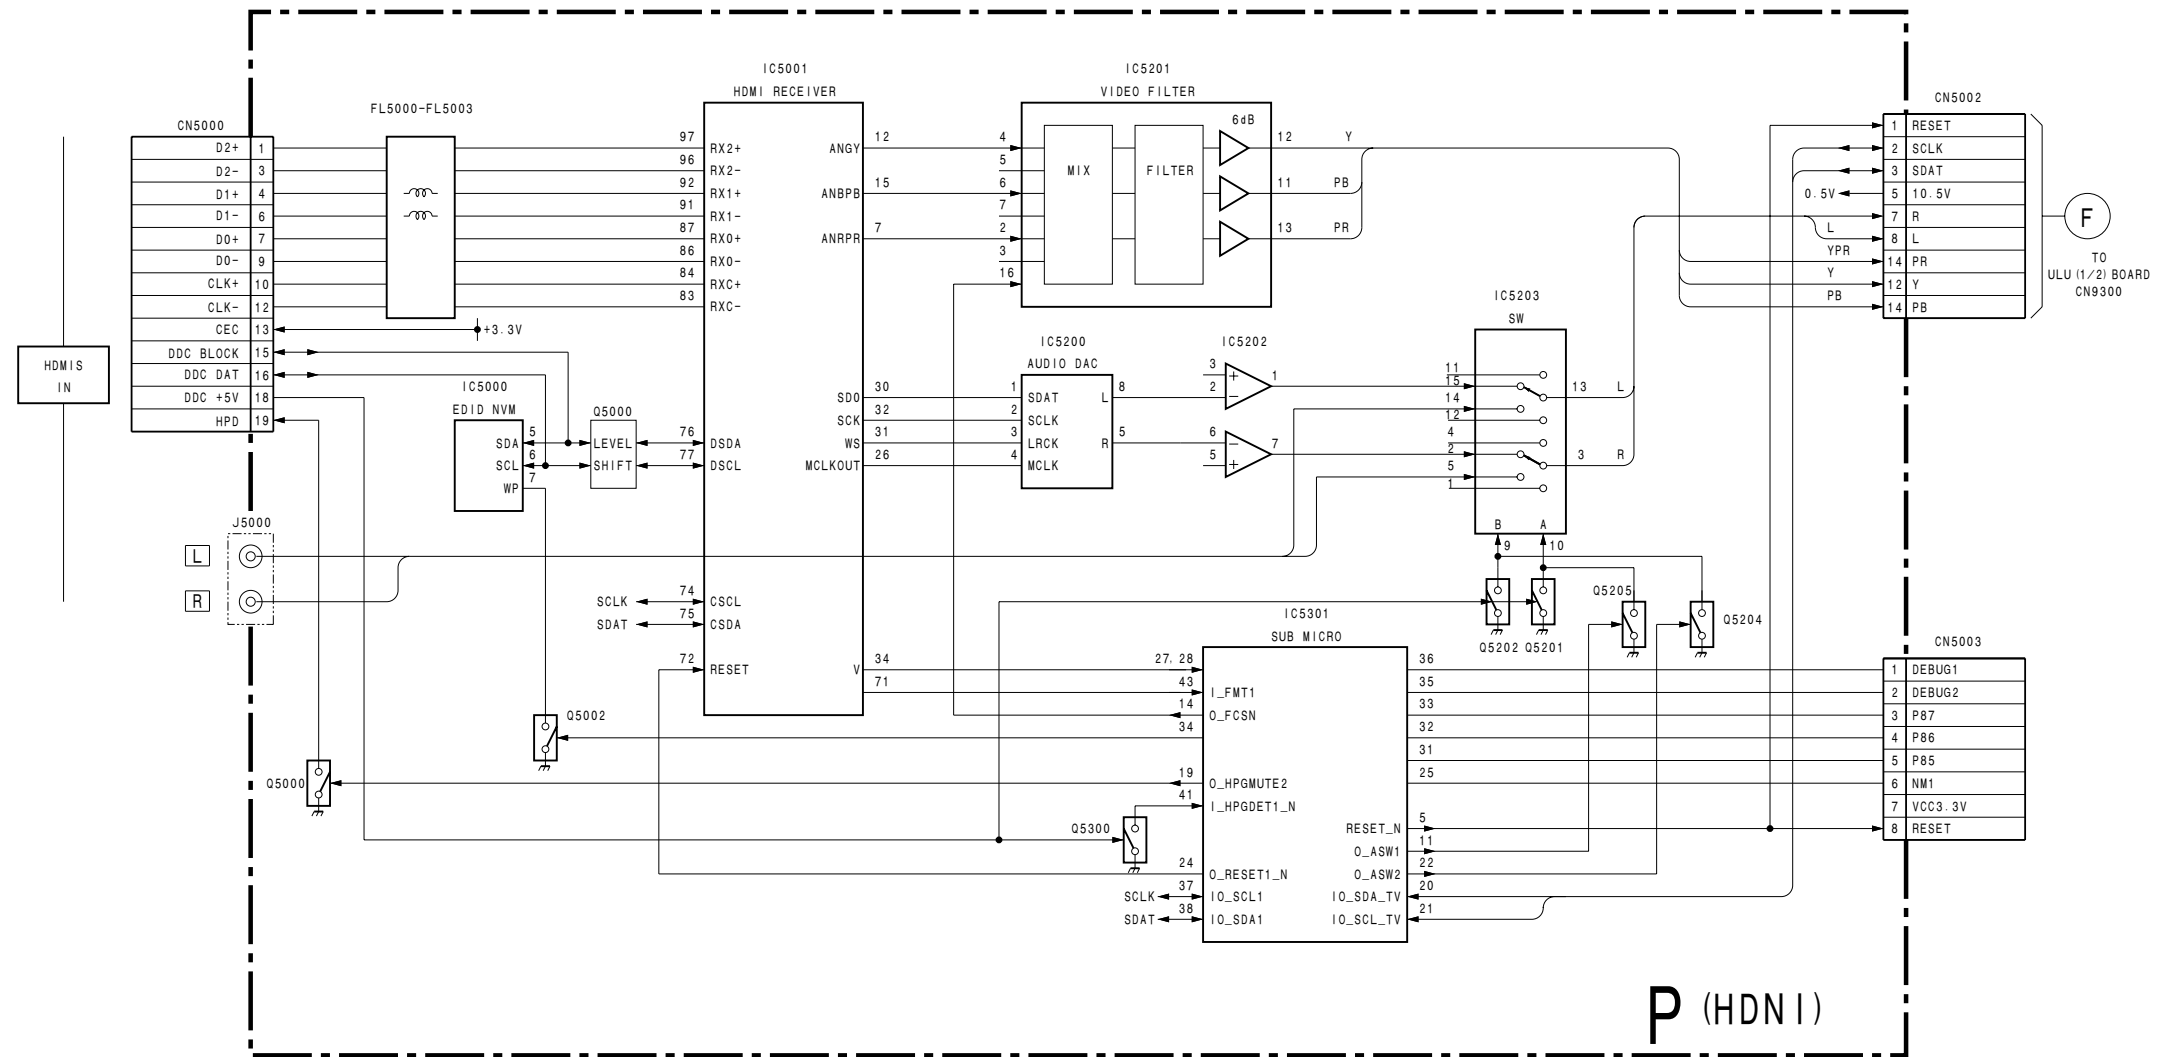


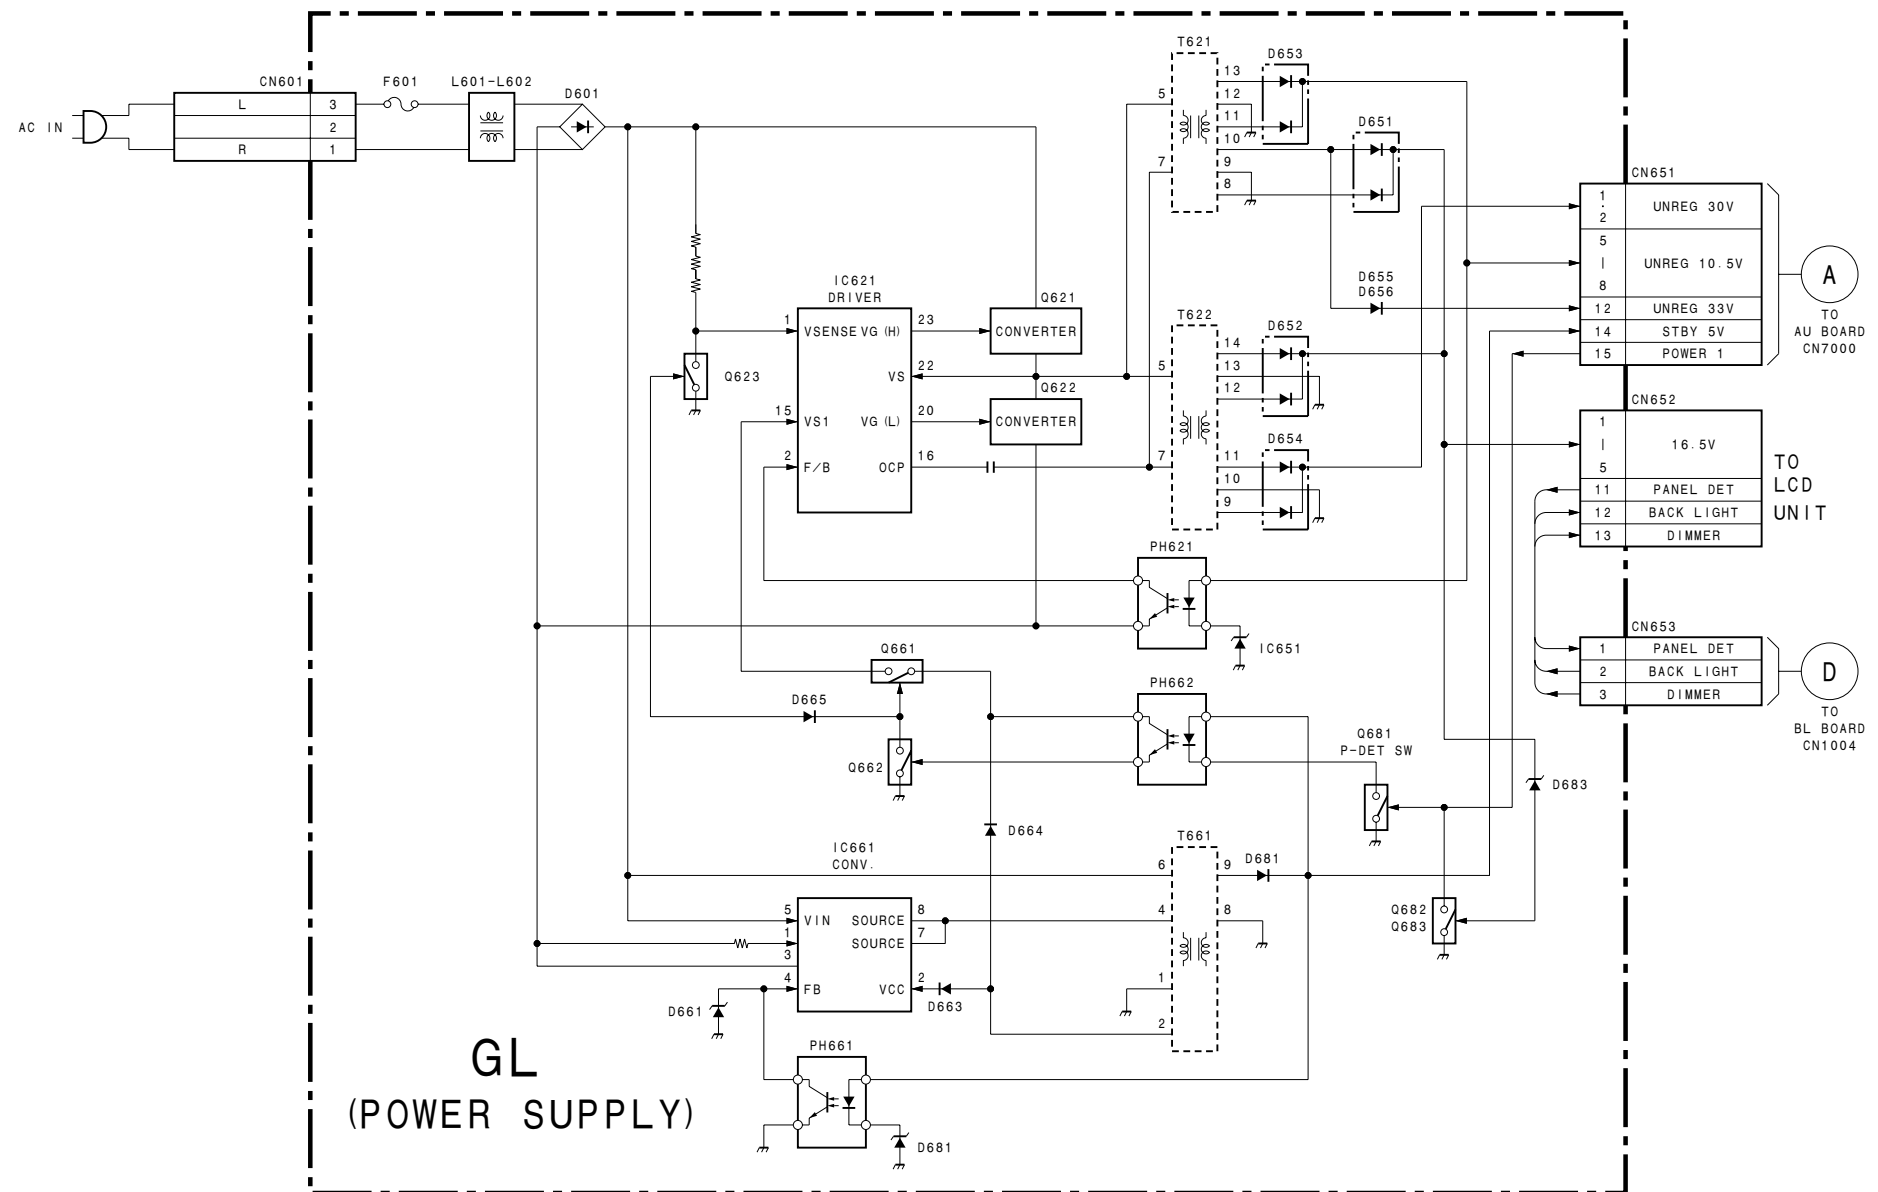

### 3-2. FRAME DIAGRAMS

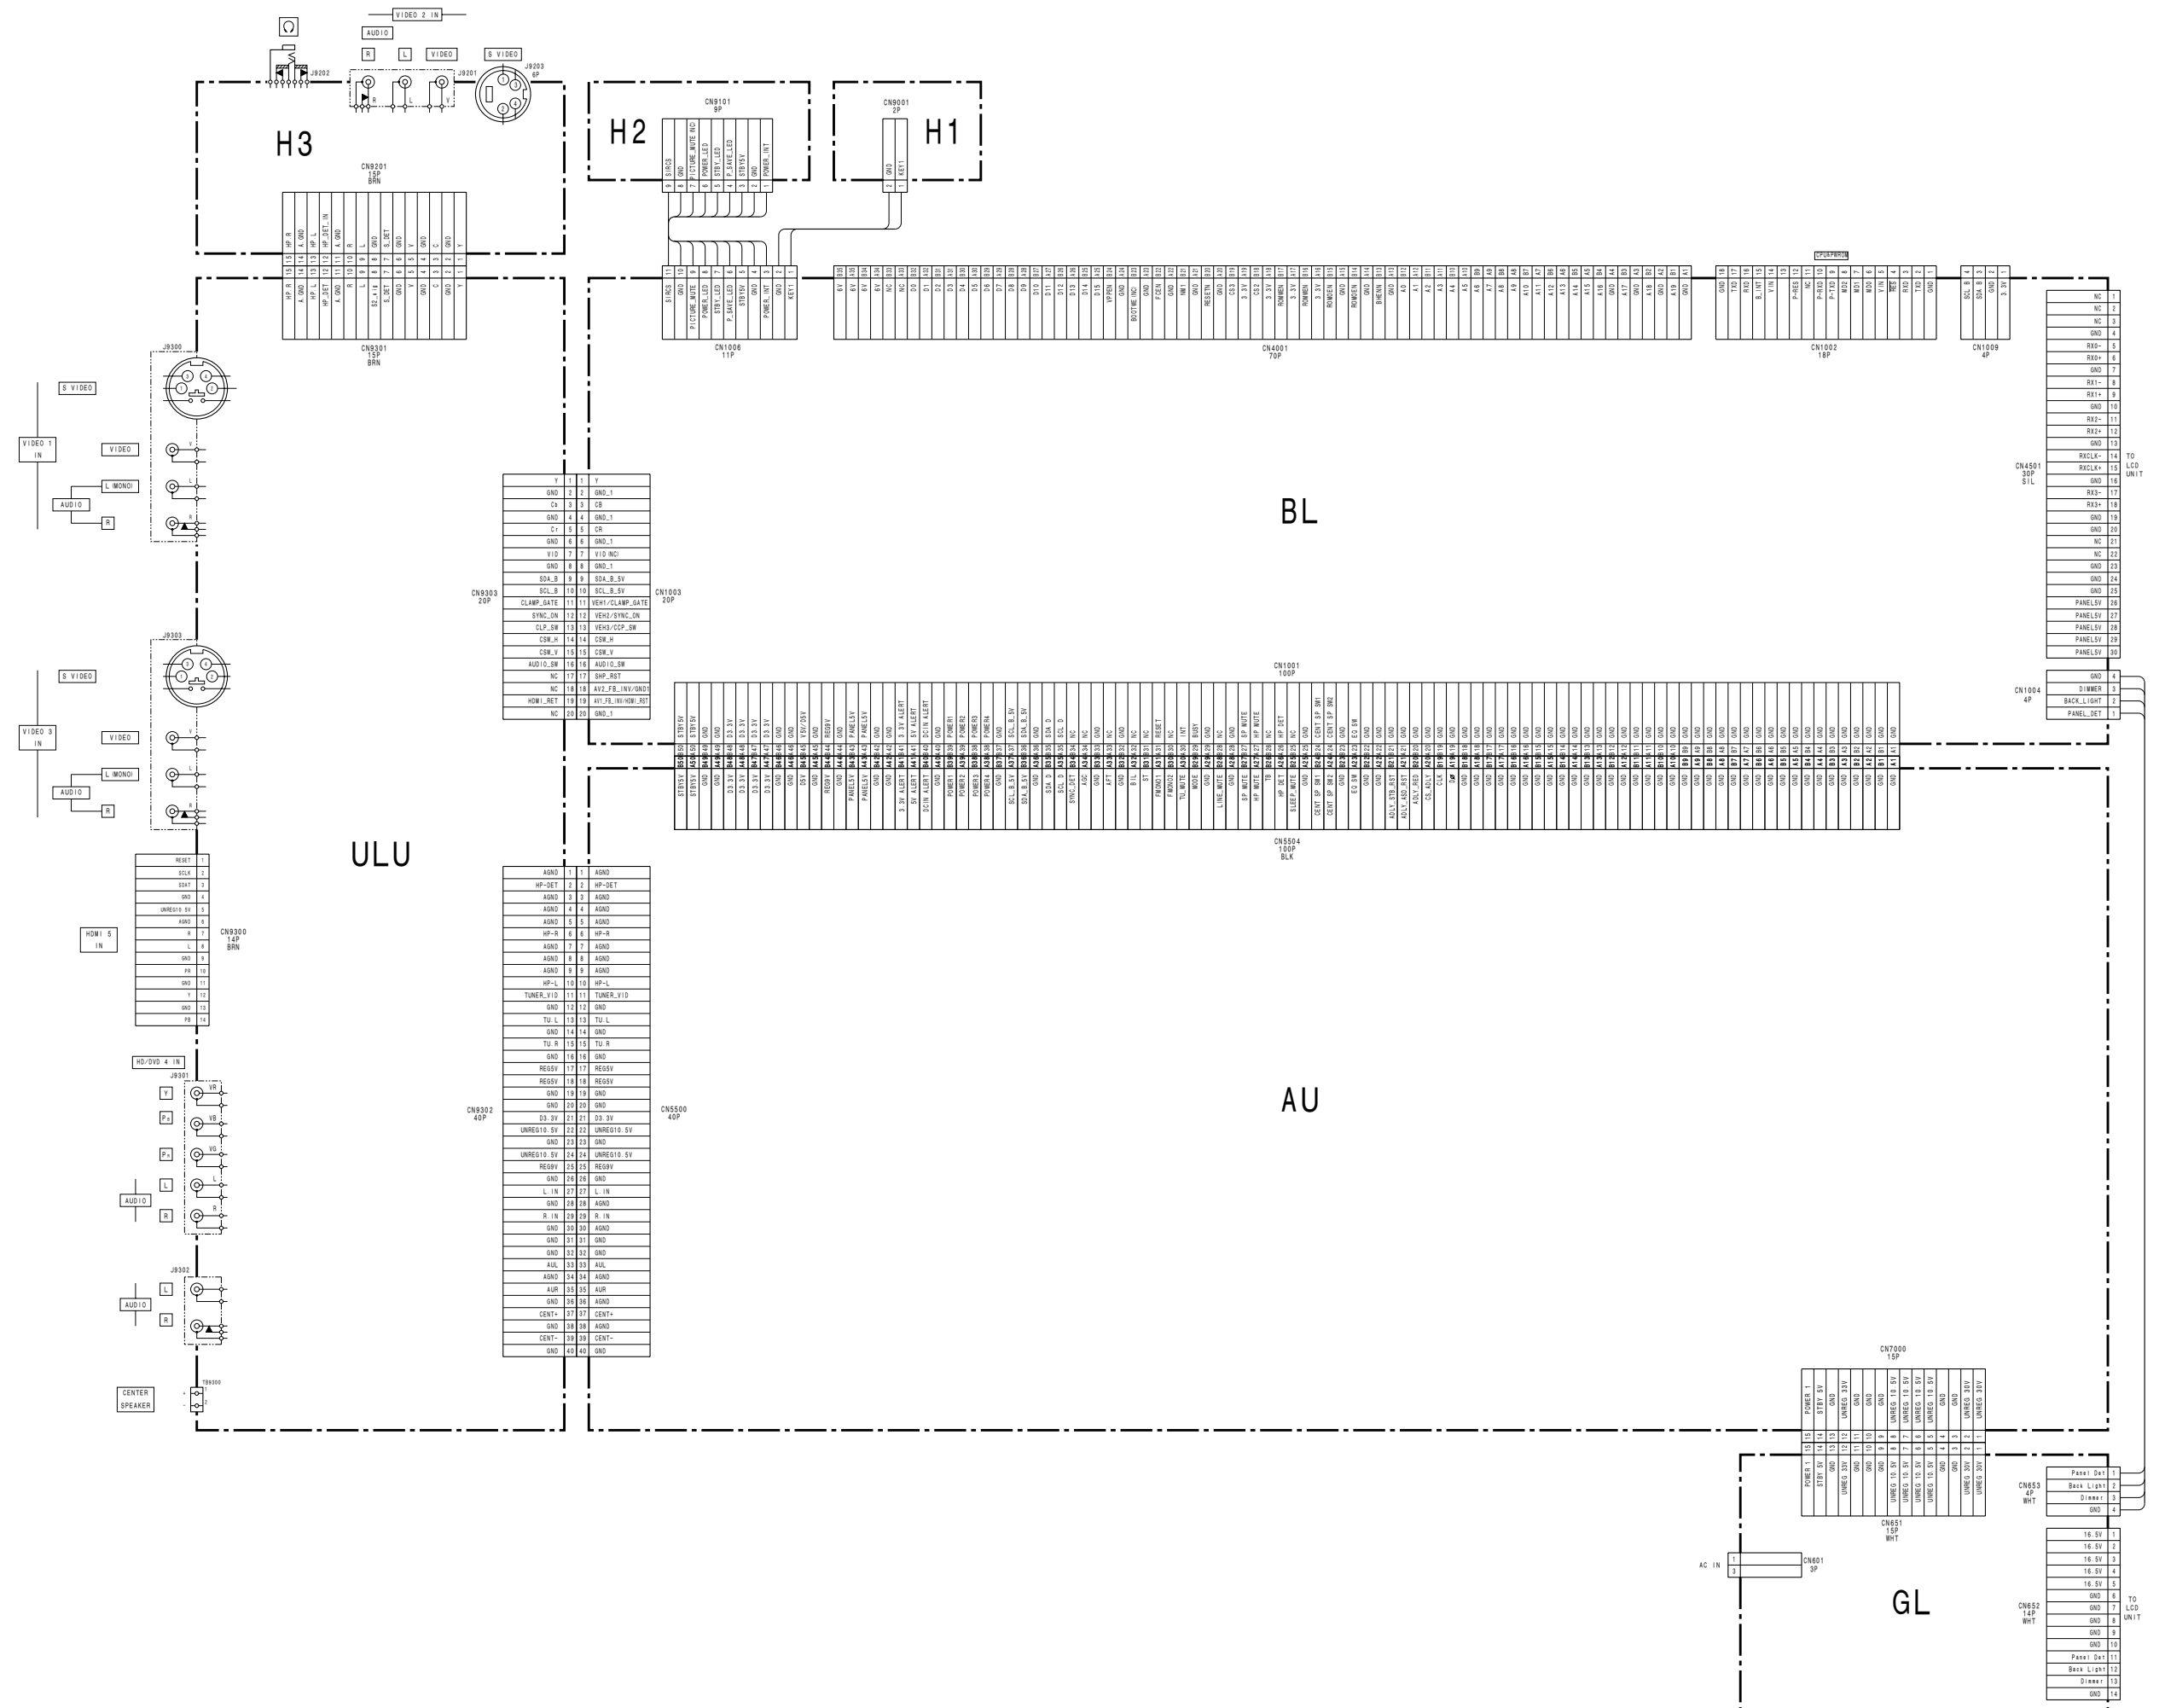

### 3-3. CIRCUIT BOARDS LOCATION

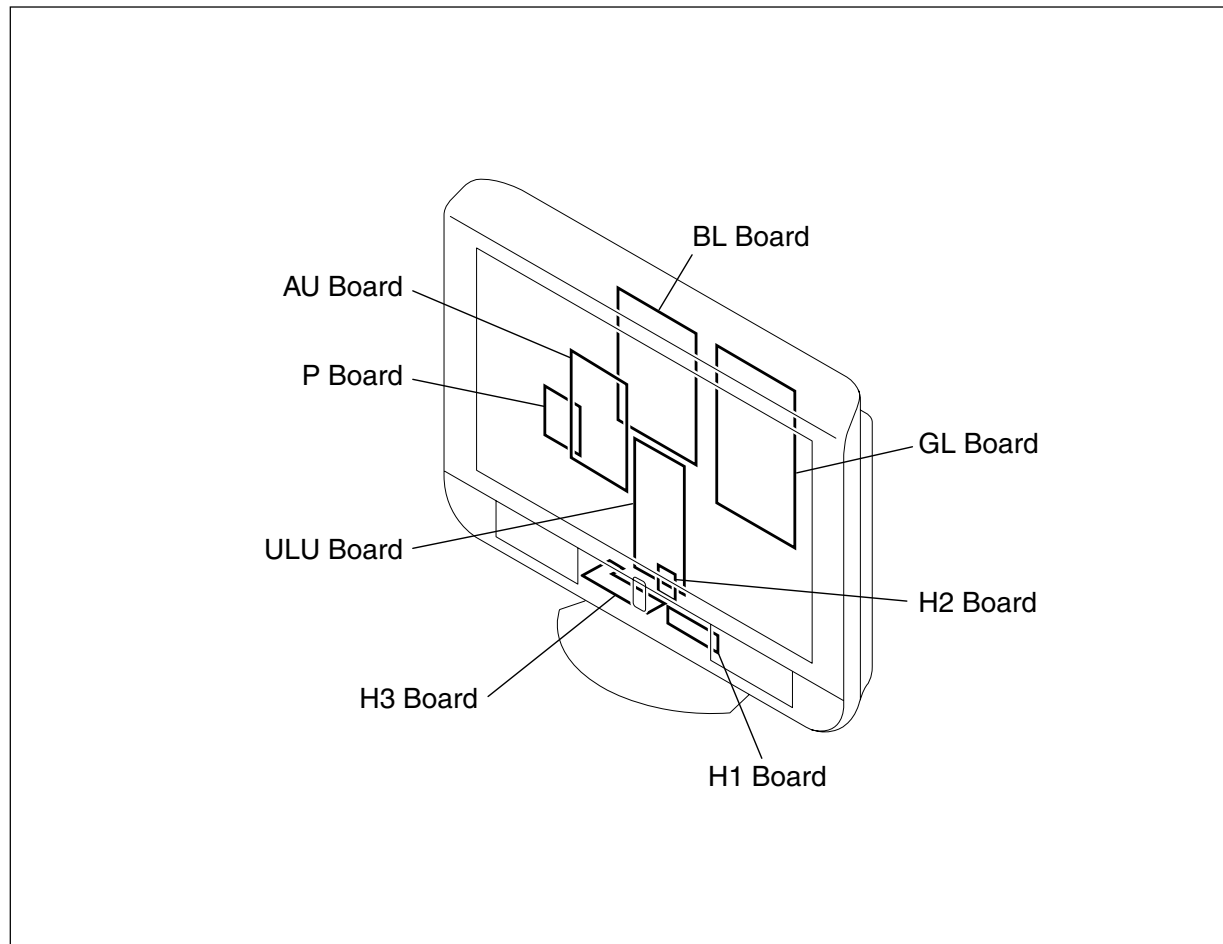

### 3-4. SCHEMATIC DIAGRAMS

**Note:**

- All capacitors are in  $\mu\text{F}$  unless otherwise noted. ( $\text{pF}$ :  $\mu\text{F}$ )  
Capacitors without voltage indication are all 50 V.
- Indication of resistance, which does not have one for rating electrical power, is as follows.

Pitch: 5 mm

Rating electrical power 1/4 W (CHIP : 1/10 W)

- All resistors are in ohms.
- : nonflammable resistor.
- : fusible resistor.
- : internal component.
- : panel designation, and adjustment for repair.
- All variable and adjustable resistors have characteristic curve B, unless otherwise noted.
- : earth-ground.
- : earth-chassis.
- When replacing the part in below table, be sure to perform the related adjustment.
- All voltages are in V.
- Readings are taken with a 10 M digital multimeter.
- Readings are taken with a color-bar signal input.
- Voltage variations may be noted due to normal production tolerances.
- \* : Can not be measured.
- **Circled numbers are waveform references.**
- : B + bus.
- : B - bus.
- : Signal path.

**Note: The components identified by shading and mark  $\triangle$  are critical for safety. Replace only with part number specified.**

**Note: Les composants identifiés par un tramé et une marque  $\triangle$  sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.**



### Terminal name of semiconductors in silk screen printed circuit (\* )

	Device	Printed symbol	Terminal name	Circuit
①	Transistor		Collector Base Emitter	
②	Transistor		Collector Base Emitter	
③	Diode		Cathode Anode	
④	Diode		Cathode Anode (NC)	
⑤	Diode		Anode (NC)	
⑥	Diode		Common Anode Cathode	
⑦	Diode		Common Anode Cathode	
⑧	Diode		Common Anode Anode	
⑨	Diode		Common Anode Anode	
⑩	Diode		Common Cathode Cathode	
⑪	Diode		Common Cathode Cathode	
⑫	Diode		Anode Anode Cathode Anode	
⑬	Transistor (FET)		Drain Source Gate	
⑭	Transistor (FET)		Drain Source Gate	
⑮	Transistor (FET)		Source Drain Gate	
⑯	Transistor		Emitter Collector Base	
⑰	Transistor		C2(B1)E1 E2(B2)C1	
⑱	Transistor		C1(B2)E2 E1(B1)C2	
⑲	Transistor		C1 B2 E2 E1 B1 C2	
⑳	Transistor		C1 B2 E2 E1 B1 C2	
㉑	Transistor		E2 B1 E1 C2 C1(B2)	
㉒	Transistor		(B2) B1 E1 E2 C1 C2	
㉓	Transistor		(B2) E2 E1 B1 C2 C1	
-	Discrete semiconductor			


(Chip semiconductors that are not actually used are included.)

Ver.1.6

(1) Schematic Diagrams of AU Board

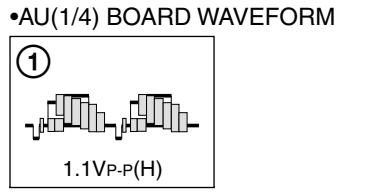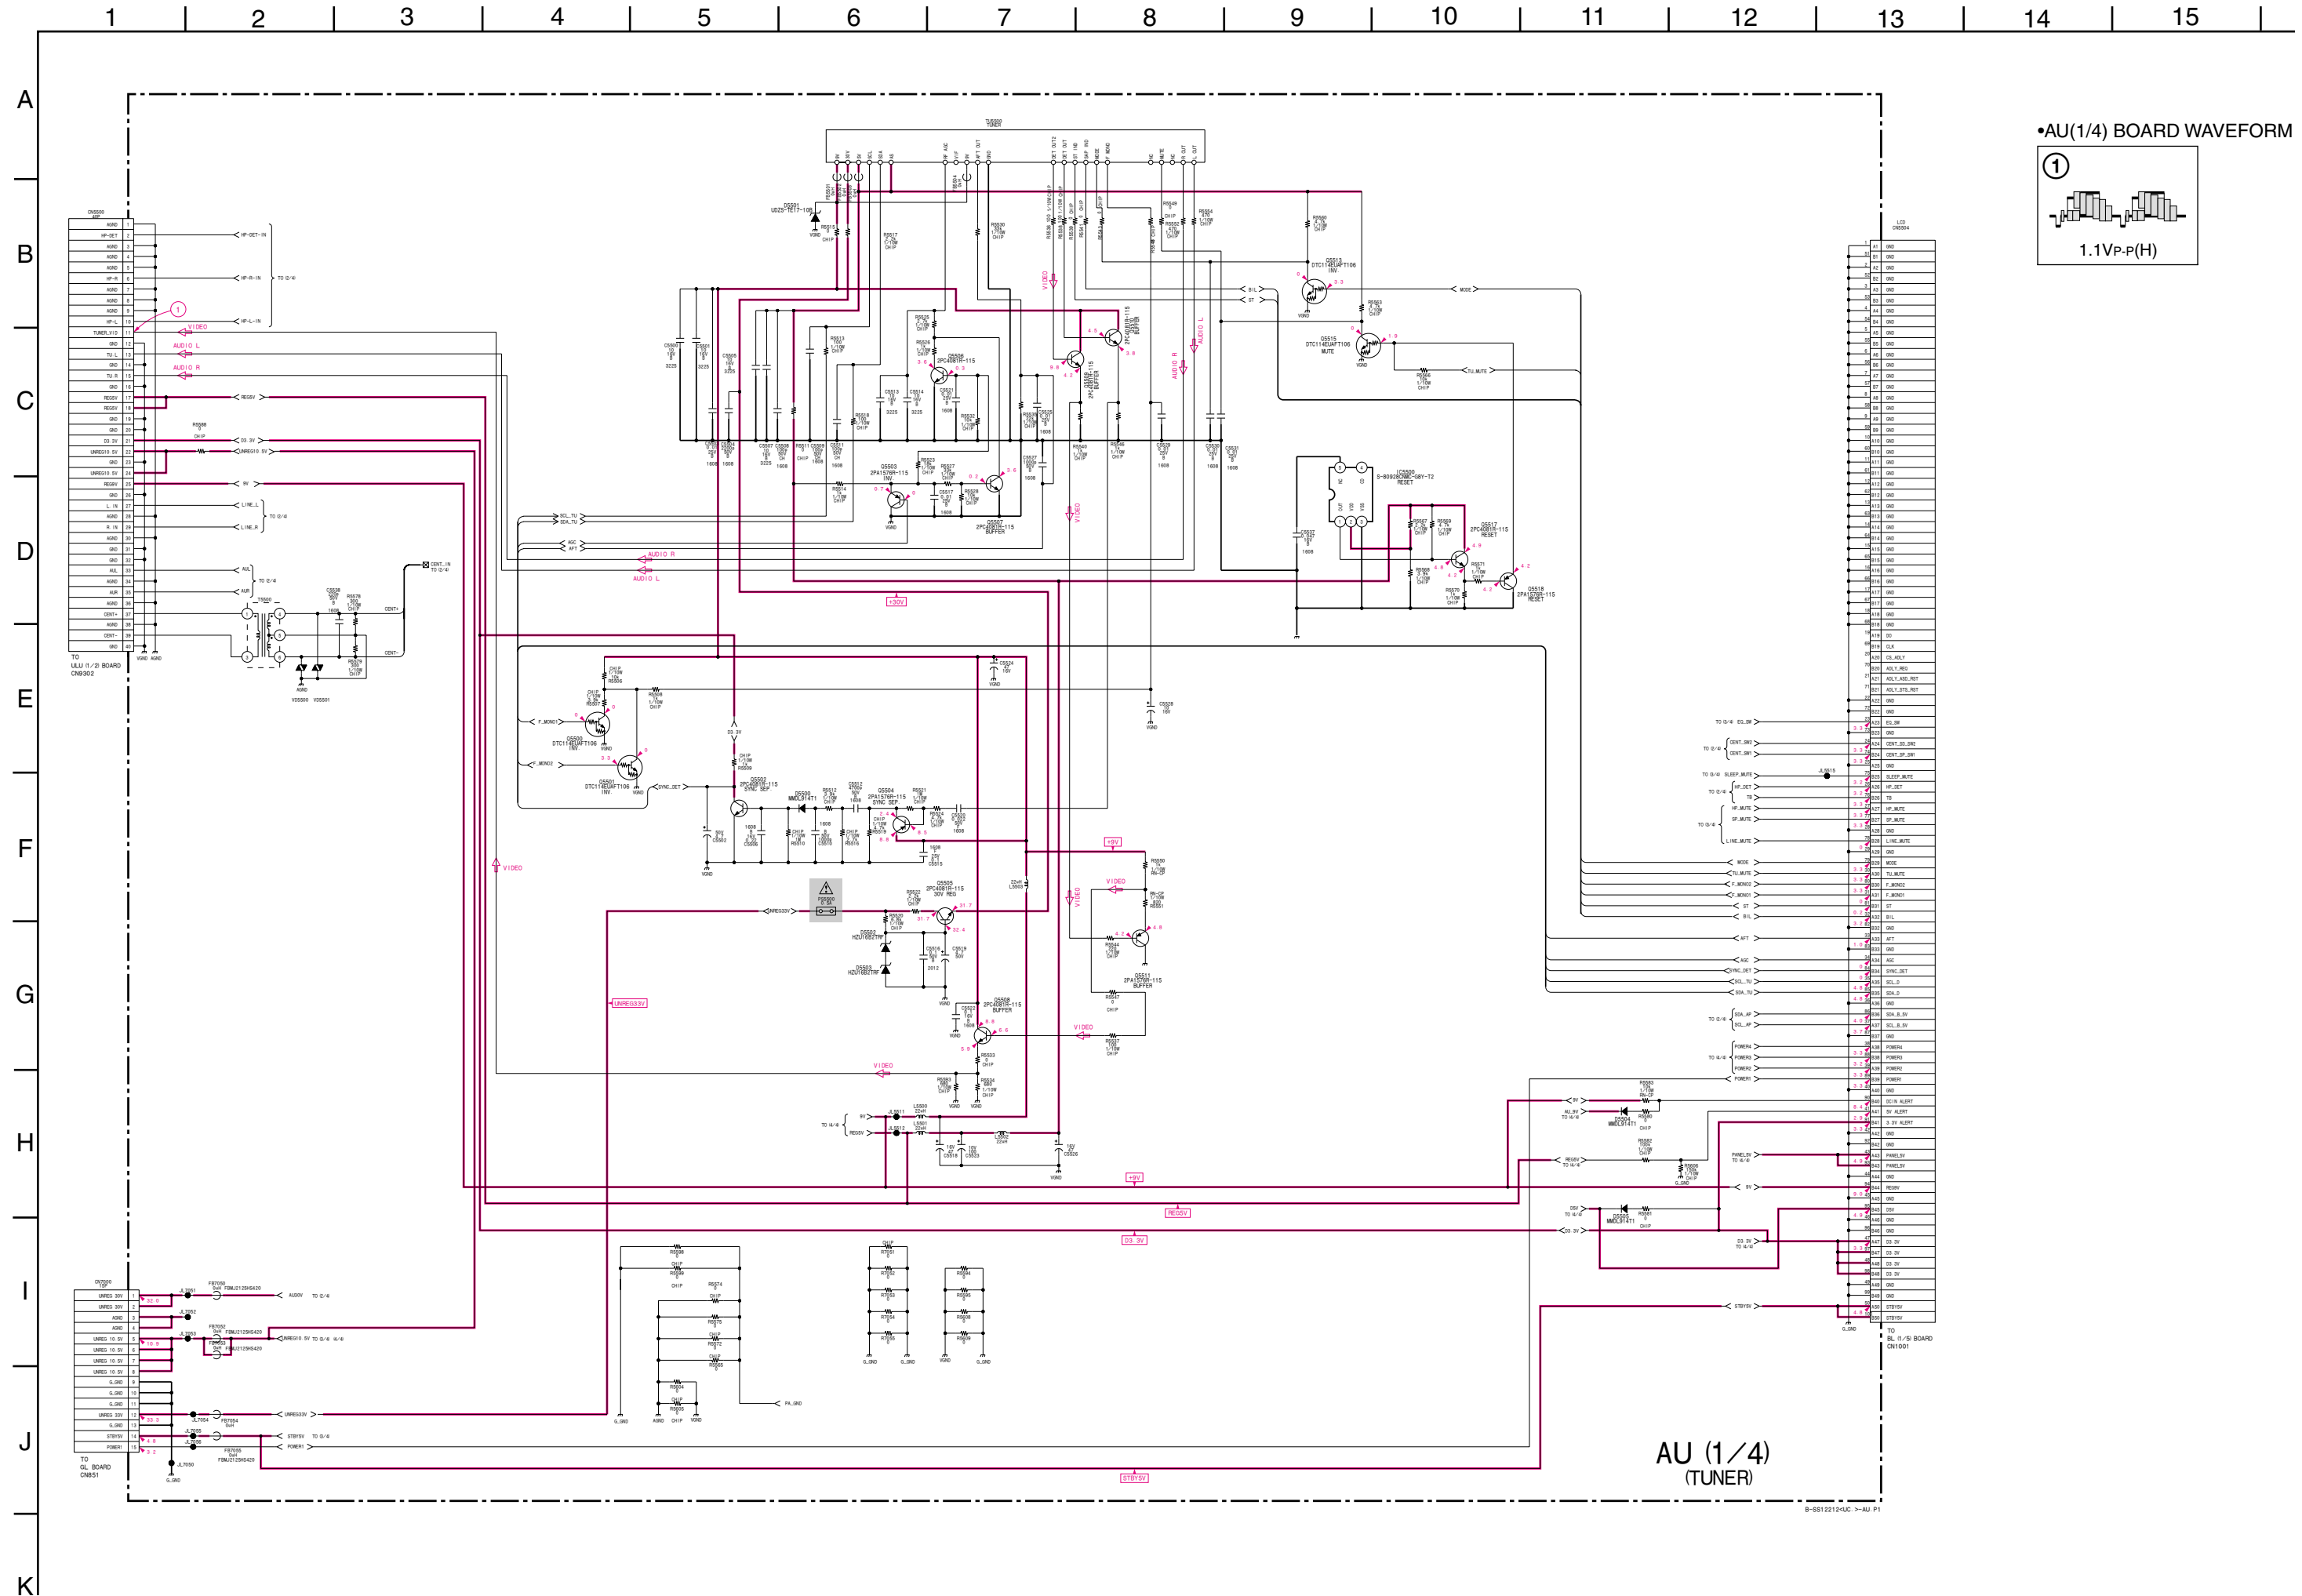




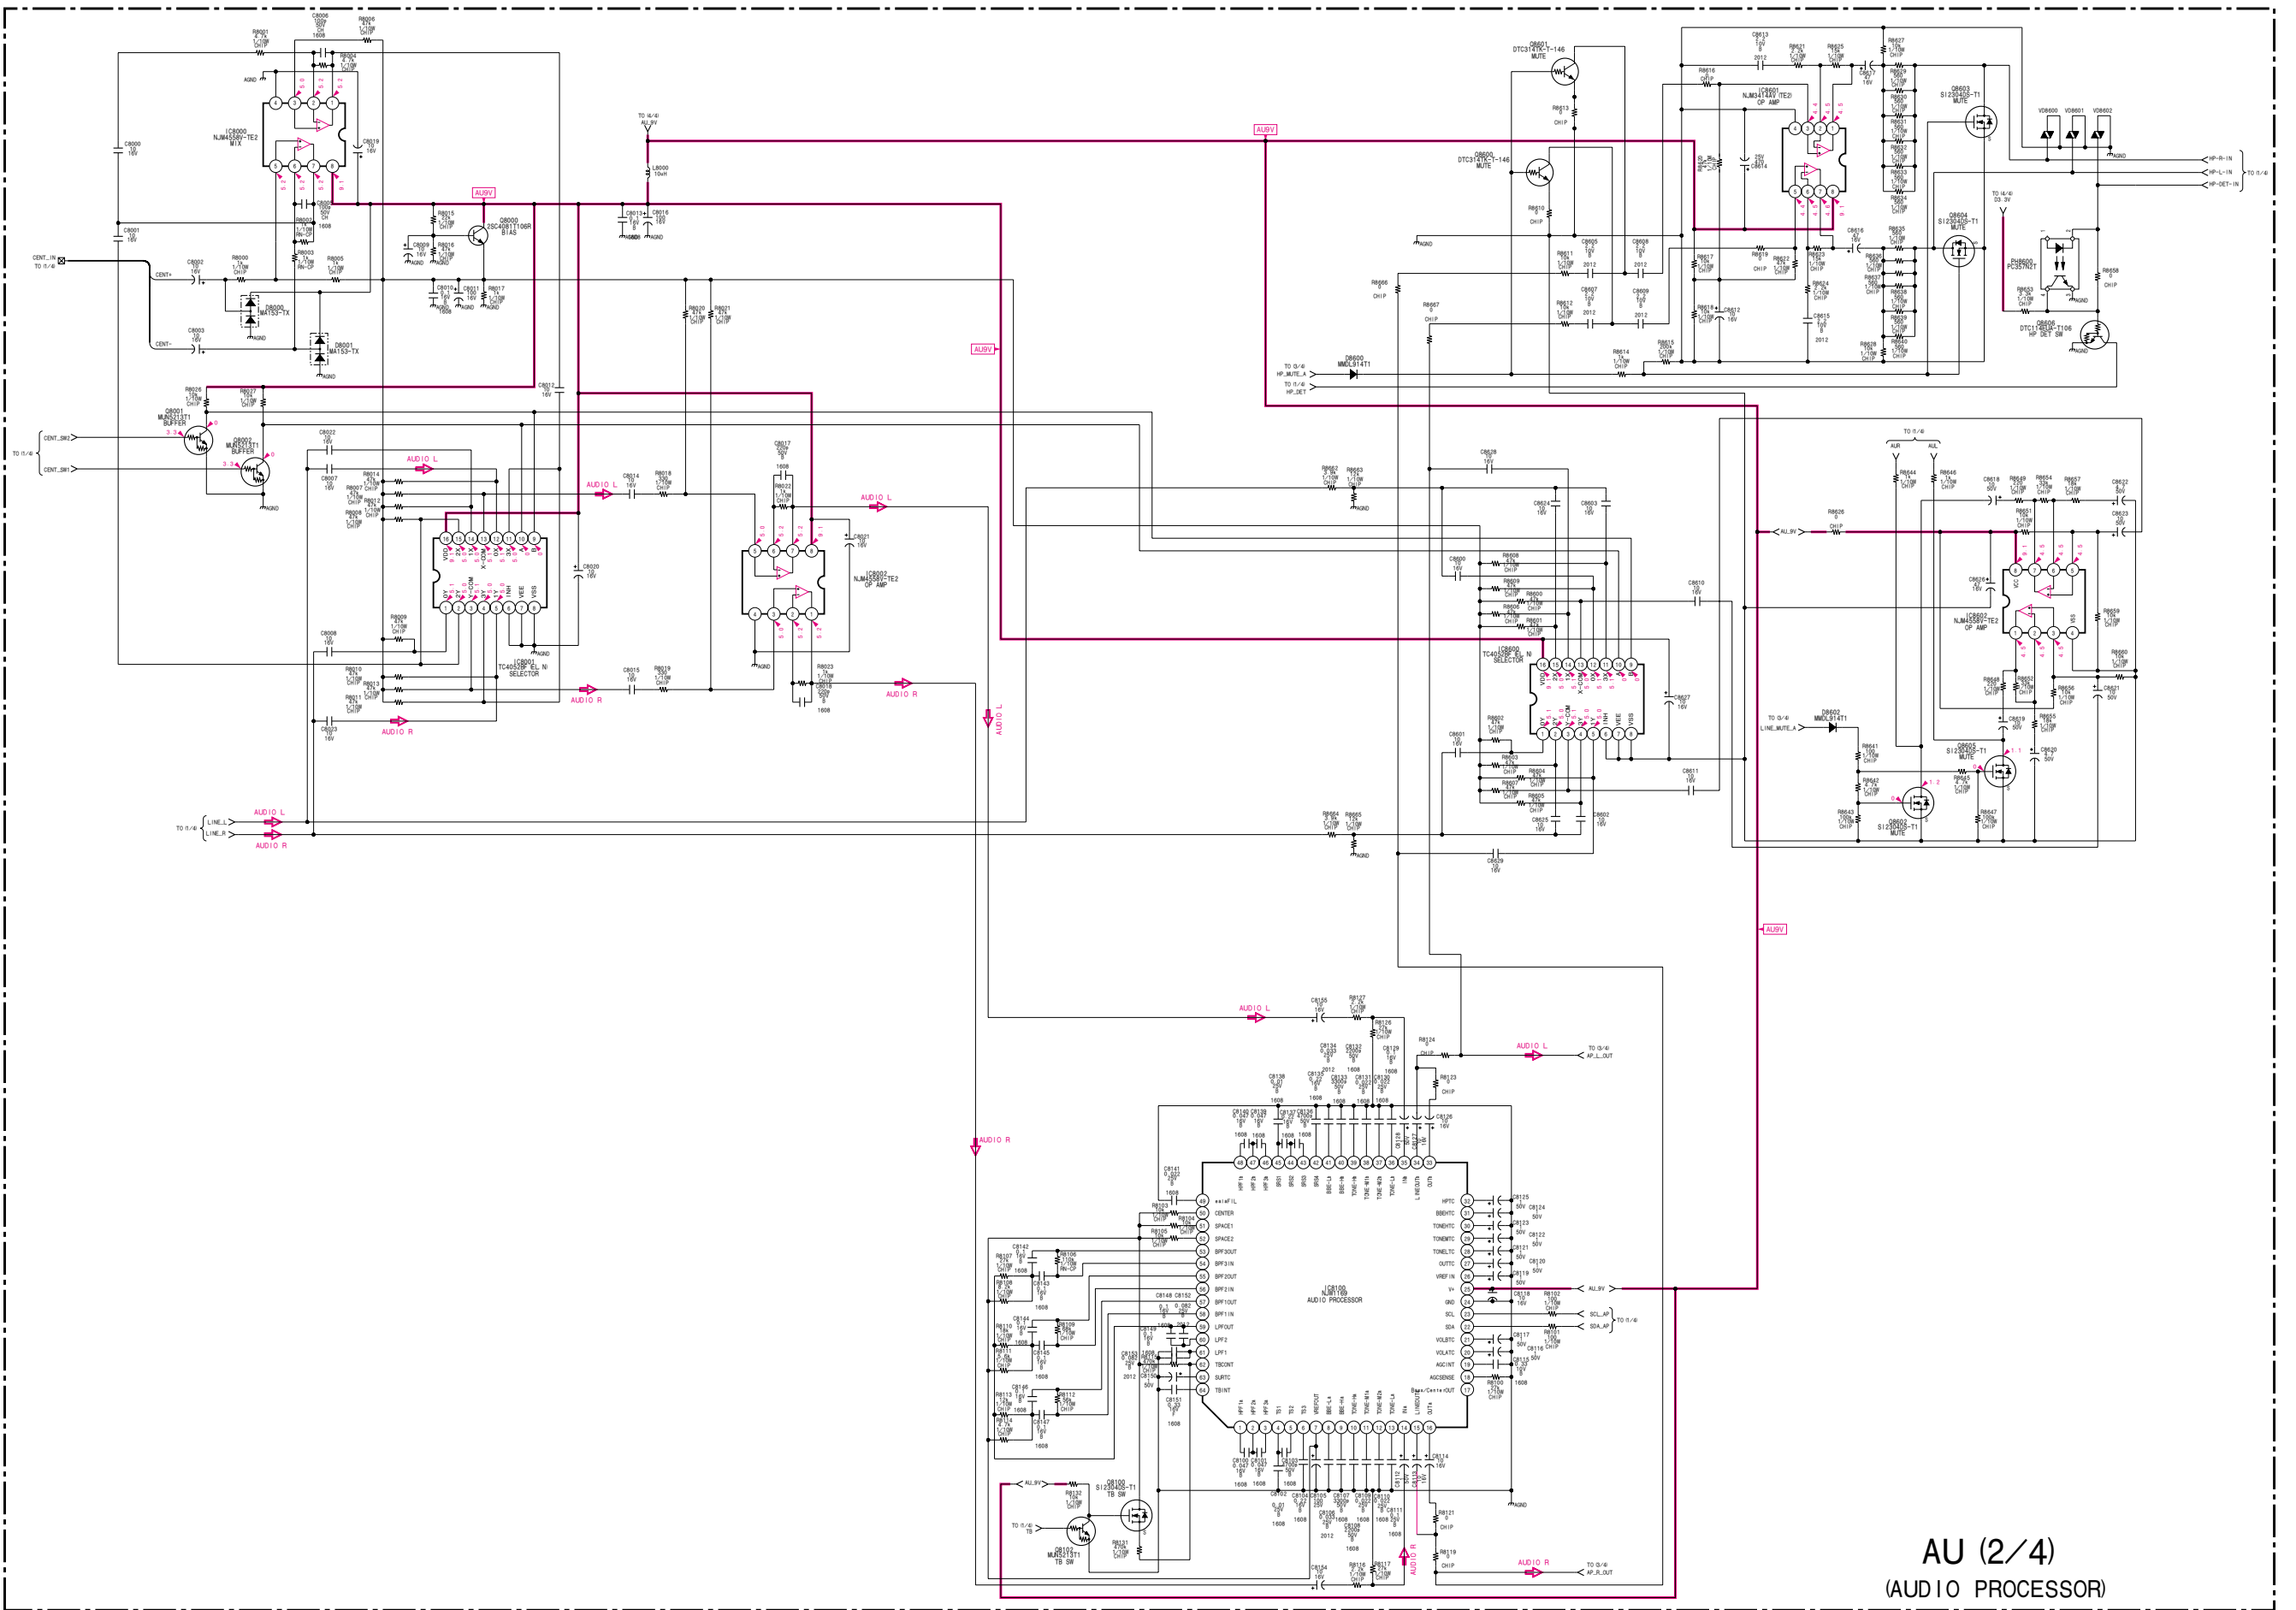


AU (2/4)  
AUDIO PROCESSOR

B-8512214UC -> AU -P2

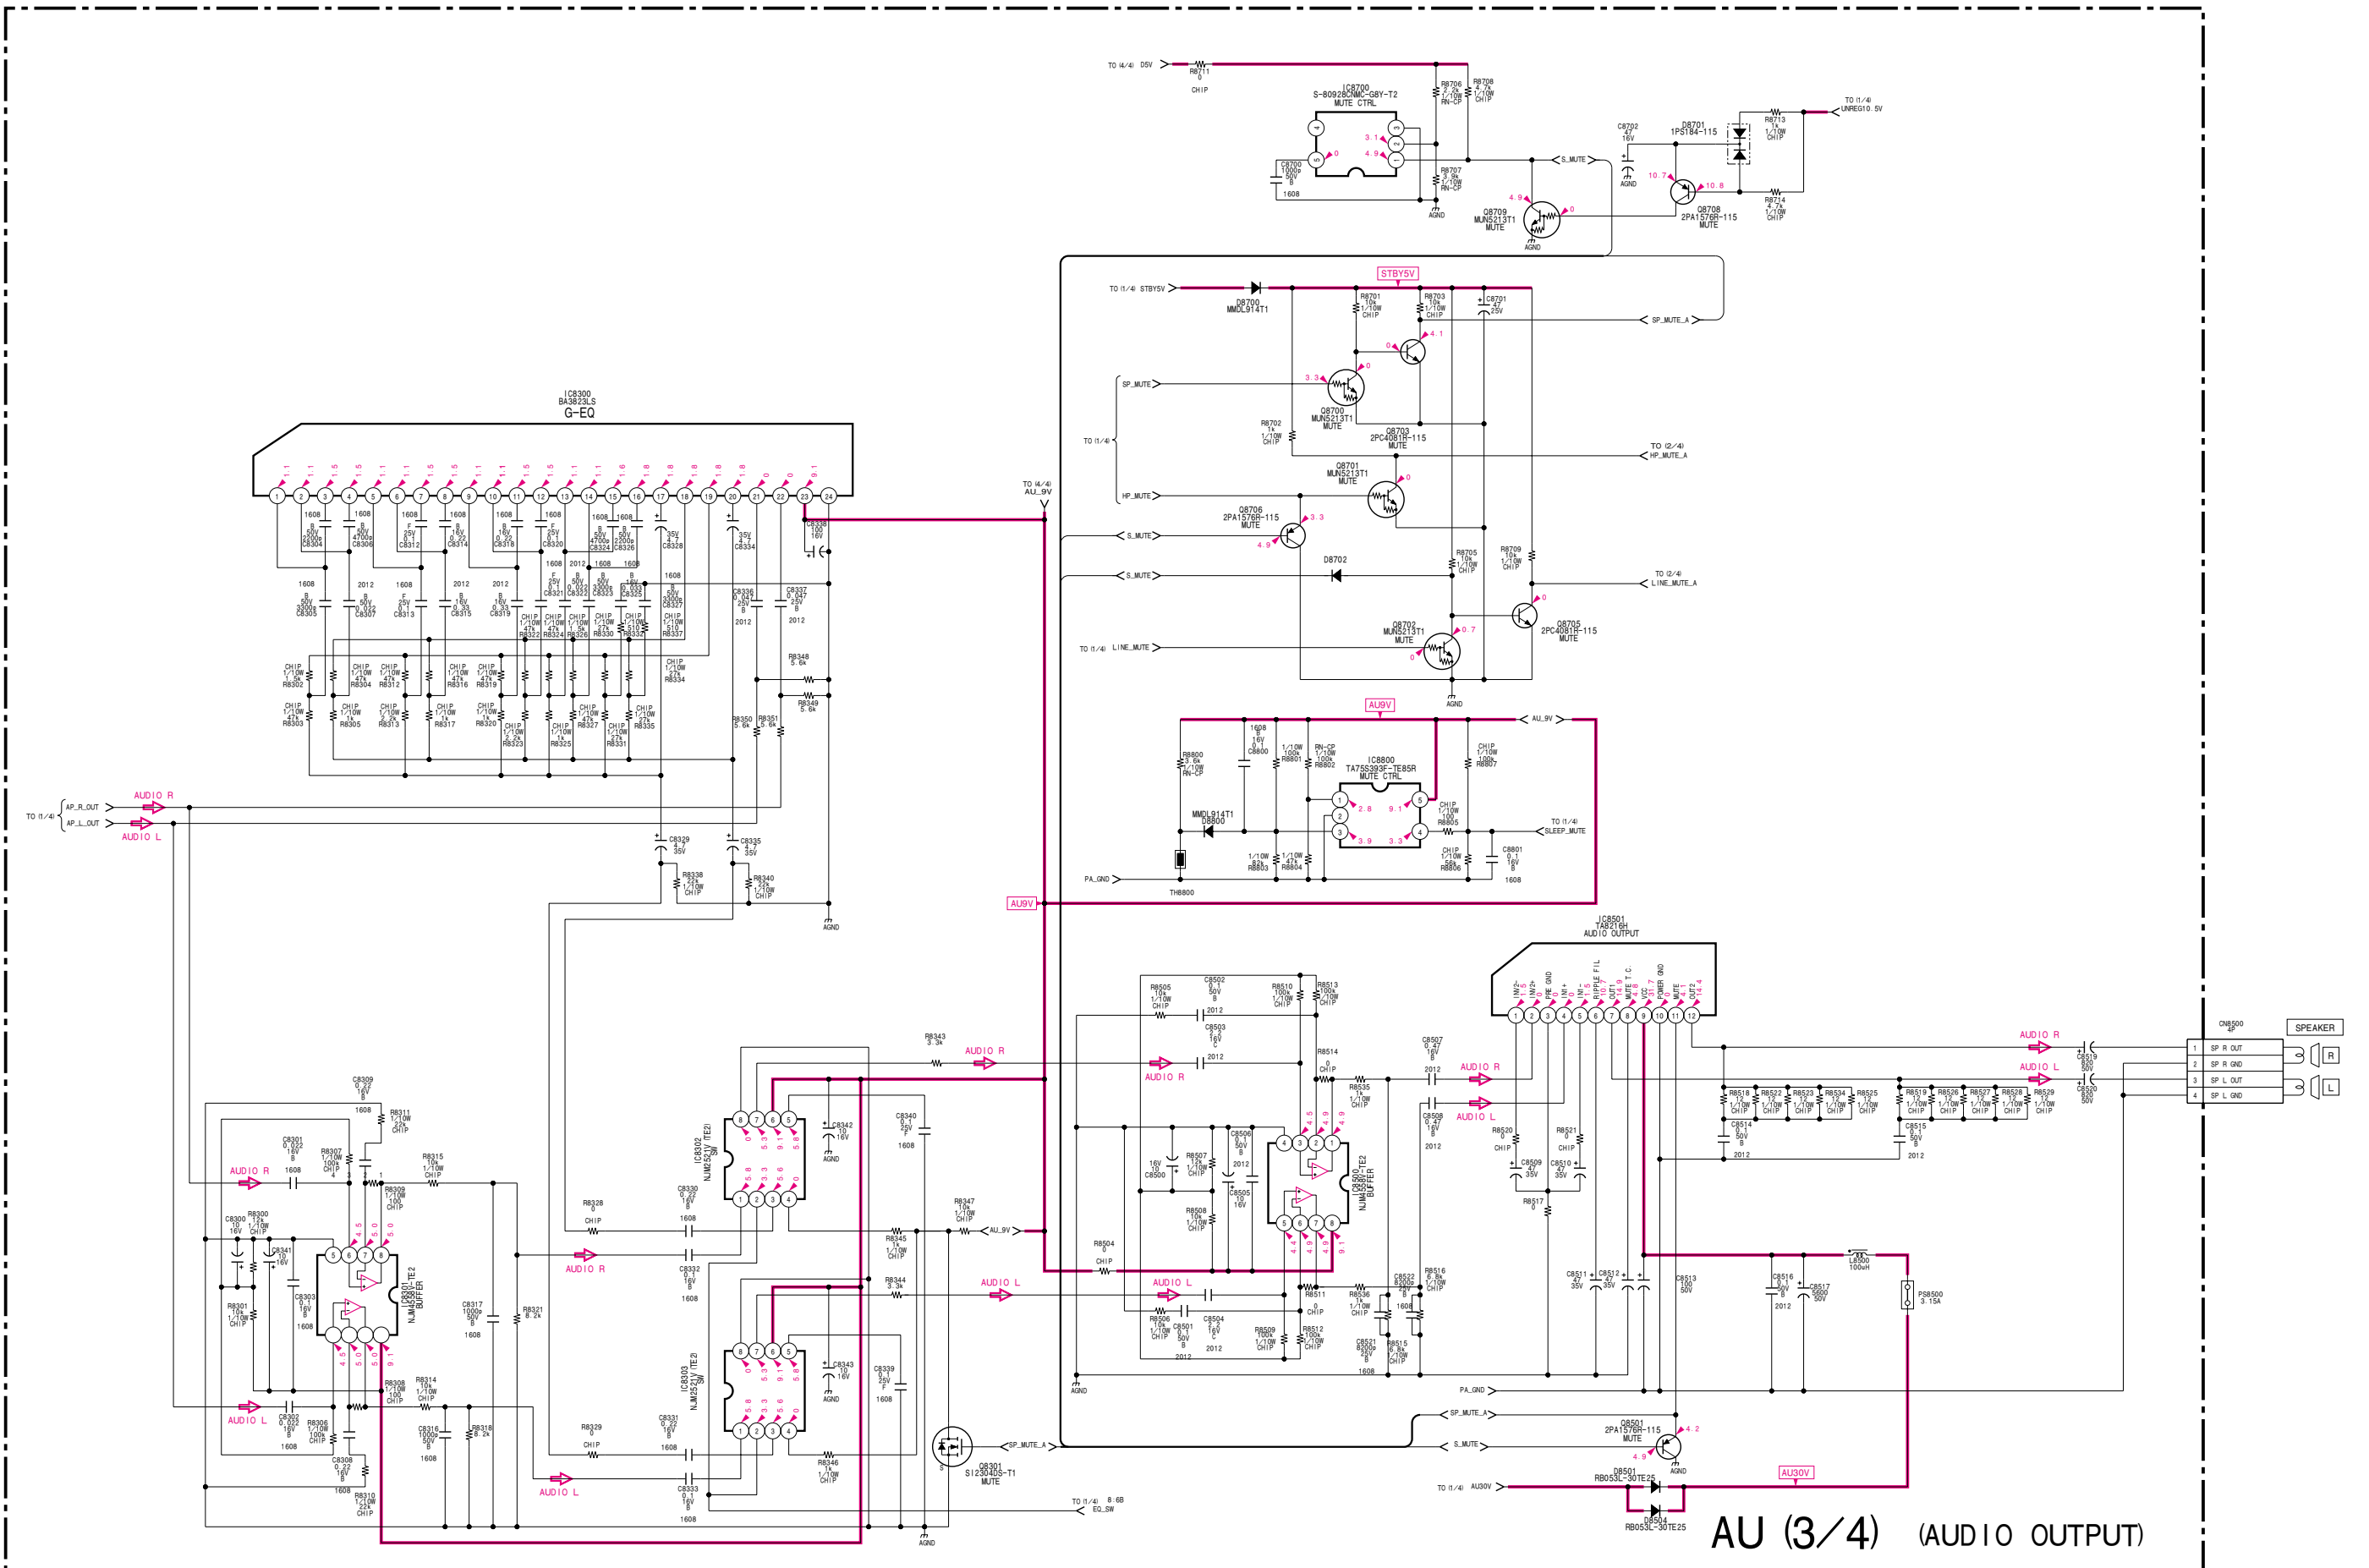

**AU (3/4) (AUDIO OUTPUT)**

B-SS12212-UC -> AU -P3

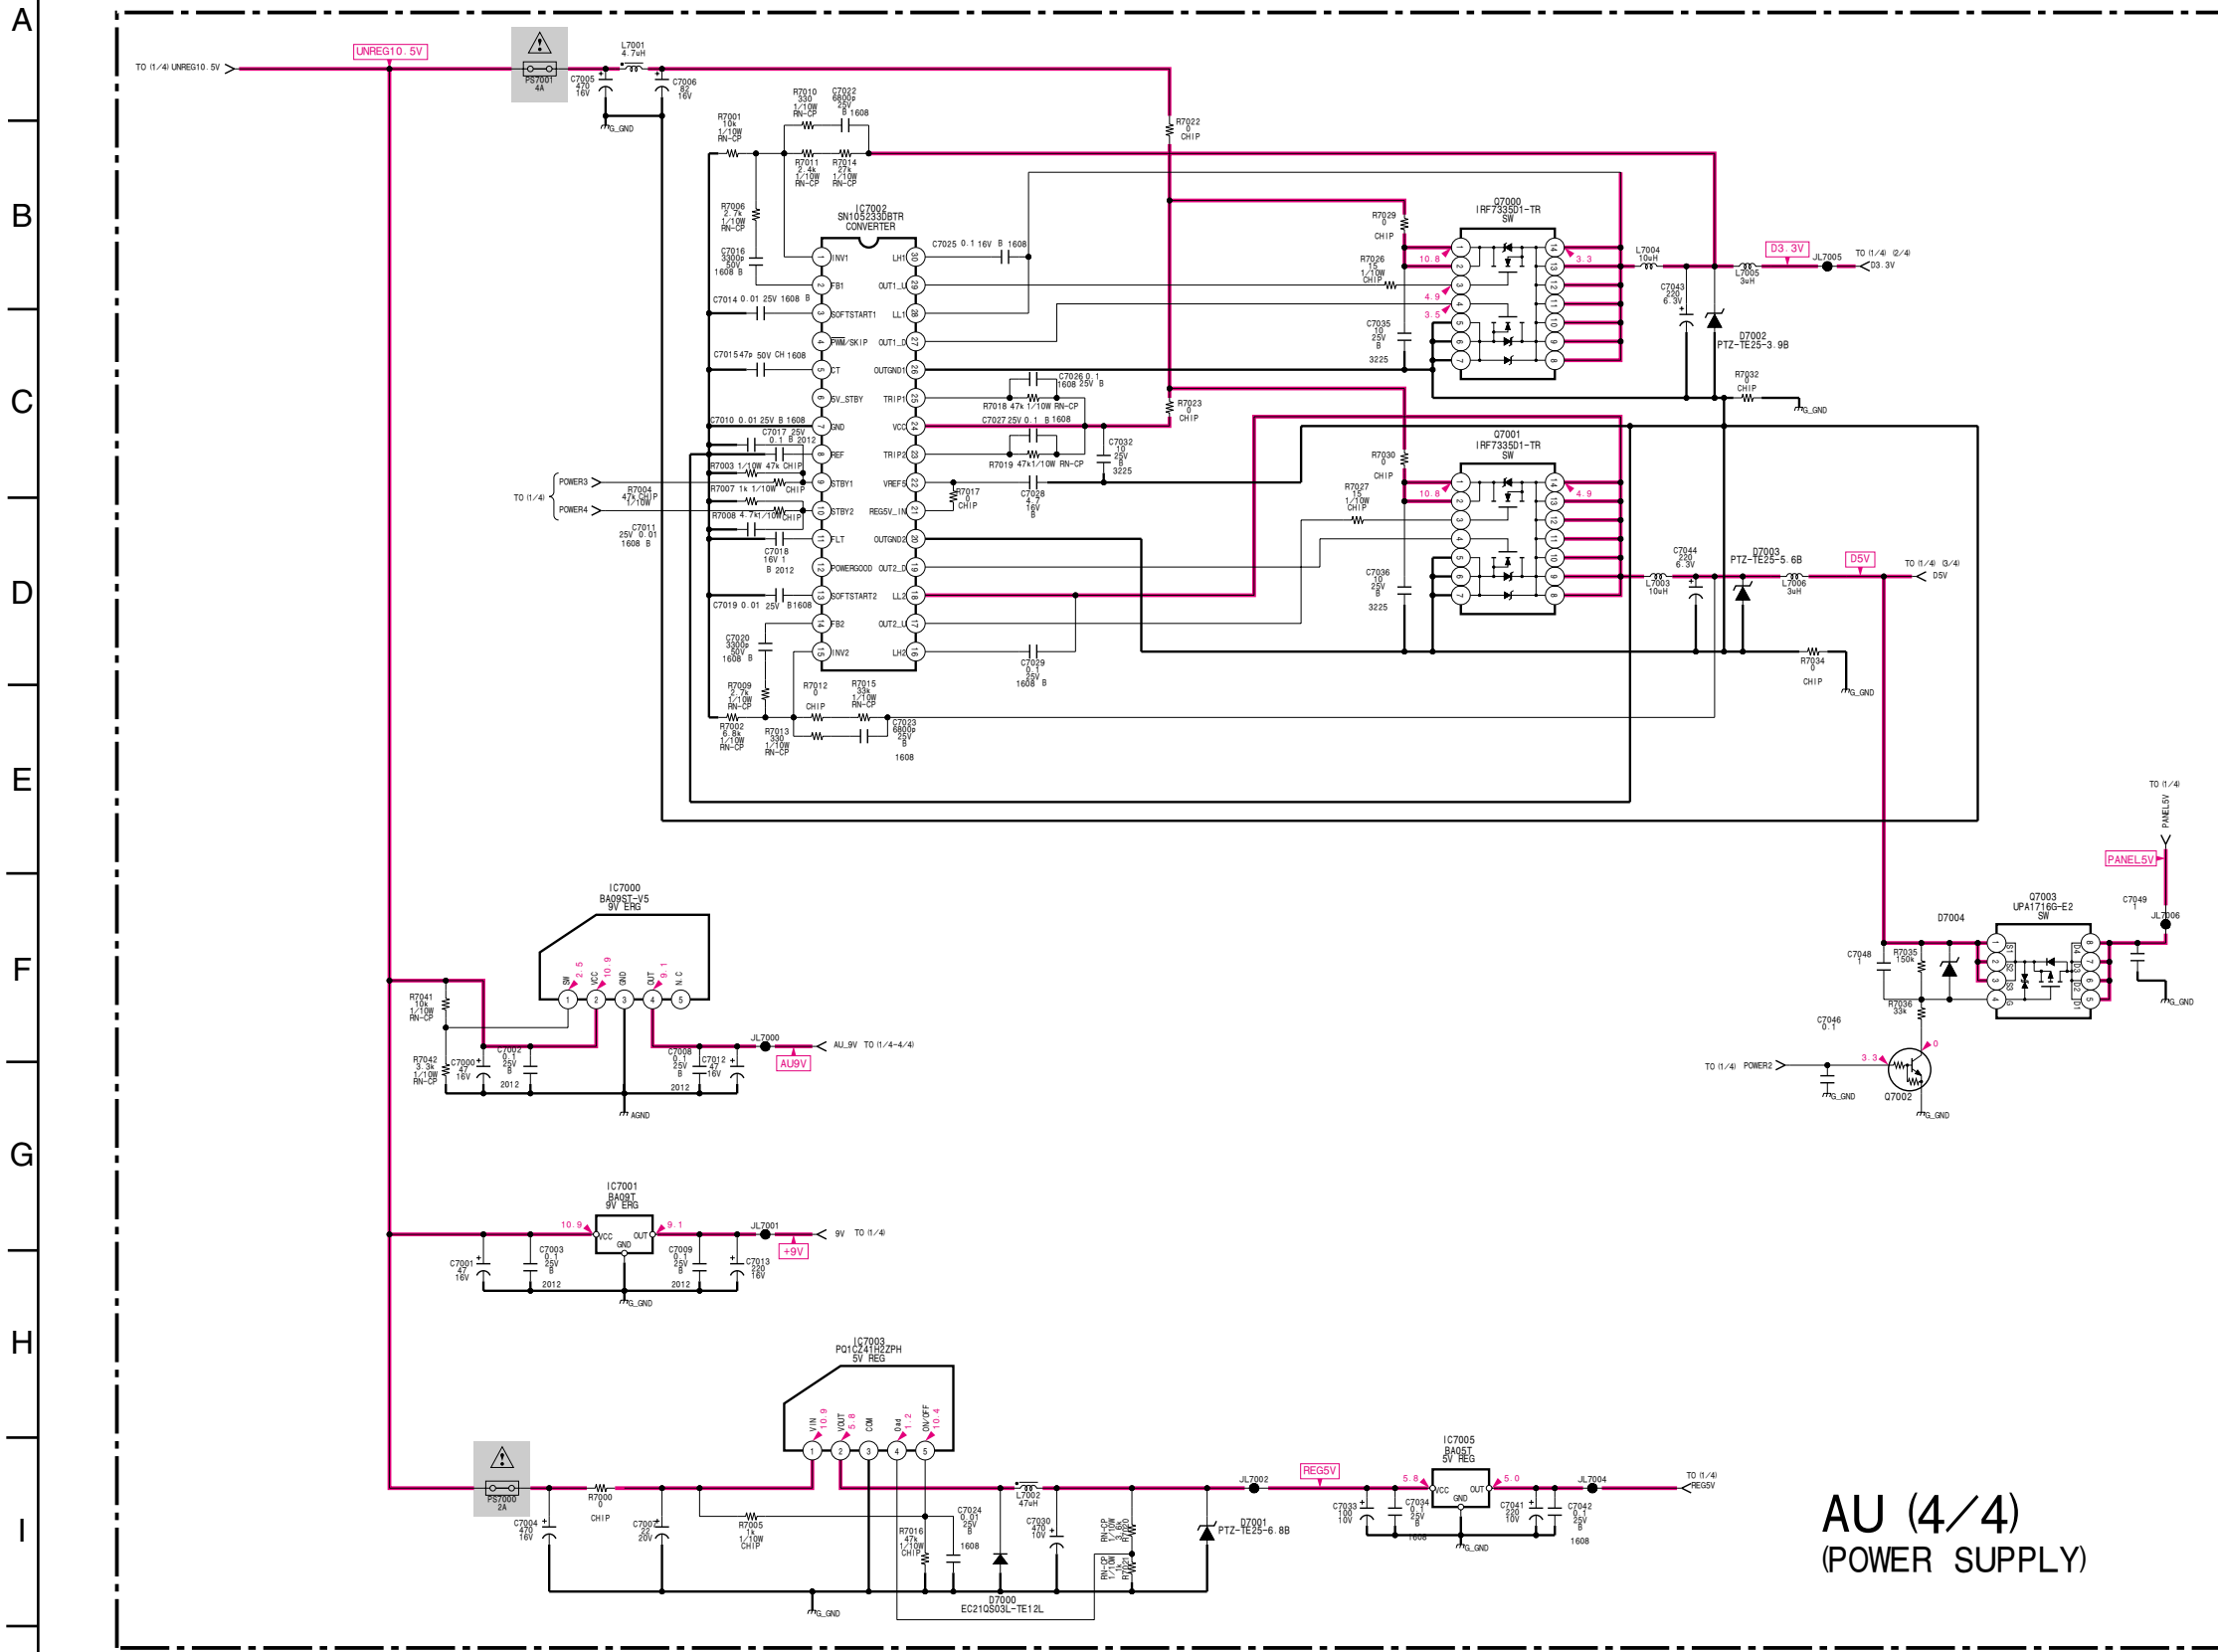


**AU (4/4)**  
**(POWER SUPPLY)**

B-SS12212-UC -> AU -P4


**AU**

[TUNER, AUDIO PROCESSOR, AUDIO OUTPUT, POWER SUPPLY]

— AU BOARD —

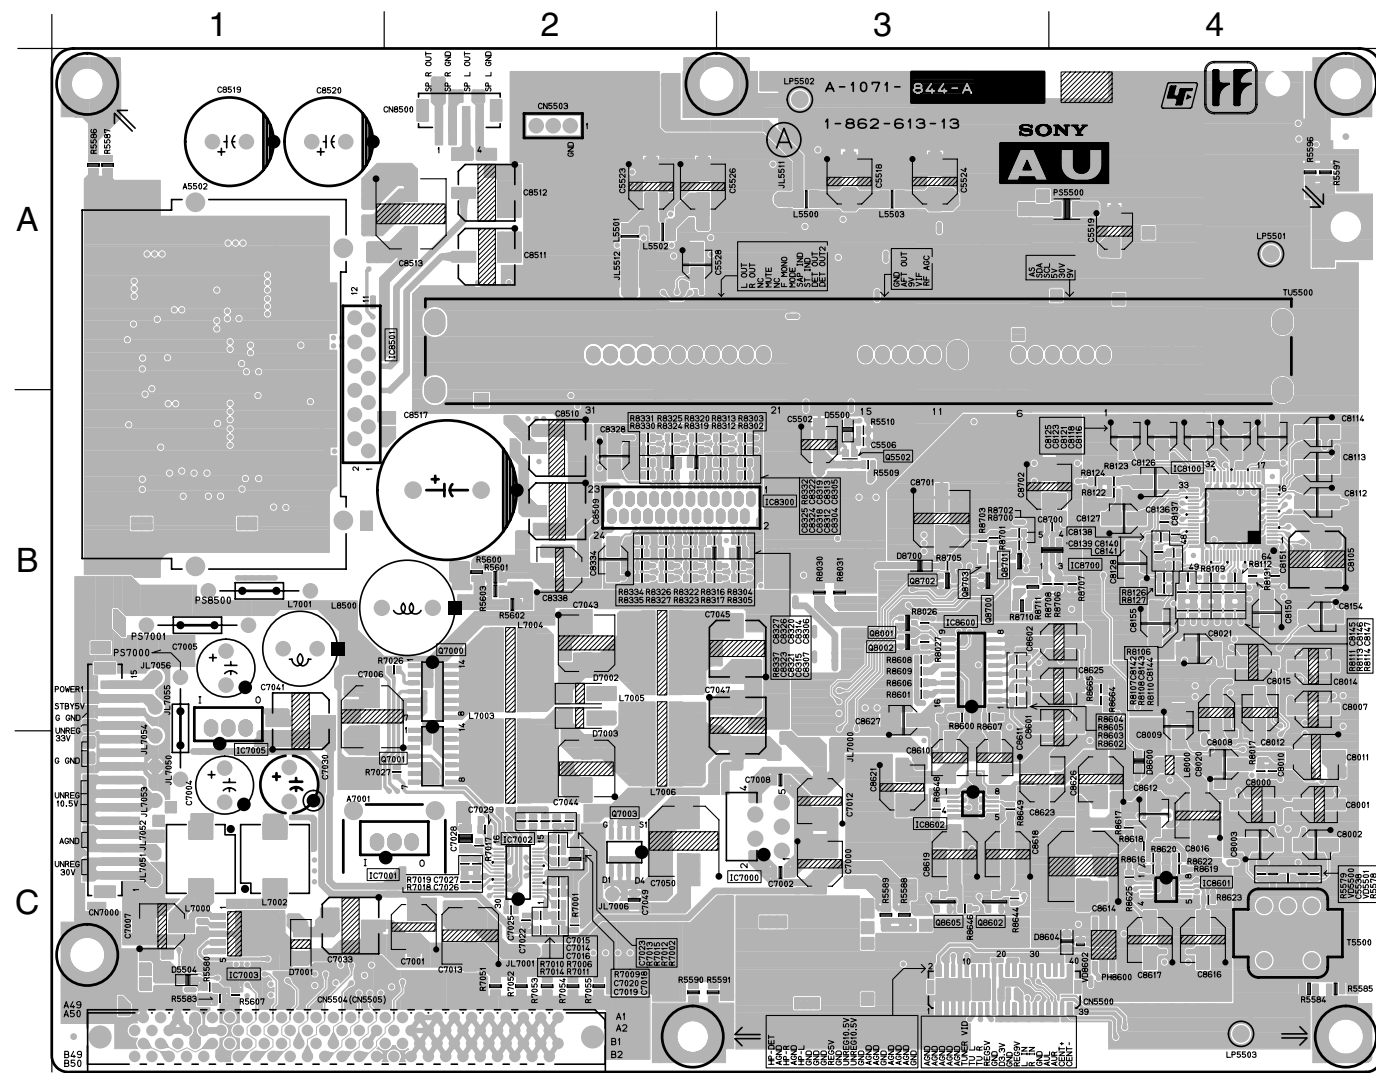

&lt;COMPONENT SIDE&gt;

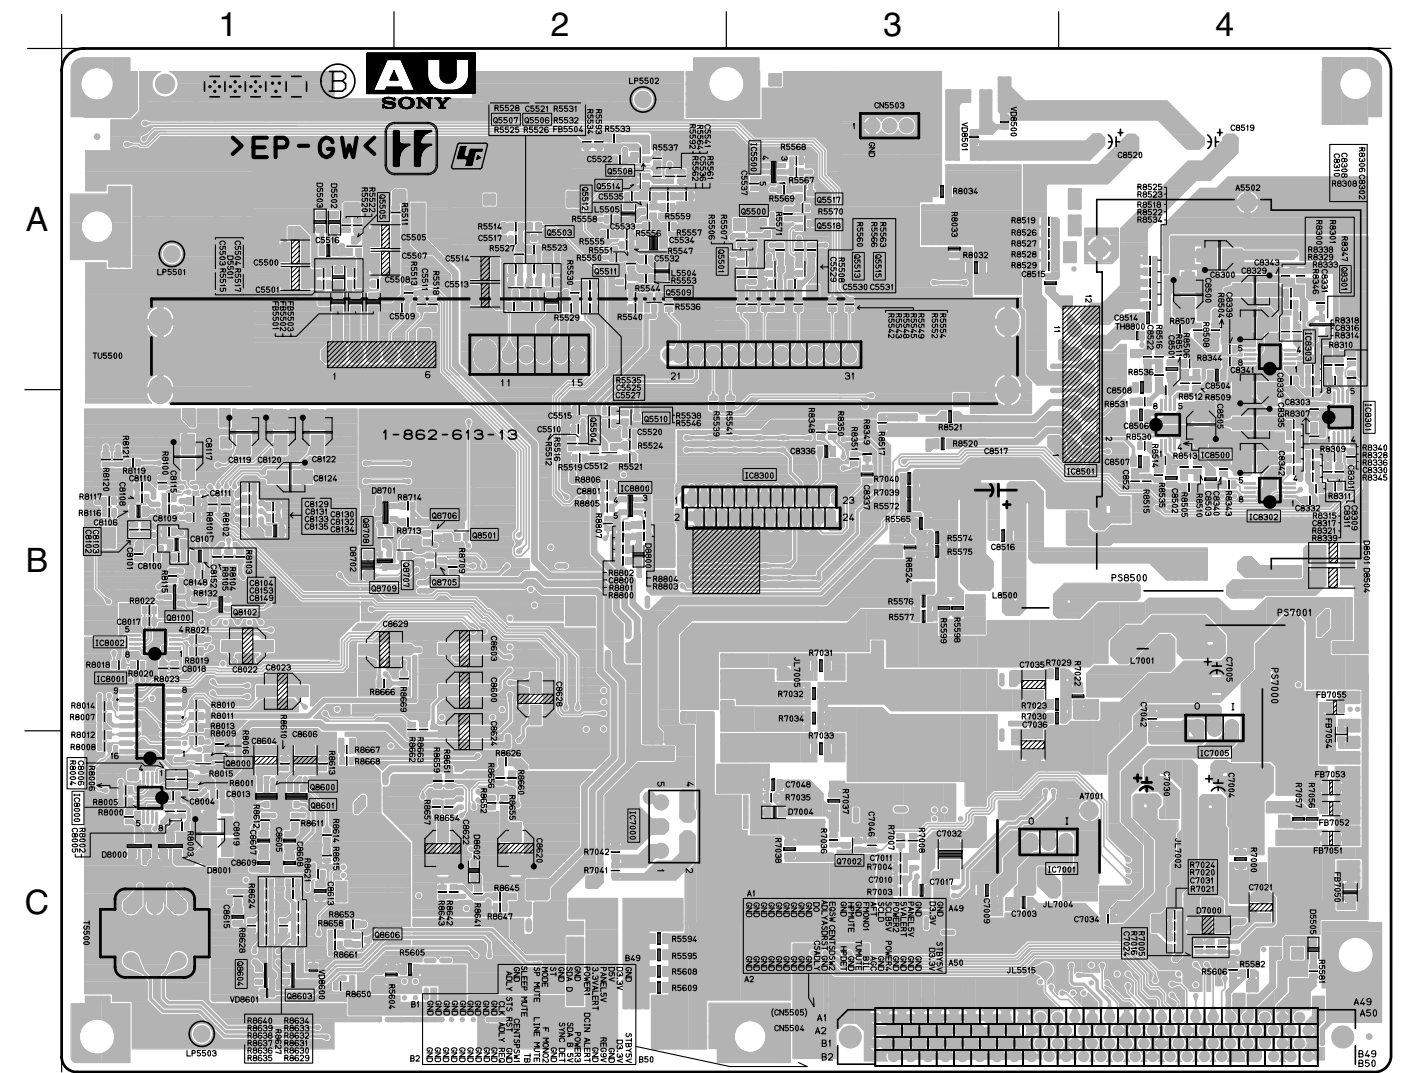


&lt;CONDUCTOR SIDE&gt;

## • AU BOARD SEMICONDUCTOR LOCATION


IC (Component Side) (Conductor Side)	IC8700 B-4		Q5518 A-3		Q8703 B-3		D8001 C-1	
	(Component Side)	(Conductor Side)	(Component Side)	(Conductor Side)	(Component Side)	(Conductor Side)	(Component Side)	(Conductor Side)
IC5500		A-3	Q7000 B-2		Q8705 B-2		D8501 B-4	
IC7000	C-3		Q7001 C-2		Q8706 B-2		D8504 B-4	
IC7002	C-2		Q7003 C-2		Q8708 B-1		D8600 C-4	
IC7003	C-1		Q8000		Q8709 B-1		D8602 C-2	
IC7005	B-1		Q8001 B-3				D8700 B-3	
IC8000		C-1	Q8002 B-3				D8701 B-1	
IC8001	B-1		Q8100				D8702 B-1	
IC8002	B-1		Q8102				D8800 B-2	
IC8100	B-4		Q8301		D5500 B-3			
IC8300	B-2		Q8501		D5501 A-1			
IC8301	B-4		Q8600		D5502 A-1			
IC8302	B-4		Q8601		D5503 A-1			
IC8303	A-4		Q8602 C-3		D5504 C-1			
IC8500	B-4		Q8603 C-1		D5505 C-4			
IC8501	A-1		Q8604 C-1		D7000 C-4			
IC8600	B-3		Q8605 C-3		D7001 C-1			
IC8601	C-4		Q8606 C-1		D7002 B-2			
IC8602	C-3		Q8700 B-3		D7003 B-2			
			Q8701 B-3		D7004 C-2			
			Q8702 B-3		D8000 C-1			

\*: Refer to Terminal name of semiconductors in silk screen printed circuit (see page 3-7)

(2) Schematic Diagrams of BL Board

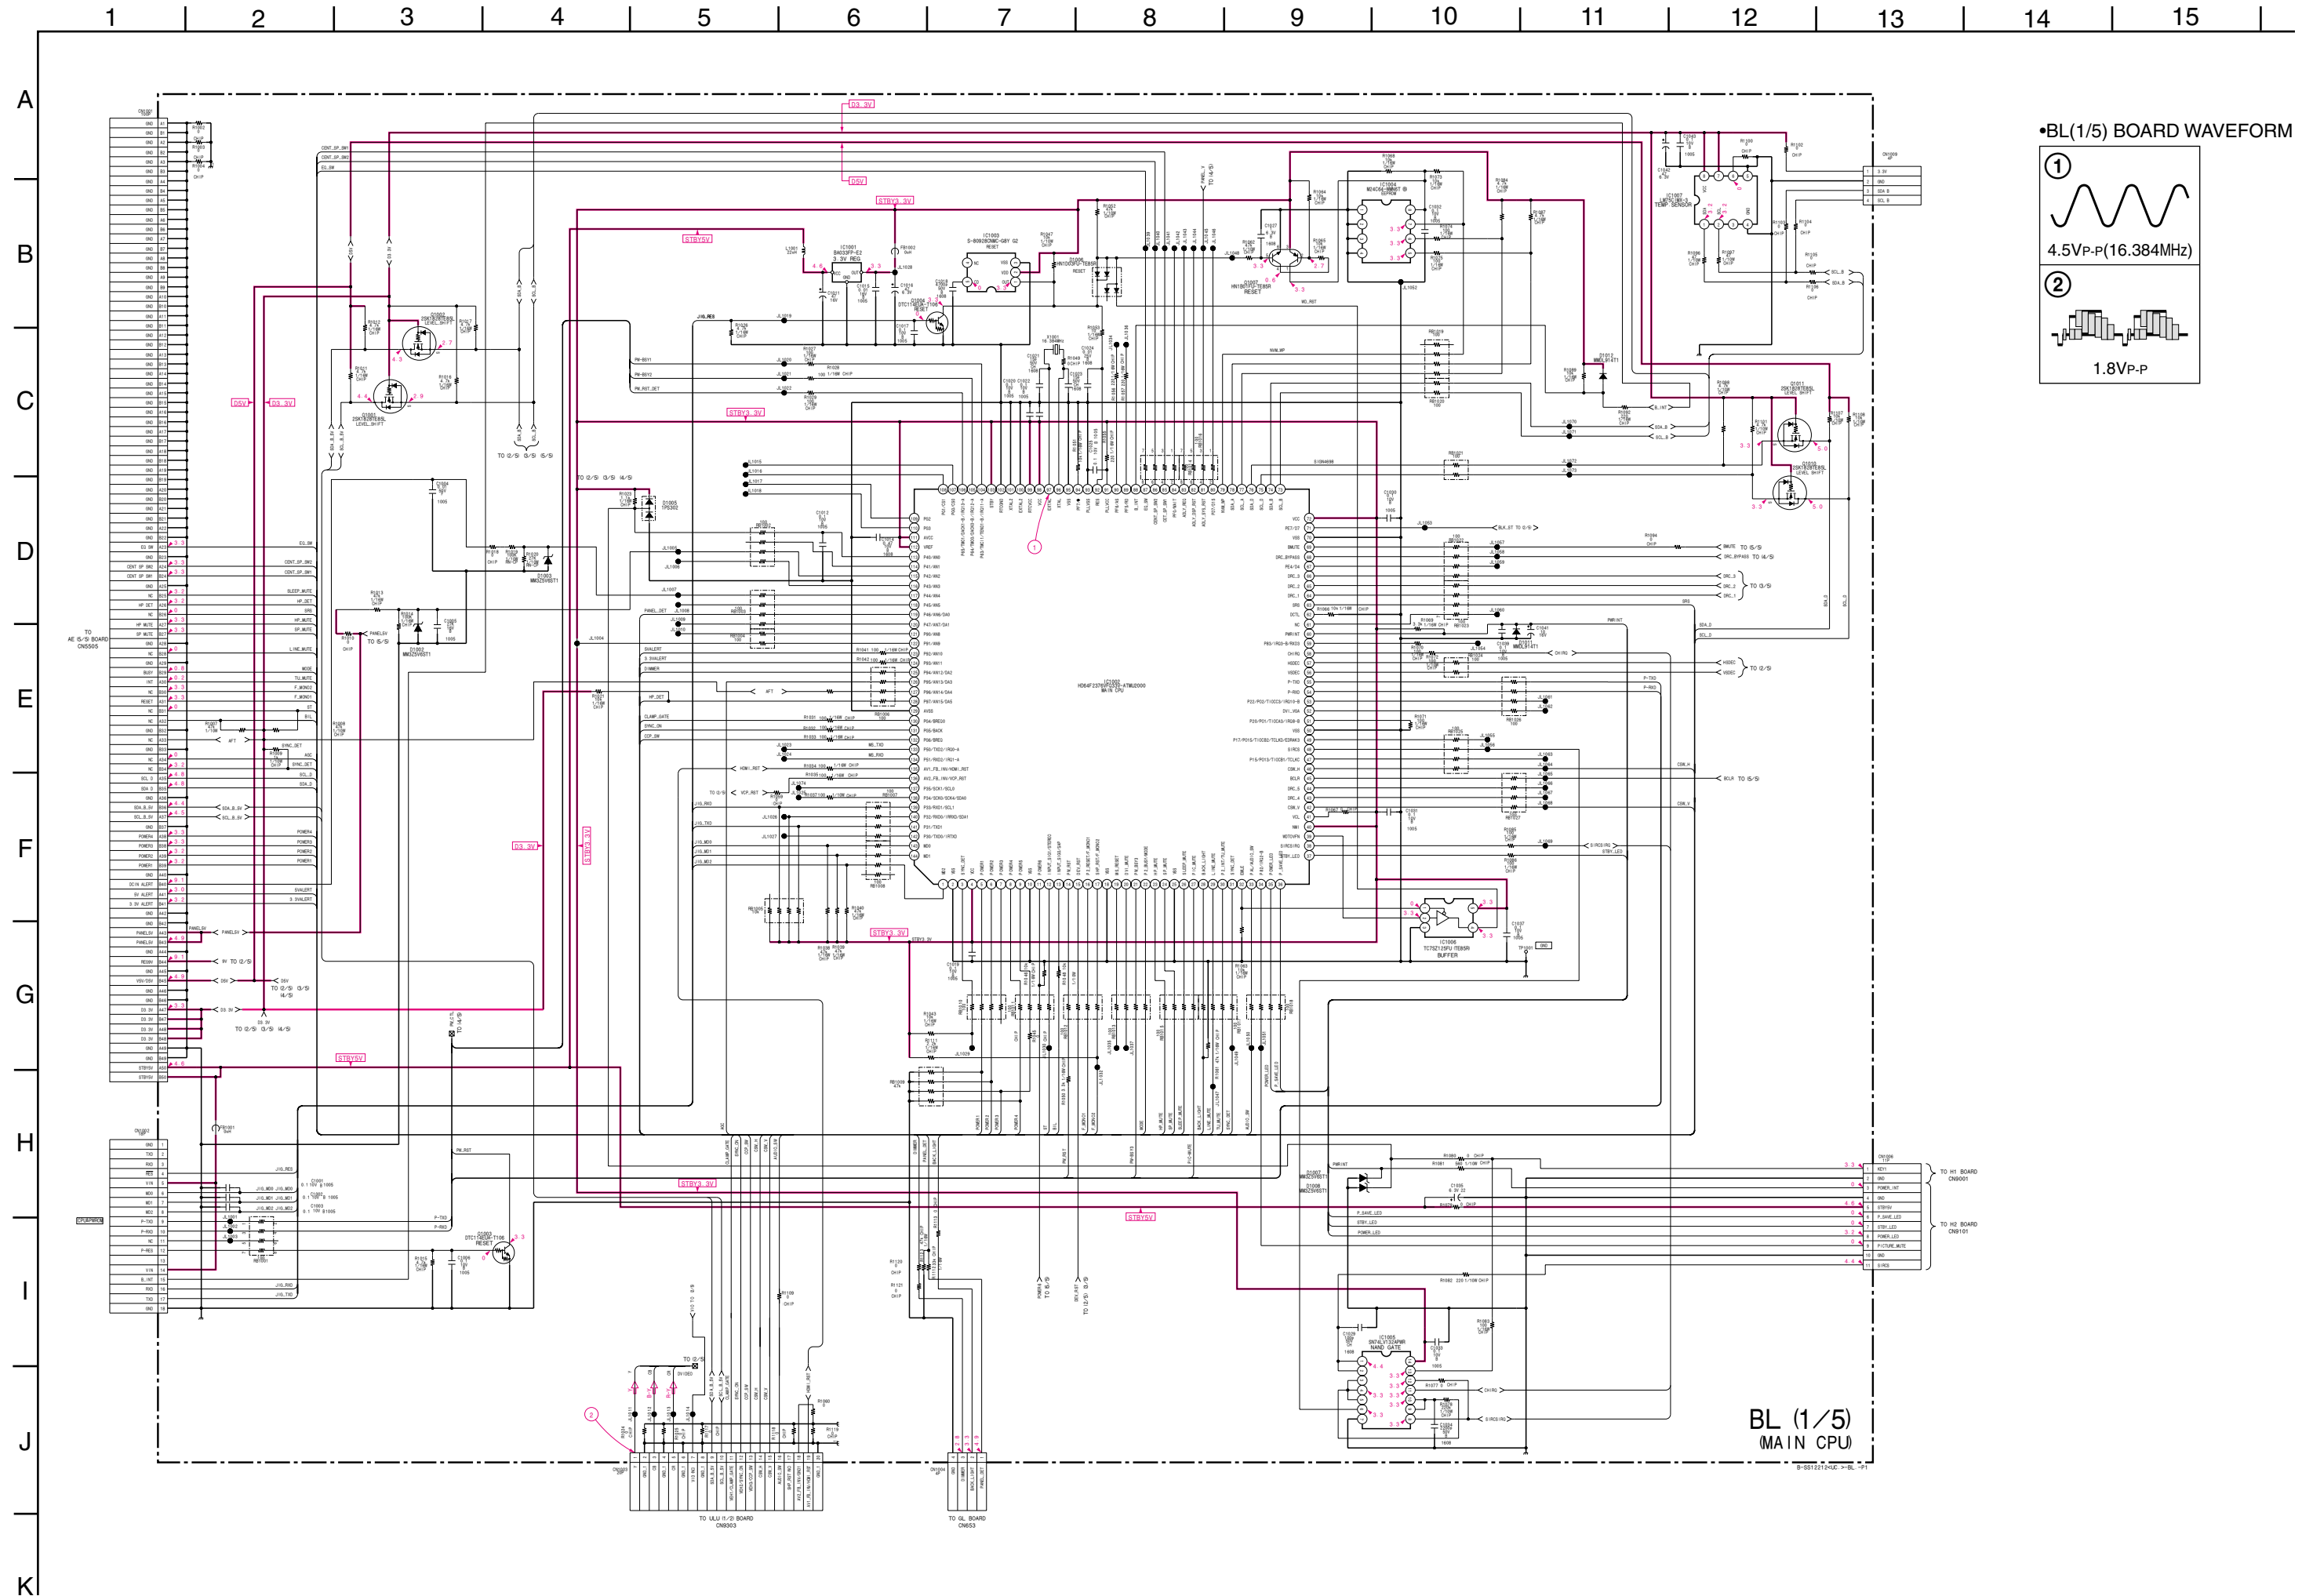




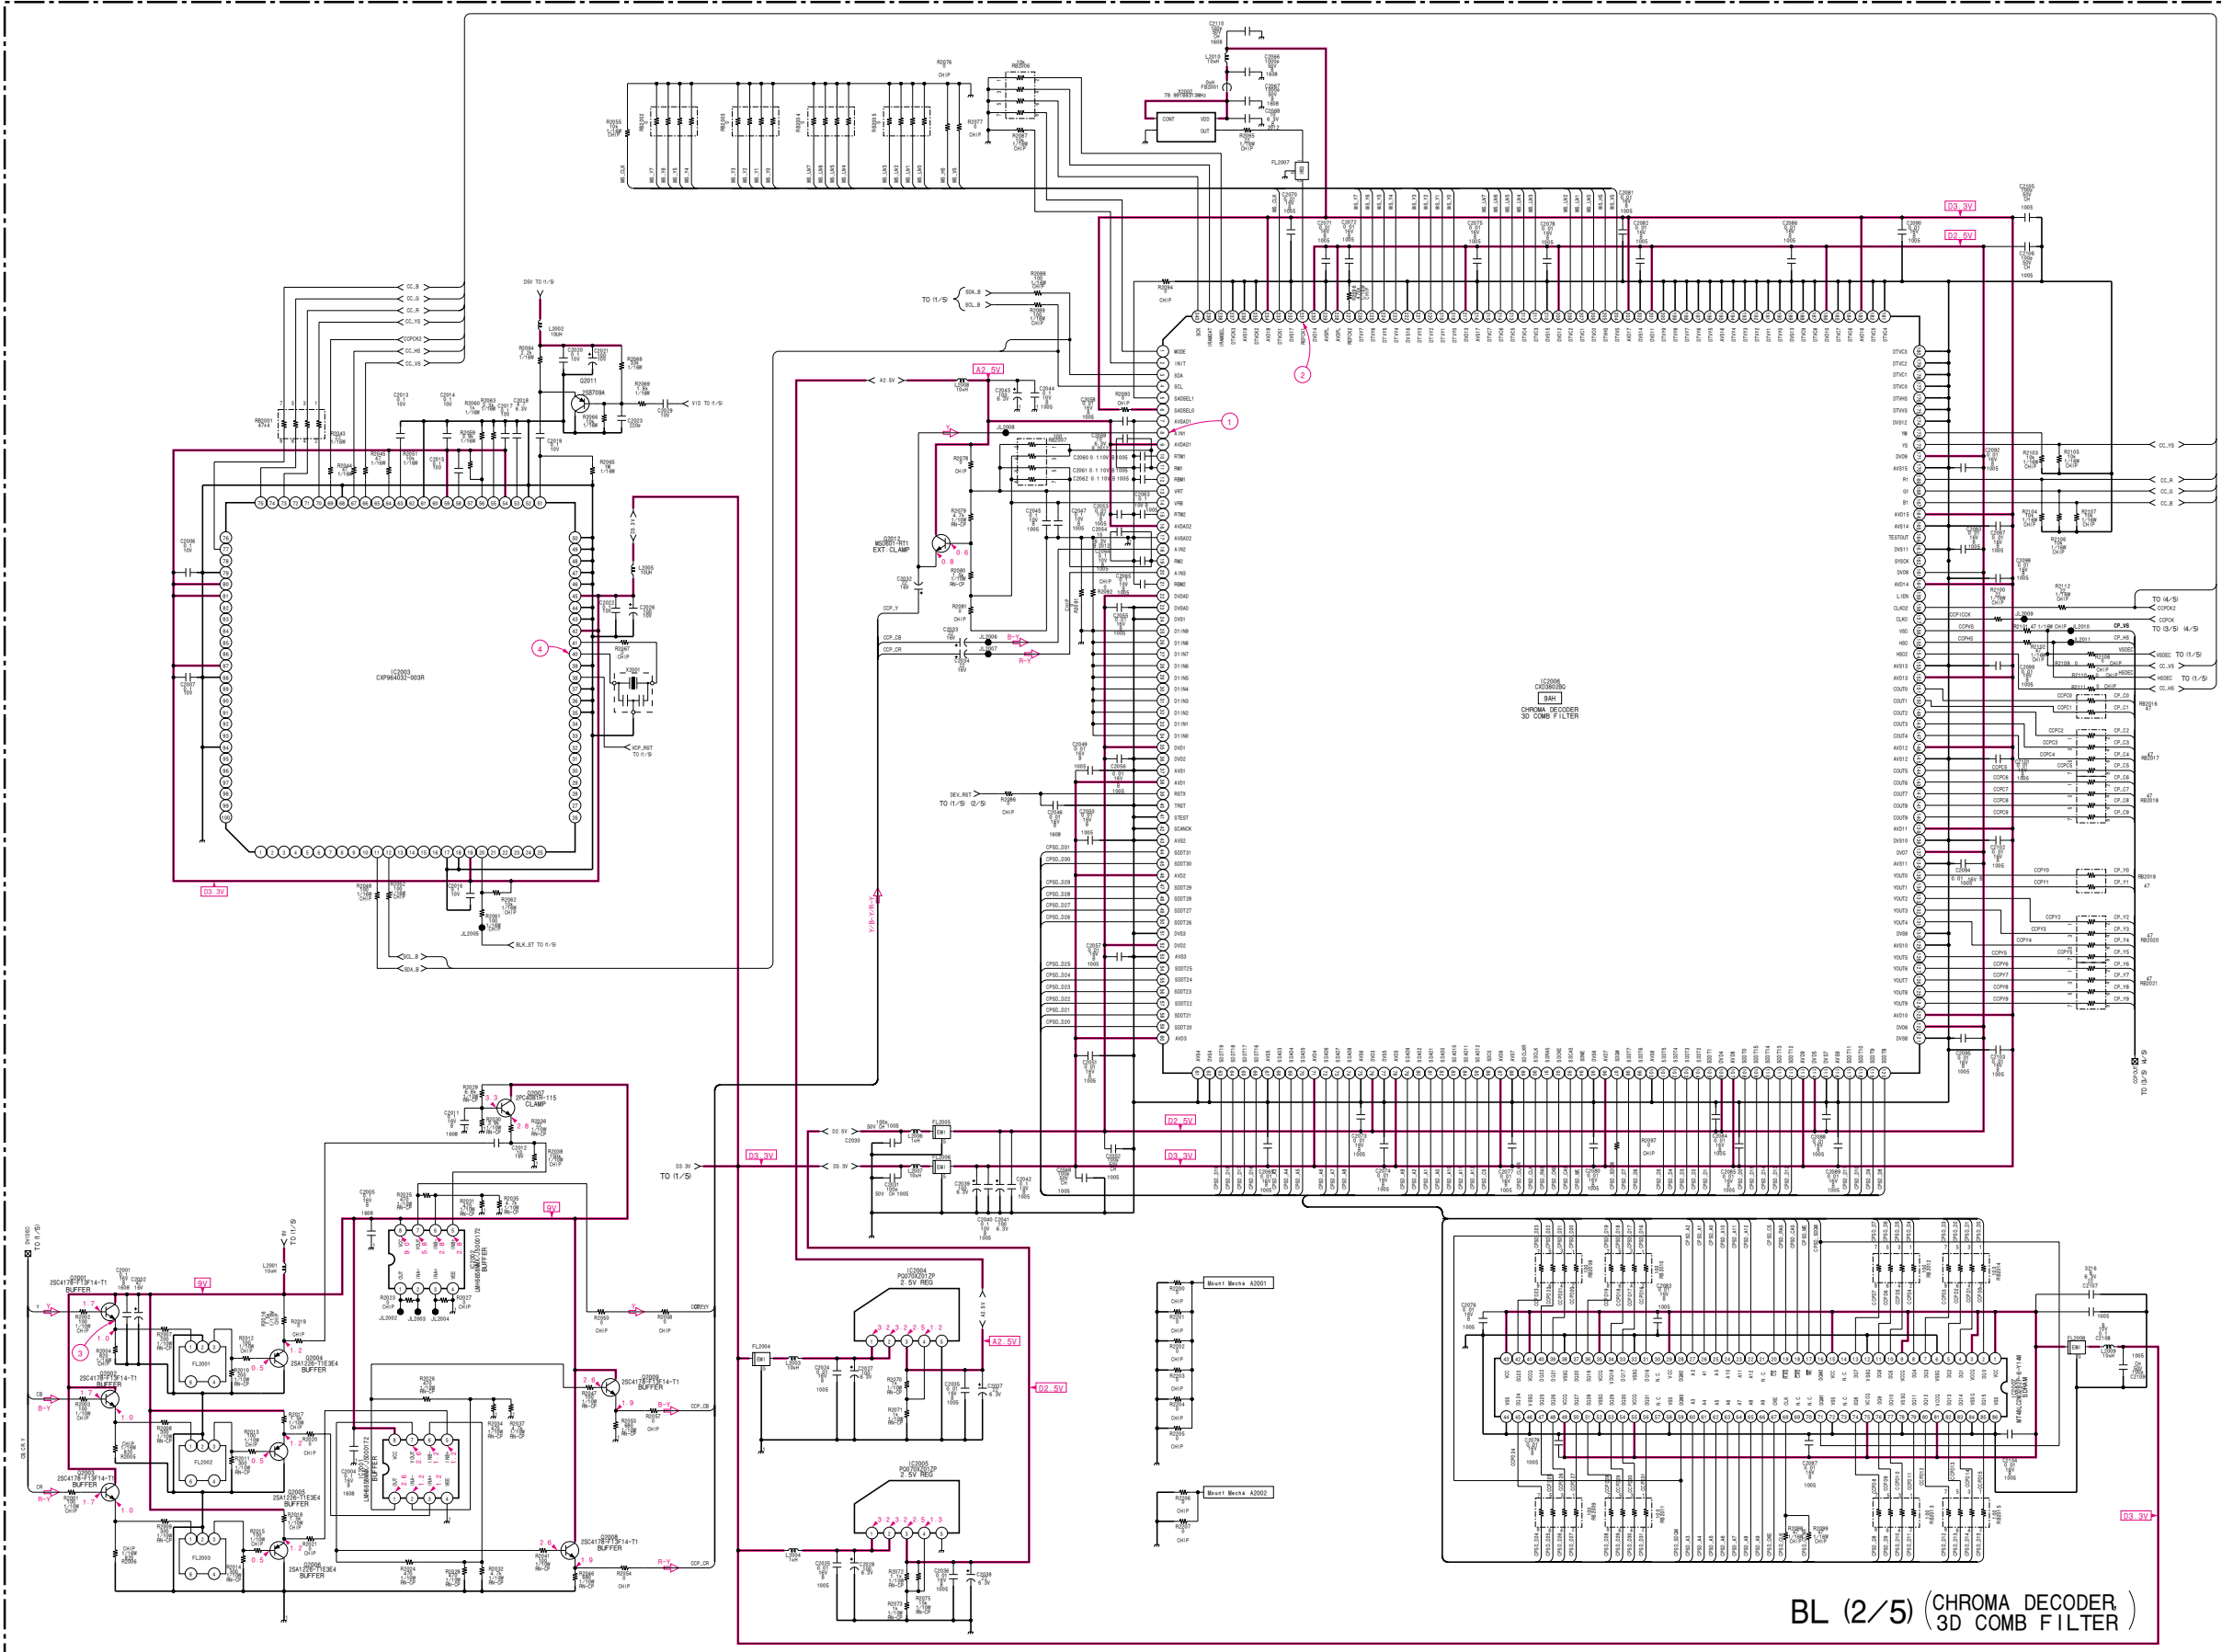


BL (2/5) (CHROMA DECODER)  
3D COMB FILTER

•BL(2/5) BOARD WAVEFORM

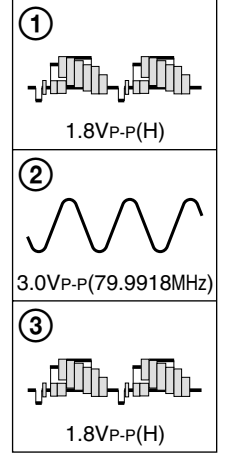



©-981221P4C --BL--P1

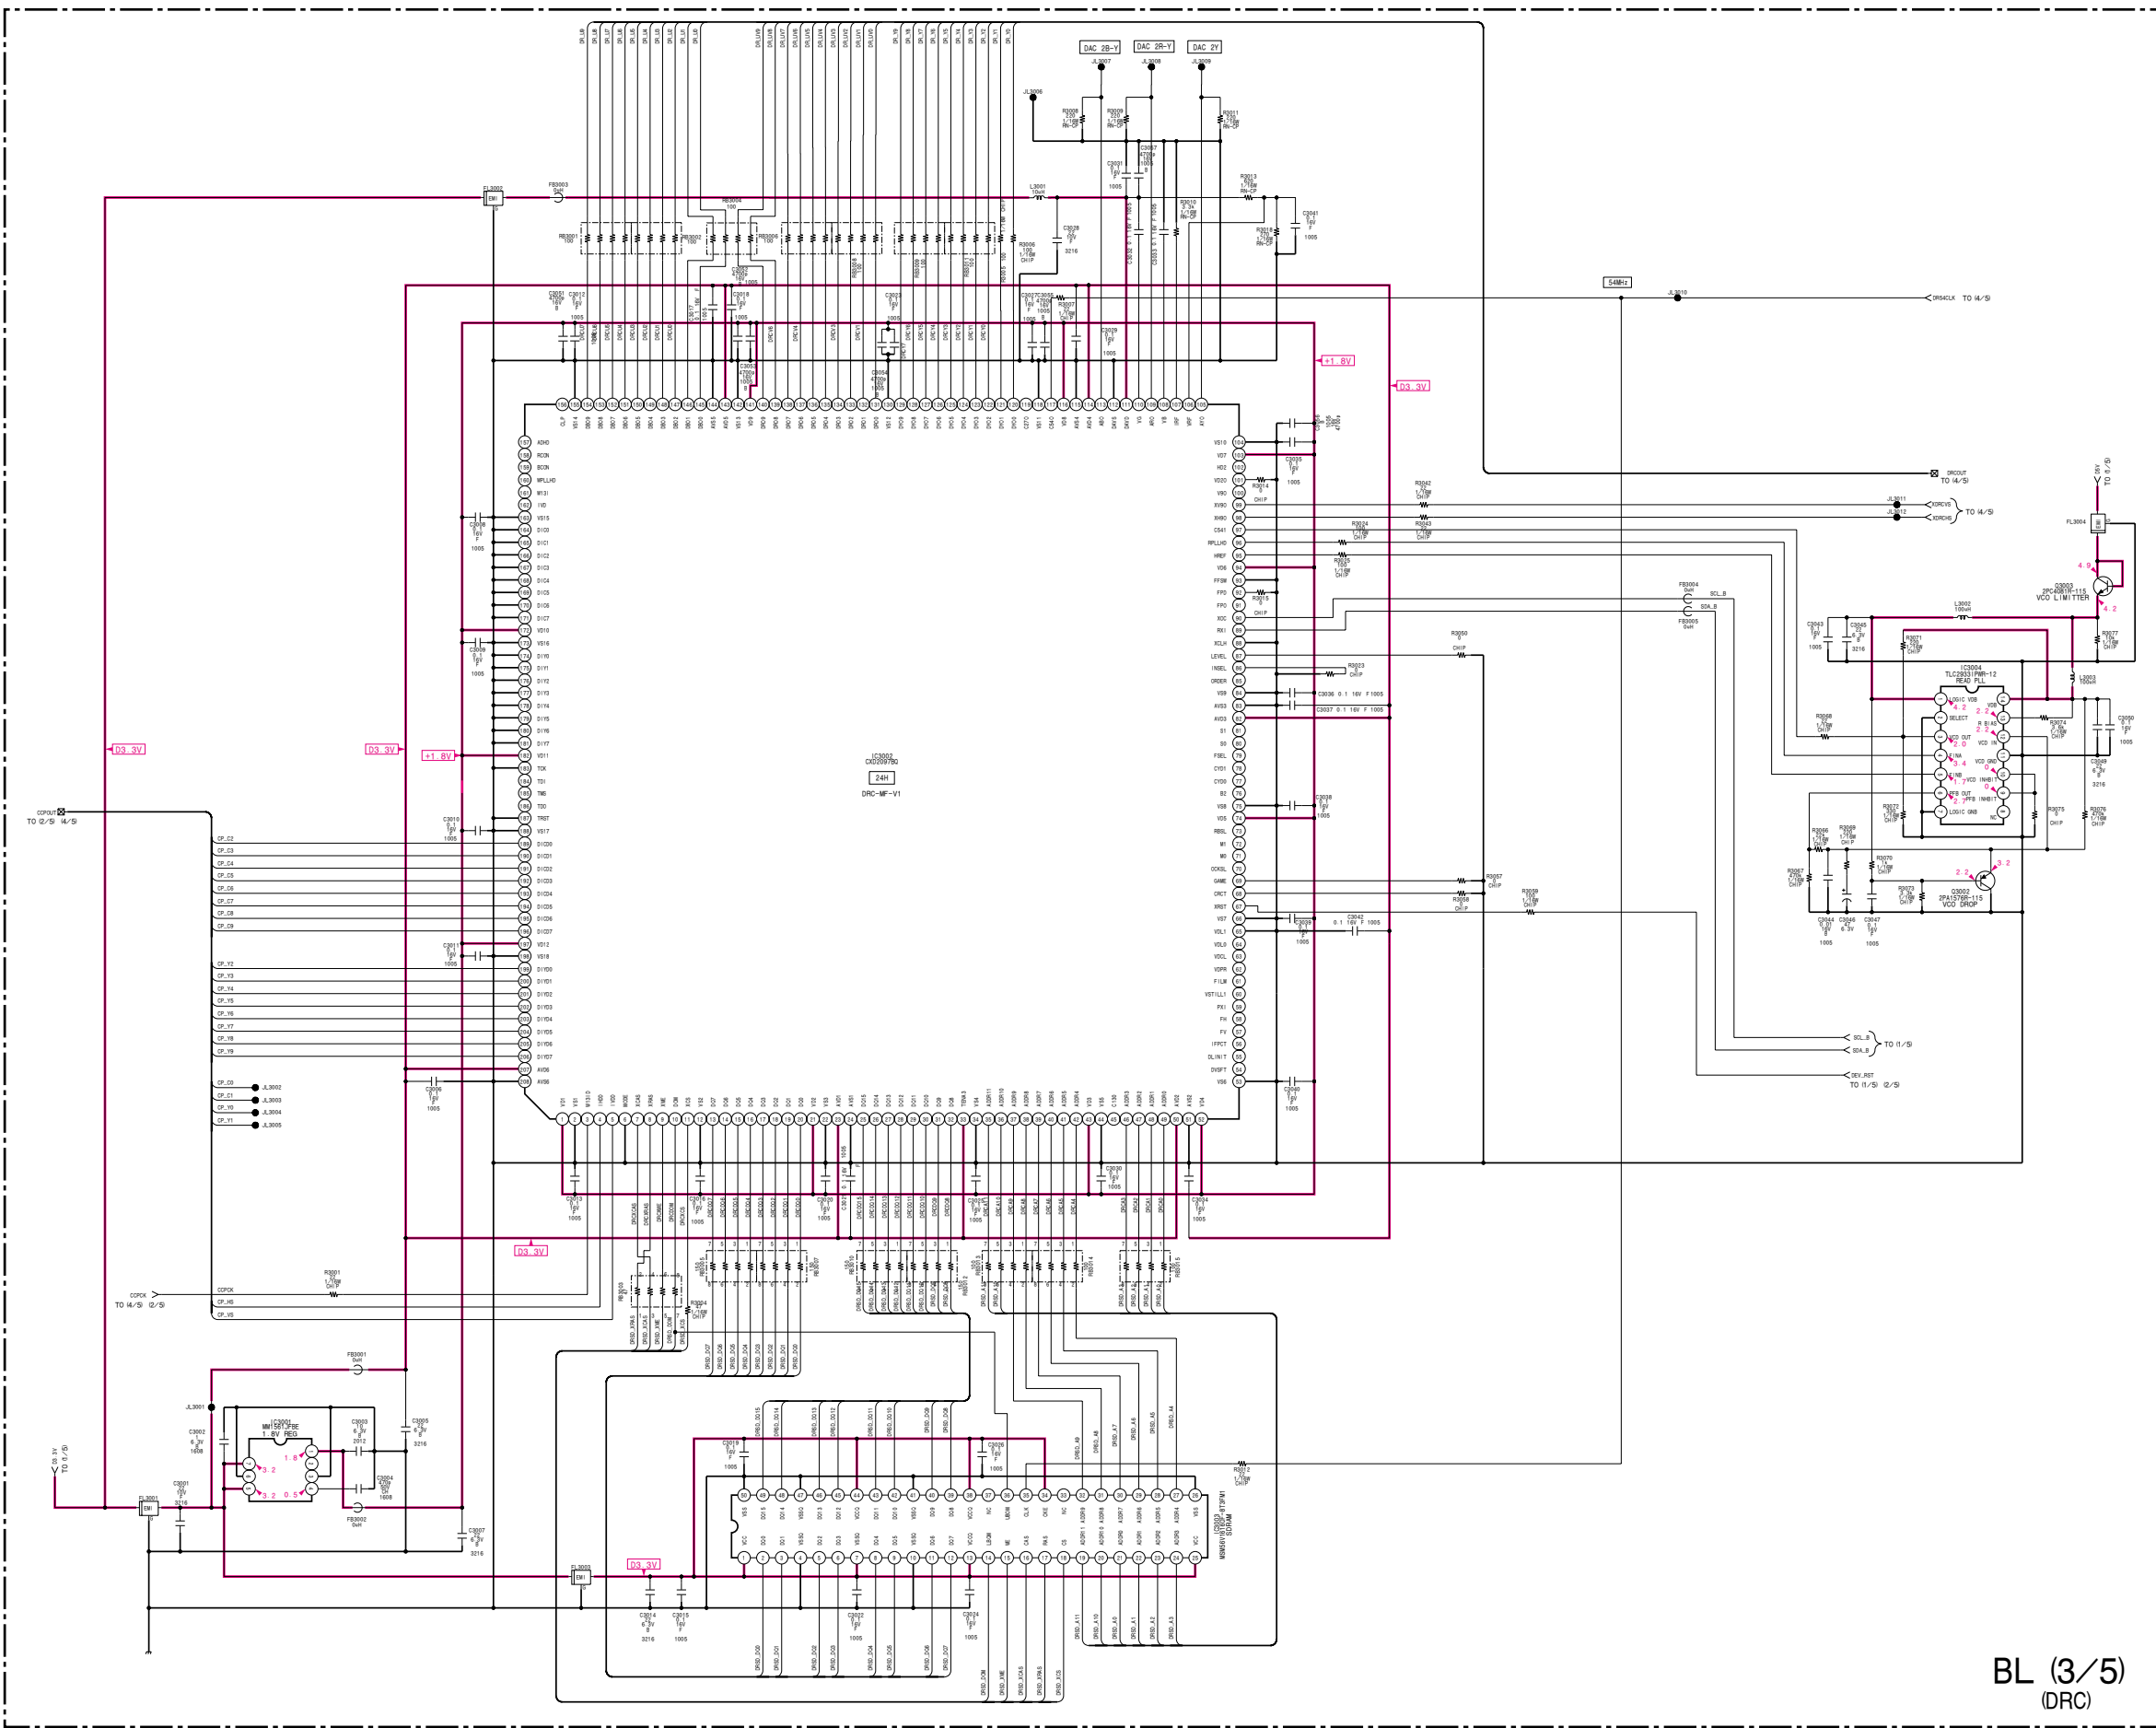

BL (3/5)  
DRC

B-5012124UC >BL-73

•BL(4/5) BOARD WAVEFORM

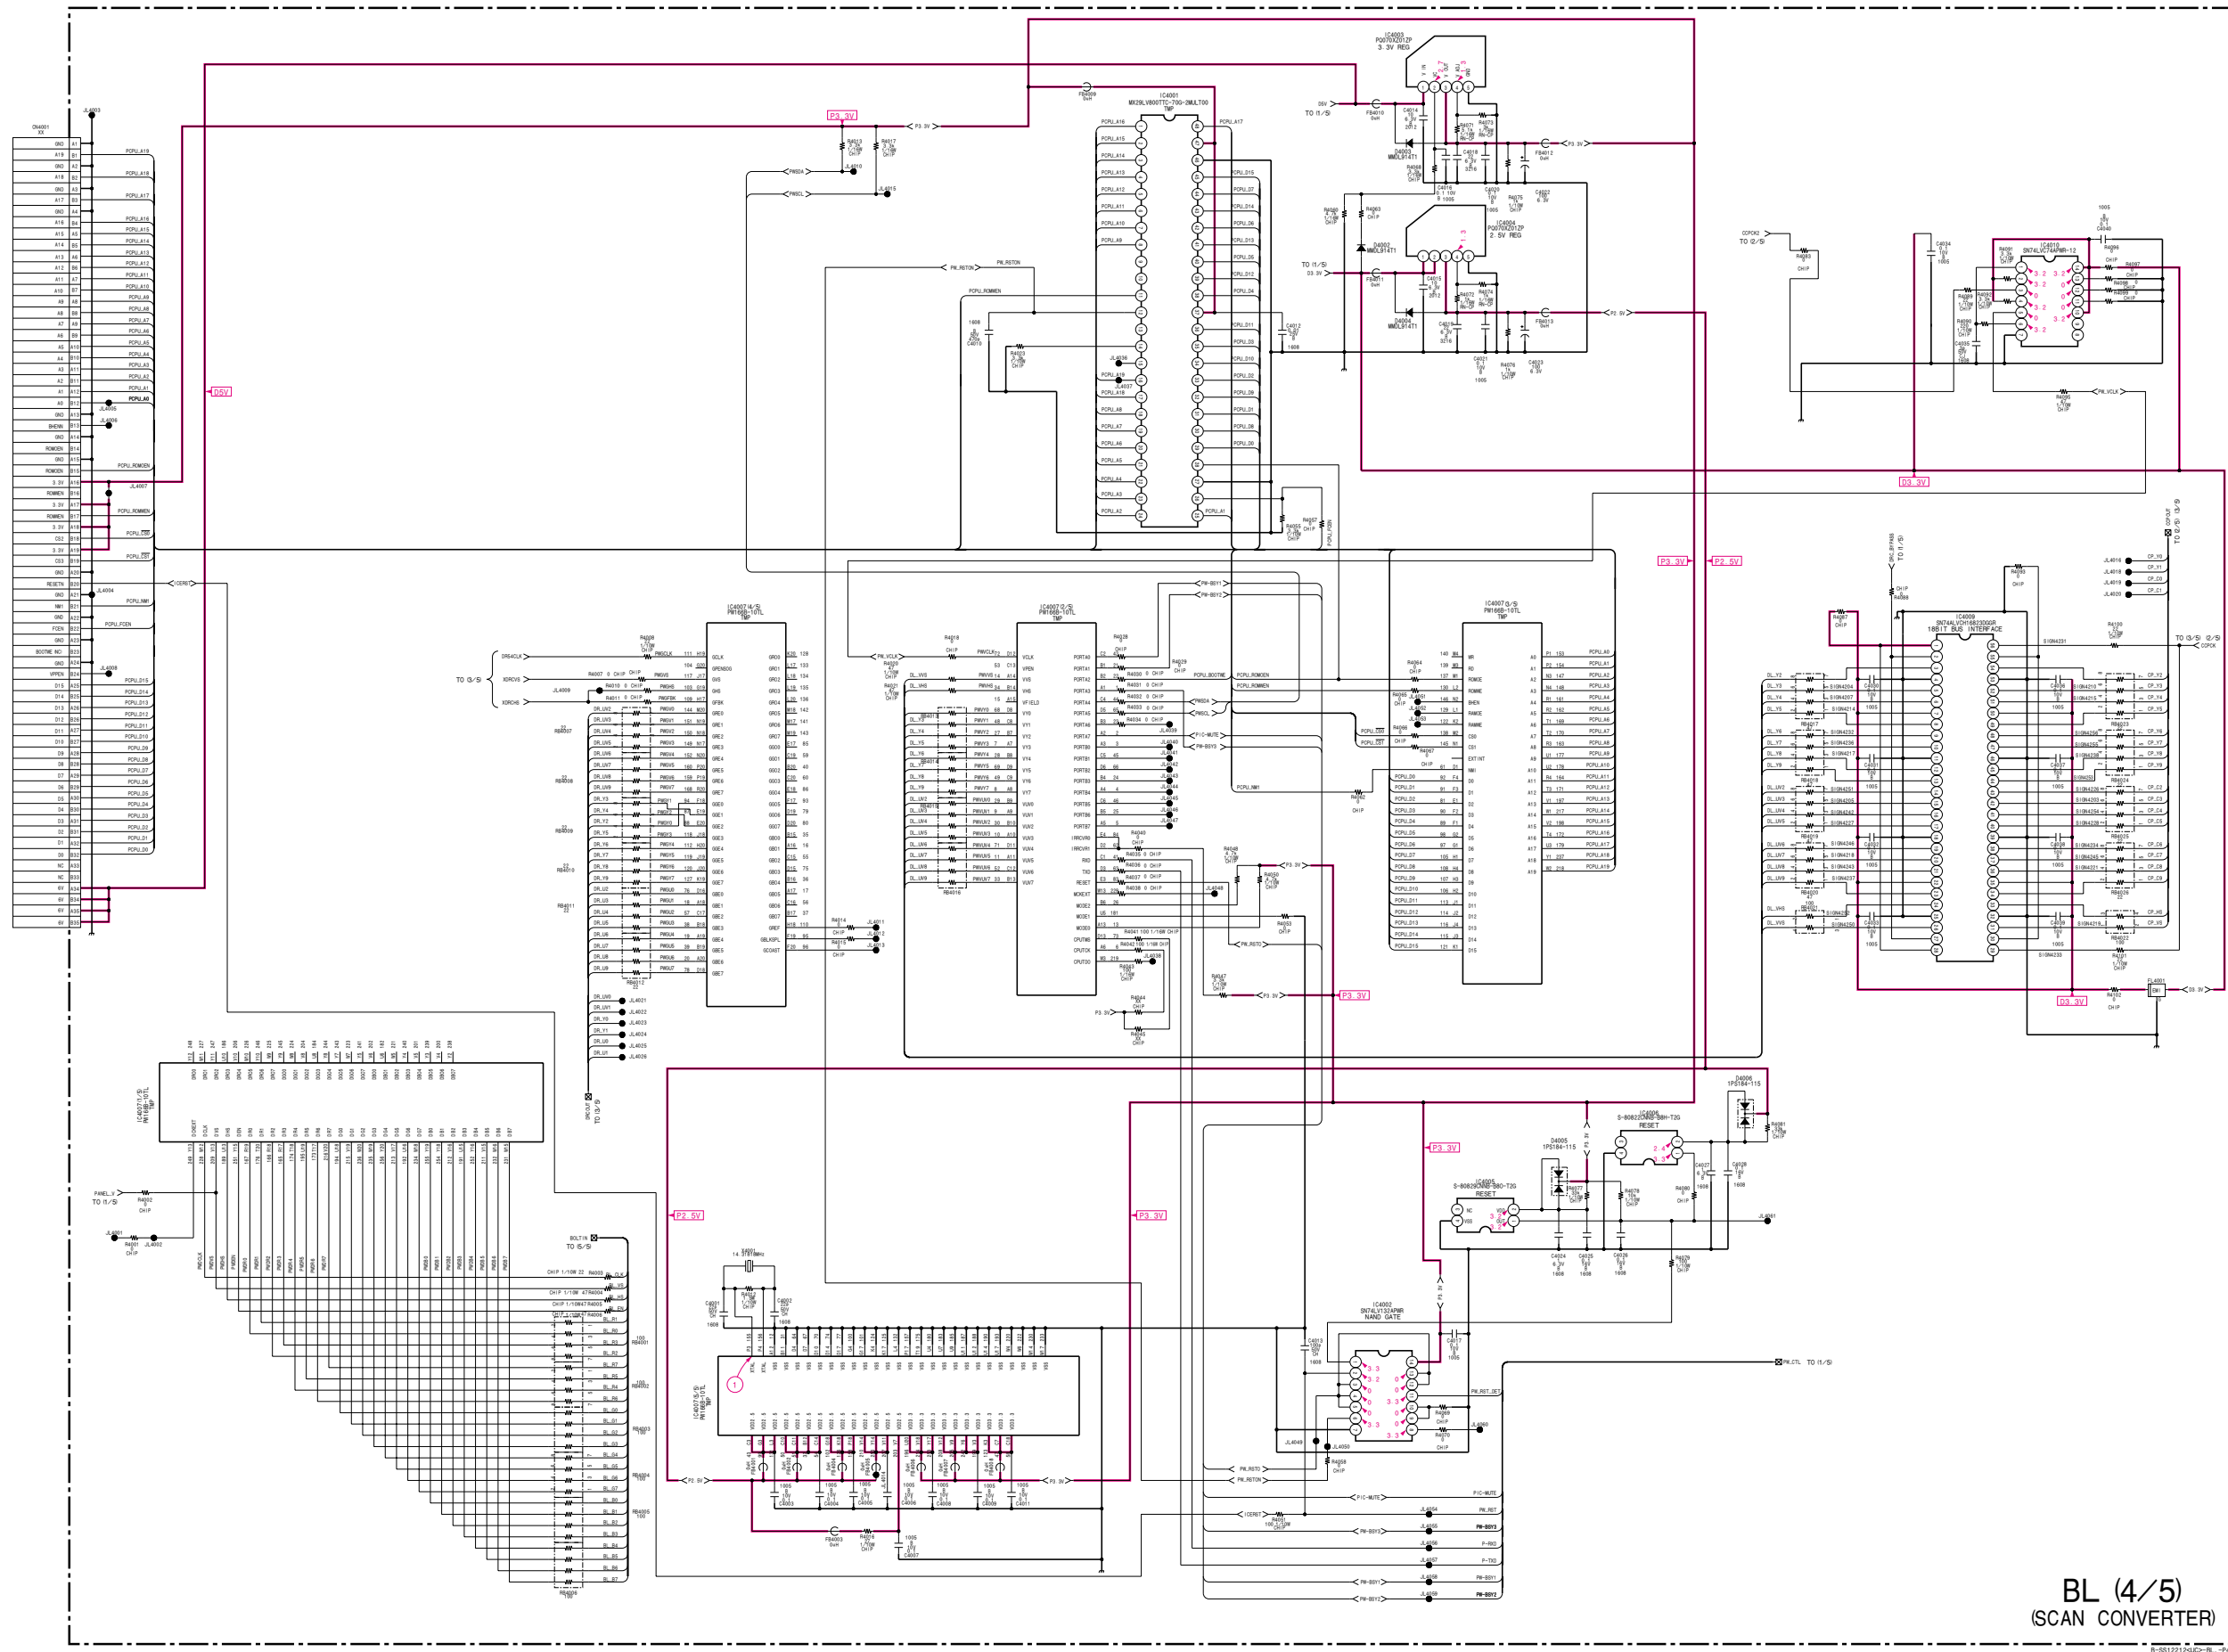

BL (4/5)  
(SCAN CONVERTER)



9-881214-GCP-BL-14



1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

A  
B  
C  
D  
E  
F  
G  
H  
I  
J  
K

•BL(5/5) BOARD WAVEFORM

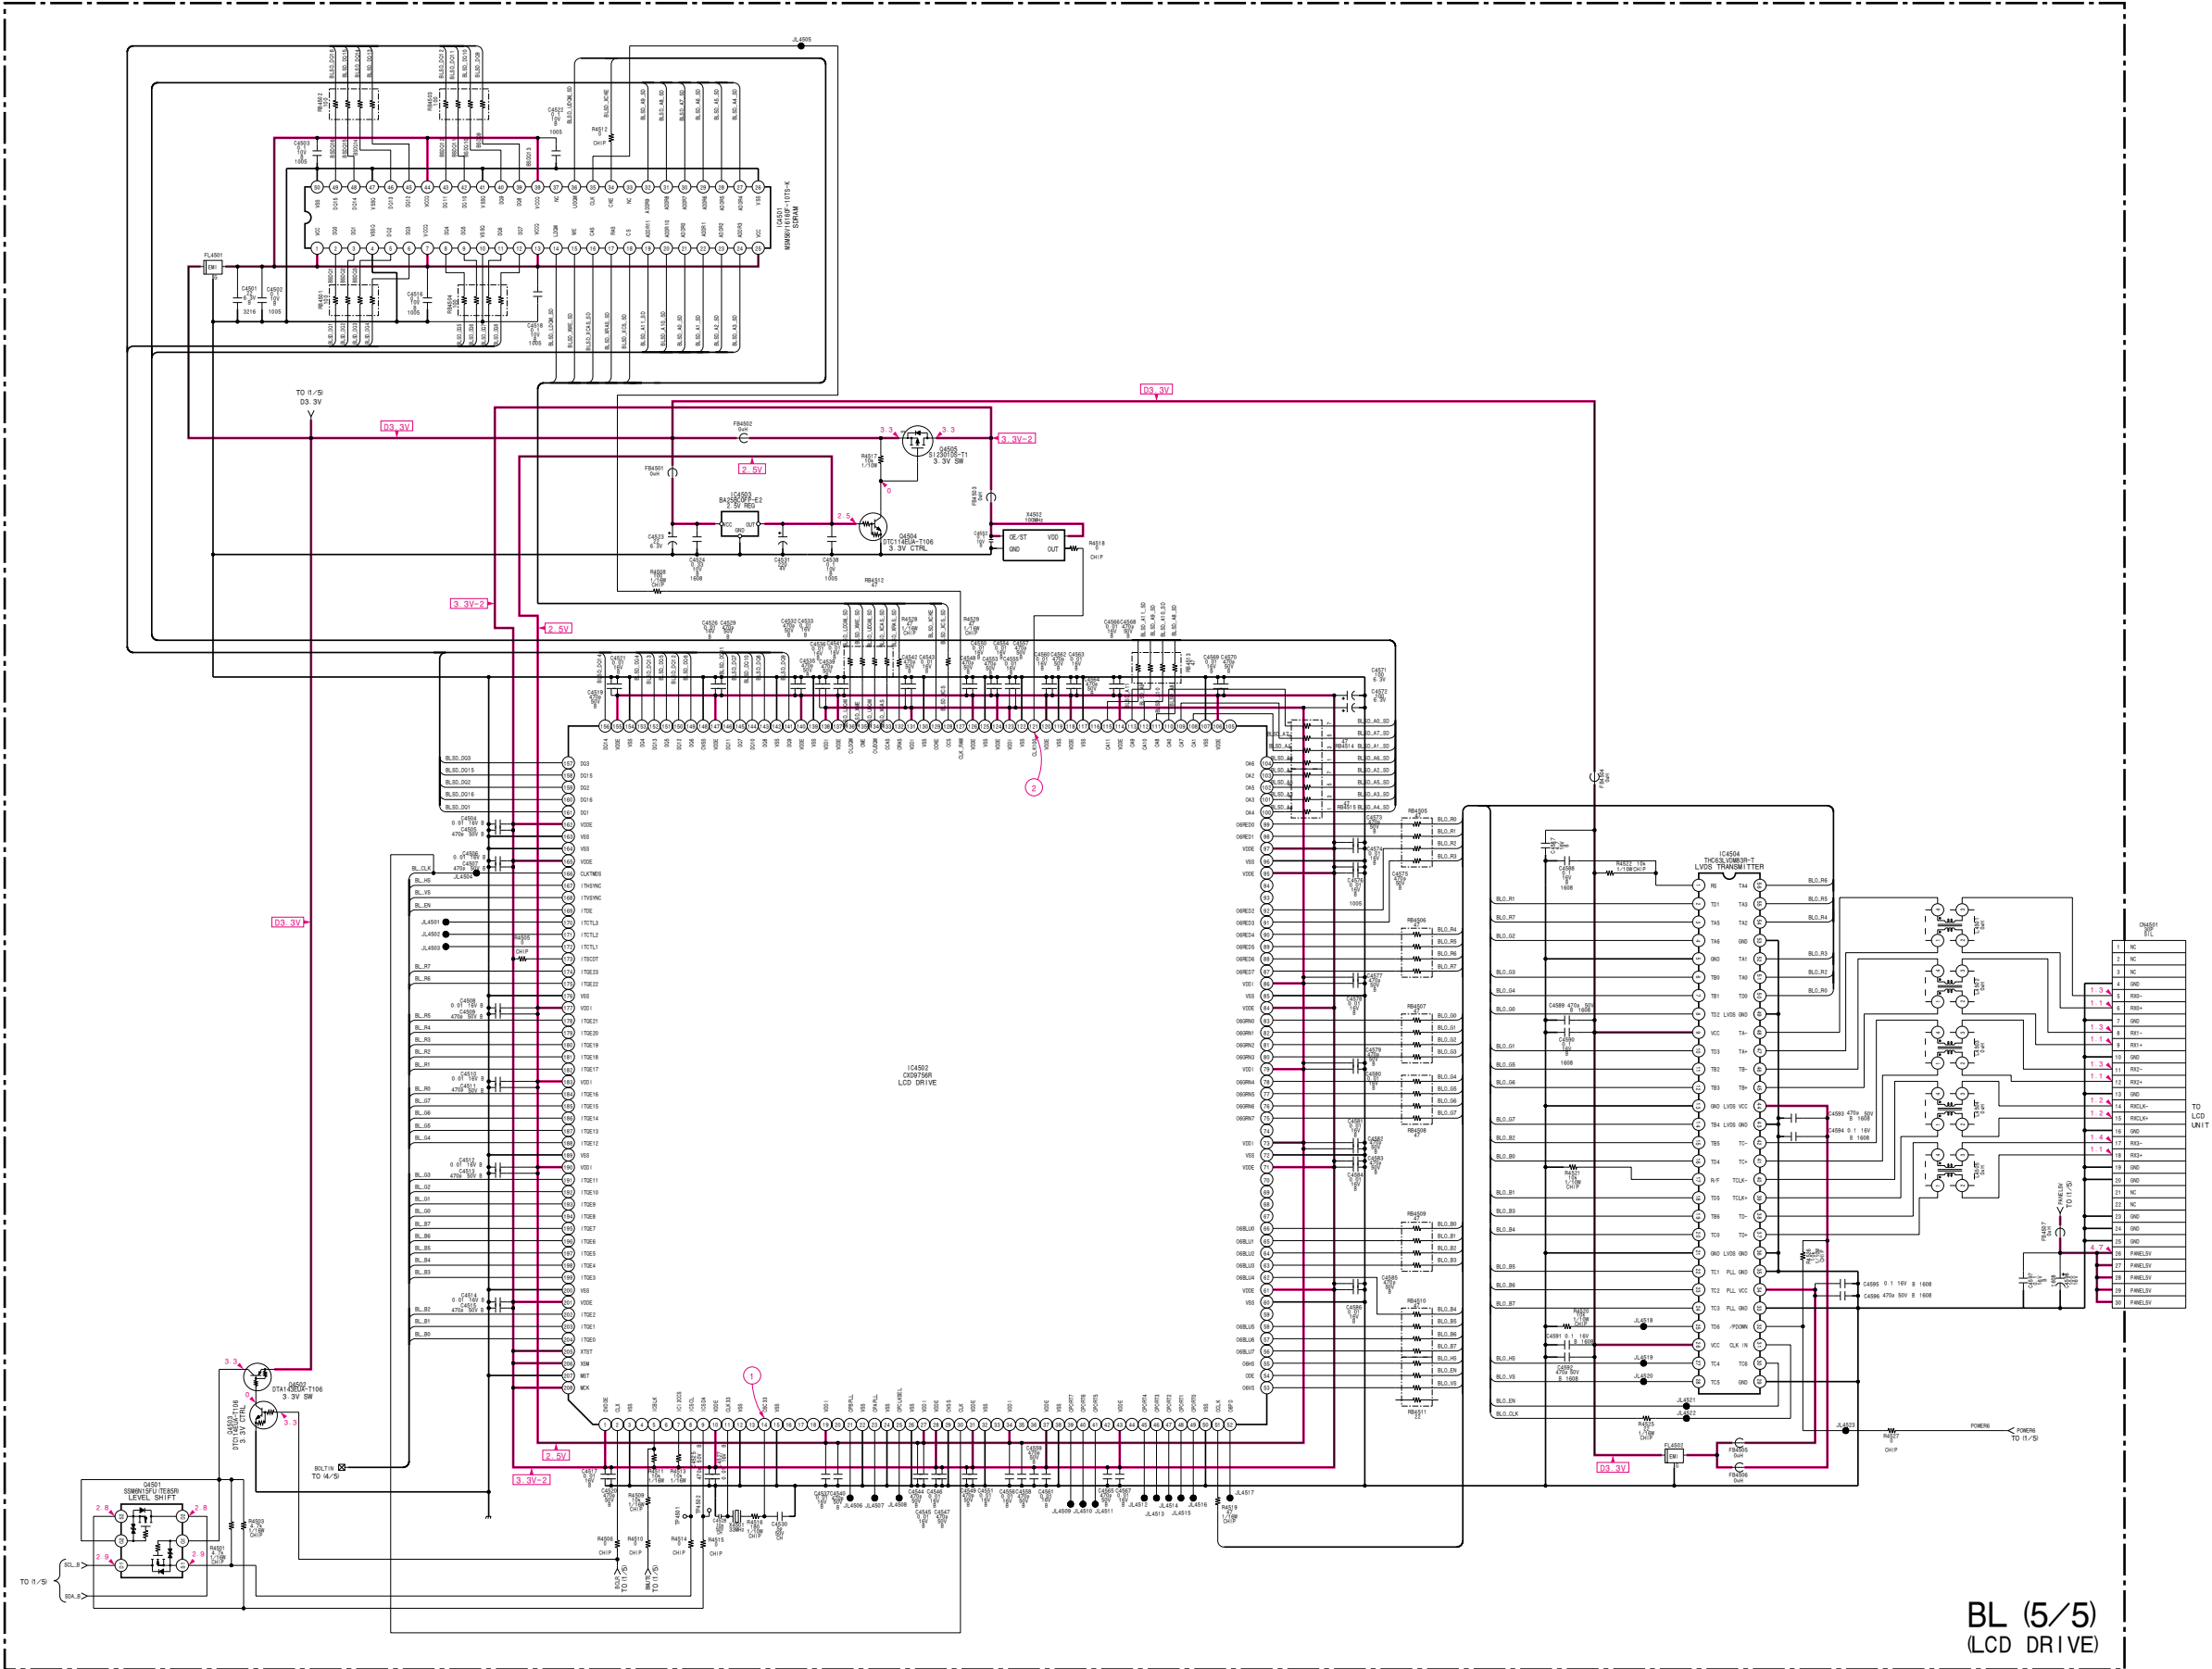


BL (5/5)  
(LCD DRIVE)


**BL**

[MAIN CPU, CHROMA DECODER, 3D CO, DRC, SCAN CONVERTER, LCD SUPPLY]

— BL BOARD —

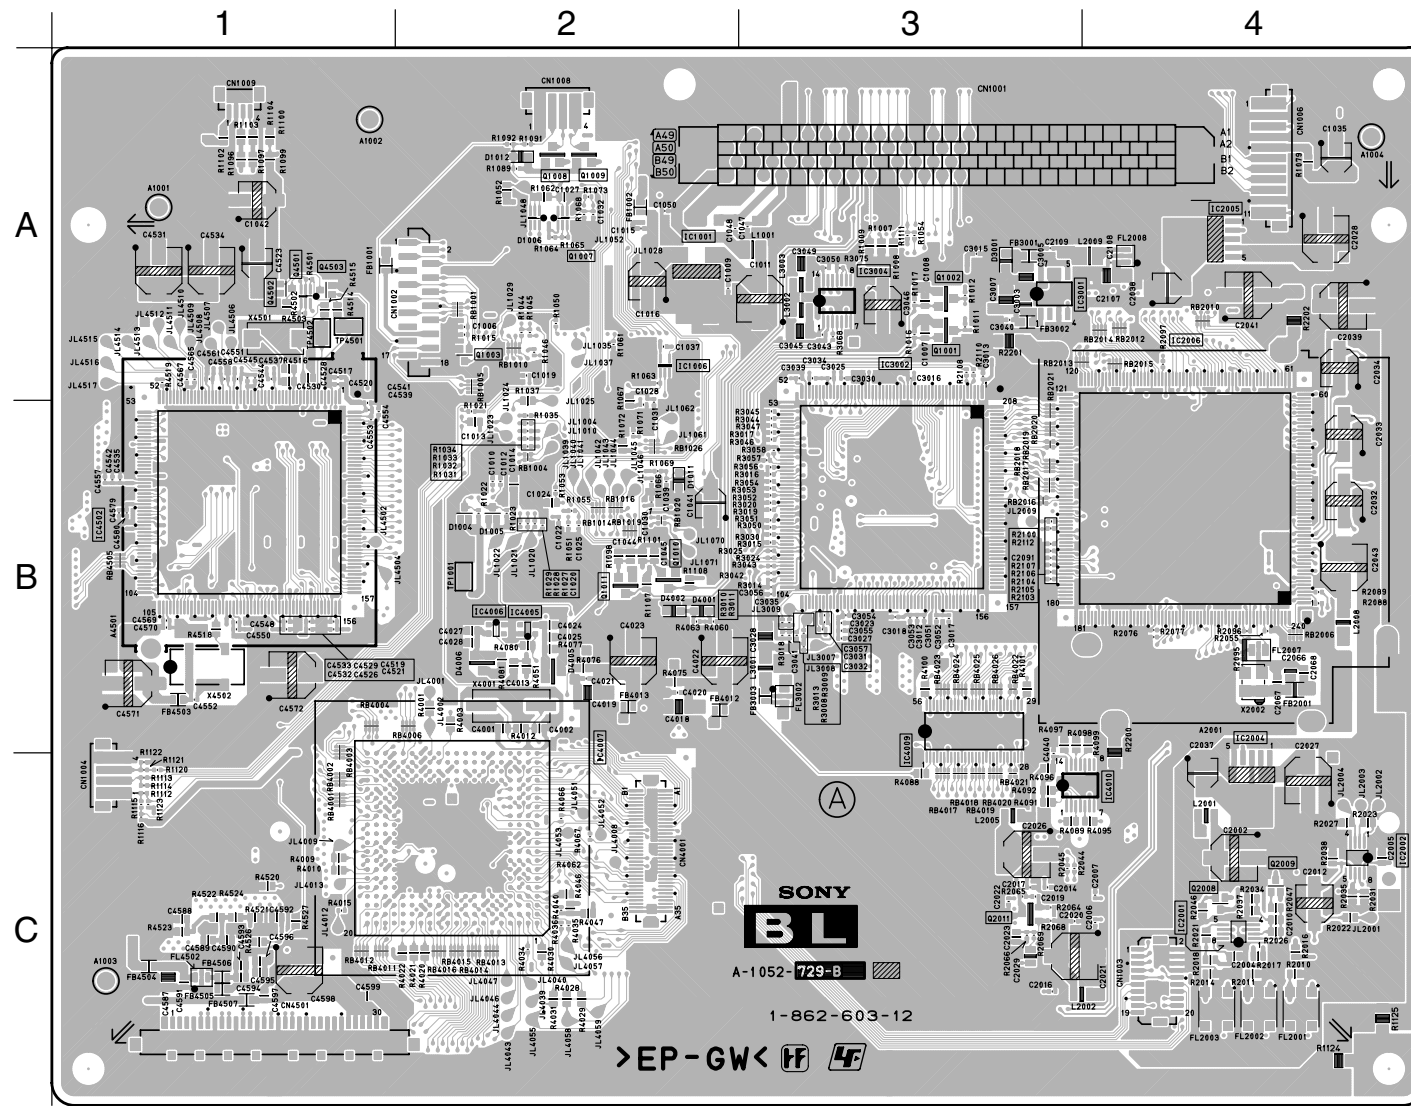

<COMPONENT SIDE>

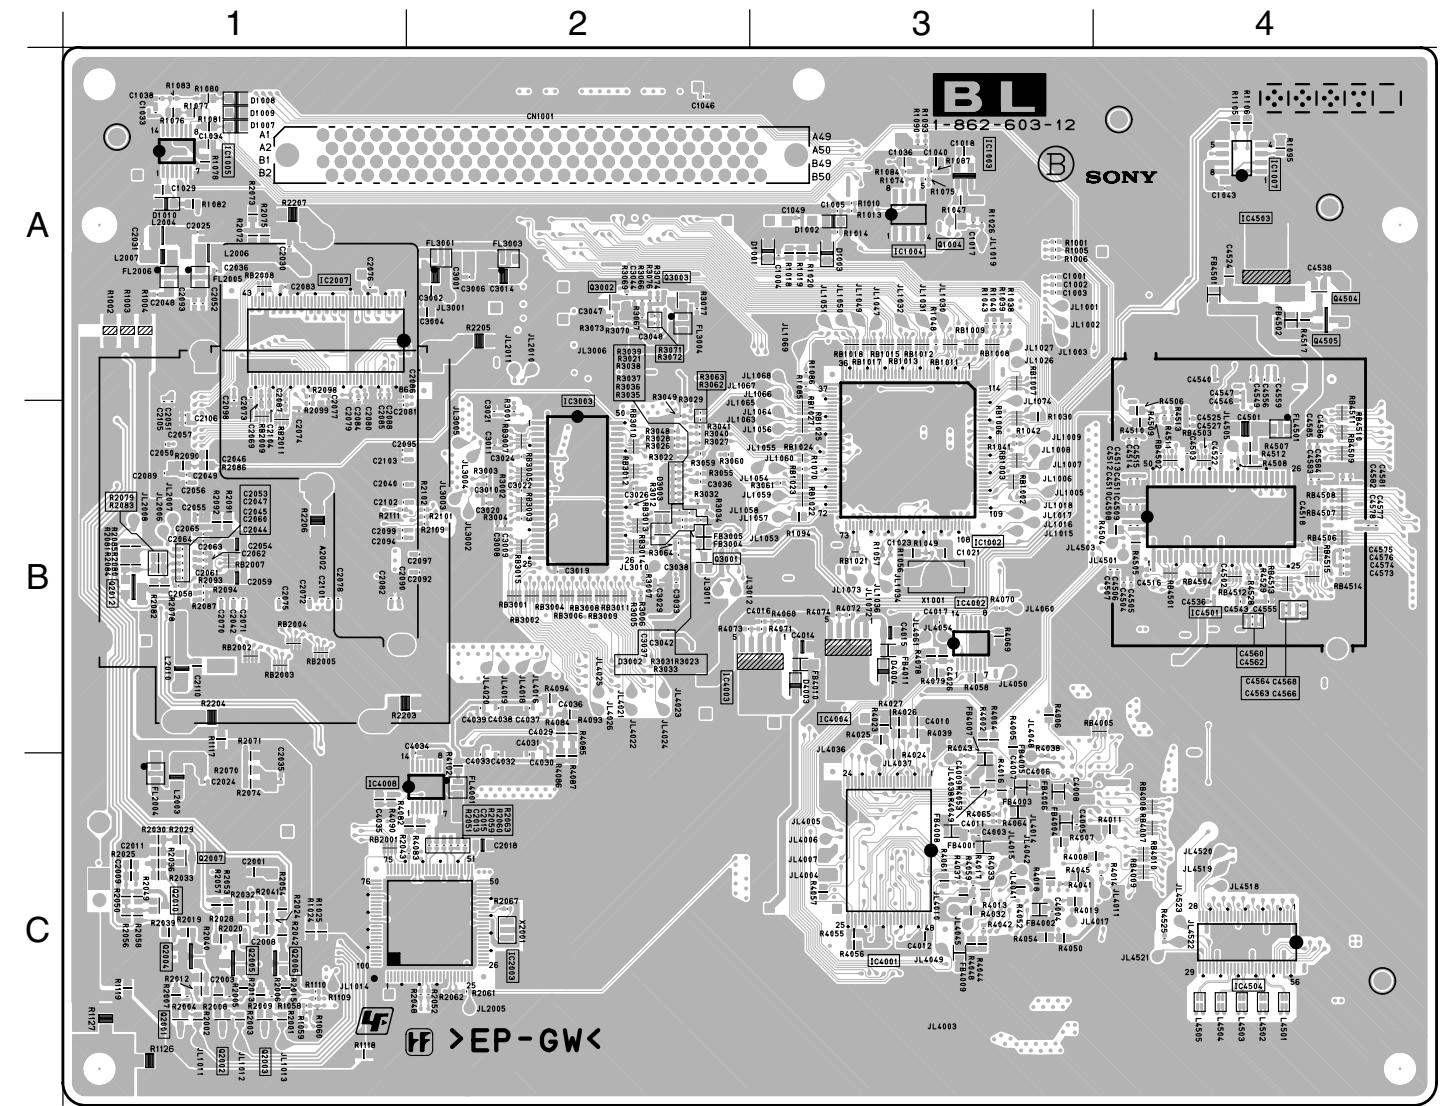


<CONDUCTOR SIDE>


• BL BOARD SEMICONDUCTOR LOCATION

IC	IC4002	B-3	Q1010	B-2	⑬	DIODE	
(Component Side) (Conductor Side)	IC4003	B-3	Q1011	B-2	⑭	(Component Side) (Conductor Side) *	
IC1001 A-2	IC4004	B-3	Q2001	C-1	②	D1002	A-3 ③
IC1002 B-3	IC4005 B-2	B-2	Q2002	C-1	②	D1003	A-3 ③
IC1003 A-1	IC4006 B-2	B-2	Q2003	C-1	②	D1005	A-3 ③
IC1004 A-3	IC4007 C-2	C-2	Q2005	C-1	②	D1006	A-2 -
IC1005 A-1	IC4009 B-3	B-3	Q2006	C-1	②	D1007	A-1 ③
IC1006 A-2	IC4010 C-3	C-3	Q2007	C-1	②	D1008	A-1 ③
IC1007 A-4	IC4501 B-4	B-4	Q2008	C-4	②	D1011	B-2 ③
IC2001 C-4	IC4502 B-1	B-1	Q2009	C-4	②	D1012	A-2 ③
IC2002 C-4	IC4503 A-4	A-4	Q2011	C-3	②	D4002	B-2 ③
IC2003 C-2	IC4504 C-4	C-4	Q2012	B-1	②	D4003	B-3 ③
IC2004 C-4			Q3002	A-2	②	D4004	B-3 ③
IC2005 A-4			Q3003	A-2	②	D4005	B-2 ⑨
IC2006 B-4			Q4501	A-1	-	D4006	B-2 ⑨
IC2007 A-1			Q4502	A-1	②		
IC3001 A-3			Q4503	A-1	②		
IC3002 B-3			Q4504	A-4	②		
IC3003 B-2			Q4505	A-4	⑬		
IC3004 A-3							
IC4001 C-3							


\*: Refer to Terminal name of semiconductors in silk screen printed circuit (see page 3-7)

(3) Schematic Diagrams of GL Board

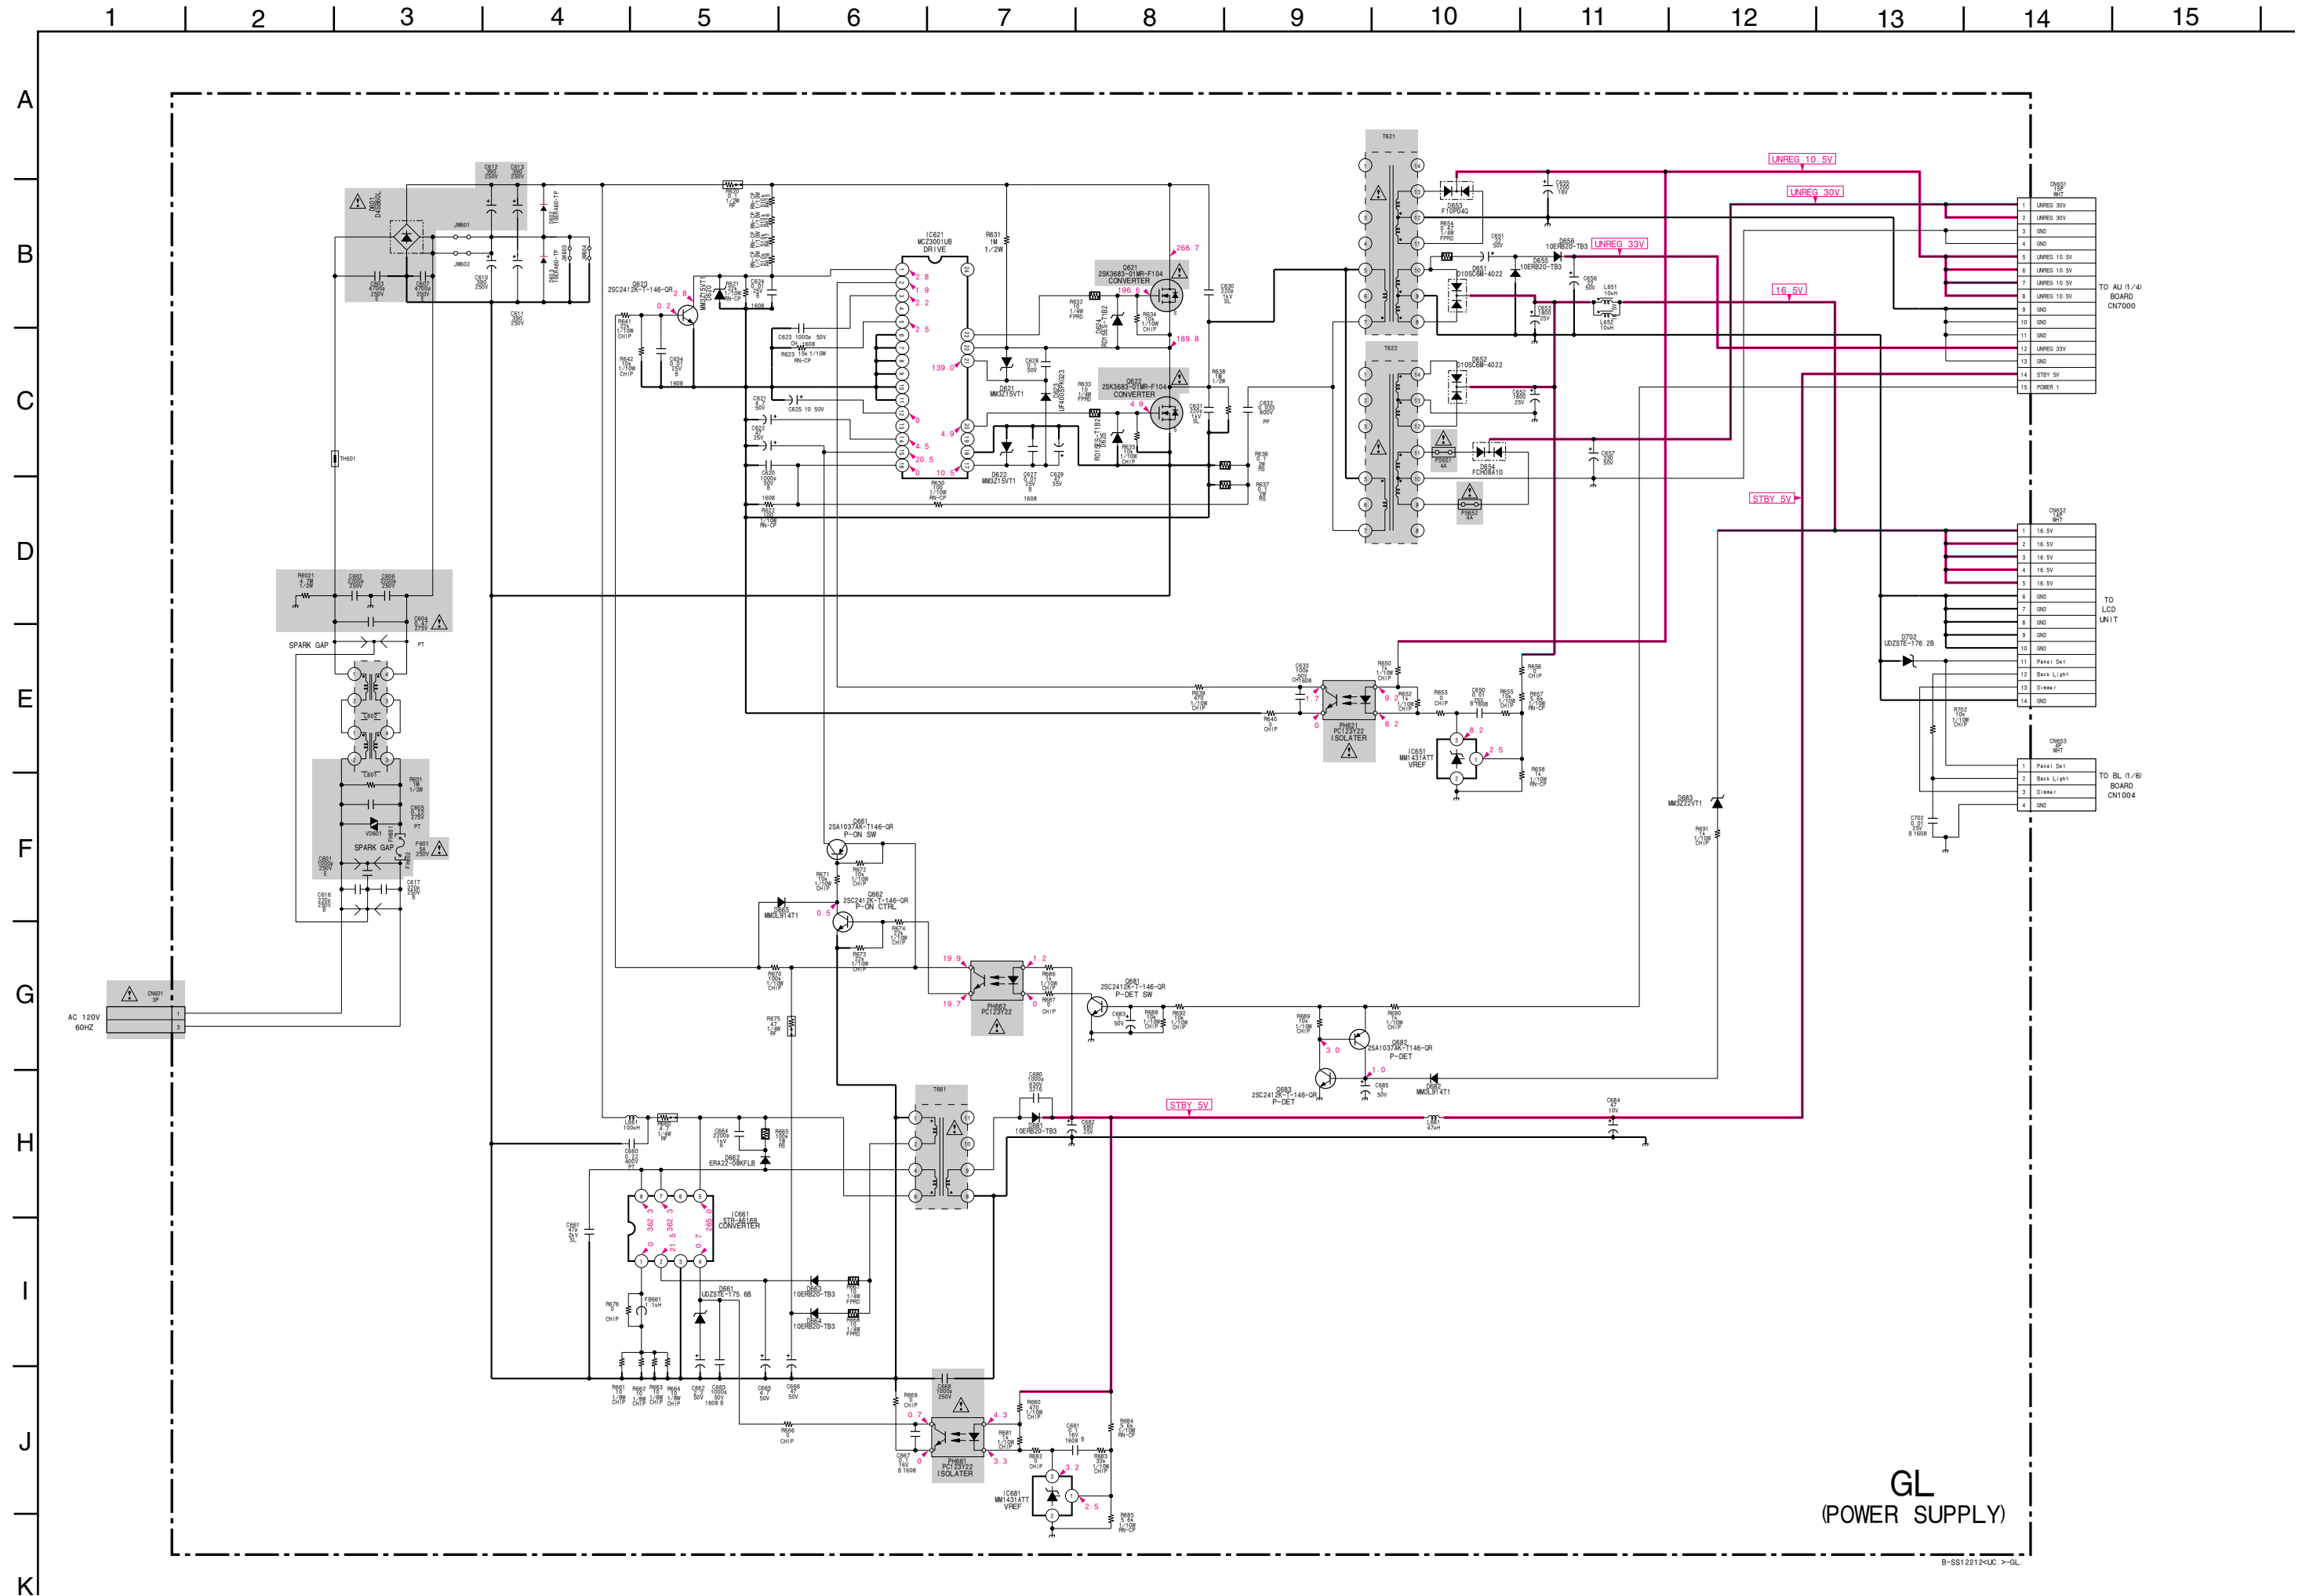

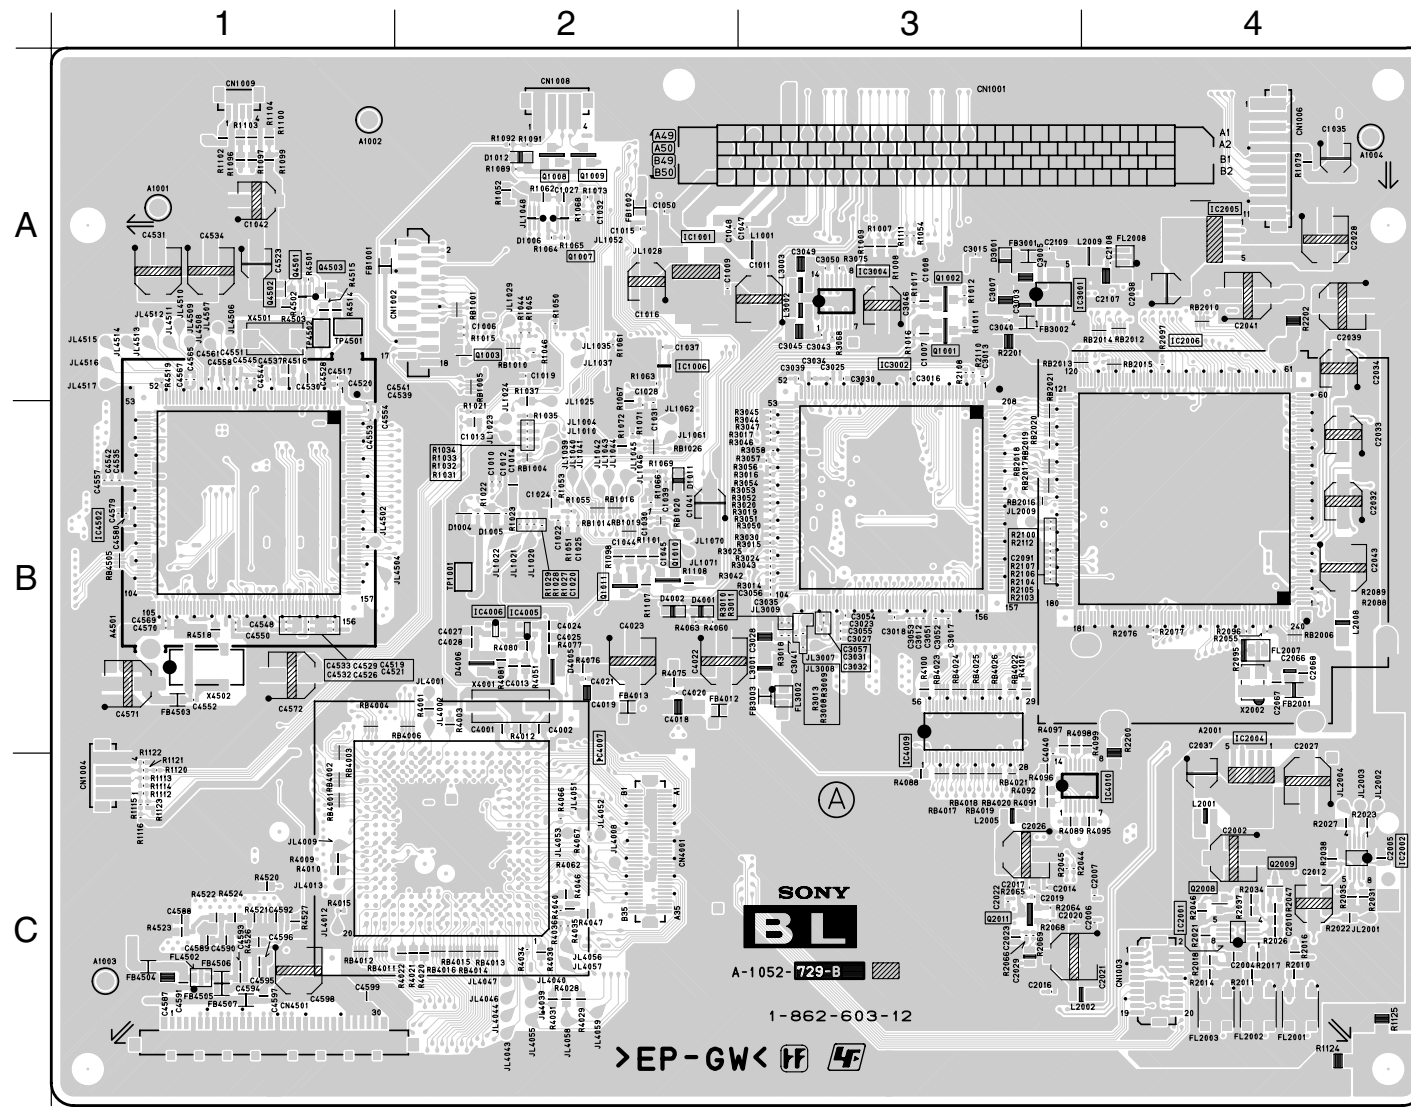

<COMPONENT SIDE>

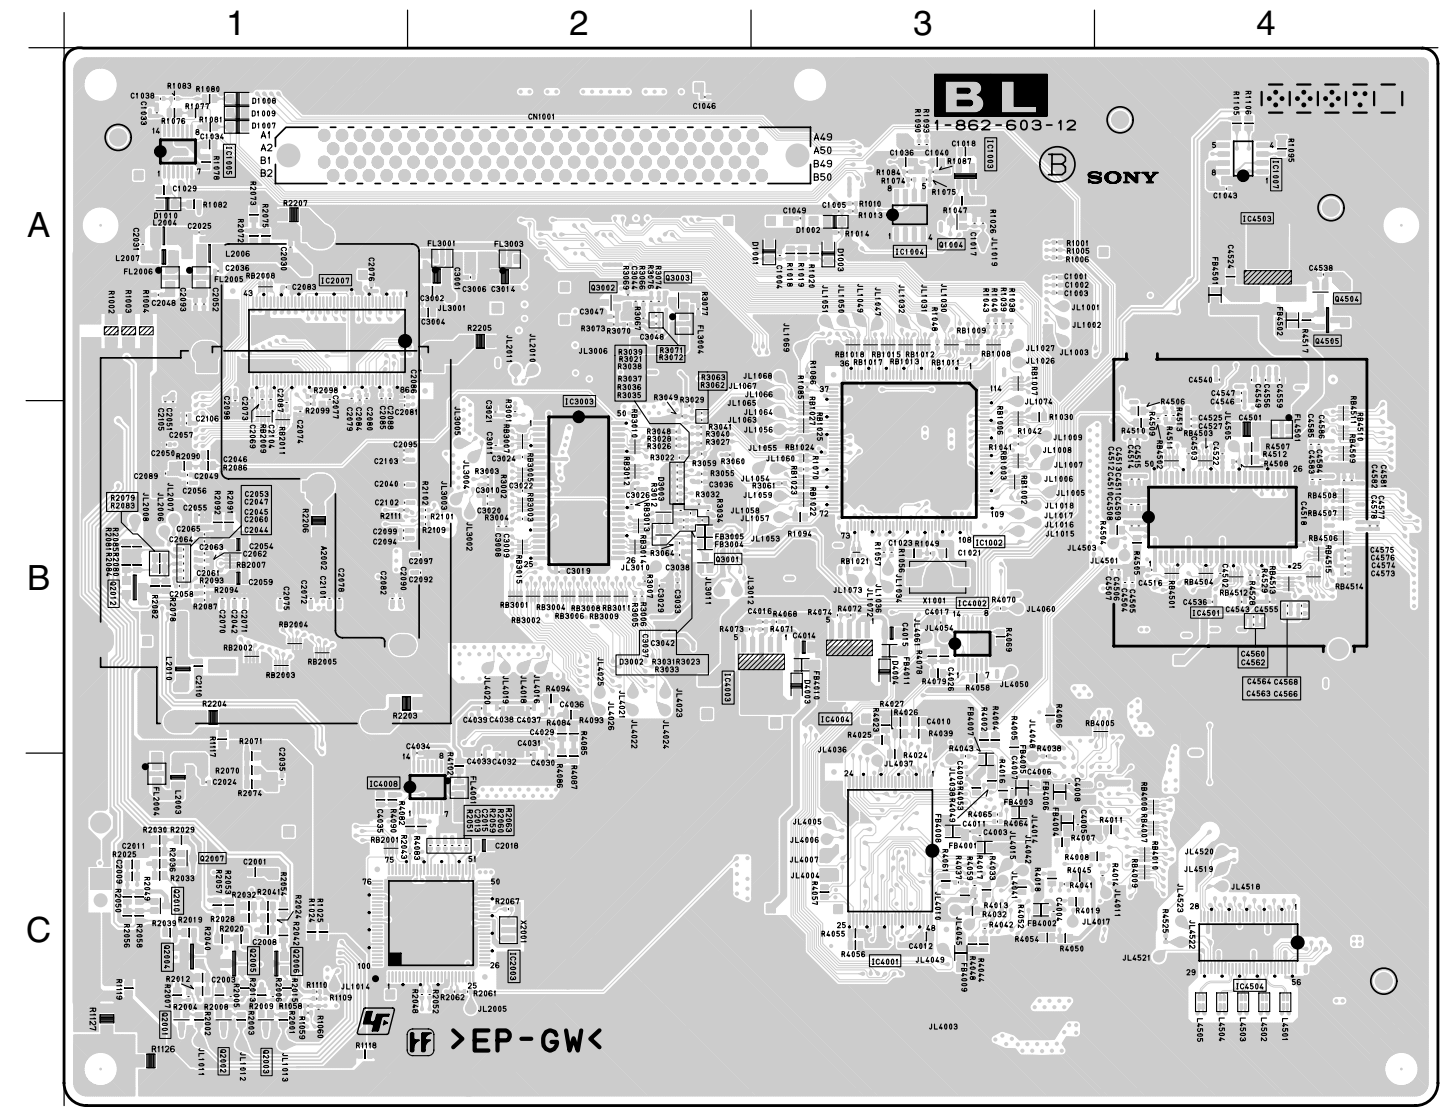



<CONDUCTOR SIDE>

• GL BOARD SEMICONDUCTOR LOCATION

IC		DIODE			
(Component Side)	(Conductor Side)	(Component Side)	(Conductor Side)	*	
IC621	C-2	D601	B-2	-	-
IC651	A-4	D602	A-3	-	-
IC661	A-4	D603	A-2	-	-
IC681	A-4	D604	C-4	③	-
		D620	B-4	③	-
		D621	C-3	③	-
		D622	C-4	③	-
TRANSISTOR					
(Component Side)	(Conductor Side)	*			
Q621	B-3	-	D623	C-2	-
Q622	C-3	-	D624	B-3	-
Q623	B-2	②	D625	C-3	-
Q661	A-2	②	D651	B-4	-
Q662	A-2	②	D652	B-4	-
Q681	A-2	②	D653	B-5	-
Q682	A-1	②	D654	C-5	-
Q683	A-5	②	D655	A-5	-
			D656	A-5	-
			D661	B-2	③
			D662	A-4	-


\*: Refer to Terminal name of semiconductors in silk screen printed circuit (see page 3-7)

(4) Schematic Diagram of H1 and H2 Boards

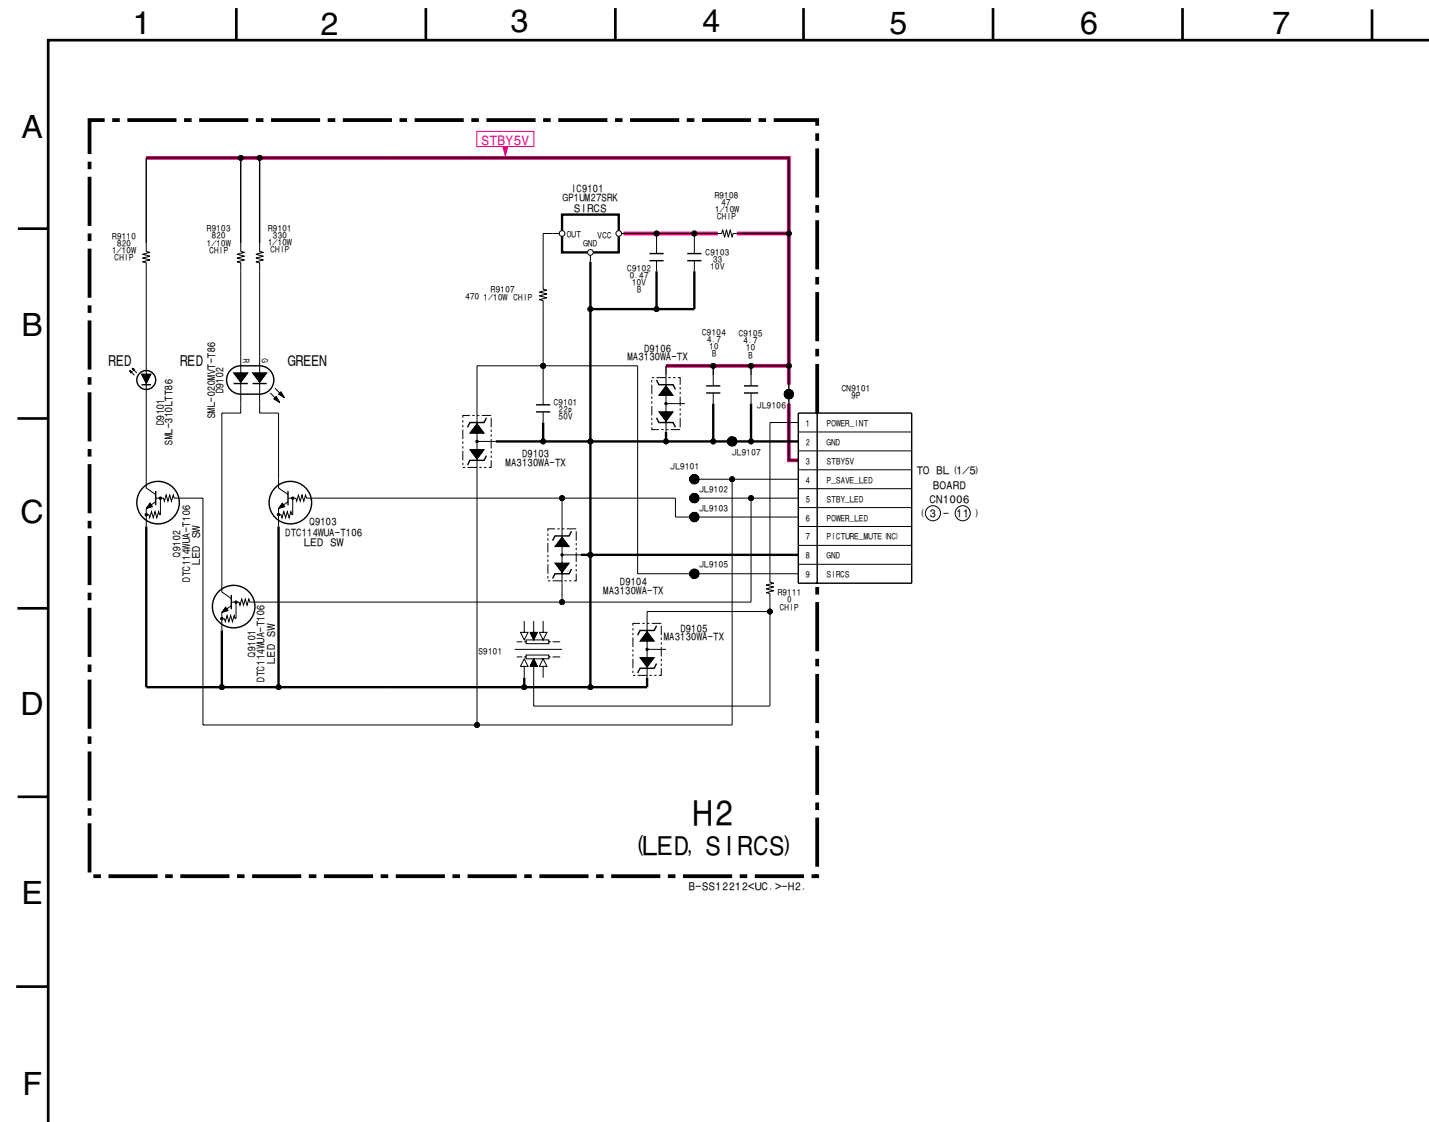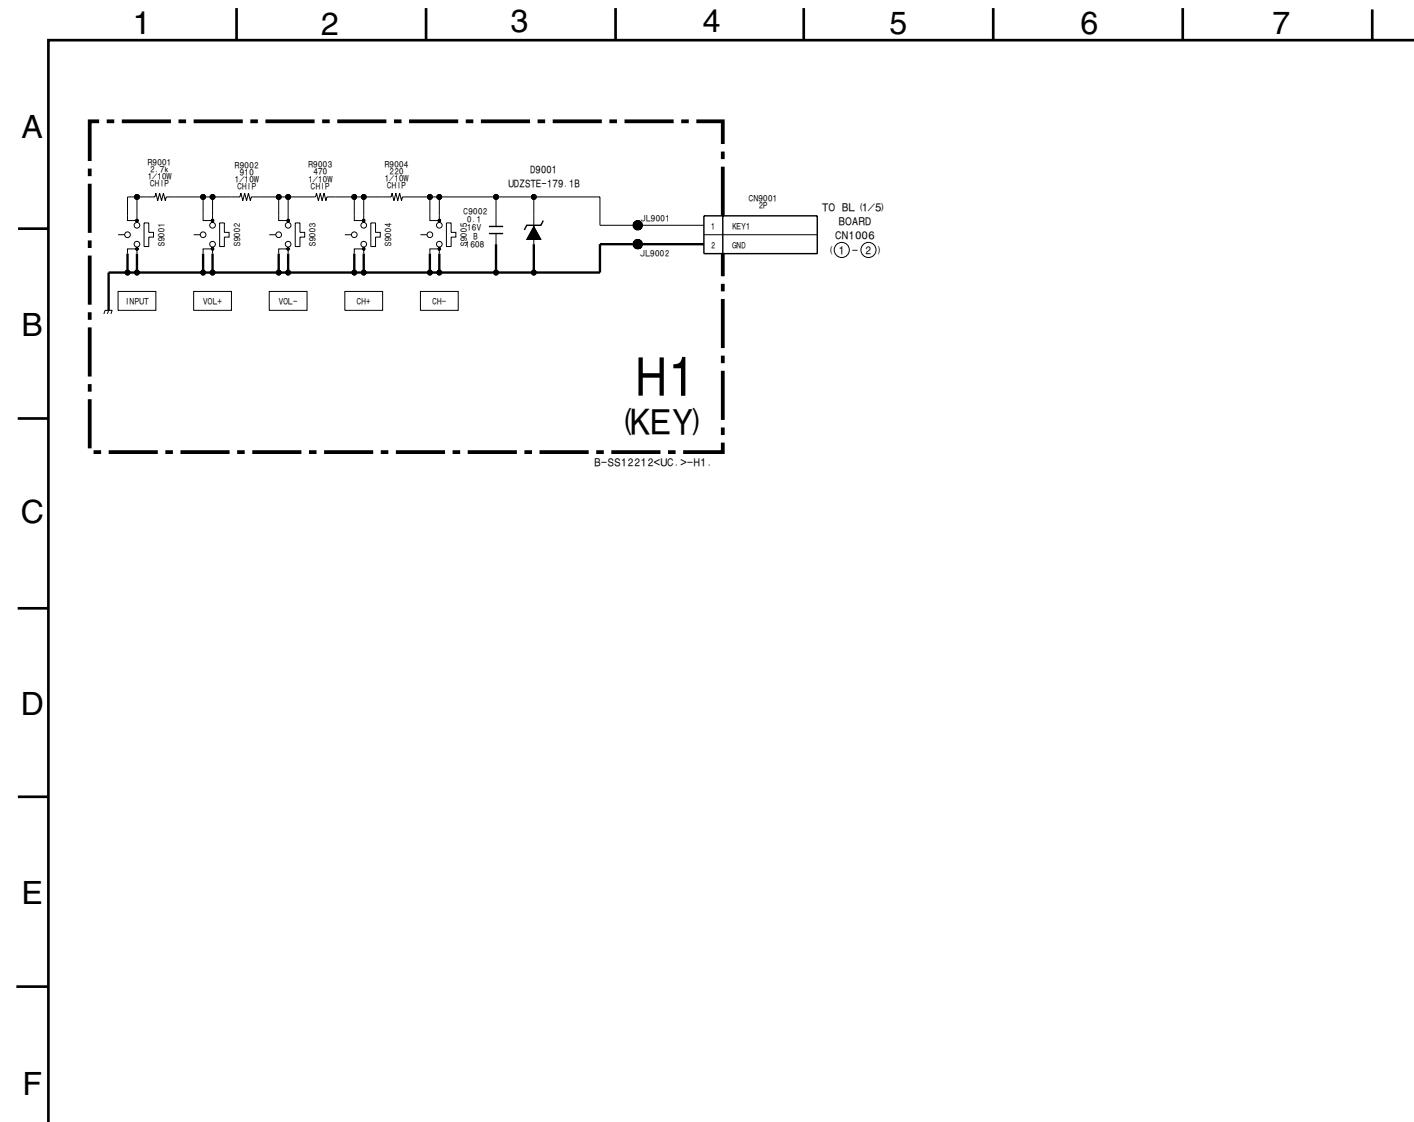


**H1** [KEY]

— H1 BOARD —

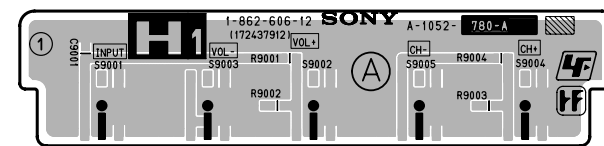

<COMPONENT SIDE>

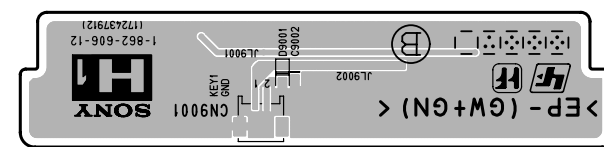

<CONDUCTOR SIDE>


• H1 BOARD SEMICONDUCTOR LOCATION

Ref.	*
D9001	③


\*: Refer to Terminal name of semiconductors in silk screen printed circuit (see page 3-7)

**H2** [LED, SIRCS]

— H2 BOARD —

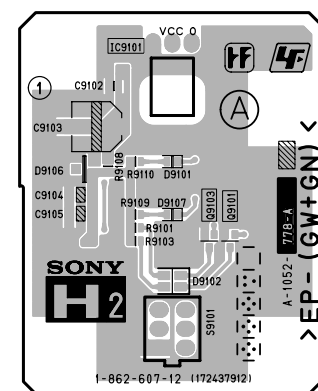

<COMPONENT SIDE>

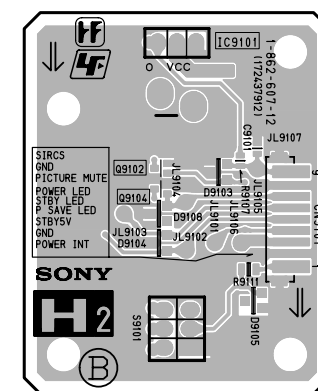


<CONDUCTOR SIDE>

• H2 BOARD SEMICONDUCTOR LOCATION

Ref.	*
Q9101-Q9103	②
D9101	③
D9102	-
D9103-D9106	⑪


\*: Refer to Terminal name of semiconductors in silk screen printed circuit (see page 3-7)

(5) Schematic Diagrams of H3 Board

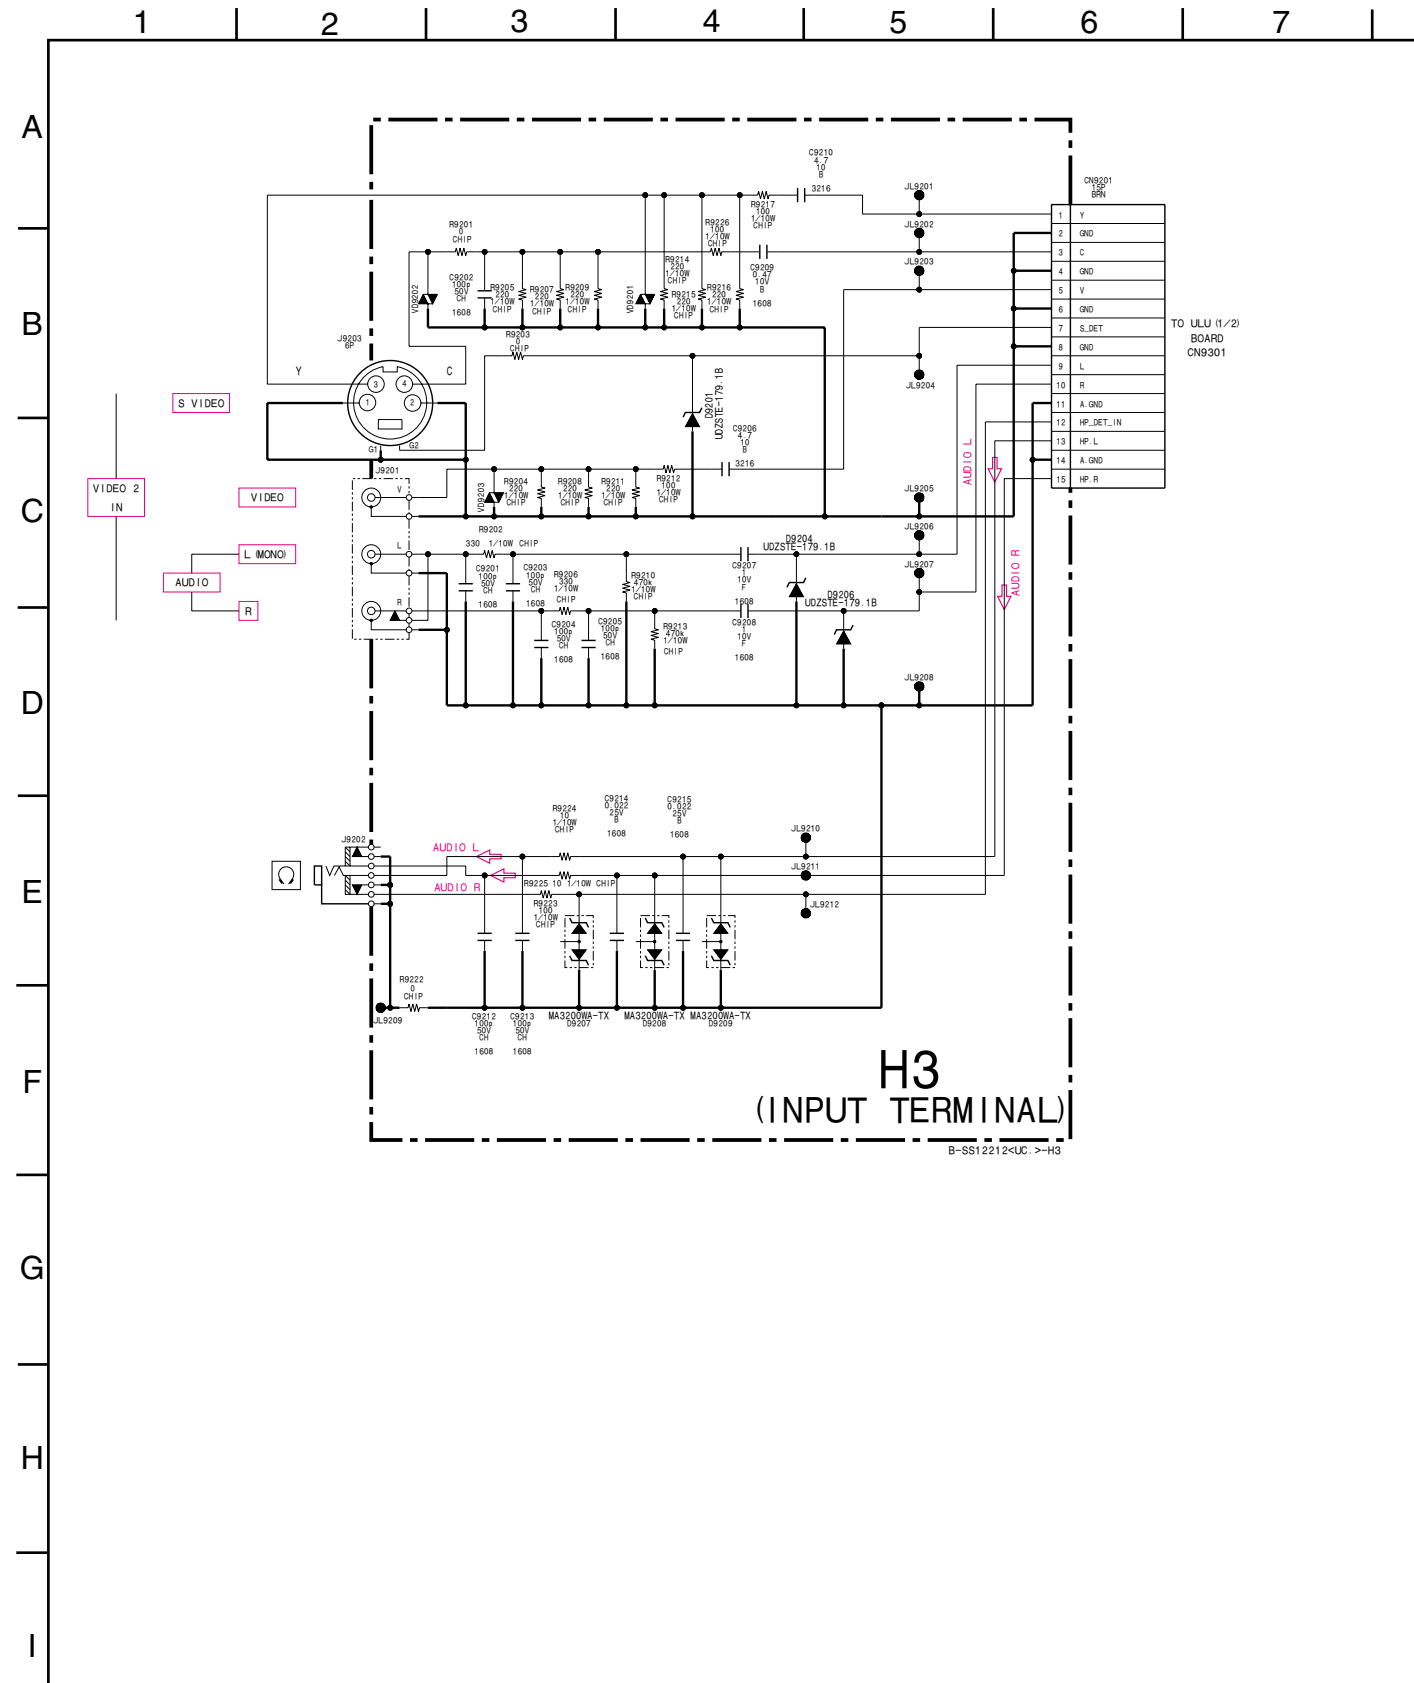


**H3** [INPUT TERMINAL]

— H3 BOARD —

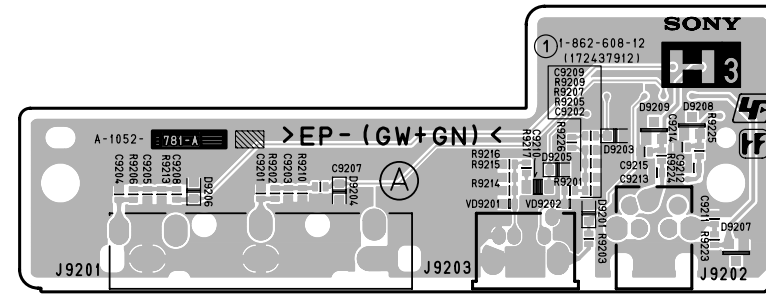

<COMPONENT SIDE>

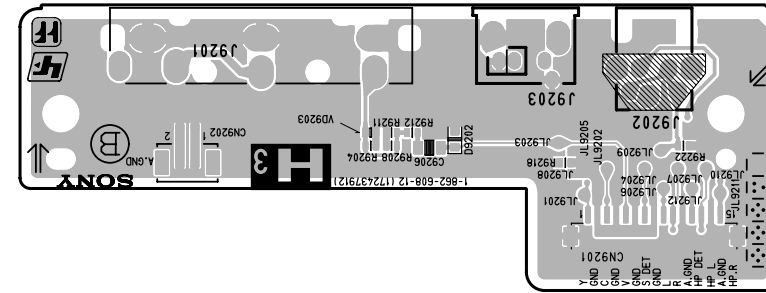

<CONDUCTOR SIDE>


• H3 BOARD SEMICONDUCTOR LOCATION

Ref.	*
D9201, D9204, D9206	③
D9207-D9209	①

\*: Refer to Terminal name of semiconductors in silk screen printed circuit (see page 3-7)




(6) Schematic Diagrams of P Board

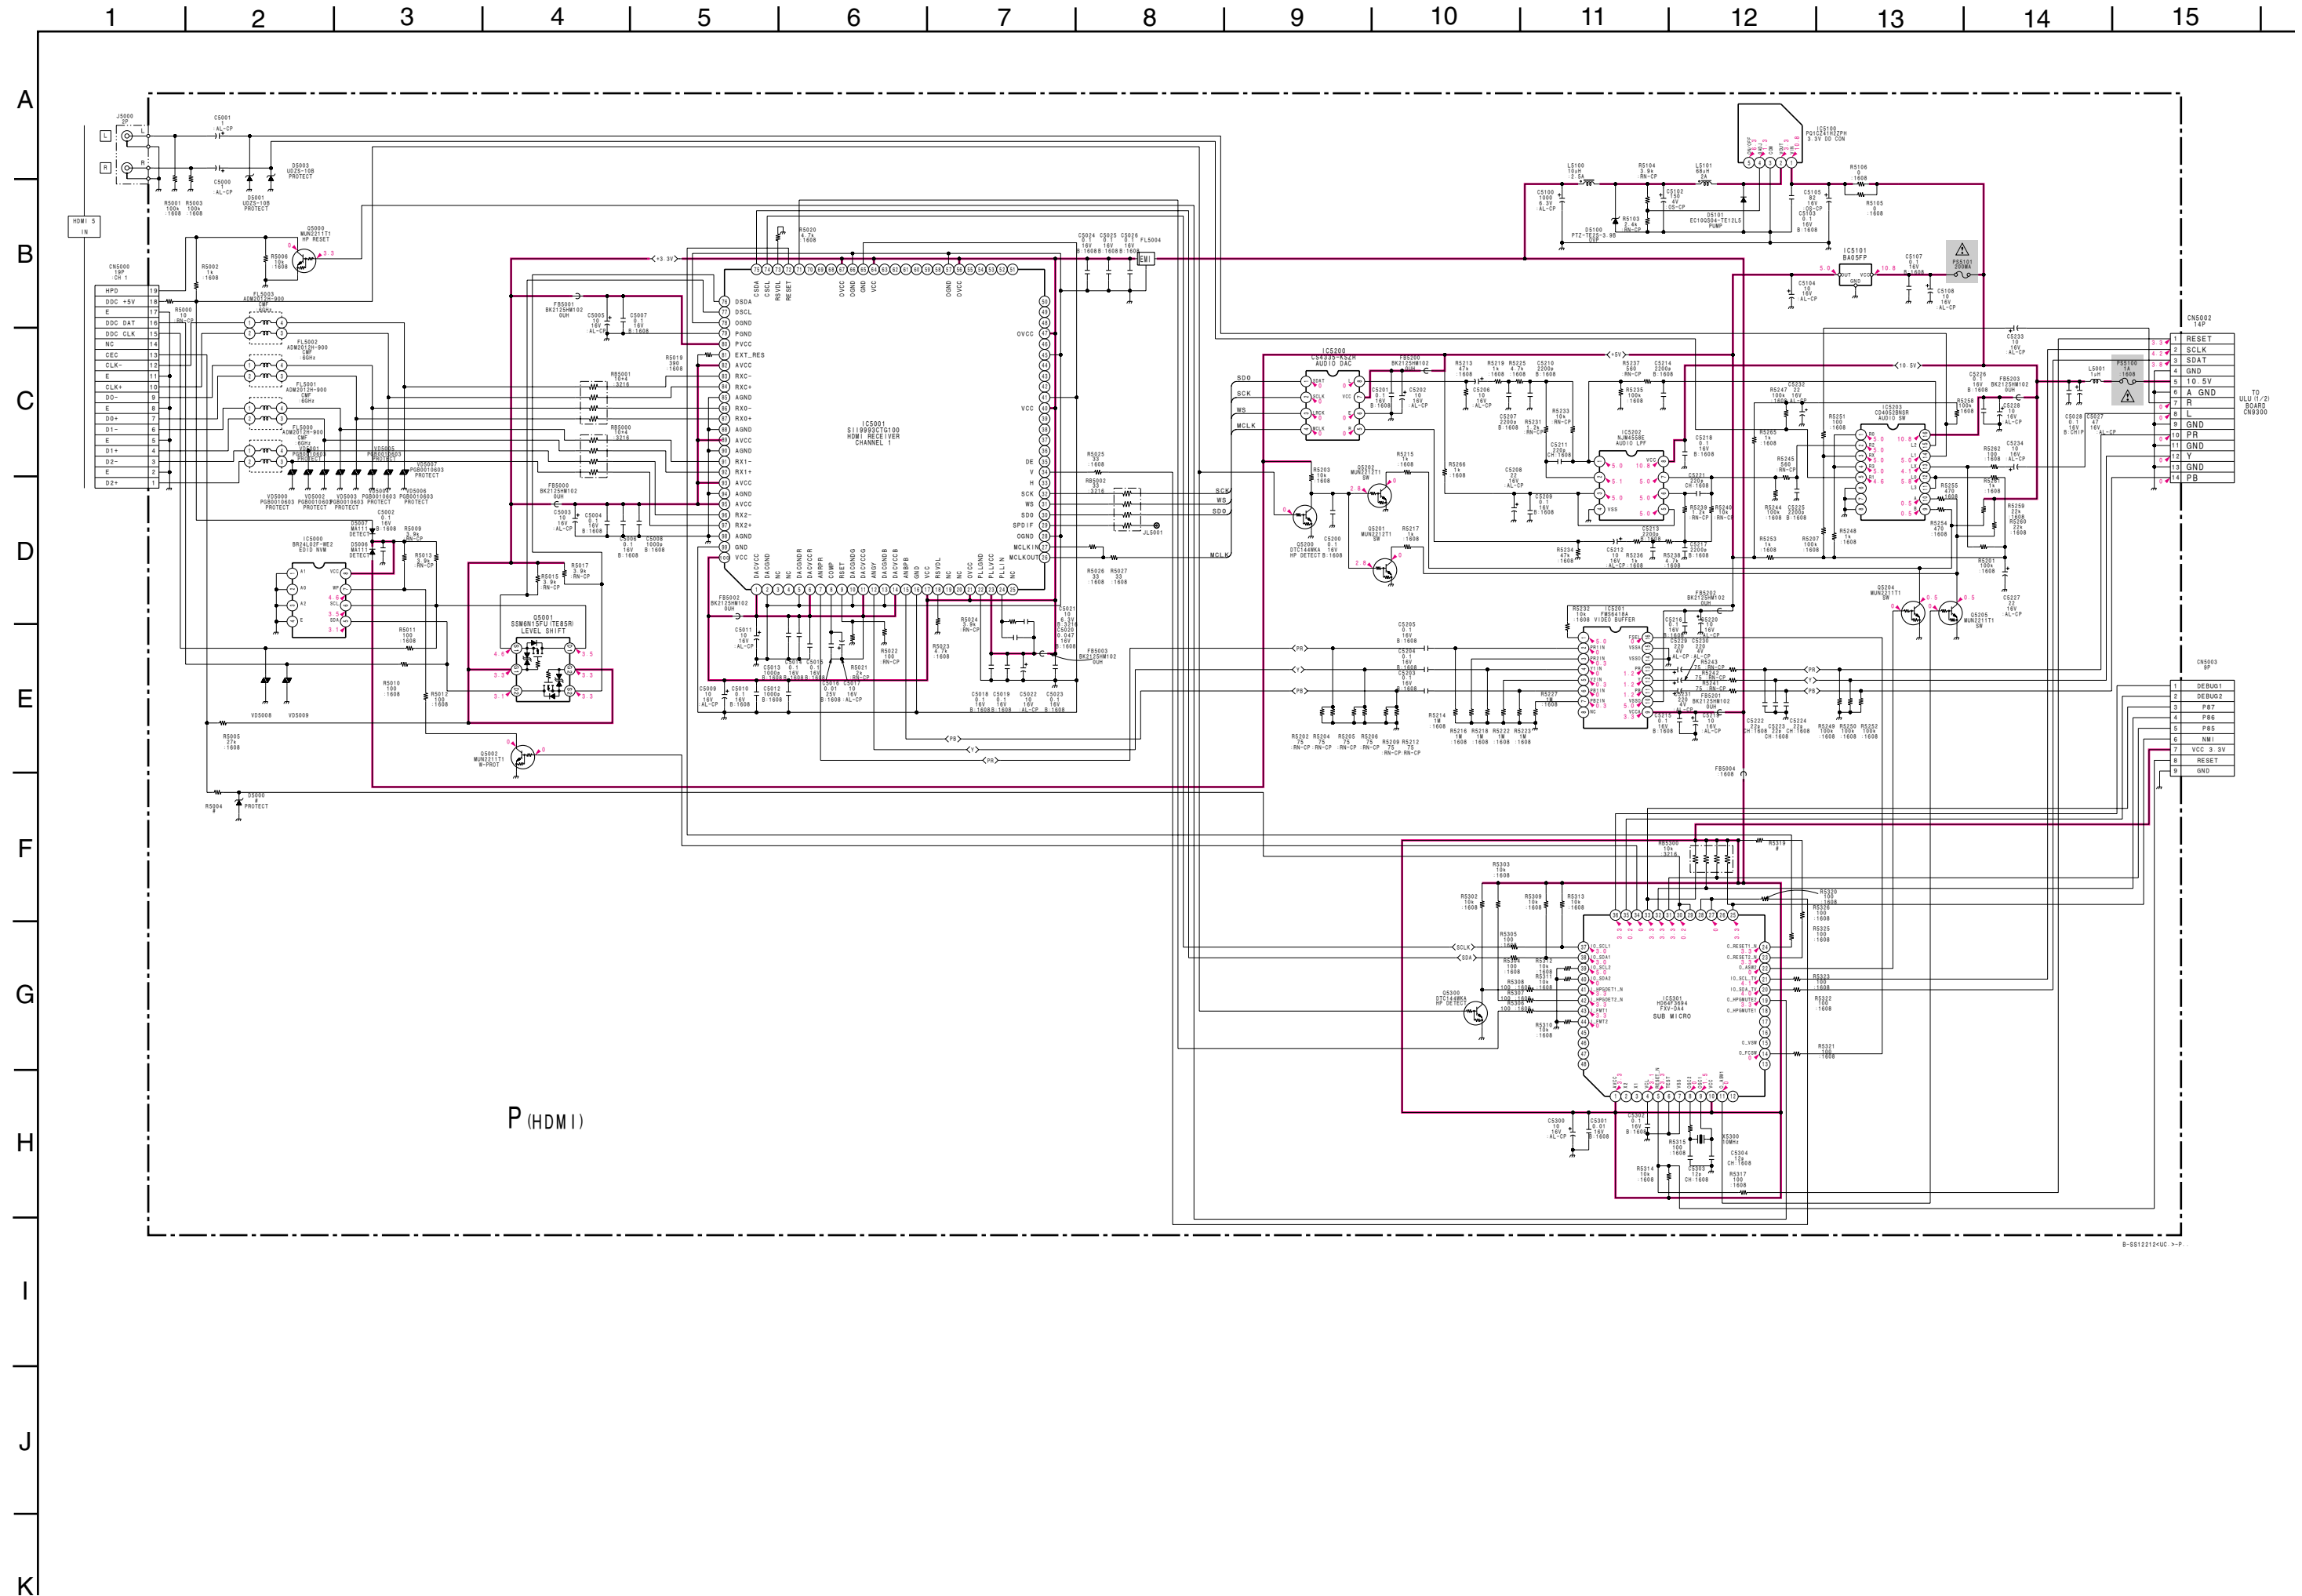


**P** [HDMI]

— P BOARD —

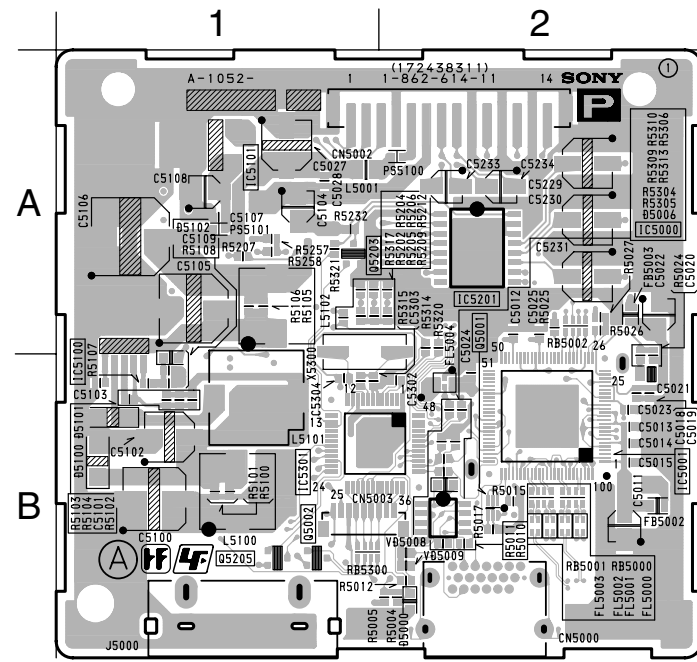

<COMPONENT SIDE>

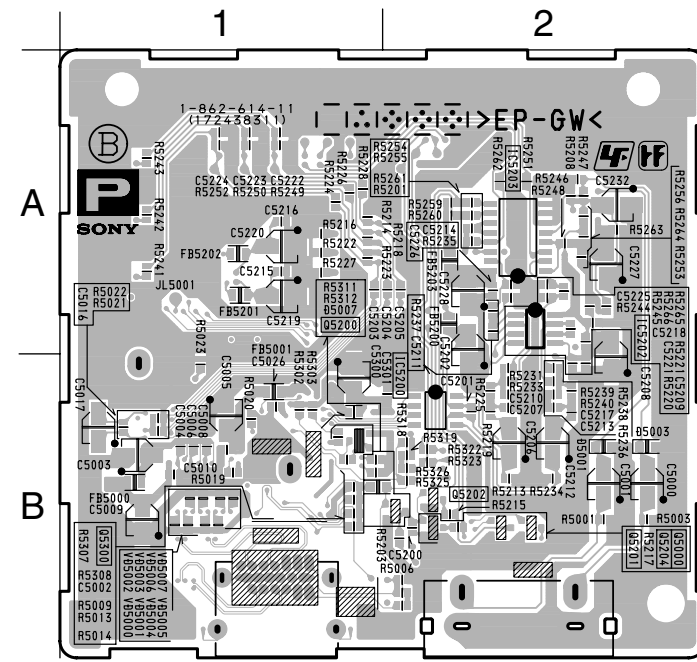

<CONDUCTOR SIDE>


• P BOARD SEMICONDUCTOR LOCATION

IC		IC	Location	Count
(Component Side)	(Conductor Side)			
IC5000	B-2	Q5201	B-2	②
IC5001	B-2	Q5202	B-2	②
IC5100	A-1	Q5204	B-2	②
IC5101	A-1	Q5205	B-1	②
IC5200	B-2	Q5300	B-1	②
IC5201	A-2	<b>DIODE</b>		
IC5202	A-2	(Component Side)	(Conductor Side)	*
IC5203	A-2	D5000	B-2	③
IC5301	B-1	D5001	B-2	③
<b>TRANSISTOR</b>		D5003	B-2	③
		D5006	B-2	③
(Component Side)	(Conductor Side)	D5007	B-1	③
Q5000	B-2	D5100	B-1	③
Q5001	B-2	D5101	B-1	③
Q5002	B-1	D5102	B-1	③
Q5200	B-2			


\*: Refer to Terminal name of semiconductors in silk screen printed circuit (see page 3-7)




(7) Schematic Diagrams of ULU Board

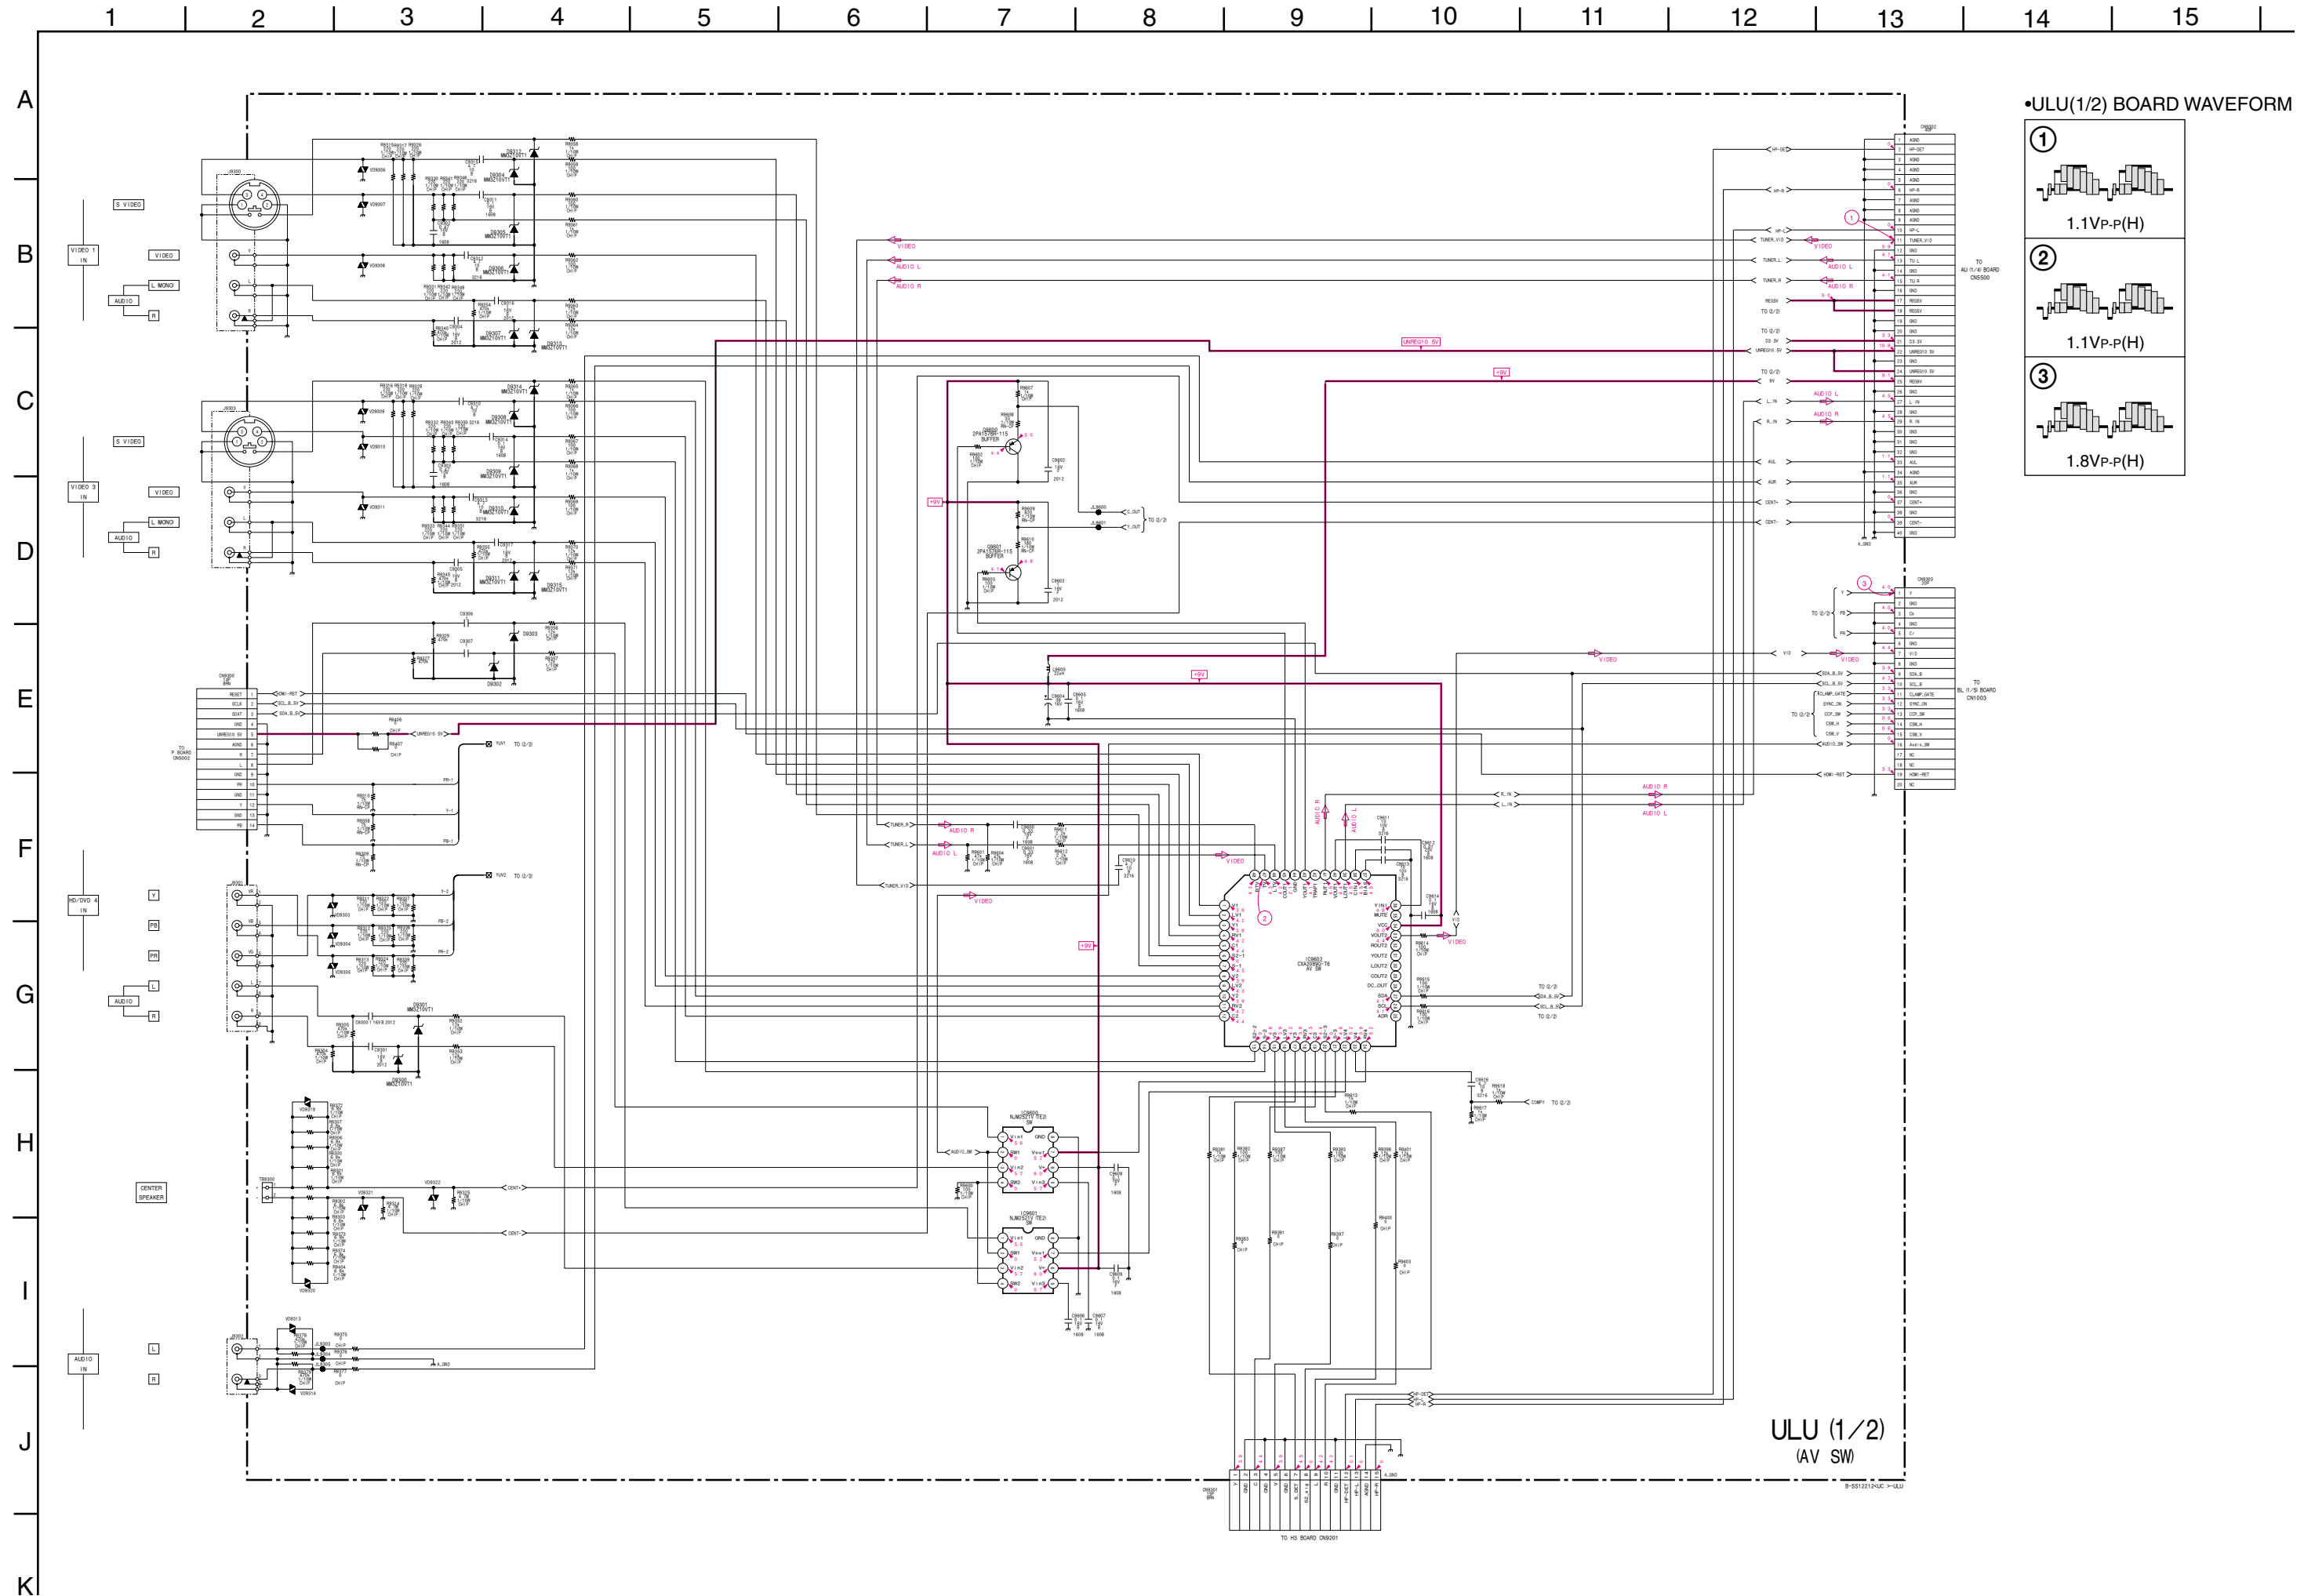

•ULU(1/2) BOARD WAVEFORM

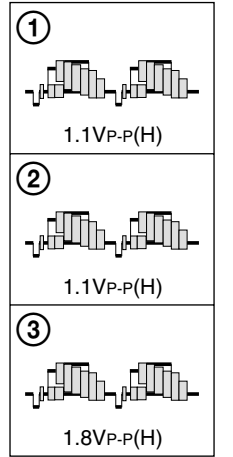


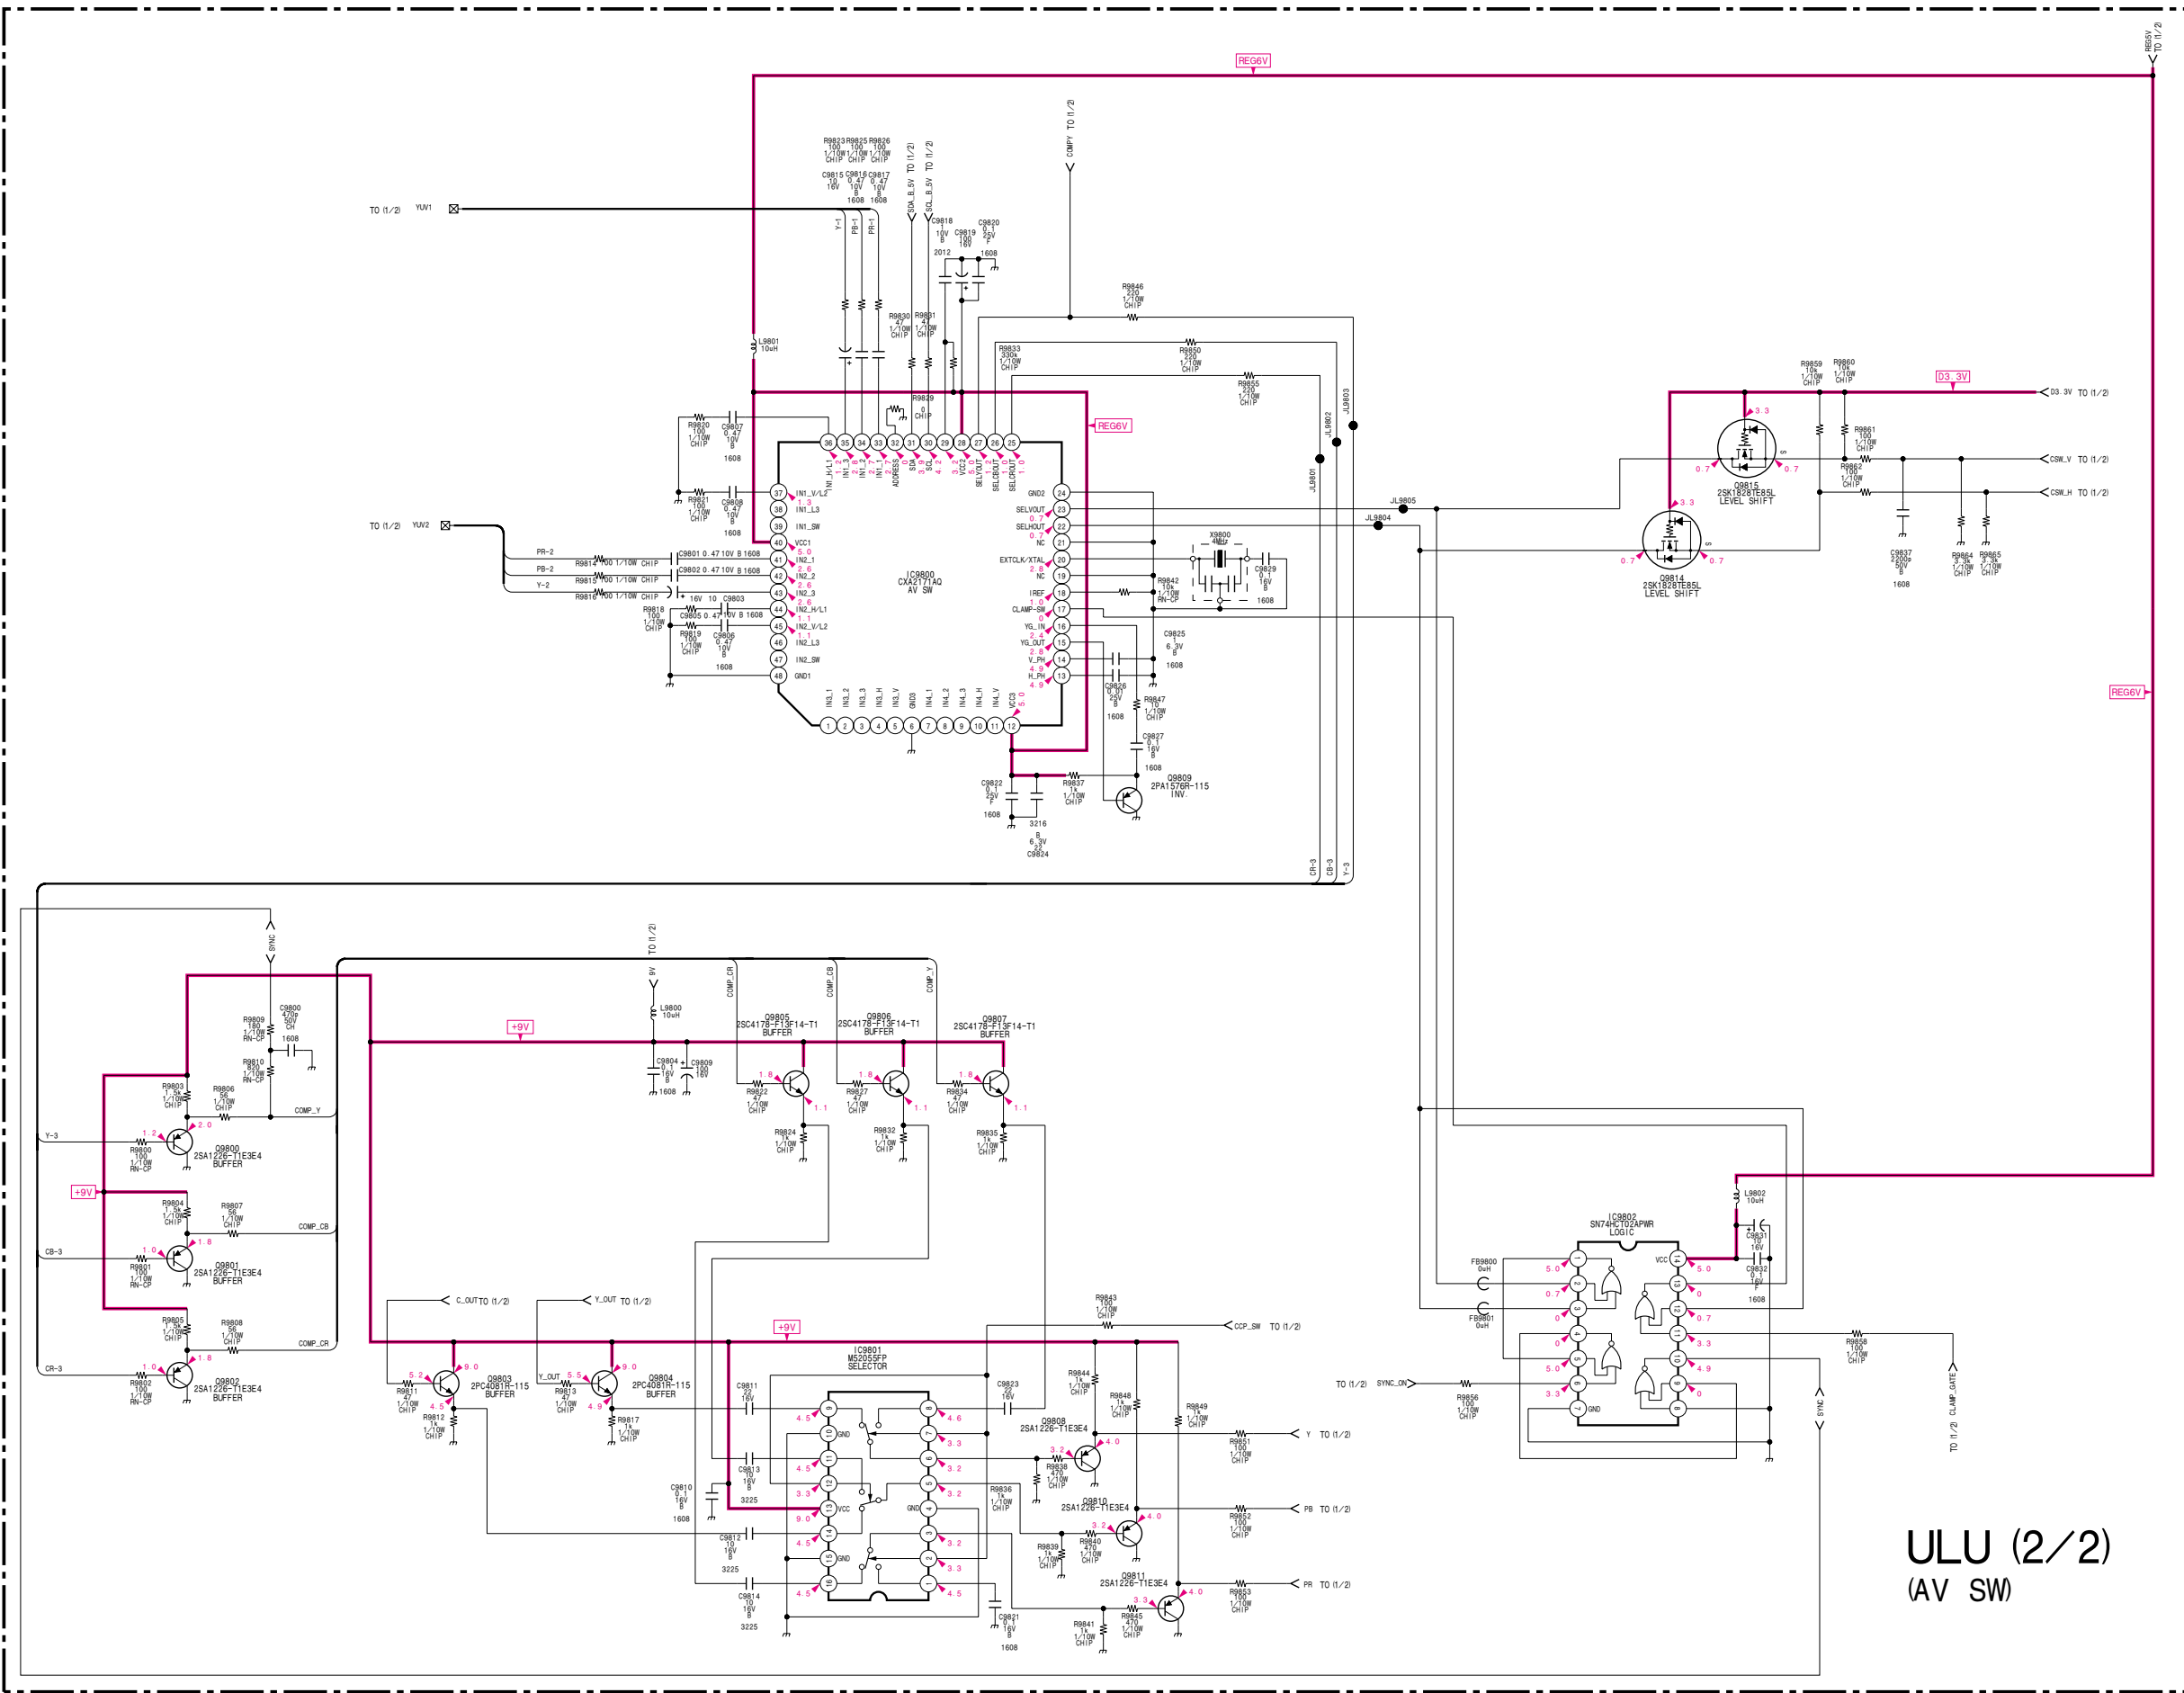


**ULU (2/2)**  
(AV SW)

B-SS12212-UC, 2-ULU, P2

— ULU BOARD —

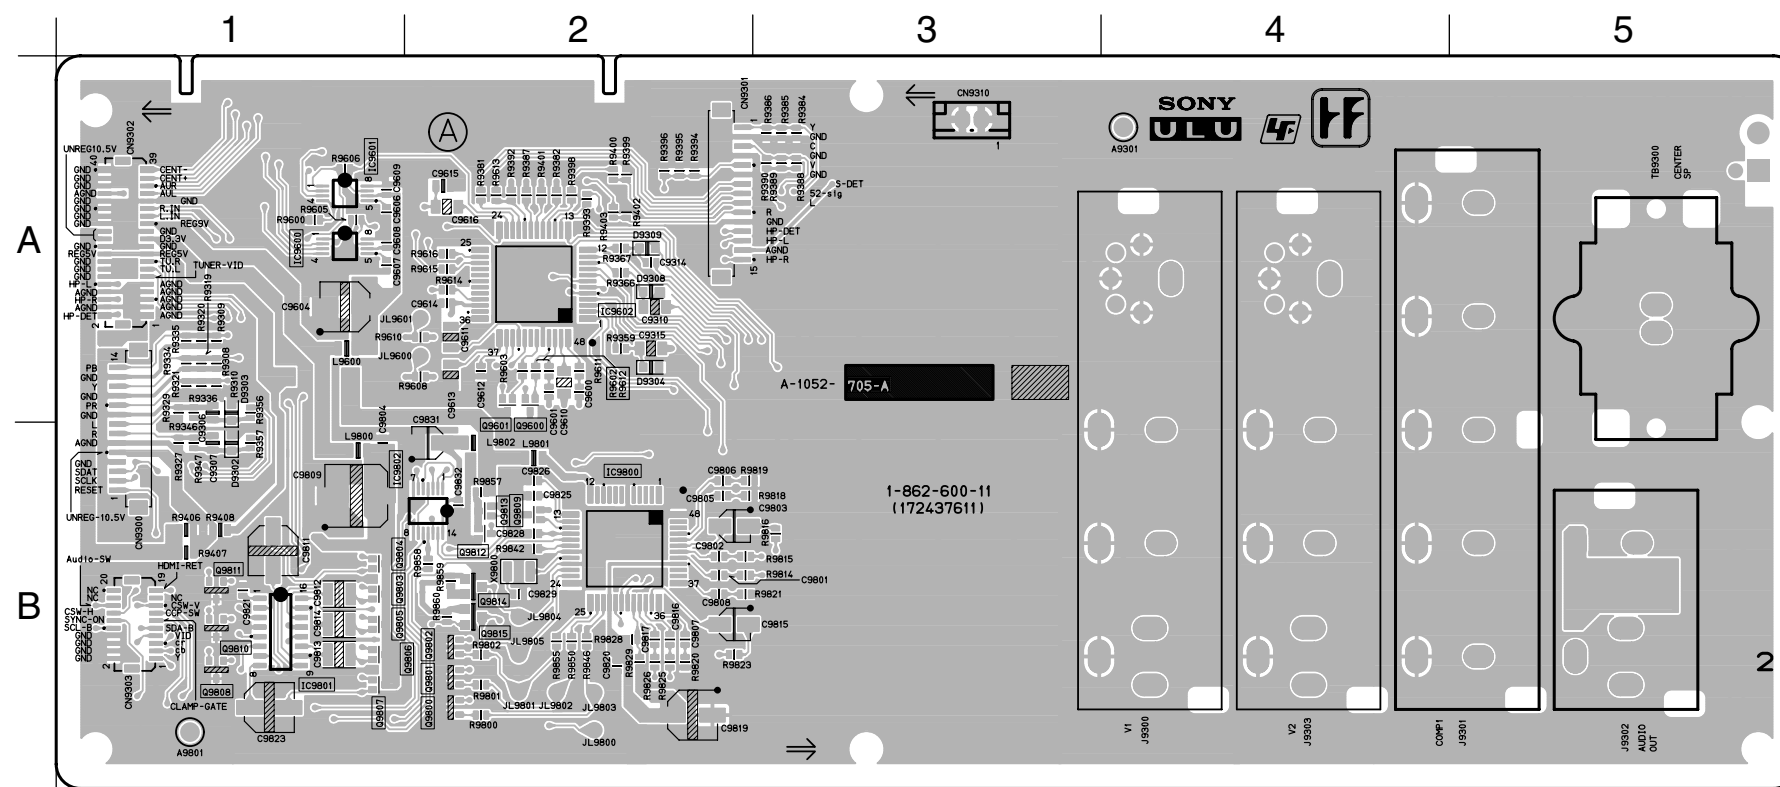

<COMPONENT SIDE>

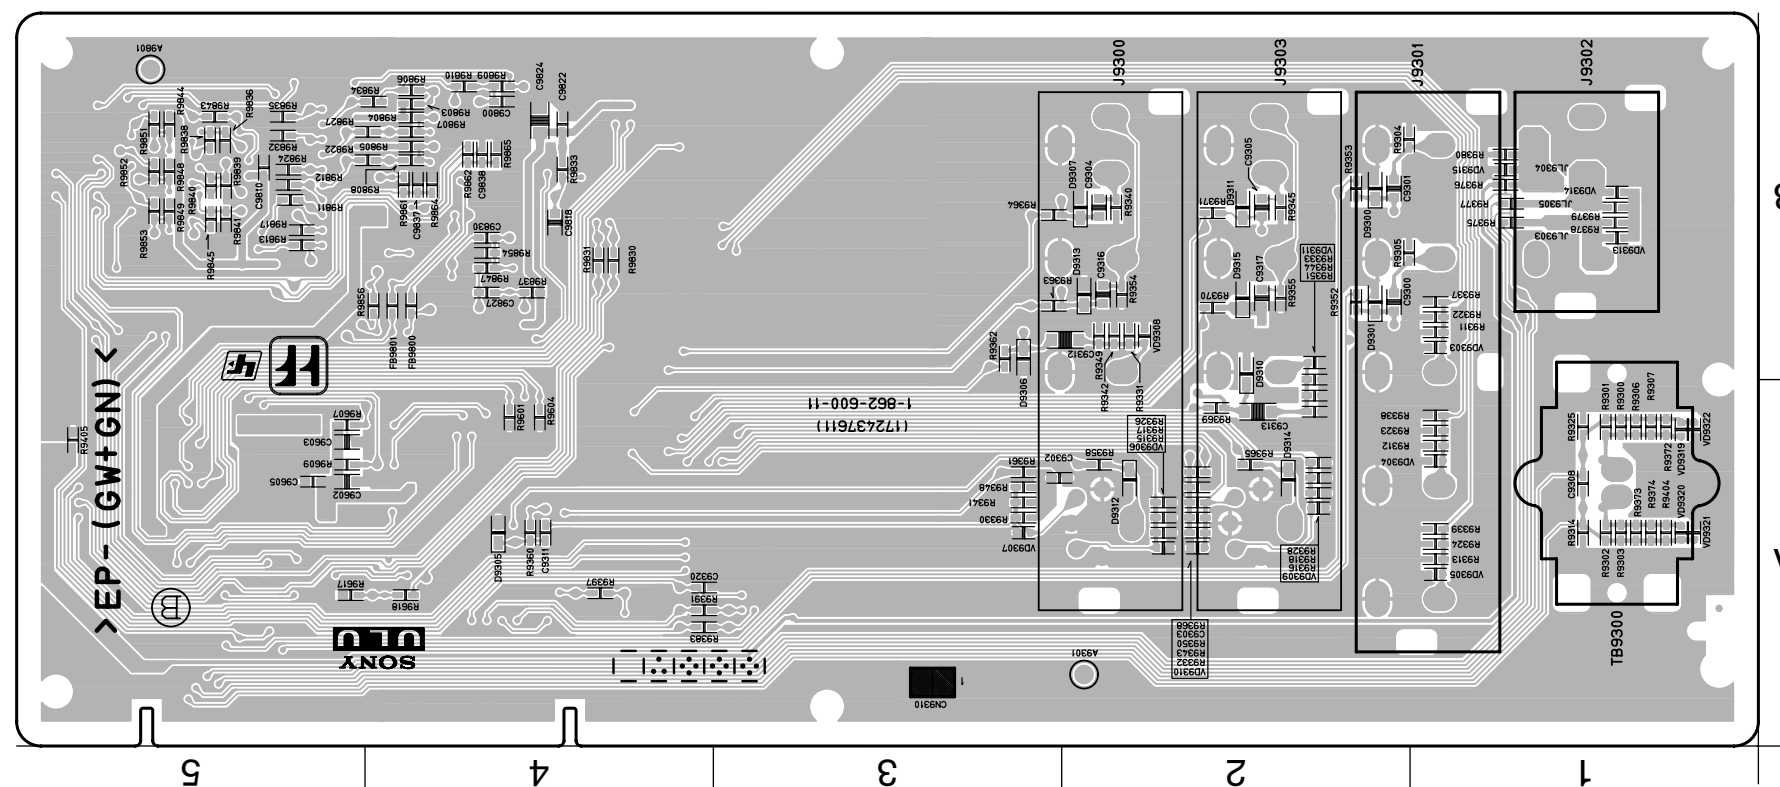

<CONDUCTOR SIDE>

• ULU BOARD SEMICONDUCTOR LOCATION


IC		TRANSISTOR		DIODE	
(Component Side)	(Conductor Side)	(Component Side)	(Conductor Side)	(Component Side)	(Conductor Side)
		Q9805	B-1	D9307	B-2
		Q9806	B-1	D9308	A-2
		Q9807	B-1	D9309	A-2
		Q9808	B-1	D9310	B-2
		Q9809	B-2	D9311	B-2
		Q9810	B-1	D9312	A-2
		Q9811	B-1	D9313	B-2
		Q9814	B-2	D9314	A-2
		Q9815	B-2	D9315	B-2
IIC9600	A-1	Q9600	A-2		
IC9601	A-1	Q9601	A-2		
IC9602	A-2	Q9800	B-2		
IC9800	B-2	Q9801	B-2		
IC9801	B-1	Q9802	B-2		
IC9802	B-2	Q9803	B-1		
		Q9804	B-1		
				D9300	B-2
				D9301	B-2
				D9302	B-1
				D9303	A-1
				D9304	A-2
				D9305	A-4
				D9306	B-3

\*: Refer to Terminal name of semiconductors in silk screen printed circuit (see page 3-7)

3-5. SEMICONDUCTORS


IC

BA033FP-E2  
BA05FP-E2  
S-80928CNMC-G8YT2G  
TA75S393F-TE85R  
TC7SZ125FU(TE85R)




5Pin CHIP


BA05T  
BA09T




BA09ST-V5




BA25BC0FP-E2



BA3823LS




CD4052BNSR  
M52055FP  
TC4052BF(EL,N)




16Pin SOP

CS4335-KSZR  
LM75CIMX-3  
LMH6658MMX/J5000172  
M24C64-WMN6T(B)  
NJM2521V(TE2)  
NJM3414AV(TE2)  
NJM4558E(TE2)  
NJM4558V-TE2




8Pin SOP

CXA2089Q-T6  
CXA2171AQ




48Pin QFP

CXD2097BQ  
CXD9756R




208Pin QFP

CXD3802BQ




240Pin QFP

CXP964032-003R




HD64F2376VFQ33V-ATMU2000




144Pin QFP

HY57V161610ETP-7DR  
MSM56V16160F-10TS-K  
MSM56V16160F-8T3FM1




50Pin SOP

IS42S32200B-6TL-TR  
MT48LC2M32B2P-6-Y14W




86Pin SOP

L88M05T-FA-TL



MCZ3001UB




24Pin SOP


MM1431ATT



MM1561JFBE




MX29LV800TTC-70G-2MUL100




48Pin SOP


PQ070XZ01ZP



PQ1CZ41H2ZPH




PW166B-10TL




256Pin PGA

SN105233DBTR




30Pin SOP

SN74ALVCH16823DGGR  
THC63LVDM83R-T




56Pin SOP

SN74HCT02APWR  
SN74LV132APWR  
SN74LVC74APWR-12  
TLC2933IPWR-12




14Pin SOP

STR-A6169




8Pin DIP

S-80822CNNB-B8HT2G  
S-80829CNNB-B8OT2G




TA8216H




TRANSISTOR


DTA143EUA-T106  
DTC114EUA-T106  
DTC114WUA-T106  
DTC144WKA-T146  
DTC314TK-T-146  
MSD601-RT1  
MUN2111T1  
MUN2211T1  
MUN5213T1  
UN2111  
UN2211  
2PA1576R-115  
2PC4081R-115  
2SA1037AK-T146-QR  
2SA1037AK-T146-R  
2SA1226-E4  
2SA1226-T1E3E4  
2SC1623-L5L6  
2SC2412K-T-146-QR  
2SC4081-R  
2SC4081T106R  
2SC4178-F13F14-T1  
2SC4178-F14




DTC114EU




HN1B01FU-TE85R




SI2301DS-T1  
SI2304DS-T1  
2SK1828  
2SK1828TE85L



SSM6N15FU(TE85R)




UPA1716G-E2




DIODE


DTZ10B  
HZU16B2TRF  
MA111-TX  
MMDL914T1  
RD5.6SB-T1  
UDZSTE-175.6B  
UDZSTE-176.2B  
UDZSTE-178.2B  
UDZSTE-179.1B  
UDZ-TE-17-8.2B




D10SC6M-4022




D4SB60L




EC10QS-04  
EC21QS03L-TE12L  
PTZ-TE25-3.9B  
PTZ-TE25-5.6B  
PTZ-TE25-6.8B  
RB053L-30TE25




ERA22-08KFLB  
UF4005PKG23  
10ERB20-TB3




F10P04Q  
FCH08A10




HN1D03FU-TE85L  
HN1D03FU-TE85R




MA153-TX  
1PS302  
1SS226




MA3130WA-TX




MA3200WA-TX




MM3Z10VT1  
MM3Z13VT1  
MM3Z15VT1  
MM3Z22VT1  
MM3Z5V6ST1




RB16M-30TR




RD15ESB2  
RD15ES-T1B2




1PS184-115



SML-310LTT86



SML-020MVT-T86



## SECTION 4 EXPLODED VIEWS


### NOTE:

The components identified  $\triangle$  marked are critical for safety.  
Replace only with the part number specified.

Les composants identifiés par la marque  $\triangle$  sont critiques pour la sécurité.  
Ne les remplacer que par une pièce portant le numéro spécifié.


- Items with no part number and no description are not stocked because they are seldom required for routine service.
- The construction parts of an assembled part are indicated with a collation number in the remark column.
- Items marked " \* " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

## 4-1. CABINET ASSY AND STAND

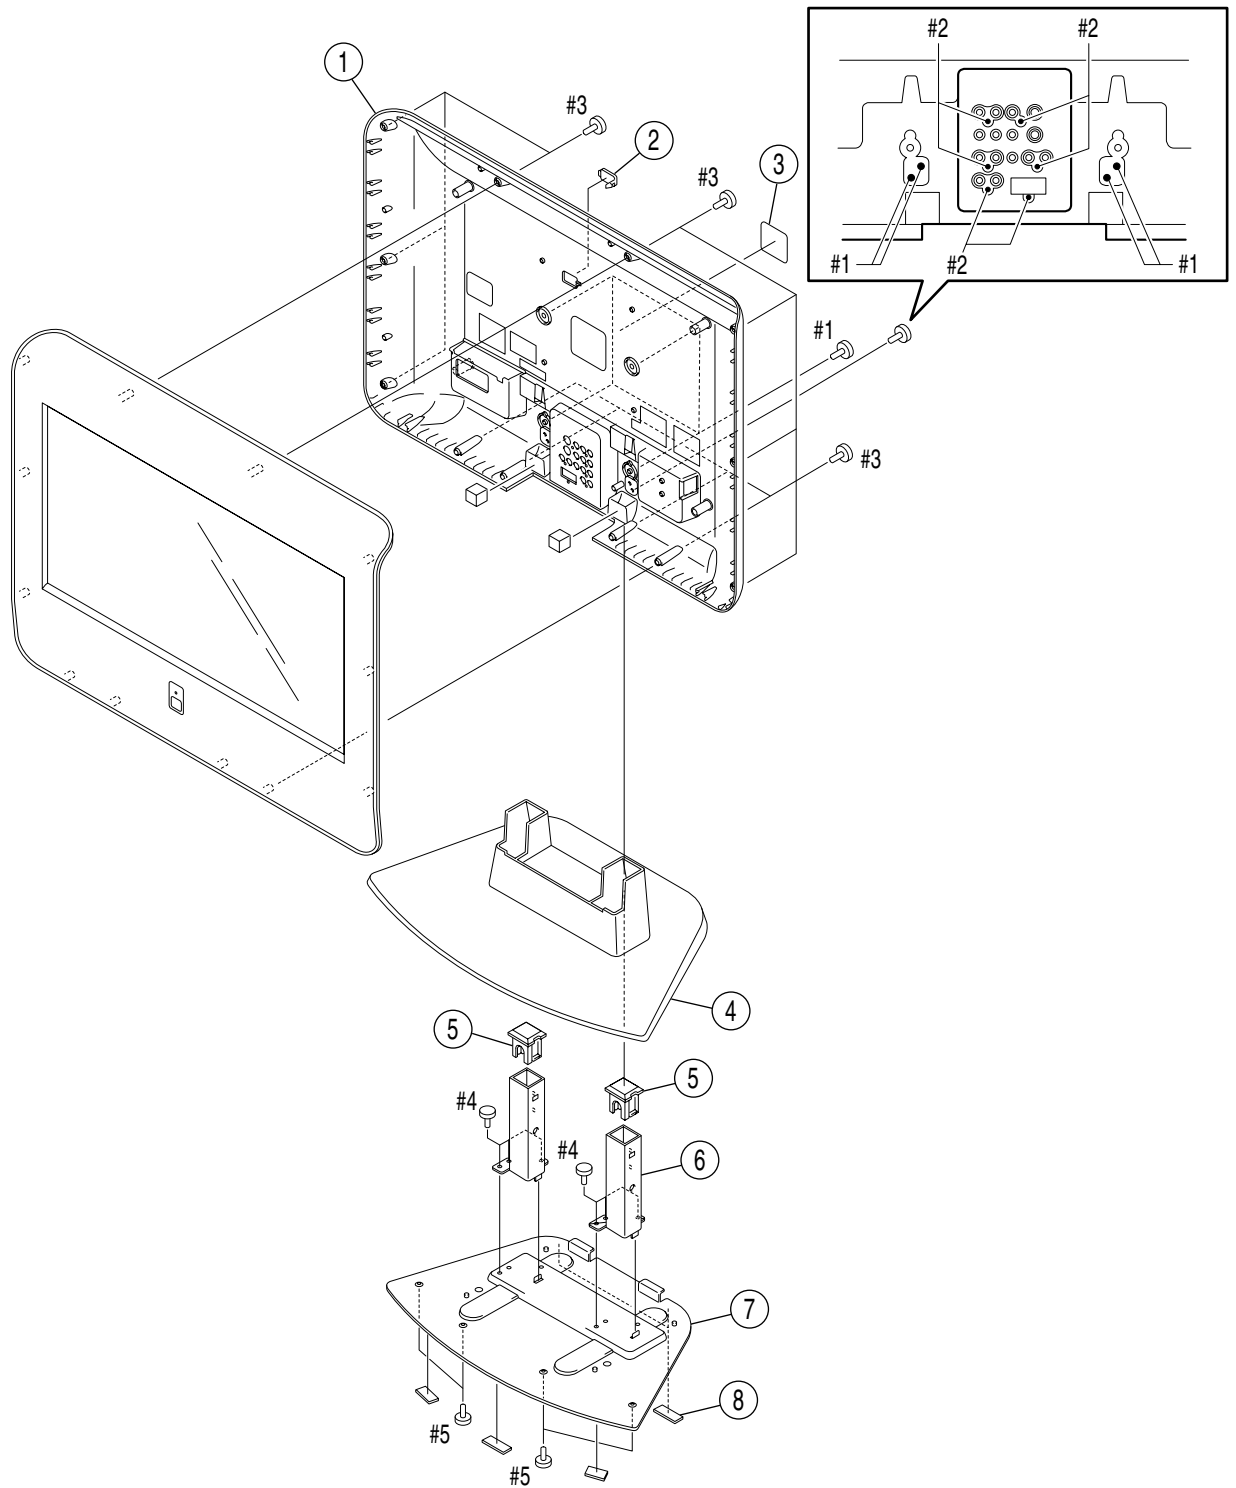


REF. No.	PART No.	DESCRIPTIONRE	MARK	REF. No.	PART No.	DESCRIPTIONRE	MARK
1	X-2022-836-1	REAR CABINET ASSY		#1	7-682-973-49	SCREW +PSW 5X16	
2	4-094-922-41	COVER, ECS (15V)		#2	7-685-648-79	SCREW +BVTP 3X12 TYPE2 IT-3	
3	* 2-024-113-11	MODEL NAME PLATE		#3	7-685-663-79	SCREW +BVTP 4X16 TYPE2 IT-3	
4	2-024-336-01	STAND COVER		#4	7-682-973-19	SCREW +PSW 5X10	
5	4-098-263-01	CAP (42), STAND		#5	7-685-659-71	SCREW +BVTP 4X8 TYPE2 IT-3	
6	2-024-338-01	STAND ARM					
7	2-024-337-01	STAND BASE					
8	2-021-805-01	FOOT					

## 4-2. CHASSIS-1

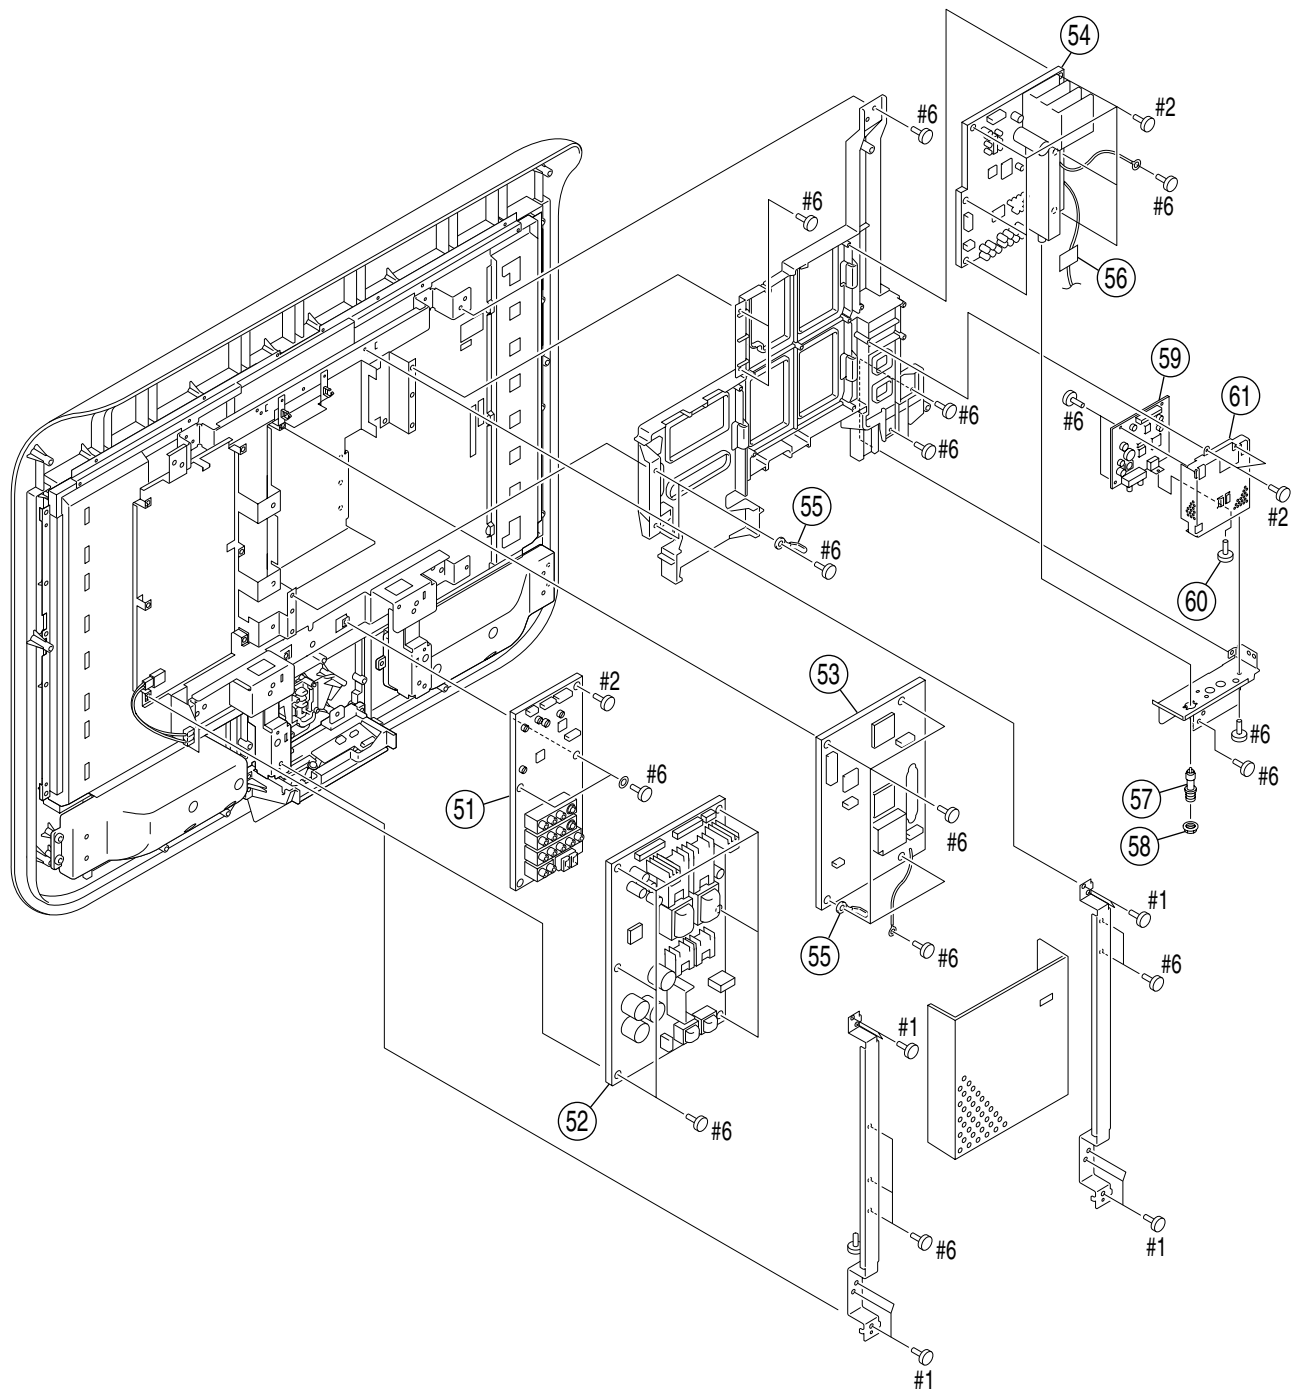

REF. No.	PART No.	DESCRIPTIONRE	MARK	REF. No.	PART No.	DESCRIPTIONRE	MARK
51	* A-1052-705-A	ULU MOUNT		59	* A-1052-776-A	P MOUNT	
52	* A-1052-704-A	GL MOUNT		60	2-148-126-01	SCREW (+B), FIXED	
53	* A-1052-703-A	BL MOUNT		61	2-021-777-01	SHIELD (LOWER), P	
54	* A-1071-844-A	AU MOUNT		#1	7-682-973-49	SCREW +PSW 5X16	
55	* 4-662-796-01	CLIP, COACHING		#2	7-685-648-79	SCREW +BVTP 3X12 TYPE2 IT-3	
56	* 4-092-814-02	CUSHION D		#6	7-685-872-09	SCREW +BVTT 3X8 (S)	
57	1-573-657-21	PLUG, F-PIN					
58	3-682-691-00	NUT, WASHER HEXAGON					


### 4-3. CHASSIS-2

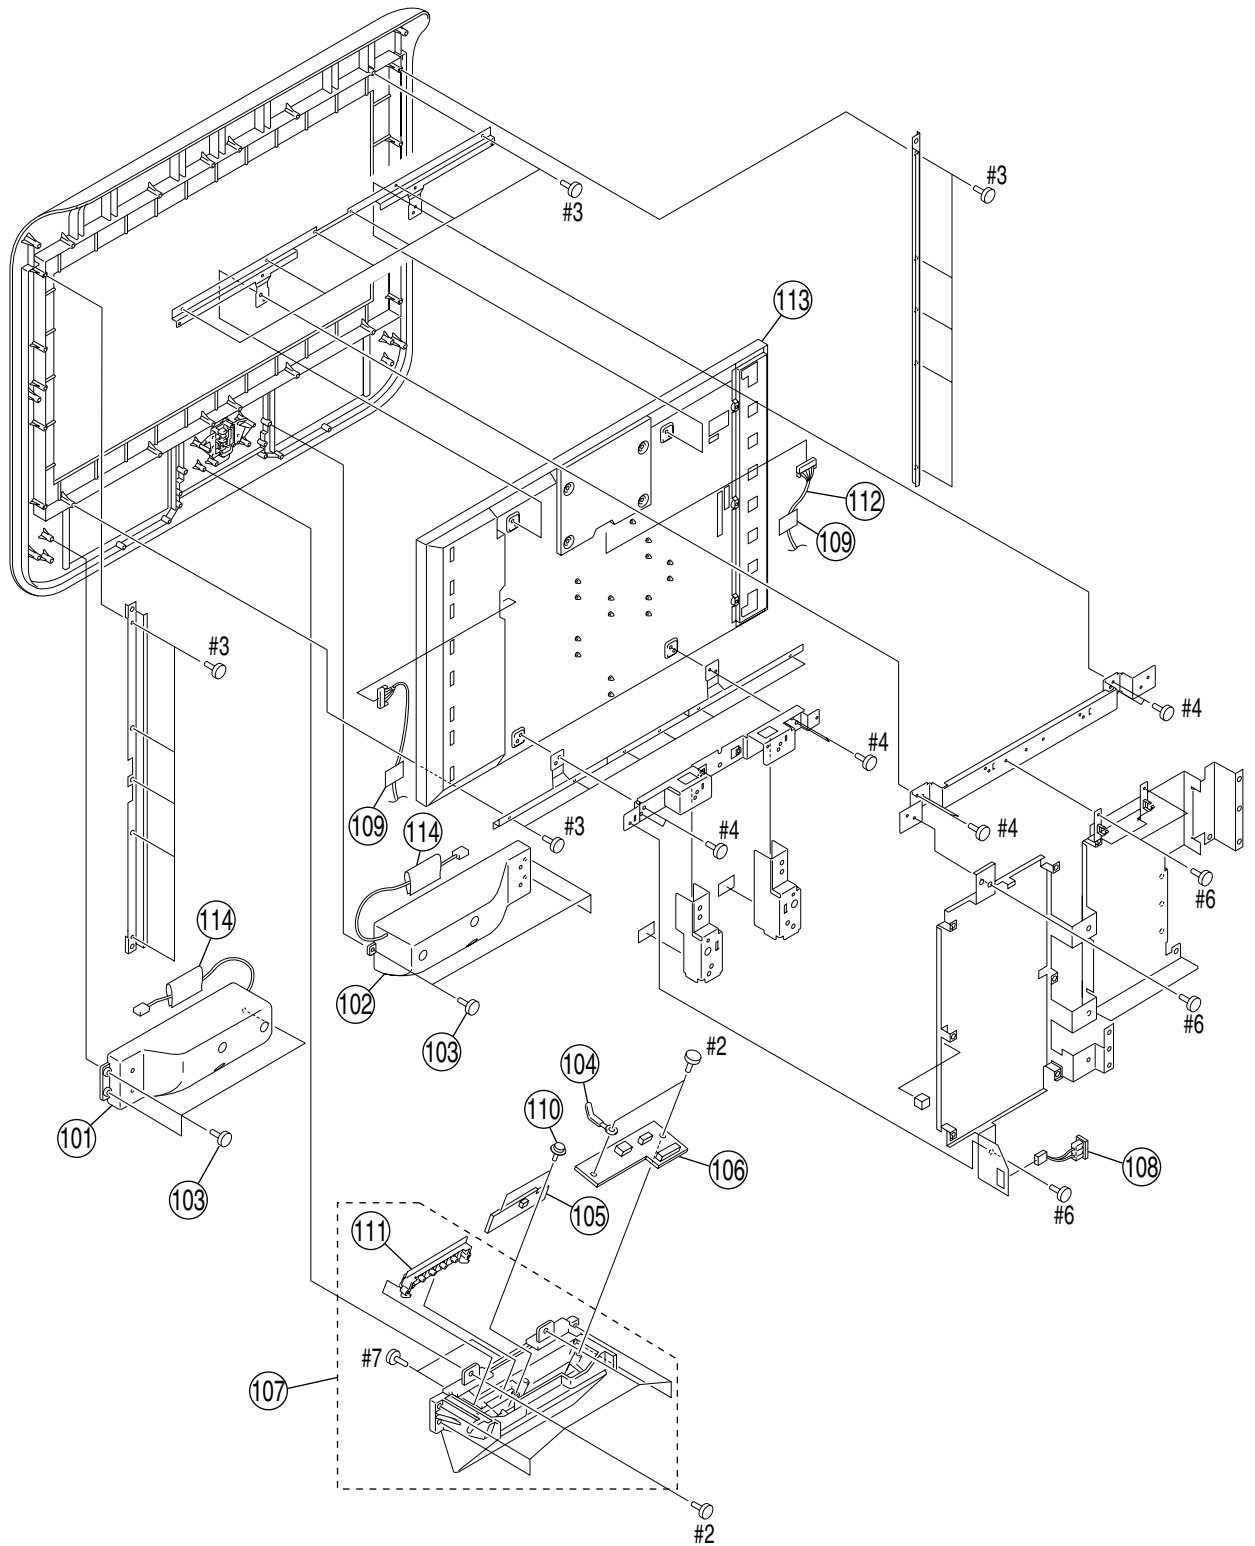

REF. No.	PART No.	DESCRIPTIONRE	MARK	REF. No.	PART No.	DESCRIPTIONRE	MARK
101	1-825-877-11	LOUDSPEAKER		111	2-024-334-01	MULTI BUTTON	
102	1-825-876-11	LOUDSPEAKER		112	1-829-352-11	LEAD WIRE WITH CONNECTER (LVDS)	
103	4-302-404-03	SCREW (WASHER HEAD) (+P 4X16)		113	1-805-640-11	LCD PANEL	
104	* 4-662-796-01	CLIP, COACHING		114	2-109-183-01	CUSHION, SP CABLE	
105	* A-1052-780-A	H1 MOUNT		#2	7-685-648-79	SCREW +BVTP 3X12 TYPE2 IT-3	
106	* A-1073-555-A	H3 MOUNT		#3	7-685-663-79	SCREW +BVTP 4X16 TYPE2 IT-3	
107	X-2021-455-1	FRONT TERMINAL ASSY	111	#4	7-682-973-19	SCREW +PSW 5X10	
108	1-818-024-11	INLET, AC		#6	7-685-872-09	SCREW +BVTT 3X8 (S)	
109	* 4-092-814-02	CUSHION D		#7	7-685-646-79	SCREW +BVTP 3X8 TYPE2 IT-3	
110	4-029-432-01	SCREW (WASHER HEAD) (+P3X12)					




#### 4-4. BEZEL ASSY

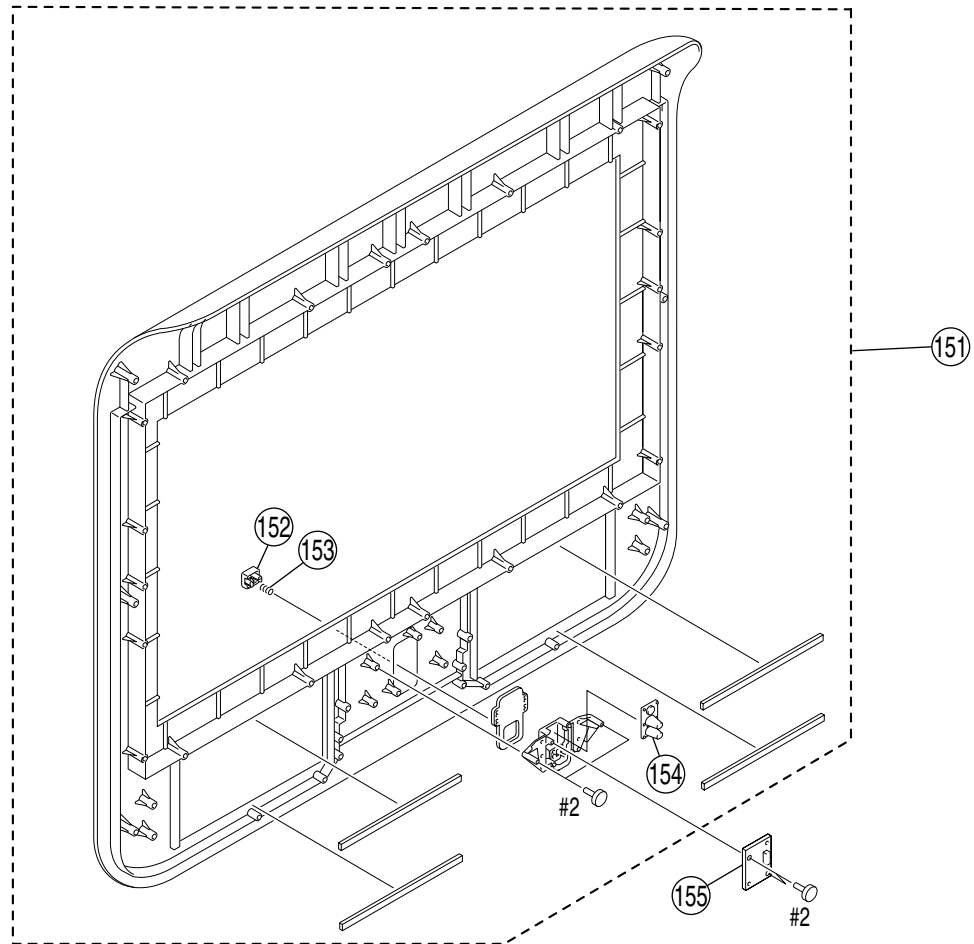

REF. No.	PART No.	DESCRIPTIONRE	MARK
151	X-2023-278-1	BEZEL ASSY	152-154
152	2-021-791-02	BUTTON, POWER	
153	2-109-058-01	SPRING, COMPRESSION	
154	2-050-241-01	GUIDE, LED	
155	* A-1055-538-A	H2 MOUNT	

REF. No.	PART No.	DESCRIPTIONRE	MARK
#2	7-685-648-79	SCREW +BVTP 3X12 TYPE2 IT-3	

## 4-5. PACKING MATERIALS

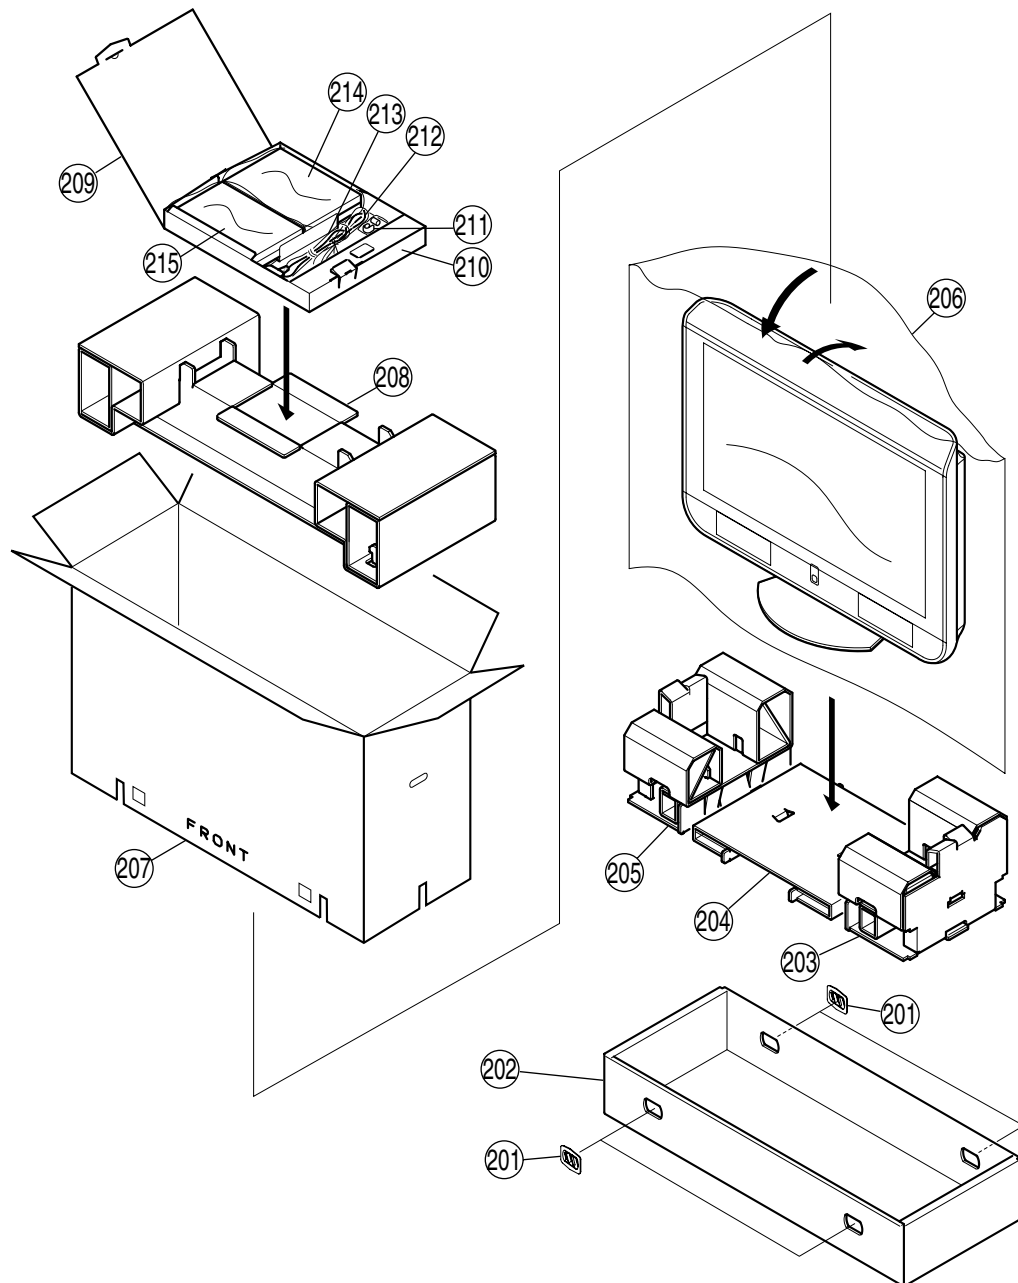

REF. No.	PART No.	DESCRIPTIONRE	MARK
201	* 3-674-673-01	STOPPER (A)	
202	* 2-050-342-01	TRAY	
203	* X-2021-684-1	CUSHION LOWER RIGHT ASSY	
204	* 2-050-349-01	CUSHION (CENTER LOWER)	
205	* X-2021-685-1	CUSHION LOWER LEFT ASSY	
206	* 2-148-373-01	BAG, PROTECTION	
207	* 2-103-649-01	INDIVIDUAL CARTON	
208	* X-2021-682-1	CUSHION UPPER ASSY	
209	* 2-148-886-01	BOX, ACCESSORY	
210	1-478-773-11	REMOTE COMMANDER (RM-Y1107)	

REF. No.	PART No.	DESCRIPTIONRE	MARK
211	4-099-720-02	HOOK	
212	1-757-319-52	CABLE, COAXIAL (WITH (F) PLUG)	
213	△ 1-827-804-11	CORD, POWER	
214	2-179-083-11	MANUAL, INSTRUCTION (US)	
	2-179-083-21	MANUAL, INSTRUCTION (FR)	
	2-179-083-31	MANUAL, INSTRUCTION (ES)	
215	2-179-084-11	QUICK SET GUIDE (US)	
	2-179-084-21	QUICK SET GUIDE (FR)	
	2-179-084-31	QUICK SET GUIDE (ES)	

## SECTION 5 ELECTRICAL PARTS LIST

### NOTE:

The components identified  $\triangle$  marked are critical for safety.  
Replace only with the part number specified.

Les composants identifiés par la marque  $\triangle$  sont critiques pour la sécurité.  
Ne les remplacer que par une pièce portant le numéro spécifié.

When indicating parts by reference number, please include the board name.

- All variable and adjustable resistors have characteristic curve B, unless otherwise noted.
- Items marked " \* " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

### RESISTORS

- All resistors are in ohms
- F : nonflammable

No.	#	Board	Type	$\Delta$ / <sup>*</sup>	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1		BL	CAPACITOR		C1001	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
2		BL	CAPACITOR		C1002	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
3		BL	CAPACITOR		C1003	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
4		BL	CAPACITOR		C1004	1-164-947-11	CERAMIC CHIP 0.01UF 50V		
5		BL	CAPACITOR		C1005	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
6		BL	CAPACITOR		C1006	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
7		BL	CAPACITOR		C1011	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
8		BL	CAPACITOR		C1012	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
9		BL	CAPACITOR		C1014	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
10		BL	CAPACITOR		C1015	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
11		BL	CAPACITOR		C1016	1-126-391-11	ELECT CHIP 47UF 20.00% 6.3V		
12		BL	CAPACITOR		C1017	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
13		BL	CAPACITOR		C1018	1-162-968-11	CERAMIC CHIP 0.0047UF 10.00% 50V		
14		BL	CAPACITOR		C1019	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
15		BL	CAPACITOR		C1020	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
16		BL	CAPACITOR		C1021	1-162-917-11	CERAMIC CHIP 15PF 5.00% 50V		
17		BL	CAPACITOR		C1022	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
18		BL	CAPACITOR		C1023	1-162-917-11	CERAMIC CHIP 15PF 5.00% 50V		
19		BL	CAPACITOR		C1024	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
20		BL	CAPACITOR		C1025	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
21		BL	CAPACITOR		C1027	1-125-837-91	CERAMIC CHIP 1UF 10% 6.3V		
22		BL	CAPACITOR		C1029	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
23		BL	CAPACITOR		C1030	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
24		BL	CAPACITOR		C1031	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
25		BL	CAPACITOR		C1032	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
26		BL	CAPACITOR		C1033	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
27		BL	CAPACITOR		C1034	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V		
28		BL	CAPACITOR		C1035	1-126-390-11	ELECT CHIP 22UF 20.00% 6.3V		
29		BL	CAPACITOR		C1037	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
30		BL	CAPACITOR		C1039	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
31		BL	CAPACITOR		C1041	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
32		BL	CAPACITOR		C1042	1-126-391-11	ELECT CHIP 47UF 20.00% 6.3V		
33		BL	CAPACITOR		C1043	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
34		BL	CAPACITOR		C2001	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
35		BL	CAPACITOR		C2002	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
36		BL	CAPACITOR		C2004	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
37		BL	CAPACITOR		C2005	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
38		BL	CAPACITOR		C2006	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
39		BL	CAPACITOR		C2007	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
40		BL	CAPACITOR		C2011	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
41		BL	CAPACITOR		C2012	1-128-357-11	ELECT CHIP 10UF 20.00% 16V		
42		BL	CAPACITOR		C2013	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
43		BL	CAPACITOR		C2014	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
44		BL	CAPACITOR		C2015	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
45		BL	CAPACITOR		C2016	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
46		BL	CAPACITOR		C2017	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
47		BL	CAPACITOR		C2018	1-127-760-11	CERAMIC CHIP 4.7UF 10% 6.3V		
48		BL	CAPACITOR		C2019	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
49		BL	CAPACITOR		C2020	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
50		BL	CAPACITOR		C2021	1-128-995-21	ELECT CHIP 100UF 20% 10V		
51		BL	CAPACITOR		C2022	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
52		BL	CAPACITOR		C2023	1-164-230-11	CERAMIC CHIP 220PF 5.00% 50V		
53		BL	CAPACITOR		C2024	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
54		BL	CAPACITOR		C2025	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
55		BL	CAPACITOR		C2026	1-128-995-21	ELECT CHIP 100UF 20% 10V		
56		BL	CAPACITOR		C2027	1-126-392-11	ELECT CHIP 100UF 20.00% 6.3V		
57		BL	CAPACITOR		C2028	1-126-392-11	ELECT CHIP 100UF 20.00% 6.3V		
58		BL	CAPACITOR		C2029	1-109-982-11	CERAMIC CHIP 1UF 10.00% 10V		
59		BL	CAPACITOR		C2030	1-164-874-11	CERAMIC CHIP 100PF 5.00% 50V		
60		BL	CAPACITOR		C2031	1-164-874-11	CERAMIC CHIP 100PF 5.00% 50V		
61		BL	CAPACITOR		C2032	1-126-395-11	ELECT CHIP 22UF 20.00% 16V		
62		BL	CAPACITOR		C2033	1-126-395-11	ELECT CHIP 22UF 20.00% 16V		
63		BL	CAPACITOR		C2034	1-126-395-11	ELECT CHIP 22UF 20.00% 16V		
64		BL	CAPACITOR		C2035	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
65		BL	CAPACITOR		C2036	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
66		BL	CAPACITOR		C2037	1-126-390-11	ELECT CHIP 22UF 20.00% 6.3V		
67		BL	CAPACITOR		C2038	1-126-390-11	ELECT CHIP 22UF 20.00% 6.3V		
68		BL	CAPACITOR		C2039	1-126-392-11	ELECT CHIP 100UF 20.00% 6.3V		
69		BL	CAPACITOR		C2040	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
70		BL	CAPACITOR		C2041	1-126-392-11	ELECT CHIP 100UF 20.00% 6.3V		
71		BL	CAPACITOR		C2042	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
72		BL	CAPACITOR		C2043	1-126-392-11	ELECT CHIP 100UF 20.00% 6.3V		
73		BL	CAPACITOR		C2044	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
74		BL	CAPACITOR		C2045	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		

No.	#	Board	Type	$\Delta/V^*$	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
75		BL	CAPACITOR		C2046	1-107-726-91	CERAMIC CHIP 0.01UF 10.00% 16V		
76		BL	CAPACITOR		C2047	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
77		BL	CAPACITOR		C2048	1-164-874-11	CERAMIC CHIP 100PF 5.00% 50V		
78		BL	CAPACITOR		C2049	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
79		BL	CAPACITOR		C2050	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
80		BL	CAPACITOR		C2051	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
81		BL	CAPACITOR		C2052	1-164-874-11	CERAMIC CHIP 100PF 5.00% 50V		
82		BL	CAPACITOR		C2053	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
83		BL	CAPACITOR		C2054	1-137-710-11	CERAMIC CHIP 10UF 20% 6.3V		
84		BL	CAPACITOR		C2055	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
85		BL	CAPACITOR		C2056	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
86		BL	CAPACITOR		C2057	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
87		BL	CAPACITOR		C2058	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
88		BL	CAPACITOR		C2059	1-137-710-11	CERAMIC CHIP 10UF 20% 6.3V		
89		BL	CAPACITOR		C2060	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
90		BL	CAPACITOR		C2061	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
91		BL	CAPACITOR		C2062	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
92		BL	CAPACITOR		C2063	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
93		BL	CAPACITOR		C2064	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
94		BL	CAPACITOR		C2065	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
95		BL	CAPACITOR		C2066	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
96		BL	CAPACITOR		C2067	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
97		BL	CAPACITOR		C2068	1-137-710-11	CERAMIC CHIP 10UF 20% 6.3V		
98		BL	CAPACITOR		C2069	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
99		BL	CAPACITOR		C2070	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
100		BL	CAPACITOR		C2071	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
101		BL	CAPACITOR		C2072	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
102		BL	CAPACITOR		C2073	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
103		BL	CAPACITOR		C2074	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
104		BL	CAPACITOR		C2075	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
105		BL	CAPACITOR		C2076	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
106		BL	CAPACITOR		C2077	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
107		BL	CAPACITOR		C2078	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
108		BL	CAPACITOR		C2079	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
109		BL	CAPACITOR		C2080	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
110		BL	CAPACITOR		C2081	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
111		BL	CAPACITOR		C2082	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
112		BL	CAPACITOR		C2083	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
113		BL	CAPACITOR		C2084	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
114		BL	CAPACITOR		C2085	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
115		BL	CAPACITOR		C2086	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
116		BL	CAPACITOR		C2087	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
117		BL	CAPACITOR		C2088	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
118		BL	CAPACITOR		C2089	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
119		BL	CAPACITOR		C2090	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
120		BL	CAPACITOR		C2092	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
121		BL	CAPACITOR		C2093	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
122		BL	CAPACITOR		C2094	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
123		BL	CAPACITOR		C2095	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
124		BL	CAPACITOR		C2097	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
125		BL	CAPACITOR		C2098	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
126		BL	CAPACITOR		C2099	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
127		BL	CAPACITOR		C2101	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
128		BL	CAPACITOR		C2102	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
129		BL	CAPACITOR		C2103	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
130		BL	CAPACITOR		C2104	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
131		BL	CAPACITOR		C2105	1-164-874-11	CERAMIC CHIP 100PF 5.00% 50V		
132		BL	CAPACITOR		C2106	1-164-874-11	CERAMIC CHIP 100PF 5.00% 50V		
133		BL	CAPACITOR		C2107	1-100-159-91	CERAMIC CHIP 22UF 10% 6.3V		
134		BL	CAPACITOR		C2108	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
135		BL	CAPACITOR		C2109	1-164-874-11	CERAMIC CHIP 100PF 5.00% 50V		
136		BL	CAPACITOR		C2110	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
137		BL	CAPACITOR		C3001	1-119-667-11	CERAMIC CHIP 22UF 10V		
138		BL	CAPACITOR		C3002	1-125-837-91	CERAMIC CHIP 1UF 10% 6.3V		
139		BL	CAPACITOR		C3003	1-137-710-11	CERAMIC CHIP 10UF 20% 6.3V		
140		BL	CAPACITOR		C3004	1-164-315-11	CERAMIC CHIP 470PF 5.00% 50V		
141		BL	CAPACITOR		C3005	1-100-159-91	CERAMIC CHIP 22UF 10% 6.3V		
142		BL	CAPACITOR		C3006	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
143		BL	CAPACITOR		C3007	1-100-159-91	CERAMIC CHIP 22UF 10% 6.3V		
144		BL	CAPACITOR		C3008	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
145		BL	CAPACITOR		C3009	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
146		BL	CAPACITOR		C3010	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
147		BL	CAPACITOR		C3011	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
148		BL	CAPACITOR		C3012	1-107-820-11	CERAMIC CHIP 0.1UF 16V		

No.	#	Board	Type	$\Delta$ / <sup>*</sup>	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
149		BL	CAPACITOR		C3013	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
150		BL	CAPACITOR		C3014	1-100-159-91	CERAMIC CHIP 22UF 10% 6.3V		
151		BL	CAPACITOR		C3015	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
152		BL	CAPACITOR		C3016	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
153		BL	CAPACITOR		C3017	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
154		BL	CAPACITOR		C3018	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
155		BL	CAPACITOR		C3019	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
156		BL	CAPACITOR		C3020	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
157		BL	CAPACITOR		C3021	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
158		BL	CAPACITOR		C3022	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
159		BL	CAPACITOR		C3023	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
160		BL	CAPACITOR		C3024	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
161		BL	CAPACITOR		C3025	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
162		BL	CAPACITOR		C3026	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
163		BL	CAPACITOR		C3027	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
164		BL	CAPACITOR		C3028	1-119-667-11	CERAMIC CHIP 22UF 10V		
165		BL	CAPACITOR		C3029	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
166		BL	CAPACITOR		C3030	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
167		BL	CAPACITOR		C3031	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
168		BL	CAPACITOR		C3032	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
169		BL	CAPACITOR		C3033	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
170		BL	CAPACITOR		C3034	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
171		BL	CAPACITOR		C3035	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
172		BL	CAPACITOR		C3036	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
173		BL	CAPACITOR		C3037	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
174		BL	CAPACITOR		C3038	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
175		BL	CAPACITOR		C3039	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
176		BL	CAPACITOR		C3040	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
177		BL	CAPACITOR		C3041	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
178		BL	CAPACITOR		C3042	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
179		BL	CAPACITOR		C3043	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
180		BL	CAPACITOR		C3044	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
181		BL	CAPACITOR		C3045	1-100-159-91	CERAMIC CHIP 22UF 10% 6.3V		
182		BL	CAPACITOR		C3046	1-126-391-11	ELECT CHIP 47UF 20.00% 6.3V		
183		BL	CAPACITOR		C3047	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
184		BL	CAPACITOR		C3049	1-100-159-91	CERAMIC CHIP 22UF 10% 6.3V		
185		BL	CAPACITOR		C3050	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
186		BL	CAPACITOR		C3051	1-164-941-11	CERAMIC CHIP 0.0047UF 10.00% 16V		
187		BL	CAPACITOR		C3052	1-164-941-11	CERAMIC CHIP 0.0047UF 10.00% 16V		
188		BL	CAPACITOR		C3053	1-164-941-11	CERAMIC CHIP 0.0047UF 10.00% 16V		
189		BL	CAPACITOR		C3054	1-164-941-11	CERAMIC CHIP 0.0047UF 10.00% 16V		
190		BL	CAPACITOR		C3055	1-164-941-11	CERAMIC CHIP 0.0047UF 10.00% 16V		
191		BL	CAPACITOR		C3056	1-164-941-11	CERAMIC CHIP 0.0047UF 10.00% 16V		
192		BL	CAPACITOR		C3057	1-164-941-11	CERAMIC CHIP 0.0047UF 10.00% 16V		
193		BL	CAPACITOR		C4001	1-162-919-11	CERAMIC CHIP 22PF 5.00% 50V		
194		BL	CAPACITOR		C4002	1-162-919-11	CERAMIC CHIP 22PF 5.00% 50V		
195		BL	CAPACITOR		C4003	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
196		BL	CAPACITOR		C4004	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
197		BL	CAPACITOR		C4005	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
198		BL	CAPACITOR		C4006	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
199		BL	CAPACITOR		C4007	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
200		BL	CAPACITOR		C4008	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
201		BL	CAPACITOR		C4009	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
202		BL	CAPACITOR		C4010	1-162-962-11	CERAMIC CHIP 470PF 10.00% 50V		
203		BL	CAPACITOR		C4011	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
204		BL	CAPACITOR		C4012	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
205		BL	CAPACITOR		C4013	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
206		BL	CAPACITOR		C4014	1-137-710-11	CERAMIC CHIP 10UF 20% 6.3V		
207		BL	CAPACITOR		C4015	1-137-710-11	CERAMIC CHIP 10UF 20% 6.3V		
208		BL	CAPACITOR		C4016	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
209		BL	CAPACITOR		C4017	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
210		BL	CAPACITOR		C4018	1-100-159-91	CERAMIC CHIP 22UF 10% 6.3V		
211		BL	CAPACITOR		C4019	1-100-159-91	CERAMIC CHIP 22UF 10% 6.3V		
212		BL	CAPACITOR		C4020	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
213		BL	CAPACITOR		C4021	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
214		BL	CAPACITOR		C4022	1-126-392-11	ELECT CHIP 100UF 20.00% 6.3V		
215		BL	CAPACITOR		C4023	1-126-392-11	ELECT CHIP 100UF 20.00% 6.3V		
216		BL	CAPACITOR		C4024	1-125-837-91	CERAMIC CHIP 1UF 10% 6.3V		
217		BL	CAPACITOR		C4025	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
218		BL	CAPACITOR		C4026	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
219		BL	CAPACITOR		C4027	1-125-837-91	CERAMIC CHIP 1UF 10% 6.3V		
220		BL	CAPACITOR		C4028	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
221		BL	CAPACITOR		C4030	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
222		BL	CAPACITOR		C4031	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		

No.	#	Board	Type	$\Delta/V^*$	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
223		BL	CAPACITOR		C4032	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
224		BL	CAPACITOR		C4033	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
225		BL	CAPACITOR		C4034	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
226		BL	CAPACITOR		C4035	1-162-908-11	CERAMIC CHIP 3PF 0.25PF 50V		
227		BL	CAPACITOR		C4036	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
228		BL	CAPACITOR		C4037	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
229		BL	CAPACITOR		C4038	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
230		BL	CAPACITOR		C4039	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
231		BL	CAPACITOR		C4040	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
232		BL	CAPACITOR		C4501	1-100-159-91	CERAMIC CHIP 22UF 10% 6.3V		
233		BL	CAPACITOR		C4502	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
234		BL	CAPACITOR		C4503	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
235		BL	CAPACITOR		C4504	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
236		BL	CAPACITOR		C4505	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
237		BL	CAPACITOR		C4506	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
238		BL	CAPACITOR		C4507	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
239		BL	CAPACITOR		C4508	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
240		BL	CAPACITOR		C4509	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
241		BL	CAPACITOR		C4510	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
242		BL	CAPACITOR		C4511	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
243		BL	CAPACITOR		C4512	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
244		BL	CAPACITOR		C4513	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
245		BL	CAPACITOR		C4514	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
246		BL	CAPACITOR		C4515	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
247		BL	CAPACITOR		C4516	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
248		BL	CAPACITOR		C4517	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
249		BL	CAPACITOR		C4518	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
250		BL	CAPACITOR		C4519	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
251		BL	CAPACITOR		C4520	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
252		BL	CAPACITOR		C4521	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
253		BL	CAPACITOR		C4522	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
254		BL	CAPACITOR		C4523	1-126-390-11	ELECT CHIP 22UF 20.00% 6.3V		
255		BL	CAPACITOR		C4524	1-128-934-91	CERAMIC CHIP 0.33UF 20% 10V		
256		BL	CAPACITOR		C4525	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
257		BL	CAPACITOR		C4526	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
258		BL	CAPACITOR		C4527	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
259		BL	CAPACITOR		C4528	1-162-915-11	CERAMIC CHIP 10PF 0.50PF 50V		
260		BL	CAPACITOR		C4529	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
261		BL	CAPACITOR		C4530	1-162-910-11	CERAMIC CHIP 5PF 0.25PF 50V		
262		BL	CAPACITOR		C4531	1-126-412-11	ELECT CHIP 220UF 20.00% 4V		
263		BL	CAPACITOR		C4532	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
264		BL	CAPACITOR		C4533	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
265		BL	CAPACITOR		C4535	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
266		BL	CAPACITOR		C4536	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
267		BL	CAPACITOR		C4537	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
268		BL	CAPACITOR		C4538	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
269		BL	CAPACITOR		C4539	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
270		BL	CAPACITOR		C4540	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
271		BL	CAPACITOR		C4541	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
272		BL	CAPACITOR		C4542	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
273		BL	CAPACITOR		C4543	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
274		BL	CAPACITOR		C4544	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
275		BL	CAPACITOR		C4545	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
276		BL	CAPACITOR		C4546	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
277		BL	CAPACITOR		C4547	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
278		BL	CAPACITOR		C4548	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
279		BL	CAPACITOR		C4549	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
280		BL	CAPACITOR		C4550	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
281		BL	CAPACITOR		C4551	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
282		BL	CAPACITOR		C4552	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
283		BL	CAPACITOR		C4553	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
284		BL	CAPACITOR		C4554	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
285		BL	CAPACITOR		C4555	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
286		BL	CAPACITOR		C4556	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
287		BL	CAPACITOR		C4557	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
288		BL	CAPACITOR		C4558	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
289		BL	CAPACITOR		C4559	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
290		BL	CAPACITOR		C4560	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
291		BL	CAPACITOR		C4561	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
292		BL	CAPACITOR		C4562	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
293		BL	CAPACITOR		C4563	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
294		BL	CAPACITOR		C4564	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
295		BL	CAPACITOR		C4565	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
296		BL	CAPACITOR		C4566	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		

No.	#	Board	Type	$\Delta$ / <sup>*</sup>	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
297		BL	CAPACITOR		C4567	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
298		BL	CAPACITOR		C4568	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
299		BL	CAPACITOR		C4569	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
300		BL	CAPACITOR		C4570	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
301		BL	CAPACITOR		C4571	1-126-392-11	ELECT CHIP 100UF 20.00% 6.3V		
302		BL	CAPACITOR		C4572	1-126-392-11	ELECT CHIP 100UF 20.00% 6.3V		
303		BL	CAPACITOR		C4573	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
304		BL	CAPACITOR		C4574	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
305		BL	CAPACITOR		C4575	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
306		BL	CAPACITOR		C4576	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
307		BL	CAPACITOR		C4577	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
308		BL	CAPACITOR		C4578	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
309		BL	CAPACITOR		C4579	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
310		BL	CAPACITOR		C4580	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
311		BL	CAPACITOR		C4581	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
312		BL	CAPACITOR		C4582	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
313		BL	CAPACITOR		C4583	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
314		BL	CAPACITOR		C4584	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
315		BL	CAPACITOR		C4585	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
316		BL	CAPACITOR		C4586	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
317		BL	CAPACITOR		C4587	1-127-820-11	CERAMIC CHIP 4.7UF 10% 16V		
318		BL	CAPACITOR		C4588	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
319		BL	CAPACITOR		C4589	1-162-962-11	CERAMIC CHIP 470PF 10.00% 50V		
320		BL	CAPACITOR		C4590	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
321		BL	CAPACITOR		C4591	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
322		BL	CAPACITOR		C4592	1-162-962-11	CERAMIC CHIP 470PF 10.00% 50V		
323		BL	CAPACITOR		C4593	1-162-962-11	CERAMIC CHIP 470PF 10.00% 50V		
324		BL	CAPACITOR		C4594	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
325		BL	CAPACITOR		C4595	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
326		BL	CAPACITOR		C4596	1-162-962-11	CERAMIC CHIP 470PF 10.00% 50V		
327		BL	CAPACITOR		C4597	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
328		BL	CAPACITOR		C4598	1-117-681-11	ELECT CHIP 100UF 20.00% 16V		
329		BL	CONNECTOR	*	CN1001	1-817-754-11	CONNECTOR, BOARD TO BOARD 100P		
330		BL	CONNECTOR		CN1002	1-779-936-21	CONNECTOR, FFC/FPC 18P		
331		BL	CONNECTOR	*	CN1003	1-793-807-21	PIN, CONNECTOR (WITH PWB) 20P		
332		BL	CONNECTOR		CN1004	1-573-290-21	PIN, CONNECTOR (1.5MM) (SMD)4P		
333		BL	CONNECTOR	*	CN1006	1-779-268-21	PIN, CONNECTOR (1.5MM)(SMD)11P		
334		BL	DIODE		D1002	8-719-036-94	DIODE RD5.6SB-T1		
335		BL	DIODE		D1003	8-719-036-94	DIODE RD5.6SB-T1		
336		BL	DIODE		D1005	8-719-077-59	DIODE 1PS302		
337		BL	DIODE		D1006	8-719-024-77	DIODE HN1D03FU-TE85L		
338		BL	DIODE		D1007	8-719-036-94	DIODE RD5.6SB-T1		
339		BL	DIODE		D1008	8-719-036-94	DIODE RD5.6SB-T1		
340		BL	DIODE		D1011	8-719-081-97	DIODE MMDL914T1		
341		BL	DIODE		D1012	8-719-081-97	DIODE MMDL914T1		
342		BL	DIODE		D4002	8-719-081-97	DIODE MMDL914T1		
343		BL	DIODE		D4003	8-719-081-97	DIODE MMDL914T1		
344		BL	DIODE		D4004	8-719-081-97	DIODE MMDL914T1		
345		BL	DIODE		D4005	8-719-066-11	DIODE 1PS184-115		
346		BL	DIODE		D4006	8-719-066-11	DIODE 1PS184-115		
347		BL	FERRITE BEAD		FB1001	1-414-445-11	FERRITE 0UH		
348		BL	FERRITE BEAD		FB1002	1-414-445-11	FERRITE 0UH		
349		BL	FERRITE BEAD		FB2001	1-414-234-22	FERRITE 0UH		
350		BL	FERRITE BEAD		FB3001	1-414-445-11	FERRITE 0UH		
351		BL	FERRITE BEAD		FB3002	1-414-864-11	FERRITE 0UH		
352		BL	FERRITE BEAD		FB3003	1-414-445-11	FERRITE 0UH		
353		BL	FERRITE BEAD		FB3004	1-414-445-11	FERRITE 0UH		
354		BL	FERRITE BEAD		FB3005	1-414-445-11	FERRITE 0UH		
355		BL	FERRITE BEAD		FB4001	1-414-445-11	FERRITE 0UH		
356		BL	FERRITE BEAD		FB4002	1-414-445-11	FERRITE 0UH		
357		BL	FERRITE BEAD		FB4003	1-414-445-11	FERRITE 0UH		
358		BL	FERRITE BEAD		FB4004	1-414-445-11	FERRITE 0UH		
359		BL	FERRITE BEAD		FB4005	1-414-445-11	FERRITE 0UH		
360		BL	FERRITE BEAD		FB4006	1-414-445-11	FERRITE 0UH		
361		BL	FERRITE BEAD		FB4007	1-414-445-11	FERRITE 0UH		
362		BL	FERRITE BEAD		FB4008	1-414-445-11	FERRITE 0UH		
363		BL	FERRITE BEAD		FB4009	1-414-445-11	FERRITE 0UH		
364		BL	FERRITE BEAD		FB4010	1-414-864-11	FERRITE 0UH		
365		BL	FERRITE BEAD		FB4011	1-414-864-11	FERRITE 0UH		
366		BL	FERRITE BEAD		FB4012	1-414-864-11	FERRITE 0UH		
367		BL	FERRITE BEAD		FB4013	1-414-864-11	FERRITE 0UH		
368		BL	FERRITE BEAD		FB4501	1-414-864-11	FERRITE 0UH		
369		BL	FERRITE BEAD		FB4502	1-414-864-11	FERRITE 0UH		
370		BL	FERRITE BEAD		FB4503	1-414-445-11	FERRITE 0UH		



No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
371		BL	FERRITE BEAD		FB4504	1-414-445-11	FERRITE 0UH		
372		BL	FERRITE BEAD		FB4505	1-414-445-11	FERRITE 0UH		
373		BL	FERRITE BEAD		FB4506	1-414-445-11	FERRITE 0UH		
374		BL	FERRITE BEAD		FB4507	1-414-864-11	FERRITE 0UH		
375		BL	FILTER		FL2001	1-234-560-21	FILTER, LOW PASS		
376		BL	FILTER		FL2002	1-234-559-21	FILTER, LOW PASS		
377		BL	FILTER		FL2003	1-234-559-21	FILTER, LOW PASS		
378		BL	FILTER		FL2004	1-234-177-21	FERRITE 0UH		
379		BL	FILTER		FL2005	1-234-177-21	FERRITE 0UH		
380		BL	FILTER		FL2006	1-234-177-21	FERRITE 0UH		
381		BL	FILTER		FL2007	1-234-677-21	FILTER, EMI		
382		BL	FILTER		FL2008	1-234-177-21	FERRITE 0UH		
383		BL	FILTER		FL3001	1-234-177-21	FERRITE 0UH		
384		BL	FILTER		FL3002	1-234-177-21	FERRITE 0UH		
385		BL	FILTER		FL3003	1-234-177-21	FERRITE 0UH		
386		BL	FILTER		FL3004	1-234-177-21	FERRITE 0UH		
387		BL	FILTER		FL4001	1-234-177-21	FERRITE 0UH		
388		BL	FILTER		FL4501	1-234-177-21	FERRITE 0UH		
389		BL	FILTER		FL4502	1-234-177-21	FERRITE 0UH		
390		BL	IC		IC1001	8-759-460-72	IC BA033FP-E2		
391		BL	IC		IC1002	6-804-709-01	IC HD64F2376VFAQ33V-ATMU2000		
392		BL	IC		IC1003	6-703-225-01	IC S-80928CNMC-G8YT2G		
393		BL	IC		IC1004	6-702-688-01	IC M24C64-WMN6T(B)		
394		BL	IC		IC1005	8-759-549-03	IC SN74LV132APWR		
395		BL	IC		IC1006	8-759-592-49	IC TC7SZ125FU(TE85R)		
396		BL	IC		IC1007	8-759-476-80	IC LM75CIMX-3		
397		BL	IC		IC2001	6-705-529-01	IC LMH6658MMX/J5000172		
398		BL	IC		IC2002	6-705-529-01	IC LMH6658MMX/J5000172		
399		BL	IC		IC2003	8-752-937-39	IC CXP964032-003R		
400		BL	IC		IC2004	8-759-712-65	IC PQ070XZ01ZP		
401		BL	IC		IC2005	8-759-712-65	IC PQ070XZ01ZP		
402		BL	IC		IC2006	8-752-425-02	IC CXD3802BQ		
403		BL	IC		IC2007	6-706-155-01	IC MT48LC2M32B2P-6-Y14W		
404		BL	IC		IC3001	6-700-227-01	IC MM1561JFBE		
405		BL	IC		IC3002	8-752-422-52	IC CXD2097BQ		
406		BL	IC		IC3003	6-705-992-11	IC HY57V161610ETP-7DR		
407		BL	IC		IC3004	8-759-669-78	IC TLC2933IPWR-12		
408		BL	IC		IC4001	6-804-607-01	IC MX29LV800TTC-70G-2MUL100		
409		BL	IC		IC4002	8-759-549-03	IC SN74LV132APWR		
410		BL	IC		IC4003	8-759-712-65	IC PQ070XZ01ZP		
411		BL	IC		IC4004	8-759-712-65	IC PQ070XZ01ZP		
412		BL	IC		IC4005	6-704-191-01	IC S-80829CNNB-B8OT2G		
413		BL	IC		IC4006	6-704-192-01	IC S-80822CNNB-B8HT2G		
414		BL	IC		IC4007	6-706-362-01	IC PW166B-10TL		
415		BL	IC		IC4009	6-704-190-01	IC SN74ALVCH16823DGGR		
416		BL	IC		IC4010	8-759-669-44	IC SN74LVC74APWR-12		
417		BL	IC		IC4501	8-759-676-70	IC MSM56V16160F-10TS-K		
418		BL	IC		IC4502	6-703-689-01	IC CXD9756R		
419		BL	IC		IC4503	6-700-394-01	IC BA25BC0FP-E2		
420		BL	IC		IC4504	6-701-098-11	IC THC63LVDM83R-T		
421		BL	COIL		L1001	1-412-030-11	INDUCTOR 22UH		
422		BL	COIL		L2001	1-469-525-91	INDUCTOR 10UH		
423		BL	COIL		L2002	1-469-525-91	INDUCTOR 10UH		
424		BL	COIL		L2003	1-469-525-91	INDUCTOR 10UH		
425		BL	COIL		L2004	1-412-026-11	INDUCTOR 1UH		
426		BL	COIL		L2005	1-469-525-91	INDUCTOR 10UH		
427		BL	COIL		L2006	1-412-026-11	INDUCTOR 1UH		
428		BL	COIL		L2007	1-469-525-91	INDUCTOR 10UH		
429		BL	COIL		L2008	1-469-525-91	INDUCTOR 10UH		
430		BL	COIL		L2009	1-412-029-11	INDUCTOR 10UH		
431		BL	COIL		L2010	1-469-525-91	INDUCTOR 10UH		
432		BL	COIL		L3001	1-469-525-91	INDUCTOR 10UH		
433		BL	COIL		L3002	1-469-528-91	INDUCTOR 100UH		
434		BL	COIL		L3003	1-469-528-91	INDUCTOR 100UH		
435		BL	COIL		L4501	1-456-583-11	INDUCTOR 0UH		
436		BL	COIL		L4502	1-456-583-11	INDUCTOR 0UH		
437		BL	COIL		L4503	1-456-583-11	INDUCTOR 0UH		
438		BL	COIL		L4504	1-456-583-11	INDUCTOR 0UH		
439		BL	COIL		L4505	1-456-583-11	INDUCTOR 0UH		
440		BL	TRANSISTOR		Q1001	8-729-025-28	TRANSISTOR 2SK1828		
441		BL	TRANSISTOR		Q1002	8-729-025-28	TRANSISTOR 2SK1828		
442		BL	TRANSISTOR		Q1003	8-729-907-00	TRANSISTOR DTC114EU		
443		BL	TRANSISTOR		Q1004	8-729-907-00	TRANSISTOR DTC114EU		
444		BL	TRANSISTOR		Q1007	8-729-013-28	TRANSISTOR HN1B01FU-TE85R		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
445		BL	TRANSISTOR		Q1010	8-729-025-28	TRANSISTOR 2SK1828		
446		BL	TRANSISTOR		Q1011	8-729-025-28	TRANSISTOR 2SK1828		
447		BL	TRANSISTOR		Q2001	8-729-117-73	TRANSISTOR 2SC4178-F14		
448		BL	TRANSISTOR		Q2002	8-729-117-73	TRANSISTOR 2SC4178-F14		
449		BL	TRANSISTOR		Q2003	8-729-117-73	TRANSISTOR 2SC4178-F14		
450		BL	TRANSISTOR		Q2004	8-729-122-63	TRANSISTOR 2SA1226-E4		
451		BL	TRANSISTOR		Q2005	8-729-122-63	TRANSISTOR 2SA1226-E4		
452		BL	TRANSISTOR		Q2006	8-729-122-63	TRANSISTOR 2SA1226-E4		
453		BL	TRANSISTOR		Q2007	6-550-585-01	TRANSISTOR 2PC4081R-115		
454		BL	TRANSISTOR		Q2008	8-729-117-73	TRANSISTOR 2SC4178-F14		
455		BL	TRANSISTOR		Q2009	8-729-117-73	TRANSISTOR 2SC4178-F14		
456		BL	TRANSISTOR		Q2011	8-729-424-02	TRANSISTOR 2SB709A-QRS-TX		
457		BL	TRANSISTOR		Q2012	8-729-010-25	TRANSISTOR MSD601-RT1		
458		BL	TRANSISTOR		Q3002	6-550-586-01	TRANSISTOR 2PA1576R-115		
459		BL	TRANSISTOR		Q3003	6-550-585-01	TRANSISTOR 2PC4081R-115		
460		BL	TRANSISTOR		Q4501	6-550-014-01	TRANSISTOR SSM6N15FU(TE85R)		
461		BL	TRANSISTOR		Q4502	8-729-028-86	TRANSISTOR DTA143EUA-T106		
462		BL	TRANSISTOR		Q4503	8-729-907-00	TRANSISTOR DTC114EU		
463		BL	TRANSISTOR		Q4504	8-729-907-00	TRANSISTOR DTC114EU		
464		BL	TRANSISTOR		Q4505	8-729-046-75	TRANSISTOR SI2301DS-T1		
465		BL	RESISTOR		R1002	1-216-296-11	SHORT CHIP 0		
466		BL	RESISTOR		R1003	1-216-296-11	SHORT CHIP 0		
467		BL	RESISTOR		R1004	1-216-296-11	SHORT CHIP 0		
468		BL	RESISTOR		R1007	1-216-841-11	METAL CHIP 47K 5% 1/10W		
469		BL	RESISTOR		R1008	1-216-841-11	METAL CHIP 47K 5% 1/10W		
470		BL	RESISTOR		R1009	1-216-821-11	METAL CHIP 1K 5% 1/10W		
471		BL	RESISTOR		R1010	1-218-990-11	SHORT CHIP 0		
472		BL	RESISTOR		R1011	1-218-961-11	RES-CHIP 4.7K 5% 1/16W		
473		BL	RESISTOR		R1012	1-218-961-11	RES-CHIP 4.7K 5% 1/16W		
474		BL	RESISTOR		R1013	1-218-973-11	RES-CHIP 47K 5% 1/16W		
475		BL	RESISTOR		R1014	1-218-971-11	RES-CHIP 33K 5% 1/16W		
476		BL	RESISTOR		R1015	1-218-961-11	RES-CHIP 4.7K 5% 1/16W		
477		BL	RESISTOR		R1016	1-218-961-11	RES-CHIP 4.7K 5% 1/16W		
478		BL	RESISTOR		R1017	1-218-961-11	RES-CHIP 4.7K 5% 1/16W		
479		BL	RESISTOR		R1018	1-216-864-11	SHORT CHIP 0		
480		BL	RESISTOR		R1019	1-218-895-11	METAL CHIP 100K 0.5% 1/10W		
481		BL	RESISTOR		R1020	1-218-881-11	METAL CHIP 27K 0.5% 1/10W		
482		BL	RESISTOR		R1021	1-218-965-11	RES-CHIP 10K 5% 1/16W		
483		BL	RESISTOR		R1023	1-220-183-81	RES-CHIP 1.1K 5% 1/16W		
484		BL	RESISTOR		R1024	1-216-864-11	SHORT CHIP 0		
485		BL	RESISTOR		R1025	1-216-864-11	SHORT CHIP 0		
486		BL	RESISTOR		R1026	1-218-961-11	RES-CHIP 4.7K 5% 1/16W		
487		BL	RESISTOR		R1027	1-218-941-81	RES-CHIP 100 5% 1/16W		
488		BL	RESISTOR		R1028	1-218-941-81	RES-CHIP 100 5% 1/16W		
489		BL	RESISTOR		R1029	1-218-941-81	RES-CHIP 100 5% 1/16W		
490		BL	RESISTOR		R1030	1-216-809-11	METAL CHIP 100 5% 1/10W		
491		BL	RESISTOR		R1031	1-218-941-81	RES-CHIP 100 5% 1/16W		
492		BL	RESISTOR		R1032	1-218-941-81	RES-CHIP 100 5% 1/16W		
493		BL	RESISTOR		R1033	1-218-941-81	RES-CHIP 100 5% 1/16W		
494		BL	RESISTOR		R1034	1-218-941-81	RES-CHIP 100 5% 1/16W		
495		BL	RESISTOR		R1035	1-218-941-81	RES-CHIP 100 5% 1/16W		
496		BL	RESISTOR		R1037	1-216-809-11	METAL CHIP 100 5% 1/10W		
497		BL	RESISTOR		R1038	1-218-973-11	RES-CHIP 47K 5% 1/16W		
498		BL	RESISTOR		R1039	1-218-973-11	RES-CHIP 47K 5% 1/16W		
499		BL	RESISTOR		R1040	1-218-973-11	RES-CHIP 47K 5% 1/16W		
500		BL	RESISTOR		R1041	1-218-941-81	RES-CHIP 100 5% 1/16W		
501		BL	RESISTOR		R1042	1-218-941-81	RES-CHIP 100 5% 1/16W		
502		BL	RESISTOR		R1043	1-218-965-11	RES-CHIP 10K 5% 1/16W		
503		BL	RESISTOR		R1045	1-218-990-11	SHORT CHIP 0		
504		BL	RESISTOR		R1046	1-218-965-11	RES-CHIP 10K 5% 1/16W		
505		BL	RESISTOR		R1047	1-216-833-11	METAL CHIP 10K 5% 1/10W		
506		BL	RESISTOR		R1048	1-218-965-11	RES-CHIP 10K 5% 1/16W		
507		BL	RESISTOR		R1049	1-218-990-11	SHORT CHIP 0		
508		BL	RESISTOR		R1050	1-218-959-11	RES-CHIP 3.3K 5% 1/16W		
509		BL	RESISTOR		R1051	1-218-965-11	RES-CHIP 10K 5% 1/16W		
510		BL	RESISTOR		R1052	1-216-841-11	METAL CHIP 47K 5% 1/10W		
511		BL	RESISTOR		R1053	1-208-635-11	RES-CHIP 10 0.5% 1/16W		
512		BL	RESISTOR		R1055	1-218-945-11	RES-CHIP 220 5% 1/16W		
513		BL	RESISTOR		R1056	1-218-945-11	RES-CHIP 220 5% 1/16W		
514		BL	RESISTOR		R1057	1-218-945-11	RES-CHIP 220 5% 1/16W		
515		BL	RESISTOR		R1059	1-218-990-11	SHORT CHIP 0		
516		BL	RESISTOR		R1060	1-218-990-11	SHORT CHIP 0		
517		BL	RESISTOR		R1061	1-218-973-11	RES-CHIP 47K 5% 1/16W		
518		BL	RESISTOR		R1062	1-216-841-11	METAL CHIP 47K 5% 1/10W		

No.	#	Board	Type	$\Delta$ / <sup>*</sup>	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
519		BL	RESISTOR		R1063	1-218-965-11	RES-CHIP 10K 5% 1/16W		
520		BL	RESISTOR		R1064	1-218-965-11	RES-CHIP 10K 5% 1/16W		
521		BL	RESISTOR		R1065	1-218-965-11	RES-CHIP 10K 5% 1/16W		
522		BL	RESISTOR		R1066	1-218-965-11	RES-CHIP 10K 5% 1/16W		
523		BL	RESISTOR		R1067	1-216-864-11	SHORT CHIP 0		
524		BL	RESISTOR		R1068	1-218-965-11	RES-CHIP 10K 5% 1/16W		
525		BL	RESISTOR		R1069	1-218-959-11	RES-CHIP 3.3K 5% 1/16W		
526		BL	RESISTOR		R1070	1-218-941-81	RES-CHIP 100 5% 1/16W		
527		BL	RESISTOR		R1071	1-218-941-81	RES-CHIP 100 5% 1/16W		
528		BL	RESISTOR		R1072	1-216-809-11	METAL CHIP 100 5% 1/10W		
529		BL	RESISTOR		R1073	1-218-965-11	RES-CHIP 10K 5% 1/16W		
530		BL	RESISTOR		R1074	1-218-941-81	RES-CHIP 100 5% 1/16W		
531		BL	RESISTOR		R1075	1-218-941-81	RES-CHIP 100 5% 1/16W		
532		BL	RESISTOR		R1077	1-216-864-11	SHORT CHIP 0		
533		BL	RESISTOR		R1078	1-216-849-11	METAL CHIP 220K 5% 1/10W		
534		BL	RESISTOR		R1079	1-216-864-11	SHORT CHIP 0		
535		BL	RESISTOR		R1080	1-216-864-11	SHORT CHIP 0		
536		BL	RESISTOR		R1081	1-216-818-11	METAL CHIP 560 5% 1/10W		
537		BL	RESISTOR		R1082	1-216-813-11	METAL CHIP 220 5% 1/10W		
538		BL	RESISTOR		R1083	1-218-941-81	RES-CHIP 100 5% 1/16W		
539		BL	RESISTOR		R1084	1-218-961-11	RES-CHIP 4.7K 5% 1/16W		
540		BL	RESISTOR		R1085	1-218-941-81	RES-CHIP 100 5% 1/16W		
541		BL	RESISTOR		R1086	1-218-941-81	RES-CHIP 100 5% 1/16W		
542		BL	RESISTOR		R1087	1-218-961-11	RES-CHIP 4.7K 5% 1/16W		
543		BL	RESISTOR		R1089	1-218-965-11	RES-CHIP 10K 5% 1/16W		
544		BL	RESISTOR		R1092	1-218-945-11	RES-CHIP 220 5% 1/16W		
545		BL	RESISTOR		R1094	1-216-864-11	SHORT CHIP 0		
546		BL	RESISTOR		R1096	1-216-805-11	METAL CHIP 47 5% 1/10W		
547		BL	RESISTOR		R1097	1-216-805-11	METAL CHIP 47 5% 1/10W		
548		BL	RESISTOR		R1098	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
549		BL	RESISTOR		R1100	1-216-864-11	SHORT CHIP 0		
550		BL	RESISTOR		R1101	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
551		BL	RESISTOR		R1102	1-216-864-11	SHORT CHIP 0		
552		BL	RESISTOR		R1103	1-216-864-11	SHORT CHIP 0		
553		BL	RESISTOR		R1104	1-216-864-11	SHORT CHIP 0		
554		BL	RESISTOR		R1105	1-216-864-11	SHORT CHIP 0		
555		BL	RESISTOR		R1106	1-216-864-11	SHORT CHIP 0		
556		BL	RESISTOR		R1107	1-216-833-11	METAL CHIP 10K 5% 1/10W		
557		BL	RESISTOR		R1108	1-216-833-11	METAL CHIP 10K 5% 1/10W		
558		BL	RESISTOR		R1109	1-218-990-11	SHORT CHIP 0		
559		BL	RESISTOR		R1111	1-218-957-11	RES-CHIP 2.2K 5% 1/16W		
560		BL	RESISTOR		R1112	1-218-971-11	RES-CHIP 33K 5% 1/16W		
561		BL	RESISTOR		R1113	1-218-990-11	SHORT CHIP 0		
562		BL	RESISTOR		R1117	1-216-864-11	SHORT CHIP 0		
563		BL	RESISTOR		R1118	1-216-864-11	SHORT CHIP 0		
564		BL	RESISTOR		R1119	1-216-864-11	SHORT CHIP 0		
565		BL	RESISTOR		R1120	1-218-990-11	SHORT CHIP 0		
566		BL	RESISTOR		R1121	1-218-990-11	SHORT CHIP 0		
567		BL	RESISTOR		R1123	1-218-973-11	RES-CHIP 47K 5% 1/16W		
568		BL	RESISTOR		R2001	1-216-809-11	METAL CHIP 100 5% 1/10W		
569		BL	RESISTOR		R2002	1-216-809-11	METAL CHIP 100 5% 1/10W		
570		BL	RESISTOR		R2003	1-216-809-11	METAL CHIP 100 5% 1/10W		
571		BL	RESISTOR		R2004	1-218-952-11	RES-CHIP 820 5% 1/16W		
572		BL	RESISTOR		R2005	1-218-952-11	RES-CHIP 820 5% 1/16W		
573		BL	RESISTOR		R2006	1-218-952-11	RES-CHIP 820 5% 1/16W		
574		BL	RESISTOR		R2007	1-218-675-11	METAL CHIP 200 0.5% 1/10W		
575		BL	RESISTOR		R2008	1-218-679-11	METAL CHIP 300 0.5% 1/10W		
576		BL	RESISTOR		R2009	1-218-679-11	METAL CHIP 300 0.5% 1/10W		
577		BL	RESISTOR		R2010	1-218-675-11	METAL CHIP 200 0.5% 1/10W		
578		BL	RESISTOR		R2011	1-218-679-11	METAL CHIP 300 0.5% 1/10W		
579		BL	RESISTOR		R2012	1-216-809-11	METAL CHIP 100 5% 1/10W		
580		BL	RESISTOR		R2013	1-216-809-11	METAL CHIP 100 5% 1/10W		
581		BL	RESISTOR		R2014	1-218-679-11	METAL CHIP 300 0.5% 1/10W		
582		BL	RESISTOR		R2015	1-216-809-11	METAL CHIP 100 5% 1/10W		
583		BL	RESISTOR		R2016	1-216-823-11	METAL CHIP 1.5K 5% 1/10W		
584		BL	RESISTOR		R2017	1-216-823-11	METAL CHIP 1.5K 5% 1/10W		
585		BL	RESISTOR		R2018	1-216-823-11	METAL CHIP 1.5K 5% 1/10W		
586		BL	RESISTOR		R2019	1-216-864-11	SHORT CHIP 0		
587		BL	RESISTOR		R2020	1-216-864-11	SHORT CHIP 0		
588		BL	RESISTOR		R2021	1-216-864-11	SHORT CHIP 0		
589		BL	RESISTOR		R2023	1-216-864-11	SHORT CHIP 0		
590		BL	RESISTOR		R2024	1-218-684-11	METAL CHIP 470 0.5% 1/10W		
591		BL	RESISTOR		R2025	1-218-684-11	METAL CHIP 470 0.5% 1/10W		
592		BL	RESISTOR		R2026	1-218-684-11	METAL CHIP 470 0.5% 1/10W		

No.	#	Board	Type	$\Delta/\ast$	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
593		BL	RESISTOR		R2027	1-216-864-11	SHORT CHIP 0		
594		BL	RESISTOR		R2028	1-218-684-11	METAL CHIP 470 0.5% 1/10W		
595		BL	RESISTOR		R2029	1-218-712-11	METAL CHIP 6.8K 0.5% 1/10W		
596		BL	RESISTOR		R2030	1-218-706-11	METAL CHIP 3.9K 0.5% 1/10W		
597		BL	RESISTOR		R2031	1-218-684-11	METAL CHIP 470 0.5% 1/10W		
598		BL	RESISTOR		R2032	1-218-708-11	METAL CHIP 4.7K 0.5% 1/10W		
599		BL	RESISTOR		R2034	1-218-684-11	METAL CHIP 470 0.5% 1/10W		
600		BL	RESISTOR		R2035	1-218-708-11	METAL CHIP 4.7K 0.5% 1/10W		
601		BL	RESISTOR		R2036	1-218-652-11	METAL CHIP 22 0.5% 1/10W		
602		BL	RESISTOR		R2037	1-218-708-11	METAL CHIP 4.7K 0.5% 1/10W		
603		BL	RESISTOR		R2038	1-216-847-11	METAL CHIP 150K 5% 1/10W		
604		BL	RESISTOR		R2041	1-218-668-11	METAL CHIP 100 0.5% 1/10W		
605		BL	RESISTOR		R2043	1-218-933-11	RES-CHIP 22 5% 1/16W		
606		BL	RESISTOR		R2044	1-218-937-11	RES-CHIP 47 5% 1/16W		
607		BL	RESISTOR		R2045	1-218-937-11	RES-CHIP 47 5% 1/16W		
608		BL	RESISTOR		R2046	1-218-688-11	METAL CHIP 680 0.5% 1/10W		
609		BL	RESISTOR		R2047	1-218-668-11	METAL CHIP 100 0.5% 1/10W		
610		BL	RESISTOR		R2048	1-218-941-81	RES-CHIP 100 5% 1/16W		
611		BL	RESISTOR		R2050	1-216-864-11	SHORT CHIP 0		
612		BL	RESISTOR		R2051	1-218-965-11	RES-CHIP 10K 5% 1/16W		
613		BL	RESISTOR		R2052	1-218-941-81	RES-CHIP 100 5% 1/16W		
614		BL	RESISTOR		R2053	1-218-688-11	METAL CHIP 680 0.5% 1/10W		
615		BL	RESISTOR		R2054	1-216-864-11	SHORT CHIP 0		
616		BL	RESISTOR		R2055	1-218-965-11	RES-CHIP 10K 5% 1/16W		
617		BL	RESISTOR		R2057	1-216-864-11	SHORT CHIP 0		
618		BL	RESISTOR		R2058	1-216-864-11	SHORT CHIP 0		
619		BL	RESISTOR		R2059	1-208-697-11	RES-CHIP 3.9K 0.5% 1/16W		
620		BL	RESISTOR		R2060	1-208-683-11	RES-CHIP 1K 0.5% 1/16W		
621		BL	RESISTOR		R2061	1-218-941-81	RES-CHIP 100 5% 1/16W		
622		BL	RESISTOR		R2062	1-218-965-11	RES-CHIP 10K 5% 1/16W		
623		BL	RESISTOR		R2063	1-218-959-11	RES-CHIP 3.3K 5% 1/16W		
624		BL	RESISTOR		R2064	1-218-957-11	RES-CHIP 2.2K 5% 1/16W		
625		BL	RESISTOR		R2065	1-218-989-11	RES-CHIP 1M 5% 1/16W		
626		BL	RESISTOR		R2066	1-218-965-11	RES-CHIP 10K 5% 1/16W		
627		BL	RESISTOR		R2067	1-218-990-11	SHORT CHIP 0		
628		BL	RESISTOR		R2068	1-218-971-11	RES-CHIP 33K 5% 1/16W		
629		BL	RESISTOR		R2069	1-218-956-11	RES-CHIP 1.8K 5% 1/16W		
630		BL	RESISTOR		R2070	1-218-692-11	METAL CHIP 1K 0.5% 1/10W		
631		BL	RESISTOR		R2071	1-218-692-11	METAL CHIP 1K 0.5% 1/10W		
632		BL	RESISTOR		R2072	1-218-693-11	METAL CHIP 1.1K 0.5% 1/10W		
633		BL	RESISTOR		R2073	1-218-692-11	METAL CHIP 1K 0.5% 1/10W		
634		BL	RESISTOR		R2075	1-218-720-11	METAL CHIP 15K 0.5% 1/10W		
635		BL	RESISTOR		R2076	1-218-990-11	SHORT CHIP 0		
636		BL	RESISTOR		R2077	1-218-990-11	SHORT CHIP 0		
637		BL	RESISTOR		R2078	1-216-864-11	SHORT CHIP 0		
638		BL	RESISTOR		R2079	1-218-708-11	METAL CHIP 4.7K 0.5% 1/10W		
639		BL	RESISTOR		R2080	1-218-696-11	METAL CHIP 1.5K 0.5% 1/10W		
640		BL	RESISTOR		R2081	1-216-864-11	SHORT CHIP 0		
641		BL	RESISTOR		R2086	1-216-864-11	SHORT CHIP 0		
642		BL	RESISTOR		R2087	1-218-965-11	RES-CHIP 10K 5% 1/16W		
643		BL	RESISTOR		R2088	1-218-941-81	RES-CHIP 100 5% 1/16W		
644		BL	RESISTOR		R2089	1-218-941-81	RES-CHIP 100 5% 1/16W		
645		BL	RESISTOR		R2091	1-216-864-11	SHORT CHIP 0		
646		BL	RESISTOR		R2092	1-216-864-11	SHORT CHIP 0		
647		BL	RESISTOR		R2093	1-218-990-11	SHORT CHIP 0		
648		BL	RESISTOR		R2094	1-218-990-11	SHORT CHIP 0		
649		BL	RESISTOR		R2095	1-218-933-11	RES-CHIP 22 5% 1/16W		
650		BL	RESISTOR		R2096	1-218-985-11	RES-CHIP 470K 5% 1/16W		
651		BL	RESISTOR		R2097	1-218-990-11	SHORT CHIP 0		
652		BL	RESISTOR		R2098	1-218-937-11	RES-CHIP 47 5% 1/16W		
653		BL	RESISTOR		R2099	1-218-937-11	RES-CHIP 47 5% 1/16W		
654		BL	RESISTOR		R2100	1-218-933-11	RES-CHIP 22 5% 1/16W		
655		BL	RESISTOR		R2101	1-218-937-11	RES-CHIP 47 5% 1/16W		
656		BL	RESISTOR		R2102	1-218-937-11	RES-CHIP 47 5% 1/16W		
657		BL	RESISTOR		R2103	1-218-965-11	RES-CHIP 10K 5% 1/16W		
658		BL	RESISTOR		R2104	1-218-965-11	RES-CHIP 10K 5% 1/16W		
659		BL	RESISTOR		R2105	1-218-965-11	RES-CHIP 10K 5% 1/16W		
660		BL	RESISTOR		R2106	1-218-965-11	RES-CHIP 10K 5% 1/16W		
661		BL	RESISTOR		R2107	1-218-965-11	RES-CHIP 10K 5% 1/16W		
662		BL	RESISTOR		R2108	1-218-990-11	SHORT CHIP 0		
663		BL	RESISTOR		R2109	1-218-990-11	SHORT CHIP 0		
664		BL	RESISTOR		R2110	1-218-990-11	SHORT CHIP 0		
665		BL	RESISTOR		R2111	1-218-990-11	SHORT CHIP 0		
666		BL	RESISTOR		R2112	1-218-933-11	RES-CHIP 22 5% 1/16W		

No.	#	Board	Type	$\Delta$ / <sup>*</sup>	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
667		BL	RESISTOR		R2200	1-216-296-11	SHORT CHIP 0		
668		BL	RESISTOR		R2201	1-216-296-11	SHORT CHIP 0		
669		BL	RESISTOR		R2202	1-216-296-11	SHORT CHIP 0		
670		BL	RESISTOR		R2203	1-216-296-11	SHORT CHIP 0		
671		BL	RESISTOR		R2204	1-216-296-11	SHORT CHIP 0		
672		BL	RESISTOR		R2205	1-216-296-11	SHORT CHIP 0		
673		BL	RESISTOR		R2206	1-216-296-11	SHORT CHIP 0		
674		BL	RESISTOR		R2207	1-216-296-11	SHORT CHIP 0		
675		BL	RESISTOR		R3001	1-218-933-11	RES-CHIP 22 5% 1/16W		
676		BL	RESISTOR		R3004	1-218-937-11	RES-CHIP 47 5% 1/16W		
677		BL	RESISTOR		R3005	1-218-941-81	RES-CHIP 100 5% 1/16W		
678		BL	RESISTOR		R3006	1-218-941-81	RES-CHIP 100 5% 1/16W		
679		BL	RESISTOR		R3007	1-218-933-11	RES-CHIP 22 5% 1/16W		
680		BL	RESISTOR		R3008	1-218-945-11	METAL CHIP 220 5% 1/16W		
681		BL	RESISTOR		R3009	1-218-945-11	METAL CHIP 220 5% 1/16W		
682		BL	RESISTOR		R3010	1-208-695-11	RES-CHIP 3.3K 0.5% 1/16W		
683		BL	RESISTOR		R3011	1-218-945-11	METAL CHIP 220 5% 1/16W		
684		BL	RESISTOR		R3012	1-218-933-11	RES-CHIP 22 5% 1/16W		
685		BL	RESISTOR		R3013	1-220-180-11	METAL CHIP 620 5% 1/16W		
686		BL	RESISTOR		R3014	1-218-990-11	SHORT CHIP 0		
687		BL	RESISTOR		R3015	1-218-990-11	SHORT CHIP 0		
688		BL	RESISTOR		R3018	1-208-873-81	METAL CHIP 270 0.5% 1/16W		
689		BL	RESISTOR		R3023	1-218-990-11	SHORT CHIP 0		
690		BL	RESISTOR		R3024	1-218-941-81	RES-CHIP 100 5% 1/16W		
691		BL	RESISTOR		R3025	1-218-941-81	RES-CHIP 100 5% 1/16W		
692		BL	RESISTOR		R3042	1-218-933-11	RES-CHIP 22 5% 1/16W		
693		BL	RESISTOR		R3043	1-218-933-11	RES-CHIP 22 5% 1/16W		
694		BL	RESISTOR		R3050	1-218-990-11	SHORT CHIP 0		
695		BL	RESISTOR		R3057	1-218-990-11	SHORT CHIP 0		
696		BL	RESISTOR		R3058	1-218-990-11	SHORT CHIP 0		
697		BL	RESISTOR		R3059	1-218-941-81	RES-CHIP 100 5% 1/16W		
698		BL	RESISTOR		R3066	1-218-969-11	RES-CHIP 22K 5% 1/16W		
699		BL	RESISTOR		R3067	1-218-985-11	RES-CHIP 470K 5% 1/16W		
700		BL	RESISTOR		R3068	1-218-933-11	RES-CHIP 22 5% 1/16W		
701		BL	RESISTOR		R3069	1-218-945-11	RES-CHIP 220 5% 1/16W		
702		BL	RESISTOR		R3070	1-218-953-11	RES-CHIP 1K 5% 1/16W		
703		BL	RESISTOR		R3071	1-218-945-11	RES-CHIP 220 5% 1/16W		
704		BL	RESISTOR		R3072	1-218-947-11	RES-CHIP 330 5% 1/16W		
705		BL	RESISTOR		R3073	1-218-959-11	RES-CHIP 3.3K 5% 1/16W		
706		BL	RESISTOR		R3074	1-208-696-11	RES-CHIP 3.6K 0.5% 1/16W		
707		BL	RESISTOR		R3075	1-218-990-11	SHORT CHIP 0		
708		BL	RESISTOR		R3076	1-218-985-11	RES-CHIP 470K 5% 1/16W		
709		BL	RESISTOR		R3077	1-218-965-11	RES-CHIP 10K 5% 1/16W		
710		BL	RESISTOR		R4001	1-216-864-11	SHORT CHIP 0		
711		BL	RESISTOR		R4002	1-216-864-11	SHORT CHIP 0		
712		BL	RESISTOR		R4003	1-216-801-11	METAL CHIP 22 5% 1/10W		
713		BL	RESISTOR		R4004	1-216-805-11	METAL CHIP 47 5% 1/10W		
714		BL	RESISTOR		R4005	1-216-805-11	METAL CHIP 47 5% 1/10W		
715		BL	RESISTOR		R4006	1-216-805-11	METAL CHIP 47 5% 1/10W		
716		BL	RESISTOR		R4007	1-216-864-11	SHORT CHIP 0		
717		BL	RESISTOR		R4008	1-216-801-11	METAL CHIP 22 5% 1/10W		
718		BL	RESISTOR		R4010	1-216-864-11	SHORT CHIP 0		
719		BL	RESISTOR		R4011	1-216-864-11	SHORT CHIP 0		
720		BL	RESISTOR		R4012	1-216-859-11	METAL CHIP 1.5M 5% 1/10W		
721		BL	RESISTOR		R4013	1-218-959-11	RES-CHIP 3.3K 5% 1/16W		
722		BL	RESISTOR		R4014	1-218-990-11	SHORT CHIP 0		
723		BL	RESISTOR		R4015	1-218-990-11	SHORT CHIP 0		
724		BL	RESISTOR		R4016	1-216-802-11	METAL CHIP 27 5% 1/10W		
725		BL	RESISTOR		R4017	1-218-959-11	RES-CHIP 3.3K 5% 1/16W		
726		BL	RESISTOR		R4018	1-216-864-11	SHORT CHIP 0		
727		BL	RESISTOR		R4020	1-216-805-11	METAL CHIP 47 5% 1/10W		
728		BL	RESISTOR		R4021	1-216-805-11	METAL CHIP 47 5% 1/10W		
729		BL	RESISTOR		R4023	1-216-827-11	METAL CHIP 3.3K 5% 1/10W		
730		BL	RESISTOR		R4028	1-216-864-11	SHORT CHIP 0		
731		BL	RESISTOR		R4029	1-216-864-11	SHORT CHIP 0		
732		BL	RESISTOR		R4030	1-216-864-11	SHORT CHIP 0		
733		BL	RESISTOR		R4031	1-216-864-11	SHORT CHIP 0		
734		BL	RESISTOR		R4032	1-216-864-11	SHORT CHIP 0		
735		BL	RESISTOR		R4033	1-216-864-11	SHORT CHIP 0		
736		BL	RESISTOR		R4034	1-218-990-11	SHORT CHIP 0		
737		BL	RESISTOR		R4035	1-218-990-11	SHORT CHIP 0		
738		BL	RESISTOR		R4036	1-218-990-11	SHORT CHIP 0		
739		BL	RESISTOR		R4037	1-218-990-11	SHORT CHIP 0		
740		BL	RESISTOR		R4038	1-218-990-11	SHORT CHIP 0		

No.	#	Board	Type	$\Delta$ / <sup>*</sup>	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
741		BL	RESISTOR		R4040	1-218-990-11	SHORT CHIP 0		
742		BL	RESISTOR		R4041	1-218-941-81	RES-CHIP 100 5% 1/16W		
743		BL	RESISTOR		R4042	1-218-941-81	RES-CHIP 100 5% 1/16W		
744		BL	RESISTOR		R4043	1-218-941-81	RES-CHIP 100 5% 1/16W		
745		BL	RESISTOR		R4047	1-216-827-11	METAL CHIP 3.3K 5% 1/10W		
746		BL	RESISTOR		R4048	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
747		BL	RESISTOR		R4050	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
748		BL	RESISTOR		R4051	1-216-809-11	METAL CHIP 100 5% 1/10W		
749		BL	RESISTOR		R4053	1-216-864-11	SHORT CHIP 0		
750		BL	RESISTOR		R4055	1-216-827-11	METAL CHIP 3.3K 5% 1/10W		
751		BL	RESISTOR		R4057	1-216-864-11	SHORT CHIP 0		
752		BL	RESISTOR		R4058	1-216-864-11	SHORT CHIP 0		
753		BL	RESISTOR		R4060	1-218-961-11	RES-CHIP 4.7K 5% 1/16W		
754		BL	RESISTOR		R4062	1-216-864-11	SHORT CHIP 0		
755		BL	RESISTOR		R4063	1-218-990-11	SHORT CHIP 0		
756		BL	RESISTOR		R4064	1-218-990-11	SHORT CHIP 0		
757		BL	RESISTOR		R4065	1-218-990-11	SHORT CHIP 0		
758		BL	RESISTOR		R4066	1-218-990-11	SHORT CHIP 0		
759		BL	RESISTOR		R4067	1-218-990-11	SHORT CHIP 0		
760		BL	RESISTOR		R4068	1-218-959-11	RES-CHIP 3.3K 5% 1/16W		
761		BL	RESISTOR		R4069	1-216-864-11	SHORT CHIP 0		
762		BL	RESISTOR		R4070	1-218-990-11	SHORT CHIP 0		
763		BL	RESISTOR		R4071	1-218-864-11	RES-CHIP 5.1K 0.5% 1/10W		
764		BL	RESISTOR		R4072	1-208-683-11	RES-CHIP 1K 0.5% 1/16W		
765		BL	RESISTOR		R4073	1-208-898-81	METAL CHIP 3K 0.5% 1/16W		
766		BL	RESISTOR		R4074	1-208-683-11	RES-CHIP 1K 0.5% 1/16W		
767		BL	RESISTOR		R4075	1-216-821-11	METAL CHIP 1K 5% 1/10W		
768		BL	RESISTOR		R4076	1-216-821-11	METAL CHIP 1K 5% 1/10W		
769		BL	RESISTOR		R4077	1-216-839-11	METAL CHIP 33K 5% 1/10W		
770		BL	RESISTOR		R4078	1-216-833-11	METAL CHIP 10K 5% 1/10W		
771		BL	RESISTOR		R4079	1-216-809-11	METAL CHIP 100 5% 1/10W		
772		BL	RESISTOR		R4080	1-216-864-11	SHORT CHIP 0		
773		BL	RESISTOR		R4081	1-216-839-11	METAL CHIP 33K 5% 1/10W		
774		BL	RESISTOR		R4083	1-216-864-11	SHORT CHIP 0		
775		BL	RESISTOR		R4087	1-216-864-11	SHORT CHIP 0		
776		BL	RESISTOR		R4088	1-216-864-11	SHORT CHIP 0		
777		BL	RESISTOR		R4089	1-216-801-11	METAL CHIP 22 5% 1/10W		
778		BL	RESISTOR		R4090	1-216-813-11	METAL CHIP 220 5% 1/10W		
779		BL	RESISTOR		R4091	1-216-827-11	METAL CHIP 3.3K 5% 1/10W		
780		BL	RESISTOR		R4092	1-216-827-11	METAL CHIP 3.3K 5% 1/10W		
781		BL	RESISTOR		R4093	1-216-864-11	SHORT CHIP 0		
782		BL	RESISTOR		R4095	1-216-805-11	METAL CHIP 47 5% 1/10W		
783		BL	RESISTOR		R4096	1-216-864-11	SHORT CHIP 0		
784		BL	RESISTOR		R4097	1-216-864-11	SHORT CHIP 0		
785		BL	RESISTOR		R4098	1-216-864-11	SHORT CHIP 0		
786		BL	RESISTOR		R4099	1-216-864-11	SHORT CHIP 0		
787		BL	RESISTOR		R4100	1-216-801-11	METAL CHIP 22 5% 1/10W		
788		BL	RESISTOR		R4101	1-216-801-11	METAL CHIP 22 5% 1/10W		
789		BL	RESISTOR		R4102	1-216-864-11	SHORT CHIP 0		
790		BL	RESISTOR		R4501	1-218-961-11	RES-CHIP 4.7K 5% 1/16W		
791		BL	RESISTOR		R4503	1-218-961-11	RES-CHIP 4.7K 5% 1/16W		
792		BL	RESISTOR		R4505	1-216-864-11	SHORT CHIP 0		
793		BL	RESISTOR		R4506	1-216-864-11	SHORT CHIP 0		
794		BL	RESISTOR		R4508	1-218-941-81	RES-CHIP 100 5% 1/16W		
795		BL	RESISTOR		R4509	1-218-965-11	RES-CHIP 10K 5% 1/16W		
796		BL	RESISTOR		R4510	1-216-864-11	SHORT CHIP 0		
797		BL	RESISTOR		R4511	1-218-965-11	RES-CHIP 10K 5% 1/16W		
798		BL	RESISTOR		R4512	1-216-864-11	SHORT CHIP 0		
799		BL	RESISTOR		R4513	1-218-965-11	RES-CHIP 10K 5% 1/16W		
800		BL	RESISTOR		R4514	1-216-864-11	SHORT CHIP 0		
801		BL	RESISTOR		R4515	1-216-864-11	SHORT CHIP 0		
802		BL	RESISTOR		R4516	1-216-812-11	METAL CHIP 180 5% 1/10W		
803		BL	RESISTOR		R4517	1-216-833-11	METAL CHIP 10K 5% 1/10W		
804		BL	RESISTOR		R4518	1-216-864-11	SHORT CHIP 0		
805		BL	RESISTOR		R4519	1-218-937-11	RES-CHIP 47 5% 1/16W		
806		BL	RESISTOR		R4520	1-216-833-11	METAL CHIP 10K 5% 1/10W		
807		BL	RESISTOR		R4521	1-216-833-11	METAL CHIP 10K 5% 1/10W		
808		BL	RESISTOR		R4522	1-216-833-11	METAL CHIP 10K 5% 1/10W		
809		BL	RESISTOR		R4525	1-218-933-11	RES-CHIP 22 5% 1/16W		
810		BL	RESISTOR		R4526	1-216-833-11	METAL CHIP 10K 5% 1/10W		
811		BL	RESISTOR		R4527	1-216-864-11	SHORT CHIP 0		
812		BL	RESISTOR		R4528	1-218-937-11	RES-CHIP 47 5% 1/16W		
813		BL	RESISTOR		R4529	1-218-937-11	RES-CHIP 47 5% 1/16W		
814		BL	NETWORK		RB1001	1-234-372-21	RES, NETWORK 100X4 (1005)		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
815		BL	NETWORK		RB1002	1-234-372-21	RES, NETWORK 100X4 (1005)		
816		BL	NETWORK		RB1003	1-234-372-21	RES, NETWORK 100X4 (1005)		
817		BL	NETWORK		RB1004	1-239-674-81	RESISTOR, NETWORK 100		
818		BL	NETWORK		RB1005	1-234-378-21	RES, NETWORK 10KX4 (1005)		
819		BL	NETWORK		RB1006	1-234-372-21	RES, NETWORK 100X4 (1005)		
820		BL	NETWORK		RB1007	1-234-372-21	RES, NETWORK 100X4 (1005)		
821		BL	NETWORK		RB1008	1-234-372-21	RES, NETWORK 100X4 (1005)		
822		BL	NETWORK		RB1009	1-234-380-21	RES, NETWORK 47KX4 (1005)		
823		BL	NETWORK		RB1010	1-234-372-21	RES, NETWORK 100X4 (1005)		
824		BL	NETWORK		RB1011	1-234-372-21	RES, NETWORK 100X4 (1005)		
825		BL	NETWORK		RB1012	1-234-372-21	RES, NETWORK 100X4 (1005)		
826		BL	NETWORK		RB1013	1-234-372-21	RES, NETWORK 100X4 (1005)		
827		BL	NETWORK		RB1014	1-234-372-21	RES, NETWORK 100X4 (1005)		
828		BL	NETWORK		RB1015	1-234-372-21	RES, NETWORK 100X4 (1005)		
829		BL	NETWORK		RB1016	1-234-372-21	RES, NETWORK 100X4 (1005)		
830		BL	NETWORK		RB1017	1-234-372-21	RES, NETWORK 100X4 (1005)		
831		BL	NETWORK		RB1018	1-234-372-21	RES, NETWORK 100X4 (1005)		
832		BL	NETWORK		RB1019	1-234-372-21	RES, NETWORK 100X4 (1005)		
833		BL	NETWORK		RB1020	1-239-674-81	RESISTOR, NETWORK 100		
834		BL	NETWORK		RB1021	1-239-674-81	RESISTOR, NETWORK 100		
835		BL	NETWORK		RB1022	1-234-372-21	RES, NETWORK 100X4 (1005)		
836		BL	NETWORK		RB1023	1-234-372-21	RES, NETWORK 100X4 (1005)		
837		BL	NETWORK		RB1024	1-239-674-81	RESISTOR, NETWORK 100		
838		BL	NETWORK		RB1025	1-234-372-21	RES, NETWORK 100X4 (1005)		
839		BL	NETWORK		RB1026	1-234-372-21	RES, NETWORK 100X4 (1005)		
840		BL	NETWORK		RB1027	1-234-372-21	RES, NETWORK 100X4 (1005)		
841		BL	NETWORK		RB2001	1-234-371-21	RES, NETWORK 47X4 (1005)		
842		BL	NETWORK		RB2002	1-234-795-21	RES, NETWORK 0X4 (2010)		
843		BL	NETWORK		RB2003	1-234-795-21	RES, NETWORK 0X4 (2010)		
844		BL	NETWORK		RB2004	1-234-795-21	RES, NETWORK 0X4 (2010)		
845		BL	NETWORK		RB2005	1-234-795-21	RES, NETWORK 0X4 (2010)		
846		BL	NETWORK		RB2006	1-234-378-21	RES, NETWORK 10KX4 (1005)		
847		BL	NETWORK		RB2007	1-234-372-21	RES, NETWORK 100X4 (1005)		
848		BL	NETWORK		RB2008	1-234-372-21	RES, NETWORK 100X4 (1005)		
849		BL	NETWORK		RB2009	1-234-372-21	RES, NETWORK 100X4 (1005)		
850		BL	NETWORK		RB2010	1-234-372-21	RES, NETWORK 100X4 (1005)		
851		BL	NETWORK		RB2011	1-234-372-21	RES, NETWORK 100X4 (1005)		
852		BL	NETWORK		RB2012	1-234-372-21	RES, NETWORK 100X4 (1005)		
853		BL	NETWORK		RB2013	1-234-372-21	RES, NETWORK 100X4 (1005)		
854		BL	NETWORK		RB2014	1-234-372-21	RES, NETWORK 100X4 (1005)		
855		BL	NETWORK		RB2015	1-234-372-21	RES, NETWORK 100X4 (1005)		
856		BL	NETWORK		RB2016	1-239-670-81	RESISTOR, NETWORK 47		
857		BL	NETWORK		RB2017	1-234-371-21	RES, NETWORK 47X4 (1005)		
858		BL	NETWORK		RB2018	1-234-371-21	RES, NETWORK 47X4 (1005)		
859		BL	NETWORK		RB2019	1-239-670-81	RESISTOR, NETWORK 47		
860		BL	NETWORK		RB2020	1-234-371-21	RES, NETWORK 47X4 (1005)		
861		BL	NETWORK		RB2021	1-234-371-21	RES, NETWORK 47X4 (1005)		
862		BL	NETWORK		RB3001	1-234-372-21	RES, NETWORK 100X4 (1005)		
863		BL	NETWORK		RB3002	1-234-372-21	RES, NETWORK 100X4 (1005)		
864		BL	NETWORK		RB3003	1-234-371-21	RES, NETWORK 47X4 (1005)		
865		BL	NETWORK		RB3004	1-234-372-21	RES, NETWORK 100X4 (1005)		
866		BL	NETWORK		RB3006	1-234-372-21	RES, NETWORK 100X4 (1005)		
867		BL	NETWORK		RB3008	1-234-372-21	RES, NETWORK 100X4 (1005)		
868		BL	NETWORK		RB3009	1-234-372-21	RES, NETWORK 100X4 (1005)		
869		BL	NETWORK		RB3011	1-234-372-21	RES, NETWORK 100X4 (1005)		
870		BL	NETWORK		RB3013	1-234-372-21	RES, NETWORK 100X4 (1005)		
871		BL	NETWORK		RB3014	1-234-372-21	RES, NETWORK 100X4 (1005)		
872		BL	NETWORK		RB3015	1-234-372-21	RES, NETWORK 100X4 (1005)		
873		BL	NETWORK		RB4001	1-234-372-21	RES, NETWORK 100X4 (1005)		
874		BL	NETWORK		RB4002	1-234-372-21	RES, NETWORK 100X4 (1005)		
875		BL	NETWORK		RB4003	1-234-372-21	RES, NETWORK 100X4 (1005)		
876		BL	NETWORK		RB4004	1-234-372-21	RES, NETWORK 100X4 (1005)		
877		BL	NETWORK		RB4005	1-234-372-21	RES, NETWORK 100X4 (1005)		
878		BL	NETWORK		RB4006	1-234-372-21	RES, NETWORK 100X4 (1005)		
879		BL	NETWORK		RB4007	1-234-370-21	RES, NETWORK 22X4 (1005)		
880		BL	NETWORK		RB4008	1-234-370-21	RES, NETWORK 22X4 (1005)		
881		BL	NETWORK		RB4009	1-234-370-21	RES, NETWORK 22X4 (1005)		
882		BL	NETWORK		RB4010	1-234-370-21	RES, NETWORK 22X4 (1005)		
883		BL	NETWORK		RB4011	1-234-370-21	RES, NETWORK 22X4 (1005)		
884		BL	NETWORK		RB4012	1-234-370-21	RES, NETWORK 22X4 (1005)		
885		BL	NETWORK		RB4013	1-234-400-21	CONDUCTOR, NETWORK (2010)		
886		BL	NETWORK		RB4014	1-234-400-21	CONDUCTOR, NETWORK (2010)		
887		BL	NETWORK		RB4015	1-234-400-21	CONDUCTOR, NETWORK (2010)		
888		BL	NETWORK		RB4016	1-234-400-21	CONDUCTOR, NETWORK (2010)		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
889		BL	NETWORK		RB4017	1-234-371-21	RES, NETWORK 47X4 (1005)		
890		BL	NETWORK		RB4018	1-234-371-21	RES, NETWORK 47X4 (1005)		
891		BL	NETWORK		RB4019	1-234-371-21	RES, NETWORK 47X4 (1005)		
892		BL	NETWORK		RB4020	1-234-371-21	RES, NETWORK 47X4 (1005)		
893		BL	NETWORK		RB4021	1-239-674-81	RESISTOR, NETWORK 100		
894		BL	NETWORK		RB4022	1-239-674-81	RESISTOR, NETWORK 100		
895		BL	NETWORK		RB4023	1-234-370-21	RES, NETWORK 22X4 (1005)		
896		BL	NETWORK		RB4024	1-234-370-21	RES, NETWORK 22X4 (1005)		
897		BL	NETWORK		RB4025	1-234-370-21	RES, NETWORK 22X4 (1005)		
898		BL	NETWORK		RB4026	1-234-370-21	RES, NETWORK 22X4 (1005)		
899		BL	NETWORK		RB4501	1-234-372-21	RES, NETWORK 100X4 (1005)		
900		BL	NETWORK		RB4502	1-234-372-21	RES, NETWORK 100X4 (1005)		
901		BL	NETWORK		RB4503	1-234-372-21	RES, NETWORK 100X4 (1005)		
902		BL	NETWORK		RB4504	1-234-372-21	RES, NETWORK 100X4 (1005)		
903		BL	NETWORK		RB4505	1-234-371-21	RES, NETWORK 47X4 (1005)		
904		BL	NETWORK		RB4506	1-234-371-21	RES, NETWORK 47X4 (1005)		
905		BL	NETWORK		RB4507	1-234-371-21	RES, NETWORK 47X4 (1005)		
906		BL	NETWORK		RB4508	1-234-371-21	RES, NETWORK 47X4 (1005)		
907		BL	NETWORK		RB4509	1-234-371-21	RES, NETWORK 47X4 (1005)		
908		BL	NETWORK		RB4510	1-234-371-21	RES, NETWORK 47X4 (1005)		
909		BL	NETWORK		RB4511	1-234-370-21	RES, NETWORK 22X4 (1005)		
910		BL	NETWORK		RB4512	1-234-371-21	RES, NETWORK 47X4 (1005)		
911		BL	NETWORK		RB4513	1-234-371-21	RES, NETWORK 47X4 (1005)		
912		BL	NETWORK		RB4514	1-234-371-21	RES, NETWORK 47X4 (1005)		
913		BL	NETWORK		RB4515	1-234-371-21	RES, NETWORK 47X4 (1005)		
914		BL	CRYSTAL		X1001	1-813-326-21	VIBRATOR, CRYSTAL		
915		BL	CRYSTAL		X2001	1-795-244-11	VIBRATOR, CERAMIC		
916		BL	CRYSTAL		X2002	1-795-951-21	QUARTZ CRYSTAL OSCILLATOR(SMD)		
917		BL	CRYSTAL		X4001	1-767-655-21	VIBRATOR, CRYSTAL		
918		BL	CRYSTAL		X4501	1-795-416-21	VIBRATOR, CRYSTAL		
919		BL	CRYSTAL		X4502	1-795-850-21	OSCILLATOR, CRYSTAL		
920		GL	CAPACITOR		C601	1-113-889-11	CERAMIC 0.001UF 20.00% 250V		
921		GL	CAPACITOR		C602	1-119-894-51	CERAMIC 2200PF 20.00% 250V		
922		GL	CAPACITOR		C603	1-119-907-51	CERAMIC 4700PF 20.00% 250V		
923		GL	CAPACITOR		C604	1-165-530-11	MYLAR 0.47UF 10 275V		
924		GL	CAPACITOR		C605	1-165-529-11	MYLAR 0.22UF 10 275V		
925		GL	CAPACITOR		C606	1-119-894-51	CERAMIC 2200PF 20.00% 250V		
926		GL	CAPACITOR		C607	1-119-907-51	CERAMIC 4700PF 20.00% 250V		
927		GL	CAPACITOR		C610	1-165-921-11	ELECT 390UF 20% 250V		
928		GL	CAPACITOR		C611	1-165-921-11	ELECT 390UF 20% 250V		
929		GL	CAPACITOR		C612	1-165-921-11	ELECT 390UF 20% 250V		
930		GL	CAPACITOR		C613	1-165-921-11	ELECT 390UF 20% 250V		
931		GL	CAPACITOR		C616	1-119-891-51	CERAMIC 220PF 10.00% 250V		
932		GL	CAPACITOR		C617	1-119-891-51	CERAMIC 220PF 10.00% 250V		
933		GL	CAPACITOR		C620	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
934		GL	CAPACITOR		C621	1-107-905-11	ELECT 4.7UF 20.00% 50V		
935		GL	CAPACITOR		C622	1-107-888-11	ELECT 47UF 20.00% 25V		
936		GL	CAPACITOR		C623	1-100-831-91	CERAMIC CHIP 0.001UF 2% 50V		
937		GL	CAPACITOR		C624	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
938		GL	CAPACITOR		C625	1-107-906-11	ELECT 10UF 20.00% 50V		
939		GL	CAPACITOR		C627	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
940		GL	CAPACITOR		C628	1-136-165-00	FILM 0.1UF 5.00% 50V		
941		GL	CAPACITOR		C629	1-107-909-11	ELECT 47UF 20.00% 50V		
942		GL	CAPACITOR		C630	1-107-824-11	CERAMIC 220PF 5.00% 1KV		
943		GL	CAPACITOR		C631	1-107-824-11	CERAMIC 220PF 5.00% 1KV		
944		GL	CAPACITOR		C632	1-137-990-22	FILM 33000PF 3% 800V		
945		GL	CAPACITOR		C633	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
946		GL	CAPACITOR		C634	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
947		GL	CAPACITOR		C650	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
948		GL	CAPACITOR		C651	1-107-907-11	ELECT 22UF 20.00% 50V		
949		GL	CAPACITOR		C652	1-165-737-31	ELECT 1800UF 20% 25V		
950		GL	CAPACITOR		C653	1-165-737-31	ELECT 1800UF 20% 25V		
951		GL	CAPACITOR		C655	1-137-903-31	ELECT 1200UF 20% 16V		
952		GL	CAPACITOR		C656	1-107-907-11	ELECT 22UF 20.00% 50V		
953		GL	CAPACITOR		C657	1-165-751-31	ELECT 330UF 20% 50V		
954		GL	CAPACITOR		C658	1-131-976-11	ELECT 820UF 20% 25V		
955		GL	CAPACITOR		C660	1-136-201-61	MYLAR 0.22UF 10.00% 400V		
956		GL	CAPACITOR		C661	1-107-974-11	CERAMIC 47PF 5.00% 2KV		
957		GL	CAPACITOR		C662	1-107-903-11	ELECT 2.2UF 20.00% 50V		
958		GL	CAPACITOR		C663	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
959		GL	CAPACITOR		C664	1-104-331-11	CERAMIC 0.0022UF 10.00% 1KV		
960		GL	CAPACITOR		C665	1-107-905-11	ELECT 4.7UF 20.00% 50V		
961		GL	CAPACITOR		C666	1-107-909-11	ELECT 47UF 20.00% 50V		
962		GL	CAPACITOR		C667	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		



No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
963		GL	CAPACITOR		C668	1-113-889-11	CERAMIC 0.001UF 20.00% 250V		
964		GL	CAPACITOR		C680	1-131-872-91	CERAMIC CHIP 1000PF 10% 630V		
965		GL	CAPACITOR		C681	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
966		GL	CAPACITOR		C682	1-165-736-31	ELECT 680UF 20% 25V		
967		GL	CAPACITOR		C683	1-107-902-11	ELECT 1UF 20.00% 50V		
968		GL	CAPACITOR		C684	1-107-909-11	ELECT 47UF 20.00% 50V		
969		GL	CAPACITOR		C685	1-107-902-11	ELECT 1UF 20.00% 50V		
970		GL	CAPACITOR		C702	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
971		GL	CONNECTOR	*	CN601	1-691-961-11	PIN, CONNECTOR (PC BOARD) 3P		
972		GL	CONNECTOR	*	CN651	1-564-596-11	PLUG, CONNECTOR 15P		
973		GL	CONNECTOR	*	CN652	1-564-595-11	PLUG, CONNECTOR 14P		
974		GL	CONNECTOR	*	CN653	1-564-507-11	PLUG, CONNECTOR 4P		
975		GL	DIODE		D601	8-719-510-53	DIODE D4SB60L		
976		GL	DIODE		D602	8-719-083-78	DIODE 10ERA60-TP		
977		GL	DIODE		D603	8-719-083-78	DIODE 10ERA60-TP		
978		GL	DIODE		D604	8-719-081-97	DIODE MMDL914T1		
979		GL	DIODE		D620	8-719-082-03	DIODE MM3Z15VT1		
980		GL	DIODE		D621	8-719-082-03	DIODE MM3Z15VT1		
981		GL	DIODE		D622	8-719-082-03	DIODE MM3Z15VT1		
982		GL	DIODE		D623	8-719-979-64	DIODE UF4005PKG23		
983		GL	DIODE		D624	8-719-110-41	DIODE RD15ESB2		
984		GL	DIODE		D625	8-719-110-41	DIODE RD15ESB2		
985		GL	DIODE		D651	6-500-501-01	DIODE D10SC6M-4022		
986		GL	DIODE		D652	6-500-501-01	DIODE D10SC6M-4022		
987		GL	DIODE		D653	8-719-052-37	DIODE F10P04Q		
988		GL	DIODE		D654	8-719-082-75	DIODE FCH08A10		
989		GL	DIODE		D655	6-500-567-31	DIODE 10ERB20-TB3		
990		GL	DIODE		D656	6-500-567-31	DIODE 10ERB20-TB3		
991		GL	DIODE		D661	8-719-069-55	DIODE UDZSTE-175.6B		
992		GL	DIODE		D662	6-500-849-01	DIODE ERA22-08KFLB		
993		GL	DIODE		D663	6-500-567-31	DIODE 10ERB20-TB3		
994		GL	DIODE		D664	6-500-567-31	DIODE 10ERB20-TB3		
995		GL	DIODE		D665	8-719-081-97	DIODE MMDL914T1		
996		GL	DIODE		D681	6-500-567-31	DIODE 10ERB20-TB3		
997		GL	DIODE		D682	8-719-081-97	DIODE MMDL914T1		
998		GL	DIODE		D702	8-719-069-56	DIODE UDZSTE-176.2B		
999		GL	FUSE	△	F601	1-576-232-12	FUSE 5A 250V		
1000		GL	FERRITE BEAD		FB661	1-410-397-21	FERRITE 1.1UH		
1001		GL	FUSE HOLDER		FH601	1-533-223-11	FUSE HOLDER 0A 0V		
1002		GL	FUSE HOLDER		FH602	1-533-223-11	FUSE HOLDER 0A 0V		
1003		GL	IC		IC621	6-705-768-01	IC MCZ3001UB		
1004		GL	IC		IC651	8-759-682-42	IC MM1431ATT		
1005		GL	IC		IC661	6-600-279-01	IC STR-A6169		
1006		GL	IC		IC681	8-759-682-42	IC MM1431ATT		
1007		GL	COIL		L601	1-456-293-11	COIL, LINE FILTER		
1008		GL	COIL		L602	1-456-293-11	COIL, LINE FILTER		
1009		GL	COIL		L651	1-406-971-21	INDUCTOR 10UH		
1010		GL	COIL		L652	1-406-971-21	INDUCTOR 10UH		
1011		GL	COIL		L661	1-412-537-31	INDUCTOR 100UH		
1012		GL	COIL		L681	1-414-187-11	INDUCTOR 47UH		
1013		GL	PHOTO COUPLER		PH621	8-749-016-81	PHOTO COUPLER PC123Y22		
1014		GL	PHOTO COUPLER		PH661	8-749-016-81	PHOTO COUPLER PC123Y22		
1015		GL	PHOTO COUPLER		PH662	8-749-016-81	PHOTO COUPLER PC123Y22		
1016		GL	IC LINK	△	PS651	1-533-596-21	IC LINK 4A 90V		
1017		GL	IC LINK	△	PS652	1-533-596-21	IC LINK 4A 90V		
1018		GL	TRANSISTOR		Q621	6-550-898-01	TRANSISTOR 2SK3683-01MR-F104		
1019		GL	TRANSISTOR		Q622	6-550-898-01	TRANSISTOR 2SK3683-01MR-F104		
1020		GL	TRANSISTOR		Q623	8-729-120-28	TRANSISTOR 2SC1623-L5L6		
1021		GL	TRANSISTOR		Q661	8-729-026-49	TRANSISTOR 2SA1037AK-T146-R		
1022		GL	TRANSISTOR		Q662	8-729-120-28	TRANSISTOR 2SC1623-L5L6		
1023		GL	TRANSISTOR		Q681	8-729-120-28	TRANSISTOR 2SC1623-L5L6		
1024		GL	TRANSISTOR		Q682	8-729-026-49	TRANSISTOR 2SA1037AK-T146-R		
1025		GL	TRANSISTOR		Q683	8-729-120-28	TRANSISTOR 2SC1623-L5L6		
1026		GL	RESISTOR		R601	1-219-759-11	METAL 1M 5% 1/2W		
1027		GL	RESISTOR		R602	1-219-513-11	METAL 4.7M 5% 1/2W		
1028		GL	RESISTOR		R609	1-260-320-11	CARBON 220 5% 1/2W		
1029		GL	RESISTOR		R610	1-216-864-11	SHORT CHIP 0		
1030		GL	RESISTOR		R620	1-202-933-61	FUSIBLE 0.1 10% 1/2W		
1031		GL	RESISTOR		R621	1-218-879-11	METAL CHIP 22K 0.5% 1/10W		
1032		GL	RESISTOR		R622	1-218-823-11	METAL CHIP 100 0.5% 1/10W		
1033		GL	RESISTOR		R623	1-218-875-11	METAL CHIP 15K 0.5% 1/10W		
1034		GL	RESISTOR		R625	1-208-847-11	METAL CHIP 510K 0.5% 1/10W		
1035		GL	RESISTOR		R626	1-208-847-11	METAL CHIP 510K 0.5% 1/10W		
1036		GL	RESISTOR		R627	1-208-847-11	METAL CHIP 510K 0.5% 1/10W		

No.	#	Board	Type	$\Delta$ / <sup>*</sup>	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1037		GL	RESISTOR		R628	1-208-847-11	METAL CHIP 510K 0.5% 1/10W		
1038		GL	RESISTOR		R630	1-218-823-11	METAL CHIP 100 0.5% 1/10W		
1039		GL	RESISTOR		R631	1-219-759-11	METAL 1M 5% 1/2W		
1040		GL	RESISTOR		R632	1-249-393-11	CARBON 10 5% 1/4W		
1041		GL	RESISTOR		R633	1-249-393-11	CARBON 10 5% 1/4W		
1042		GL	RESISTOR		R634	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1043		GL	RESISTOR		R635	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1044		GL	RESISTOR		R636	1-245-315-71	METAL OXIDE 0.1 5% 2W		
1045		GL	RESISTOR		R637	1-245-315-71	METAL OXIDE 0.1 5% 2W		
1046		GL	RESISTOR		R638	1-219-759-11	METAL 1M 5% 1/2W		
1047		GL	RESISTOR		R639	1-216-817-11	METAL CHIP 470 5% 1/10W		
1048		GL	RESISTOR		R640	1-216-864-11	SHORT CHIP 0		
1049		GL	RESISTOR		R641	1-216-837-11	METAL CHIP 22K 5% 1/10W		
1050		GL	RESISTOR		R642	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1051		GL	RESISTOR		R650	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1052		GL	RESISTOR		R652	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1053		GL	RESISTOR		R653	1-216-864-11	SHORT CHIP 0		
1054		GL	RESISTOR		R654	1-249-377-11	CARBON 0.47 5% 1/4W		
1055		GL	RESISTOR		R655	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1056		GL	RESISTOR		R656	1-216-864-11	SHORT CHIP 0		
1057		GL	RESISTOR		R657	1-218-865-11	METAL CHIP 5.6K 0.5% 1/10W		
1058		GL	RESISTOR		R658	1-218-847-11	METAL CHIP 1K 0.5% 1/10W		
1059		GL	RESISTOR		R660	1-211-771-11	FUSIBLE 4.7 5% 1/4W		
1060		GL	RESISTOR		R661	1-216-150-91	RES-CHIP 10 5% 1/8W		
1061		GL	RESISTOR		R662	1-216-150-91	RES-CHIP 10 5% 1/8W		
1062		GL	RESISTOR		R663	1-216-150-91	RES-CHIP 10 5% 1/8W		
1063		GL	RESISTOR		R664	1-216-150-91	RES-CHIP 10 5% 1/8W		
1064		GL	RESISTOR		R665	1-218-642-11	METAL OXIDE 100K 5% 1W		
1065		GL	RESISTOR		R666	1-216-864-11	SHORT CHIP 0		
1066		GL	RESISTOR		R667	1-249-393-11	CARBON 10 5% 1/4W		
1067		GL	RESISTOR		R668	1-249-393-11	CARBON 10 5% 1/4W		
1068		GL	RESISTOR		R669	1-216-864-11	SHORT CHIP 0		
1069		GL	RESISTOR		R670	1-216-845-11	METAL CHIP 100K 5% 1/10W		
1070		GL	RESISTOR		R671	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1071		GL	RESISTOR		R672	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1072		GL	RESISTOR		R673	1-216-837-11	METAL CHIP 22K 5% 1/10W		
1073		GL	RESISTOR		R674	1-216-837-11	METAL CHIP 22K 5% 1/10W		
1074		GL	RESISTOR		R675	1-211-783-71	FUSIBLE 47 5% 1/4W		
1075		GL	RESISTOR		R676	1-216-864-11	SHORT CHIP 0		
1076		GL	RESISTOR		R680	1-216-817-11	METAL CHIP 470 5% 1/10W		
1077		GL	RESISTOR		R681	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1078		GL	RESISTOR		R682	1-216-864-11	SHORT CHIP 0		
1079		GL	RESISTOR		R683	1-216-839-11	METAL CHIP 33K 5% 1/10W		
1080		GL	RESISTOR		R684	1-218-865-11	METAL CHIP 5.6K 0.5% 1/10W		
1081		GL	RESISTOR		R685	1-218-865-11	METAL CHIP 5.6K 0.5% 1/10W		
1082		GL	RESISTOR		R686	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1083		GL	RESISTOR		R687	1-216-864-11	SHORT CHIP 0		
1084		GL	RESISTOR		R688	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1085		GL	RESISTOR		R689	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1086		GL	RESISTOR		R690	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1087		GL	RESISTOR		R691	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1088		GL	RESISTOR		R692	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1089		GL	RESISTOR		R702	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1090		GL	RELAY		RY601	1-755-318-11	RELAY, POWER		
1091		GL	TRANSFORMER		T621	1-443-384-11	CONVERTER TRANSFORMER (PIT)		
1092		GL	TRANSFORMER		T622	1-443-385-11	CONVERTER TRANSFORMER (PIT)		
1093		GL	TRANSFORMER		T661	1-443-312-11	TRANSFORMER, CONVERTER (SBT)		
1094		GL	THERMISTOR		TH601	1-803-339-11	THERMISTOR, NTC		
1095		GL	VARISTOR		VD601	1-805-479-21	VARISTOR		
1096		ULU	CAPACITOR		C9300	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
1097		ULU	CAPACITOR		C9301	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
1098		ULU	CAPACITOR		C9302	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
1099		ULU	CAPACITOR		C9303	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
1100		ULU	CAPACITOR		C9304	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
1101		ULU	CAPACITOR		C9305	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
1102		ULU	CAPACITOR		C9306	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
1103		ULU	CAPACITOR		C9307	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
1104		ULU	CAPACITOR		C9310	1-115-566-11	CERAMIC CHIP 4.7UF 10.00% 10V		
1105		ULU	CAPACITOR		C9311	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1106		ULU	CAPACITOR		C9312	1-115-566-11	CERAMIC CHIP 4.7UF 10.00% 10V		
1107		ULU	CAPACITOR		C9313	1-115-566-11	CERAMIC CHIP 4.7UF 10.00% 10V		
1108		ULU	CAPACITOR		C9314	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1109		ULU	CAPACITOR		C9315	1-115-566-11	CERAMIC CHIP 4.7UF 10.00% 10V		
1110		ULU	CAPACITOR		C9316	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		

No.	#	Board	Type	$\Delta$ / <sup>*</sup>	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1111		ULU	CAPACITOR		C9317	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
1112		ULU	CAPACITOR		C9600	1-165-112-11	CERAMIC CHIP 0.33UF 16V		
1113		ULU	CAPACITOR		C9601	1-165-112-11	CERAMIC CHIP 0.33UF 16V		
1114		ULU	CAPACITOR		C9602	1-164-346-11	CERAMIC CHIP 1UF 16V		
1115		ULU	CAPACITOR		C9603	1-164-346-11	CERAMIC CHIP 1UF 16V		
1116		ULU	CAPACITOR		C9604	1-135-346-21	ELECT CHIP 39UF 20% 16V		
1117		ULU	CAPACITOR		C9605	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1118		ULU	CAPACITOR		C9606	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1119		ULU	CAPACITOR		C9607	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1120		ULU	CAPACITOR		C9608	1-164-360-11	CERAMIC CHIP 0.1UF 16V		
1121		ULU	CAPACITOR		C9609	1-164-360-11	CERAMIC CHIP 0.1UF 16V		
1122		ULU	CAPACITOR		C9610	1-115-566-11	CERAMIC CHIP 4.7UF 10.00% 10V		
1123		ULU	CAPACITOR		C9611	1-165-875-11	CERAMIC CHIP 10UF 10% 10V		
1124		ULU	CAPACITOR		C9612	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
1125		ULU	CAPACITOR		C9613	1-165-875-11	CERAMIC CHIP 10UF 10% 10V		
1126		ULU	CAPACITOR		C9614	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1127		ULU	CAPACITOR		C9616	1-115-566-11	CERAMIC CHIP 4.7UF 10.00% 10V		
1128		ULU	CAPACITOR		C9800	1-164-315-11	CERAMIC CHIP 470PF 5.00% 50V		
1129		ULU	CAPACITOR		C9801	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
1130		ULU	CAPACITOR		C9802	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
1131		ULU	CAPACITOR		C9803	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
1132		ULU	CAPACITOR		C9804	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1133		ULU	CAPACITOR		C9805	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
1134		ULU	CAPACITOR		C9806	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
1135		ULU	CAPACITOR		C9807	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
1136		ULU	CAPACITOR		C9808	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
1137		ULU	CAPACITOR		C9809	1-128-416-11	ELECT CHIP 100UF 20.00% 16V		
1138		ULU	CAPACITOR		C9810	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1139		ULU	CAPACITOR		C9811	1-113-701-21	ELECT CHIP 22UF 20.00% 16V		
1140		ULU	CAPACITOR		C9812	1-127-692-11	CERAMIC CHIP 10UF 10% 16V		
1141		ULU	CAPACITOR		C9813	1-127-692-11	CERAMIC CHIP 10UF 10% 16V		
1142		ULU	CAPACITOR		C9814	1-127-692-11	CERAMIC CHIP 10UF 10% 16V		
1143		ULU	CAPACITOR		C9815	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
1144		ULU	CAPACITOR		C9816	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
1145		ULU	CAPACITOR		C9817	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
1146		ULU	CAPACITOR		C9818	1-109-982-11	CERAMIC CHIP 1UF 10.00% 10V		
1147		ULU	CAPACITOR		C9819	1-117-681-11	ELECT CHIP 100UF 20.00% 16V		
1148		ULU	CAPACITOR		C9820	1-164-156-11	CERAMIC CHIP 0.1UF 25V		
1149		ULU	CAPACITOR		C9821	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1150		ULU	CAPACITOR		C9822	1-164-156-11	CERAMIC CHIP 0.1UF 25V		
1151		ULU	CAPACITOR		C9823	1-113-701-21	ELECT CHIP 22UF 20.00% 16V		
1152		ULU	CAPACITOR		C9824	1-100-159-91	CERAMIC CHIP 22UF 10% 6.3V		
1153		ULU	CAPACITOR		C9825	1-125-837-91	CERAMIC CHIP 1UF 10% 6.3V		
1154		ULU	CAPACITOR		C9826	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
1155		ULU	CAPACITOR		C9827	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1156		ULU	CAPACITOR		C9829	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1157		ULU	CAPACITOR		C9831	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
1158		ULU	CAPACITOR		C9832	1-164-360-11	CERAMIC CHIP 0.1UF 16V		
1159		ULU	CAPACITOR		C9837	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V		
1160		ULU	CONNECTOR		CN9300	1-764-087-21	PIN, CONNECTOR (PC BOARD) 14P		
1161		ULU	CONNECTOR		CN9301	1-695-209-21	PIN, CONNECTOR (PC BOARD) 15P		
1162		ULU	CONNECTOR		CN9302	1-794-283-21	PIN, CONNECTOR (FOR PWB) 40P		
1163		ULU	CONNECTOR	*	CN9303	1-793-807-21	PIN, CONNECTOR (WITH PWB) 20P		
1164		ULU	DIODE		D9300	8-719-977-28	DIODE DTZ10B		
1165		ULU	DIODE		D9301	8-719-977-28	DIODE DTZ10B		
1166		ULU	DIODE		D9302	8-719-977-28	DIODE DTZ10B		
1167		ULU	DIODE		D9303	8-719-977-28	DIODE DTZ10B		
1168		ULU	DIODE		D9304	8-719-977-28	DIODE DTZ10B		
1169		ULU	DIODE		D9305	8-719-977-28	DIODE DTZ10B		
1170		ULU	DIODE		D9306	8-719-977-28	DIODE DTZ10B		
1171		ULU	DIODE		D9307	8-719-977-28	DIODE DTZ10B		
1172		ULU	DIODE		D9308	8-719-977-28	DIODE DTZ10B		
1173		ULU	DIODE		D9309	8-719-977-28	DIODE DTZ10B		
1174		ULU	DIODE		D9310	8-719-977-28	DIODE DTZ10B		
1175		ULU	DIODE		D9311	8-719-977-28	DIODE DTZ10B		
1176		ULU	DIODE		D9312	8-719-977-28	DIODE DTZ10B		
1177		ULU	DIODE		D9313	8-719-977-28	DIODE DTZ10B		
1178		ULU	DIODE		D9314	8-719-977-28	DIODE DTZ10B		
1179		ULU	DIODE		D9315	8-719-977-28	DIODE DTZ10B		
1180		ULU	FERRITE BEAD		FB9800	1-414-445-11	FERRITE 0UH		
1181		ULU	FERRITE BEAD		FB9801	1-414-445-11	FERRITE 0UH		
1182		ULU	IC		IC9600	8-759-836-72	IC NJM2521V(TE2)		
1183		ULU	IC		IC9601	8-759-836-72	IC NJM2521V(TE2)		
1184		ULU	IC		IC9602	8-752-087-76	IC CXA2089Q-T6		

No.	#	Board	Type	$\Delta$ / <sup>*</sup>	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1185		ULU	IC		IC9800	8-752-108-35	IC CXA2171AQ		
1186		ULU	IC		IC9801	8-759-548-56	IC M52055FP		
1187		ULU	IC		IC9802	8-759-660-21	IC SN74HCT02APWR		
1188		ULU	JACK		J9300	1-780-169-11	TERMINAL BLOCK, S		
1189		ULU	JACK		J9301	1-817-895-11	JACK BLOCK, PIN		
1190		ULU	JACK		J9302	1-565-838-11	JACK BLOCK, PIN 2P		
1191		ULU	JACK		J9303	1-780-169-11	TERMINAL BLOCK, S		
1192		ULU	COIL		L9600	1-469-526-91	INDUCTOR 22UH		
1193		ULU	COIL		L9800	1-469-525-91	INDUCTOR 10UH		
1194		ULU	COIL		L9801	1-469-525-91	INDUCTOR 10UH		
1195		ULU	COIL		L9802	1-469-525-91	INDUCTOR 10UH		
1196		ULU	TRANSISTOR		Q9600	6-550-586-01	TRANSISTOR 2PA1576R-115		
1197		ULU	TRANSISTOR		Q9601	6-550-586-01	TRANSISTOR 2PA1576R-115		
1198		ULU	TRANSISTOR		Q9800	8-729-122-63	TRANSISTOR 2SA1226-E4		
1199		ULU	TRANSISTOR		Q9801	8-729-122-63	TRANSISTOR 2SA1226-E4		
1200		ULU	TRANSISTOR		Q9802	8-729-122-63	TRANSISTOR 2SA1226-E4		
1201		ULU	TRANSISTOR		Q9803	6-550-585-01	TRANSISTOR 2PC4081R-115		
1202		ULU	TRANSISTOR		Q9804	6-550-585-01	TRANSISTOR 2PC4081R-115		
1203		ULU	TRANSISTOR		Q9805	8-729-117-73	TRANSISTOR 2SC4178-F14		
1204		ULU	TRANSISTOR		Q9806	8-729-117-73	TRANSISTOR 2SC4178-F14		
1205		ULU	TRANSISTOR		Q9807	8-729-117-73	TRANSISTOR 2SC4178-F14		
1206		ULU	TRANSISTOR		Q9808	8-729-122-63	TRANSISTOR 2SA1226-E4		
1207		ULU	TRANSISTOR		Q9809	6-550-586-01	TRANSISTOR 2PA1576R-115		
1208		ULU	TRANSISTOR		Q9810	8-729-122-63	TRANSISTOR 2SA1226-E4		
1209		ULU	TRANSISTOR		Q9811	8-729-122-63	TRANSISTOR 2SA1226-E4		
1210		ULU	TRANSISTOR		Q9814	8-729-025-28	TRANSISTOR 2SK1828		
1211		ULU	TRANSISTOR		Q9815	8-729-025-28	TRANSISTOR 2SK1828		
1212		ULU	RESISTOR		R9300	1-218-867-11	RES-CHIP 6.8K 0.5% 1/10W		
1213		ULU	RESISTOR		R9301	1-218-867-11	RES-CHIP 6.8K 0.5% 1/10W		
1214		ULU	RESISTOR		R9302	1-218-867-11	RES-CHIP 6.8K 0.5% 1/10W		
1215		ULU	RESISTOR		R9303	1-218-867-11	RES-CHIP 6.8K 0.5% 1/10W		
1216		ULU	RESISTOR		R9304	1-216-853-11	METAL CHIP 470K 5% 1/10W		
1217		ULU	RESISTOR		R9305	1-216-853-11	METAL CHIP 470K 5% 1/10W		
1218		ULU	RESISTOR		R9306	1-218-867-11	RES-CHIP 6.8K 0.5% 1/10W		
1219		ULU	RESISTOR		R9307	1-218-867-11	RES-CHIP 6.8K 0.5% 1/10W		
1220		ULU	RESISTOR		R9308	1-218-665-11	METAL CHIP 75 0.5% 1/10W		
1221		ULU	RESISTOR		R9309	1-218-665-11	METAL CHIP 75 0.5% 1/10W		
1222		ULU	RESISTOR		R9310	1-218-665-11	METAL CHIP 75 0.5% 1/10W		
1223		ULU	RESISTOR		R9311	1-216-813-11	METAL CHIP 220 5% 1/10W		
1224		ULU	RESISTOR		R9312	1-216-813-11	METAL CHIP 220 5% 1/10W		
1225		ULU	RESISTOR		R9313	1-216-813-11	METAL CHIP 220 5% 1/10W		
1226		ULU	RESISTOR		R9314	1-220-397-11	METAL CHIP 4.7M 5% 1/10W		
1227		ULU	RESISTOR		R9315	1-216-813-11	METAL CHIP 220 5% 1/10W		
1228		ULU	RESISTOR		R9316	1-216-813-11	METAL CHIP 220 5% 1/10W		
1229		ULU	RESISTOR		R9317	1-216-813-11	METAL CHIP 220 5% 1/10W		
1230		ULU	RESISTOR		R9318	1-216-813-11	METAL CHIP 220 5% 1/10W		
1231		ULU	RESISTOR		R9322	1-216-813-11	METAL CHIP 220 5% 1/10W		
1232		ULU	RESISTOR		R9323	1-216-813-11	METAL CHIP 220 5% 1/10W		
1233		ULU	RESISTOR		R9324	1-216-813-11	METAL CHIP 220 5% 1/10W		
1234		ULU	RESISTOR		R9325	1-220-397-11	METAL CHIP 4.7M 5% 1/10W		
1235		ULU	RESISTOR		R9326	1-216-813-11	METAL CHIP 220 5% 1/10W		
1236		ULU	RESISTOR		R9327	1-216-853-11	METAL CHIP 470K 5% 1/10W		
1237		ULU	RESISTOR		R9328	1-216-813-11	METAL CHIP 220 5% 1/10W		
1238		ULU	RESISTOR		R9329	1-216-853-11	METAL CHIP 470K 5% 1/10W		
1239		ULU	RESISTOR		R9330	1-216-813-11	METAL CHIP 220 5% 1/10W		
1240		ULU	RESISTOR		R9331	1-216-813-11	METAL CHIP 220 5% 1/10W		
1241		ULU	RESISTOR		R9332	1-216-813-11	METAL CHIP 220 5% 1/10W		
1242		ULU	RESISTOR		R9333	1-216-813-11	METAL CHIP 220 5% 1/10W		
1243		ULU	RESISTOR		R9337	1-216-813-11	METAL CHIP 220 5% 1/10W		
1244		ULU	RESISTOR		R9338	1-216-813-11	METAL CHIP 220 5% 1/10W		
1245		ULU	RESISTOR		R9339	1-216-813-11	METAL CHIP 220 5% 1/10W		
1246		ULU	RESISTOR		R9340	1-216-853-11	METAL CHIP 470K 5% 1/10W		
1247		ULU	RESISTOR		R9341	1-216-813-11	METAL CHIP 220 5% 1/10W		
1248		ULU	RESISTOR		R9342	1-216-813-11	METAL CHIP 220 5% 1/10W		
1249		ULU	RESISTOR		R9343	1-216-813-11	METAL CHIP 220 5% 1/10W		
1250		ULU	RESISTOR		R9344	1-216-813-11	METAL CHIP 220 5% 1/10W		
1251		ULU	RESISTOR		R9345	1-216-853-11	METAL CHIP 470K 5% 1/10W		
1252		ULU	RESISTOR		R9348	1-216-813-11	METAL CHIP 220 5% 1/10W		
1253		ULU	RESISTOR		R9349	1-216-813-11	METAL CHIP 220 5% 1/10W		
1254		ULU	RESISTOR		R9350	1-216-813-11	METAL CHIP 220 5% 1/10W		
1255		ULU	RESISTOR		R9351	1-216-813-11	METAL CHIP 220 5% 1/10W		
1256		ULU	RESISTOR		R9352	1-216-834-11	METAL CHIP 12K 5% 1/10W		
1257		ULU	RESISTOR		R9353	1-216-834-11	METAL CHIP 12K 5% 1/10W		
1258		ULU	RESISTOR		R9354	1-216-853-11	METAL CHIP 470K 5% 1/10W		

No.	#	Board	Type	$\Delta$ / <sup>*</sup>	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1259		ULU	RESISTOR		R9355	1-216-853-11	METAL CHIP 470K 5% 1/10W		
1260		ULU	RESISTOR		R9356	1-216-834-11	METAL CHIP 12K 5% 1/10W		
1261		ULU	RESISTOR		R9357	1-216-834-11	METAL CHIP 12K 5% 1/10W		
1262		ULU	RESISTOR		R9358	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1263		ULU	RESISTOR		R9359	1-216-809-11	METAL CHIP 100 5% 1/10W		
1264		ULU	RESISTOR		R9360	1-216-809-11	METAL CHIP 100 5% 1/10W		
1265		ULU	RESISTOR		R9361	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1266		ULU	RESISTOR		R9362	1-216-809-11	METAL CHIP 100 5% 1/10W		
1267		ULU	RESISTOR		R9363	1-216-834-11	METAL CHIP 12K 5% 1/10W		
1268		ULU	RESISTOR		R9364	1-216-834-11	METAL CHIP 12K 5% 1/10W		
1269		ULU	RESISTOR		R9365	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1270		ULU	RESISTOR		R9366	1-216-809-11	METAL CHIP 100 5% 1/10W		
1271		ULU	RESISTOR		R9367	1-216-809-11	METAL CHIP 100 5% 1/10W		
1272		ULU	RESISTOR		R9368	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1273		ULU	RESISTOR		R9369	1-216-809-11	METAL CHIP 100 5% 1/10W		
1274		ULU	RESISTOR		R9370	1-216-834-11	METAL CHIP 12K 5% 1/10W		
1275		ULU	RESISTOR		R9371	1-216-834-11	METAL CHIP 12K 5% 1/10W		
1276		ULU	RESISTOR		R9372	1-218-867-11	RES-CHIP 6.8K 0.5% 1/10W		
1277		ULU	RESISTOR		R9373	1-218-867-11	RES-CHIP 6.8K 0.5% 1/10W		
1278		ULU	RESISTOR		R9374	1-218-867-11	RES-CHIP 6.8K 0.5% 1/10W		
1279		ULU	RESISTOR		R9375	1-216-864-11	SHORT CHIP 0		
1280		ULU	RESISTOR		R9376	1-216-864-11	SHORT CHIP 0		
1281		ULU	RESISTOR		R9377	1-216-864-11	SHORT CHIP 0		
1282		ULU	RESISTOR		R9378	1-216-853-11	METAL CHIP 470K 5% 1/10W		
1283		ULU	RESISTOR		R9379	1-216-853-11	METAL CHIP 470K 5% 1/10W		
1284		ULU	RESISTOR		R9381	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1285		ULU	RESISTOR		R9382	1-216-809-11	METAL CHIP 100 5% 1/10W		
1286		ULU	RESISTOR		R9383	1-216-864-11	SHORT CHIP 0		
1287		ULU	RESISTOR		R9387	1-216-809-11	METAL CHIP 100 5% 1/10W		
1288		ULU	RESISTOR		R9391	1-216-864-11	SHORT CHIP 0		
1289		ULU	RESISTOR		R9393	1-216-809-11	METAL CHIP 100 5% 1/10W		
1290		ULU	RESISTOR		R9397	1-216-864-11	SHORT CHIP 0		
1291		ULU	RESISTOR		R9398	1-216-834-11	METAL CHIP 12K 5% 1/10W		
1292		ULU	RESISTOR		R9400	1-216-864-11	SHORT CHIP 0		
1293		ULU	RESISTOR		R9401	1-216-834-11	METAL CHIP 12K 5% 1/10W		
1294		ULU	RESISTOR		R9403	1-216-864-11	SHORT CHIP 0		
1295		ULU	RESISTOR		R9404	1-218-867-11	RES-CHIP 6.8K 0.5% 1/10W		
1296		ULU	RESISTOR		R9406	1-216-295-91	SHORT CHIP 0		
1297		ULU	RESISTOR		R9407	1-216-295-91	SHORT CHIP 0		
1298		ULU	RESISTOR		R9600	1-216-809-11	METAL CHIP 100 5% 1/10W		
1299		ULU	RESISTOR		R9601	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1300		ULU	RESISTOR		R9602	1-216-809-11	METAL CHIP 100 5% 1/10W		
1301		ULU	RESISTOR		R9603	1-216-809-11	METAL CHIP 100 5% 1/10W		
1302		ULU	RESISTOR		R9604	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1303		ULU	RESISTOR		R9607	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1304		ULU	RESISTOR		R9608	1-211-981-11	METAL CHIP 33 0.5% 1/10W		
1305		ULU	RESISTOR		R9609	1-218-845-11	METAL CHIP 820 0.5% 1/10W		
1306		ULU	RESISTOR		R9610	1-218-674-11	METAL CHIP 180 0.5% 1/10W		
1307		ULU	RESISTOR		R9611	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
1308		ULU	RESISTOR		R9612	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
1309		ULU	RESISTOR		R9613	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1310		ULU	RESISTOR		R9614	1-216-809-11	METAL CHIP 100 5% 1/10W		
1311		ULU	RESISTOR		R9615	1-216-809-11	METAL CHIP 100 5% 1/10W		
1312		ULU	RESISTOR		R9616	1-216-809-11	METAL CHIP 100 5% 1/10W		
1313		ULU	RESISTOR		R9617	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1314		ULU	RESISTOR		R9618	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1315		ULU	RESISTOR		R9800	1-218-668-11	METAL CHIP 100 0.5% 1/10W		
1316		ULU	RESISTOR		R9801	1-218-668-11	METAL CHIP 100 0.5% 1/10W		
1317		ULU	RESISTOR		R9802	1-218-668-11	METAL CHIP 100 0.5% 1/10W		
1318		ULU	RESISTOR		R9803	1-216-823-11	METAL CHIP 1.5K 5% 1/10W		
1319		ULU	RESISTOR		R9804	1-216-823-11	METAL CHIP 1.5K 5% 1/10W		
1320		ULU	RESISTOR		R9805	1-216-823-11	METAL CHIP 1.5K 5% 1/10W		
1321		ULU	RESISTOR		R9806	1-216-806-11	METAL CHIP 56 5% 1/10W		
1322		ULU	RESISTOR		R9807	1-216-806-11	METAL CHIP 56 5% 1/10W		
1323		ULU	RESISTOR		R9808	1-216-806-11	METAL CHIP 56 5% 1/10W		
1324		ULU	RESISTOR		R9809	1-218-674-11	METAL CHIP 180 0.5% 1/10W		
1325		ULU	RESISTOR		R9810	1-218-690-11	METAL CHIP 820 0.5% 1/10W		
1326		ULU	RESISTOR		R9811	1-216-805-11	METAL CHIP 47 5% 1/10W		
1327		ULU	RESISTOR		R9812	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1328		ULU	RESISTOR		R9813	1-216-805-11	METAL CHIP 47 5% 1/10W		
1329		ULU	RESISTOR		R9814	1-216-809-11	METAL CHIP 100 5% 1/10W		
1330		ULU	RESISTOR		R9815	1-216-809-11	METAL CHIP 100 5% 1/10W		
1331		ULU	RESISTOR		R9816	1-216-809-11	METAL CHIP 100 5% 1/10W		
1332		ULU	RESISTOR		R9817	1-216-821-11	METAL CHIP 1K 5% 1/10W		

No.	#	Board	Type	$\Delta$ / <sup>*</sup>	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1333		ULU	RESISTOR		R9818	1-216-809-11	METAL CHIP 100 5% 1/10W		
1334		ULU	RESISTOR		R9819	1-216-809-11	METAL CHIP 100 5% 1/10W		
1335		ULU	RESISTOR		R9820	1-216-809-11	METAL CHIP 100 5% 1/10W		
1336		ULU	RESISTOR		R9821	1-216-809-11	METAL CHIP 100 5% 1/10W		
1337		ULU	RESISTOR		R9822	1-216-805-11	METAL CHIP 47 5% 1/10W		
1338		ULU	RESISTOR		R9823	1-216-809-11	METAL CHIP 100 5% 1/10W		
1339		ULU	RESISTOR		R9824	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1340		ULU	RESISTOR		R9825	1-216-809-11	METAL CHIP 100 5% 1/10W		
1341		ULU	RESISTOR		R9826	1-216-809-11	METAL CHIP 100 5% 1/10W		
1342		ULU	RESISTOR		R9827	1-216-805-11	METAL CHIP 47 5% 1/10W		
1343		ULU	RESISTOR		R9829	1-216-864-11	SHORT CHIP 0		
1344		ULU	RESISTOR		R9830	1-216-805-11	METAL CHIP 47 5% 1/10W		
1345		ULU	RESISTOR		R9831	1-216-805-11	METAL CHIP 47 5% 1/10W		
1346		ULU	RESISTOR		R9832	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1347		ULU	RESISTOR		R9833	1-216-851-11	METAL CHIP 330K 5% 1/10W		
1348		ULU	RESISTOR		R9834	1-216-805-11	METAL CHIP 47 5% 1/10W		
1349		ULU	RESISTOR		R9835	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1350		ULU	RESISTOR		R9836	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1351		ULU	RESISTOR		R9837	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1352		ULU	RESISTOR		R9838	1-216-817-11	METAL CHIP 470 5% 1/10W		
1353		ULU	RESISTOR		R9839	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1354		ULU	RESISTOR		R9840	1-216-817-11	METAL CHIP 470 5% 1/10W		
1355		ULU	RESISTOR		R9841	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1356		ULU	RESISTOR		R9842	1-218-716-11	METAL CHIP 10K 0.5% 1/10W		
1357		ULU	RESISTOR		R9843	1-216-809-11	METAL CHIP 100 5% 1/10W		
1358		ULU	RESISTOR		R9844	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1359		ULU	RESISTOR		R9845	1-216-817-11	METAL CHIP 470 5% 1/10W		
1360		ULU	RESISTOR		R9846	1-216-813-11	METAL CHIP 220 5% 1/10W		
1361		ULU	RESISTOR		R9847	1-216-797-11	METAL CHIP 10 5% 1/10W		
1362		ULU	RESISTOR		R9848	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1363		ULU	RESISTOR		R9849	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1364		ULU	RESISTOR		R9850	1-216-813-11	METAL CHIP 220 5% 1/10W		
1365		ULU	RESISTOR		R9851	1-216-809-11	METAL CHIP 100 5% 1/10W		
1366		ULU	RESISTOR		R9852	1-216-809-11	METAL CHIP 100 5% 1/10W		
1367		ULU	RESISTOR		R9853	1-216-809-11	METAL CHIP 100 5% 1/10W		
1368		ULU	RESISTOR		R9855	1-216-813-11	METAL CHIP 220 5% 1/10W		
1369		ULU	RESISTOR		R9856	1-216-809-11	METAL CHIP 100 5% 1/10W		
1370		ULU	RESISTOR		R9858	1-216-809-11	METAL CHIP 100 5% 1/10W		
1371		ULU	RESISTOR		R9859	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1372		ULU	RESISTOR		R9860	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1373		ULU	RESISTOR		R9861	1-216-809-11	METAL CHIP 100 5% 1/10W		
1374		ULU	RESISTOR		R9862	1-216-809-11	METAL CHIP 100 5% 1/10W		
1375		ULU	RESISTOR		R9864	1-216-827-11	METAL CHIP 3.3K 5% 1/10W		
1376		ULU	RESISTOR		R9865	1-216-827-11	METAL CHIP 3.3K 5% 1/10W		
1377		ULU	TERMINAL		TB9300	1-537-712-11	TERMINAL, PUSH		
1378		ULU	VARISTOR		VD9303	1-801-925-21	VARISTOR, CHIP (1608)		
1379		ULU	VARISTOR		VD9304	1-801-925-21	VARISTOR, CHIP (1608)		
1380		ULU	VARISTOR		VD9305	1-801-925-21	VARISTOR, CHIP (1608)		
1381		ULU	VARISTOR		VD9306	1-801-925-21	VARISTOR, CHIP (1608)		
1382		ULU	VARISTOR		VD9307	1-801-925-21	VARISTOR, CHIP (1608)		
1383		ULU	VARISTOR		VD9308	1-801-925-21	VARISTOR, CHIP (1608)		
1384		ULU	VARISTOR		VD9309	1-801-925-21	VARISTOR, CHIP (1608)		
1385		ULU	VARISTOR		VD9310	1-801-925-21	VARISTOR, CHIP (1608)		
1386		ULU	VARISTOR		VD9311	1-801-925-21	VARISTOR, CHIP (1608)		
1387		ULU	VARISTOR		VD9313	1-801-925-21	VARISTOR, CHIP (1608)		
1388		ULU	VARISTOR		VD9314	1-801-925-21	VARISTOR, CHIP (1608)		
1389		ULU	VARISTOR		VD9319	1-801-925-21	VARISTOR, CHIP (1608)		
1390		ULU	VARISTOR		VD9320	1-801-925-21	VARISTOR, CHIP (1608)		
1391		ULU	VARISTOR		VD9321	1-801-925-21	VARISTOR, CHIP (1608)		
1392		ULU	VARISTOR		VD9322	1-801-925-21	VARISTOR, CHIP (1608)		
1393		ULU	CRYSTAL		X9800	1-813-124-21	VIBRATOR, CERAMIC		
1394		H1	CAPACITOR		C9002	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1395		H1	CONNECTOR	*	CN9001	1-580-055-21	PIN, CONNECTOR (SMD) 2P		
1396		H1	DIODE		D9001	8-719-069-60	DIODE UDZSTE-179.1B		
1397		H1	RESISTOR		R9001	1-216-826-11	METAL CHIP 2.7K 5% 1/10W		
1398		H1	RESISTOR		R9002	1-218-457-11	METAL CHIP 910 5% 1/10W		
1399		H1	RESISTOR		R9003	1-216-817-11	METAL CHIP 470 5% 1/10W		
1400		H1	RESISTOR		R9004	1-216-813-11	METAL CHIP 220 5% 1/10W		
1401		H1	SWITCH		S9001	1-572-595-11	SWITCH, TACTIL (REFLOW TYPE)		
1402		H1	SWITCH		S9002	1-572-595-11	SWITCH, TACTIL (REFLOW TYPE)		
1403		H1	SWITCH		S9003	1-572-595-11	SWITCH, TACTIL (REFLOW TYPE)		
1404		H1	SWITCH		S9004	1-572-595-11	SWITCH, TACTIL (REFLOW TYPE)		
1405		H1	SWITCH		S9005	1-572-595-11	SWITCH, TACTIL (REFLOW TYPE)		
1406		H3	CAPACITOR		C9201	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		

No.	#	Board	Type	$\Delta$ / <sup>*</sup>	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1407		H3	CAPACITOR		C9202	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
1408		H3	CAPACITOR		C9203	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
1409		H3	CAPACITOR		C9204	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
1410		H3	CAPACITOR		C9205	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
1411		H3	CAPACITOR		C9206	1-115-566-11	CERAMIC CHIP 4.7UF 10.00% 10V		
1412		H3	CAPACITOR		C9207	1-115-156-11	CERAMIC CHIP 1UF 10V		
1413		H3	CAPACITOR		C9208	1-115-156-11	CERAMIC CHIP 1UF 10V		
1414		H3	CAPACITOR		C9209	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
1415		H3	CAPACITOR		C9210	1-115-566-11	CERAMIC CHIP 4.7UF 10.00% 10V		
1416		H3	CAPACITOR		C9212	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
1417		H3	CAPACITOR		C9213	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
1418		H3	CAPACITOR		C9214	1-164-227-11	CERAMIC CHIP 0.022UF 10.00% 25V		
1419		H3	CAPACITOR		C9215	1-164-227-11	CERAMIC CHIP 0.022UF 10.00% 25V		
1420		H3	CONNECTOR		CN9201	1-695-209-21	PIN, CONNECTOR (PC BOARD) 15P		
1421		H3	DIODE		D9201	8-719-069-60	DIODE UDZSTE-179.1B		
1422		H3	DIODE		D9204	8-719-069-60	DIODE UDZSTE-179.1B		
1423		H3	DIODE		D9206	8-719-069-60	DIODE UDZSTE-179.1B		
1424		H3	DIODE		D9207	8-719-062-19	DIODE MA3200WA-TX		
1425		H3	DIODE		D9208	8-719-062-19	DIODE MA3200WA-TX		
1426		H3	DIODE		D9209	8-719-062-19	DIODE MA3200WA-TX		
1427		H3	JACK		J9201	1-770-328-21	JACK, PIN 3P		
1428		H3	JACK		J9202	1-568-267-11	JACK		
1429		H3	JACK		J9203	1-770-860-11	CONNECTOR, S TERMINAL		
1430		H3	RESISTOR		R9201	1-216-864-11	SHORT CHIP 0		
1431		H3	RESISTOR		R9202	1-216-815-11	METAL CHIP 330 5% 1/10W		
1432		H3	RESISTOR		R9203	1-216-864-11	SHORT CHIP 0		
1433		H3	RESISTOR		R9204	1-216-813-11	METAL CHIP 220 5% 1/10W		
1434		H3	RESISTOR		R9205	1-216-813-11	METAL CHIP 220 5% 1/10W		
1435		H3	RESISTOR		R9206	1-216-815-11	METAL CHIP 330 5% 1/10W		
1436		H3	RESISTOR		R9207	1-216-813-11	METAL CHIP 220 5% 1/10W		
1437		H3	RESISTOR		R9208	1-216-813-11	METAL CHIP 220 5% 1/10W		
1438		H3	RESISTOR		R9209	1-216-813-11	METAL CHIP 220 5% 1/10W		
1439		H3	RESISTOR		R9210	1-216-853-11	METAL CHIP 470K 5% 1/10W		
1440		H3	RESISTOR		R9211	1-216-813-11	METAL CHIP 220 5% 1/10W		
1441		H3	RESISTOR		R9212	1-216-809-11	METAL CHIP 100 5% 1/10W		
1442		H3	RESISTOR		R9213	1-216-853-11	METAL CHIP 470K 5% 1/10W		
1443		H3	RESISTOR		R9214	1-216-813-11	METAL CHIP 220 5% 1/10W		
1444		H3	RESISTOR		R9215	1-216-813-11	METAL CHIP 220 5% 1/10W		
1445		H3	RESISTOR		R9216	1-216-813-11	METAL CHIP 220 5% 1/10W		
1446		H3	RESISTOR		R9217	1-216-809-11	METAL CHIP 100 5% 1/10W		
1447		H3	RESISTOR		R9218	1-216-864-11	SHORT CHIP 0		
1448		H3	RESISTOR		R9222	1-216-864-11	SHORT CHIP 0		
1449		H3	RESISTOR		R9223	1-216-809-11	METAL CHIP 100 5% 1/10W		
1450		H3	RESISTOR		R9224	1-216-797-11	METAL CHIP 10 5% 1/10W		
1451		H3	RESISTOR		R9225	1-216-797-11	METAL CHIP 10 5% 1/10W		
1452		H3	RESISTOR		R9226	1-216-809-11	METAL CHIP 100 5% 1/10W		
1453		H3	VARISTOR		VD9201	1-801-925-21	VARISTOR, CHIP (1608)		
1454		H3	VARISTOR		VD9202	1-801-925-21	VARISTOR, CHIP (1608)		
1455		H3	VARISTOR		VD9203	1-801-925-21	VARISTOR, CHIP (1608)		
1456		P	CAPACITOR		C5000	1-126-193-11	ELECT CHIP 1UF 20.00% 50V		
1457		P	CAPACITOR		C5001	1-126-193-11	ELECT CHIP 1UF 20.00% 50V		
1458		P	CAPACITOR		C5002	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1459		P	CAPACITOR		C5003	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1460		P	CAPACITOR		C5004	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1461		P	CAPACITOR		C5005	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1462		P	CAPACITOR		C5006	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1463		P	CAPACITOR		C5007	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1464		P	CAPACITOR		C5008	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
1465		P	CAPACITOR		C5009	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1466		P	CAPACITOR		C5010	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1467		P	CAPACITOR		C5011	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1468		P	CAPACITOR		C5012	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
1469		P	CAPACITOR		C5013	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
1470		P	CAPACITOR		C5014	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1471		P	CAPACITOR		C5015	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1472		P	CAPACITOR		C5016	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
1473		P	CAPACITOR		C5017	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1474		P	CAPACITOR		C5018	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1475		P	CAPACITOR		C5019	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1476		P	CAPACITOR		C5020	1-165-176-11	CERAMIC CHIP 0.047UF 10.00% 16V		
1477		P	CAPACITOR		C5021	1-127-692-11	CERAMIC CHIP 10UF 10% 16V		
1478		P	CAPACITOR		C5022	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1479		P	CAPACITOR		C5023	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1480		P	CAPACITOR		C5024	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		

No.	#	Board	Type	$\Delta$ / <sup>*</sup>	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1481		P	CAPACITOR		C5025	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1482		P	CAPACITOR		C5026	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1483		P	CAPACITOR		C5027	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
1484		P	CAPACITOR		C5028	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1485		P	CAPACITOR		C5100	1-100-588-21	ELECT CHIP 1000UF 20% 6.3V		
1486		P	CAPACITOR		C5102	1-137-897-21	ELECT CHIP 150UF 20% 4V		
1487		P	CAPACITOR		C5103	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1488		P	CAPACITOR		C5104	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1489		P	CAPACITOR		C5105	1-100-118-21	ELECT CHIP 82UF 20% 16V		
1490		P	CAPACITOR		C5107	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1491		P	CAPACITOR		C5108	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1492		P	CAPACITOR		C5200	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1493		P	CAPACITOR		C5201	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1494		P	CAPACITOR		C5202	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1495		P	CAPACITOR		C5203	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1496		P	CAPACITOR		C5204	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1497		P	CAPACITOR		C5205	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1498		P	CAPACITOR		C5206	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1499		P	CAPACITOR		C5207	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V		
1500		P	CAPACITOR		C5208	1-128-993-21	ELECT CHIP 22UF 20% 10V		
1501		P	CAPACITOR		C5209	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1502		P	CAPACITOR		C5210	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V		
1503		P	CAPACITOR		C5211	1-164-230-11	CERAMIC CHIP 220PF 5.00% 50V		
1504		P	CAPACITOR		C5212	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1505		P	CAPACITOR		C5213	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V		
1506		P	CAPACITOR		C5214	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V		
1507		P	CAPACITOR		C5215	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1508		P	CAPACITOR		C5216	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1509		P	CAPACITOR		C5217	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V		
1510		P	CAPACITOR		C5218	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1511		P	CAPACITOR		C5219	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1512		P	CAPACITOR		C5220	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1513		P	CAPACITOR		C5221	1-164-230-11	CERAMIC CHIP 220PF 5.00% 50V		
1514		P	CAPACITOR		C5222	1-162-919-11	CERAMIC CHIP 22PF 5.00% 50V		
1515		P	CAPACITOR		C5223	1-162-919-11	CERAMIC CHIP 22PF 5.00% 50V		
1516		P	CAPACITOR		C5224	1-162-919-11	CERAMIC CHIP 22PF 5.00% 50V		
1517		P	CAPACITOR		C5225	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V		
1518		P	CAPACITOR		C5226	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1519		P	CAPACITOR		C5227	1-128-993-21	ELECT CHIP 22UF 20% 10V		
1520		P	CAPACITOR		C5228	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1521		P	CAPACITOR		C5229	1-126-412-11	ELECT CHIP 220UF 20.00% 4V		
1522		P	CAPACITOR		C5230	1-126-412-11	ELECT CHIP 220UF 20.00% 4V		
1523		P	CAPACITOR		C5231	1-126-412-11	ELECT CHIP 220UF 20.00% 4V		
1524		P	CAPACITOR		C5232	1-128-993-21	ELECT CHIP 22UF 20% 10V		
1525		P	CAPACITOR		C5233	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1526		P	CAPACITOR		C5234	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1527		P	CAPACITOR		C5300	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1528		P	CAPACITOR		C5301	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
1529		P	CAPACITOR		C5302	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1530		P	CAPACITOR		C5303	1-162-916-11	CERAMIC CHIP 12PF 5.00% 50V		
1531		P	CAPACITOR		C5304	1-162-916-11	CERAMIC CHIP 12PF 5.00% 50V		
1532		P	CONNECTOR	*	CN5000	1-818-400-11	HDMI CONNECTOR		
1533		P	CONNECTOR		CN5002	1-794-519-21	PIN, CONNECTOR (PC BOARD) 14P		
1534		P	DIODE		D5001	8-719-977-28	DIODE DTZ10B		
1535		P	DIODE		D5003	8-719-977-28	DIODE DTZ10B		
1536		P	DIODE		D5006	8-719-404-50	DIODE MA111-TX		
1537		P	DIODE		D5007	8-719-404-50	DIODE MA111-TX		
1538		P	DIODE		D5100	6-500-294-01	DIODE PTZ-TE25-3.9B		
1539		P	DIODE		D5101	8-719-210-39	DIODE EC10QS-04		
1540		P	FERRITE BEAD		FB5000	1-414-235-22	FERRITE 0UH		
1541		P	FERRITE BEAD		FB5001	1-414-235-22	FERRITE 0UH		
1542		P	FERRITE BEAD		FB5002	1-414-235-22	FERRITE 0UH		
1543		P	FERRITE BEAD		FB5003	1-414-235-22	FERRITE 0UH		
1544		P	FERRITE BEAD		FB5004	1-414-445-11	FERRITE 0UH		
1545		P	FERRITE BEAD		FB5200	1-414-235-22	FERRITE 0UH		
1546		P	FERRITE BEAD		FB5201	1-414-235-22	FERRITE 0UH		
1547		P	FERRITE BEAD		FB5202	1-414-235-22	FERRITE 0UH		
1548		P	FERRITE BEAD		FB5203	1-414-235-22	FERRITE 0UH		
1549		P	FILTER	*	FL5000	1-813-308-11	COMMON MODE CHOKE		
1550		P	FILTER	*	FL5001	1-813-308-11	COMMON MODE CHOKE		
1551		P	FILTER	*	FL5002	1-813-308-11	COMMON MODE CHOKE		
1552		P	FILTER	*	FL5003	1-813-308-11	COMMON MODE CHOKE		
1553		P	FILTER		FL5004	1-234-177-21	FERRITE 0UH		
1554		P	IC		IC5000	6-704-001-01	IC BR24L02F-WE2		



No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1555		P	IC		IC5001	6-704-499-01	IC SII9993CTG100		
1556		P	IC		IC5100	6-704-407-01	IC PQ1CZ41H2ZPH		
1557		P	IC		IC5101	8-759-533-85	IC L88M05T-FA-TL		
1558		P	IC		IC5200	6-704-819-01	IC CS4335-KSZR		
1559		P	IC		IC5201	6-706-257-01	IC FMS6418AM16X		
1560		P	IC		IC5202	8-759-331-71	IC NJM4558E(TE2)		
1561		P	IC		IC5203	6-703-042-01	IC CD4052BNSR		
1562		P	IC		IC5301	6-804-248-01	IC HD64F3694FXV-DA4		
1563		P	JACK		J5000	1-794-623-21	JACK, PIN 2P		
1564		P	COIL		L5001	1-412-026-11	INDUCTOR 1UH		
1565		P	COIL		L5100	1-456-046-21	INDUCTOR 10UH		
1566		P	COIL		L5101	1-400-303-21	INDUCTOR 68UH		
1567		P	IC LINK	△	PS5100	1-576-612-21	FUSE 1A 32V		
1568		P	IC LINK	△	PS5101	1-576-647-11	FUSE 0.2A 50V		
1569		P	TRANSISTOR		Q5000	8-729-421-22	TRANSISTOR UN2211		
1570		P	TRANSISTOR		Q5001	6-550-014-01	TRANSISTOR SSM6N15FU(TE85R)		
1571		P	TRANSISTOR		Q5002	8-729-421-22	TRANSISTOR UN2211		
1572		P	TRANSISTOR		Q5200	8-729-027-62	TRANSISTOR DTC144WKA-T146		
1573		P	TRANSISTOR		Q5201	8-729-024-88	TRANSISTOR MUN2212T1		
1574		P	TRANSISTOR		Q5202	8-729-024-88	TRANSISTOR MUN2212T1		
1575		P	TRANSISTOR		Q5204	8-729-421-22	TRANSISTOR UN2211		
1576		P	TRANSISTOR		Q5205	8-729-421-22	TRANSISTOR UN2211		
1577		P	TRANSISTOR		Q5300	8-729-027-62	TRANSISTOR DTC144WKA-T146		
1578		P	RESISTOR		R5000	1-218-644-11	METAL CHIP 10 0.5% 1/10W		
1579		P	RESISTOR		R5001	1-216-845-11	METAL CHIP 100K 5% 1/10W		
1580		P	RESISTOR		R5002	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1581		P	RESISTOR		R5003	1-216-845-11	METAL CHIP 100K 5% 1/10W		
1582		P	RESISTOR		R5005	1-216-838-11	METAL CHIP 27K 5% 1/10W		
1583		P	RESISTOR		R5006	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1584		P	RESISTOR		R5009	1-218-706-11	METAL CHIP 3.9K 0.5% 1/10W		
1585		P	RESISTOR		R5010	1-216-809-11	METAL CHIP 100 5% 1/10W		
1586		P	RESISTOR		R5011	1-216-809-11	METAL CHIP 100 5% 1/10W		
1587		P	RESISTOR		R5012	1-216-809-11	METAL CHIP 100 5% 1/10W		
1588		P	RESISTOR		R5013	1-218-706-11	METAL CHIP 3.9K 0.5% 1/10W		
1589		P	RESISTOR		R5015	1-218-706-11	METAL CHIP 3.9K 0.5% 1/10W		
1590		P	RESISTOR		R5017	1-218-706-11	METAL CHIP 3.9K 0.5% 1/10W		
1591		P	RESISTOR		R5019	1-216-816-11	METAL CHIP 390 5% 1/10W		
1592		P	RESISTOR		R5020	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1593		P	RESISTOR		R5021	1-218-854-11	METAL CHIP 2K 0.5% 1/10W		
1594		P	RESISTOR		R5022	1-218-823-11	METAL CHIP 100 0.5% 1/10W		
1595		P	RESISTOR		R5023	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1596		P	RESISTOR		R5024	1-218-706-11	METAL CHIP 3.9K 0.5% 1/10W		
1597		P	RESISTOR		R5025	1-216-803-11	METAL CHIP 33 5% 1/10W		
1598		P	RESISTOR		R5026	1-216-803-11	METAL CHIP 33 5% 1/10W		
1599		P	RESISTOR		R5027	1-216-803-11	METAL CHIP 33 5% 1/10W		
1600		P	RESISTOR		R5103	1-218-701-11	METAL CHIP 2.4K 0.5% 1/10W		
1601		P	RESISTOR		R5104	1-218-706-11	METAL CHIP 3.9K 0.5% 1/10W		
1602		P	RESISTOR		R5105	1-216-864-11	SHORT CHIP 0		
1603		P	RESISTOR		R5106	1-216-864-11	SHORT CHIP 0		
1604		P	RESISTOR		R5201	1-216-845-11	METAL CHIP 100K 5% 1/10W		
1605		P	RESISTOR		R5202	1-218-665-11	METAL CHIP 75 0.5% 1/10W		
1606		P	RESISTOR		R5203	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1607		P	RESISTOR		R5204	1-218-665-11	METAL CHIP 75 0.5% 1/10W		
1608		P	RESISTOR		R5205	1-218-665-11	METAL CHIP 75 0.5% 1/10W		
1609		P	RESISTOR		R5206	1-218-665-11	METAL CHIP 75 0.5% 1/10W		
1610		P	RESISTOR		R5207	1-216-845-11	METAL CHIP 100K 5% 1/10W		
1611		P	RESISTOR		R5209	1-218-665-11	METAL CHIP 75 0.5% 1/10W		
1612		P	RESISTOR		R5212	1-218-665-11	METAL CHIP 75 0.5% 1/10W		
1613		P	RESISTOR		R5213	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1614		P	RESISTOR		R5214	1-216-857-11	METAL CHIP 1M 5% 1/10W		
1615		P	RESISTOR		R5215	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1616		P	RESISTOR		R5216	1-216-857-11	METAL CHIP 1M 5% 1/10W		
1617		P	RESISTOR		R5217	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1618		P	RESISTOR		R5218	1-216-857-11	METAL CHIP 1M 5% 1/10W		
1619		P	RESISTOR		R5219	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1620		P	RESISTOR		R5222	1-216-857-11	METAL CHIP 1M 5% 1/10W		
1621		P	RESISTOR		R5223	1-216-857-11	METAL CHIP 1M 5% 1/10W		
1622		P	RESISTOR		R5225	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1623		P	RESISTOR		R5227	1-216-857-11	METAL CHIP 1M 5% 1/10W		
1624		P	RESISTOR		R5231	1-218-694-11	METAL CHIP 1.2K 0.5% 1/10W		
1625		P	RESISTOR		R5232	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1626		P	RESISTOR		R5233	1-218-716-11	METAL CHIP 10K 0.5% 1/10W		
1627		P	RESISTOR		R5234	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1628		P	RESISTOR		R5235	1-216-845-11	METAL CHIP 100K 5% 1/10W		

No.	#	Board	Type	$\Delta$ / <sup>*</sup>	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1629		P	RESISTOR		R5236	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1630		P	RESISTOR		R5237	1-218-686-11	METAL CHIP 560 0.5% 1/10W		
1631		P	RESISTOR		R5238	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1632		P	RESISTOR		R5239	1-218-694-11	METAL CHIP 1.2K 0.5% 1/10W		
1633		P	RESISTOR		R5240	1-218-716-11	METAL CHIP 10K 0.5% 1/10W		
1634		P	RESISTOR		R5241	1-218-665-11	METAL CHIP 75 0.5% 1/10W		
1635		P	RESISTOR		R5242	1-218-665-11	METAL CHIP 75 0.5% 1/10W		
1636		P	RESISTOR		R5243	1-218-665-11	METAL CHIP 75 0.5% 1/10W		
1637		P	RESISTOR		R5244	1-216-845-11	METAL CHIP 100K 5% 1/10W		
1638		P	RESISTOR		R5245	1-218-686-11	METAL CHIP 560 0.5% 1/10W		
1639		P	RESISTOR		R5247	1-216-845-11	METAL CHIP 100K 5% 1/10W		
1640		P	RESISTOR		R5248	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1641		P	RESISTOR		R5249	1-216-845-11	METAL CHIP 100K 5% 1/10W		
1642		P	RESISTOR		R5250	1-216-845-11	METAL CHIP 100K 5% 1/10W		
1643		P	RESISTOR		R5251	1-216-809-11	METAL CHIP 100 5% 1/10W		
1644		P	RESISTOR		R5252	1-216-845-11	METAL CHIP 100K 5% 1/10W		
1645		P	RESISTOR		R5253	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1646		P	RESISTOR		R5254	1-216-817-11	METAL CHIP 470 5% 1/10W		
1647		P	RESISTOR		R5255	1-216-817-11	METAL CHIP 470 5% 1/10W		
1648		P	RESISTOR		R5258	1-216-845-11	METAL CHIP 100K 5% 1/10W		
1649		P	RESISTOR		R5259	1-216-837-11	METAL CHIP 22K 5% 1/10W		
1650		P	RESISTOR		R5260	1-216-837-11	METAL CHIP 22K 5% 1/10W		
1651		P	RESISTOR		R5261	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1652		P	RESISTOR		R5262	1-216-809-11	METAL CHIP 100 5% 1/10W		
1653		P	RESISTOR		R5265	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1654		P	RESISTOR		R5266	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1655		P	RESISTOR		R5302	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1656		P	RESISTOR		R5303	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1657		P	RESISTOR		R5304	1-216-809-11	METAL CHIP 100 5% 1/10W		
1658		P	RESISTOR		R5305	1-216-809-11	METAL CHIP 100 5% 1/10W		
1659		P	RESISTOR		R5306	1-216-809-11	METAL CHIP 100 5% 1/10W		
1660		P	RESISTOR		R5307	1-216-809-11	METAL CHIP 100 5% 1/10W		
1661		P	RESISTOR		R5308	1-216-809-11	METAL CHIP 100 5% 1/10W		
1662		P	RESISTOR		R5309	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1663		P	RESISTOR		R5310	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1664		P	RESISTOR		R5311	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1665		P	RESISTOR		R5312	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1666		P	RESISTOR		R5313	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1667		P	RESISTOR		R5314	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1668		P	RESISTOR		R5315	1-216-809-11	METAL CHIP 100 5% 1/10W		
1669		P	RESISTOR		R5317	1-216-809-11	METAL CHIP 100 5% 1/10W		
1670		P	RESISTOR		R5320	1-216-809-11	METAL CHIP 100 5% 1/10W		
1671		P	RESISTOR		R5321	1-216-809-11	METAL CHIP 100 5% 1/10W		
1672		P	RESISTOR		R5322	1-216-809-11	METAL CHIP 100 5% 1/10W		
1673		P	RESISTOR		R5323	1-216-809-11	METAL CHIP 100 5% 1/10W		
1674		P	RESISTOR		R5325	1-216-809-11	METAL CHIP 100 5% 1/10W		
1675		P	RESISTOR		R5326	1-216-809-11	METAL CHIP 100 5% 1/10W		
1676		P	NETWORK		RB5000	1-233-574-11	RES, CHIP NETWORK 10 (3216)		
1677		P	NETWORK		RB5001	1-233-574-11	RES, CHIP NETWORK 10 (3216)		
1678		P	NETWORK		RB5002	1-234-524-21	RES, CHIP NETWORK 33 (3216)		
1679		P	NETWORK		RB5300	1-236-908-11	RES, CHIP NETWORK 10K		
1680		P	VARISTOR		VD5000	1-805-043-11	ABSORBER, CHIP SURGE		
1681		P	VARISTOR		VD5001	1-805-043-11	ABSORBER, CHIP SURGE		
1682		P	VARISTOR		VD5002	1-805-043-11	ABSORBER, CHIP SURGE		
1683		P	VARISTOR		VD5003	1-805-043-11	ABSORBER, CHIP SURGE		
1684		P	VARISTOR		VD5004	1-805-043-11	ABSORBER, CHIP SURGE		
1685		P	VARISTOR		VD5005	1-805-043-11	ABSORBER, CHIP SURGE		
1686		P	VARISTOR		VD5006	1-805-043-11	ABSORBER, CHIP SURGE		
1687		P	VARISTOR		VD5007	1-805-043-11	ABSORBER, CHIP SURGE		
1688		P	VARISTOR		VD5008	1-805-043-11	ABSORBER, CHIP SURGE		
1689		P	VARISTOR		VD5009	1-805-043-11	ABSORBER, CHIP SURGE		
1690		P	CRYSTAL		X5300	1-767-984-21	VIBRATOR, CRYSTAL		
1691		H2	CAPACITOR		C9101	1-162-945-11	CERAMIC CHIP 22PF 5.00% 50V		
1692		H2	CAPACITOR		C9102	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
1693		H2	CAPACITOR		C9103	1-117-137-11	ELECT CHIP 33UF 20.00% 10V		
1694		H2	CAPACITOR		C9104	1-115-566-11	CERAMIC CHIP 4.7UF 10.00% 10V		
1695		H2	CAPACITOR		C9105	1-115-566-11	CERAMIC CHIP 4.7UF 10.00% 10V		
1696		H2	CONNECTOR	*	CN9101	1-766-376-11	PIN, CONNECTOR (1.5MM)(SMD) 9P		
1697		H2	DIODE		D9101	8-719-064-07	DIODE SML-310LTT86		
1698		H2	DIODE		D9102	6-500-861-01	DIODE SML-020MVT-T86		
1699		H2	DIODE		D9103	8-719-421-59	DIODE MA3130WA-TX		
1700		H2	DIODE		D9104	8-719-421-59	DIODE MA3130WA-TX		
1701		H2	DIODE		D9105	8-719-421-59	DIODE MA3130WA-TX		
1702		H2	DIODE		D9106	8-719-421-59	DIODE MA3130WA-TX		

No.	#	Board	Type	$\Delta$ / <sup>*</sup>	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1703		H2	IC		IC9101	6-600-117-01	IC GP1UM27SRK		
1704		H2	TRANSISTOR		Q9101	8-729-028-98	TRANSISTOR DTC114WUA-T106		
1705		H2	TRANSISTOR		Q9102	8-729-028-98	TRANSISTOR DTC114WUA-T106		
1706		H2	TRANSISTOR		Q9103	8-729-028-98	TRANSISTOR DTC114WUA-T106		
1707		H2	RESISTOR		R9101	1-216-815-11	METAL CHIP 330 5% 1/10W		
1708		H2	RESISTOR		R9103	1-216-820-11	METAL CHIP 820 5% 1/10W		
1709		H2	RESISTOR		R9107	1-216-817-11	METAL CHIP 470 5% 1/10W		
1710		H2	RESISTOR		R9108	1-216-805-11	METAL CHIP 47 5% 1/10W		
1711		H2	RESISTOR		R9110	1-216-820-11	METAL CHIP 820 5% 1/10W		
1712		H2	RESISTOR		R9111	1-216-295-91	SHORT CHIP 0		
1713		H2	SWITCH		S9101	1-554-419-00	SWITCH, PUSH (1 KEY)		
1714		AU	CAPACITOR		C5500	1-127-692-11	CERAMIC CHIP 10UF 10% 16V		
1715		AU	CAPACITOR		C5501	1-127-692-11	CERAMIC CHIP 10UF 10% 16V		
1716		AU	CAPACITOR		C5502	1-126-404-11	ELECT CHIP 4.7UF 20.00% 50V		
1717		AU	CAPACITOR		C5503	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
1718		AU	CAPACITOR		C5504	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V		
1719		AU	CAPACITOR		C5505	1-127-692-11	CERAMIC CHIP 10UF 10% 16V		
1720		AU	CAPACITOR		C5506	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
1721		AU	CAPACITOR		C5507	1-127-692-11	CERAMIC CHIP 10UF 10% 16V		
1722		AU	CAPACITOR		C5508	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
1723		AU	CAPACITOR		C5509	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
1724		AU	CAPACITOR		C5510	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
1725		AU	CAPACITOR		C5511	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
1726		AU	CAPACITOR		C5512	1-162-968-11	CERAMIC CHIP 0.0047UF 10.00% 50V		
1727		AU	CAPACITOR		C5513	1-127-692-11	CERAMIC CHIP 10UF 10% 16V		
1728		AU	CAPACITOR		C5514	1-127-692-11	CERAMIC CHIP 10UF 10% 16V		
1729		AU	CAPACITOR		C5515	1-164-156-11	CERAMIC CHIP 0.1UF 25V		
1730		AU	CAPACITOR		C5516	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V		
1731		AU	CAPACITOR		C5517	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
1732		AU	CAPACITOR		C5518	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
1733		AU	CAPACITOR		C5519	1-126-404-11	ELECT CHIP 4.7UF 20.00% 50V		
1734		AU	CAPACITOR		C5520	1-162-995-11	CERAMIC CHIP 0.022UF 50V		
1735		AU	CAPACITOR		C5521	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
1736		AU	CAPACITOR		C5522	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1737		AU	CAPACITOR		C5523	1-131-661-21	ELECT CHIP 100UF 20% 10V		
1738		AU	CAPACITOR		C5524	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
1739		AU	CAPACITOR		C5525	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
1740		AU	CAPACITOR		C5526	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
1741		AU	CAPACITOR		C5527	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
1742		AU	CAPACITOR		C5528	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
1743		AU	CAPACITOR		C5529	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
1744		AU	CAPACITOR		C5530	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
1745		AU	CAPACITOR		C5531	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
1746		AU	CAPACITOR		C5537	1-165-176-11	CERAMIC CHIP 0.047UF 10.00% 16V		
1747		AU	CAPACITOR		C5538	1-162-960-11	CERAMIC CHIP 220PF 10.00% 50V		
1748		AU	CAPACITOR		C7000	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
1749		AU	CAPACITOR		C7001	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
1750		AU	CAPACITOR		C7002	1-164-004-11	CERAMIC CHIP 0.1UF 10.00% 25V		
1751		AU	CAPACITOR		C7003	1-164-004-11	CERAMIC CHIP 0.1UF 10.00% 25V		
1752		AU	CAPACITOR		C7004	1-128-528-11	ELECT 470UF 20.00% 25V		
1753		AU	CAPACITOR		C7005	1-128-528-11	ELECT 470UF 20.00% 25V		
1754		AU	CAPACITOR		C7006	1-100-118-21	ELECT CHIP 82UF 20% 16V		
1755		AU	CAPACITOR		C7007	1-135-349-21	ELECT CHIP 22UF 20% 20V		
1756		AU	CAPACITOR		C7008	1-164-004-11	CERAMIC CHIP 0.1UF 10.00% 25V		
1757		AU	CAPACITOR		C7009	1-164-004-11	CERAMIC CHIP 0.1UF 10.00% 25V		
1758		AU	CAPACITOR		C7010	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
1759		AU	CAPACITOR		C7011	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
1760		AU	CAPACITOR		C7012	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
1761		AU	CAPACITOR		C7013	1-128-398-11	ELECT CHIP 220UF 20% 16V		
1762		AU	CAPACITOR		C7014	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
1763		AU	CAPACITOR		C7015	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		
1764		AU	CAPACITOR		C7016	1-162-967-11	CERAMIC CHIP 0.0033UF 10.00% 50V		
1765		AU	CAPACITOR		C7017	1-164-004-11	CERAMIC CHIP 0.1UF 10.00% 25V		
1766		AU	CAPACITOR		C7018	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
1767		AU	CAPACITOR		C7019	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
1768		AU	CAPACITOR		C7020	1-162-967-11	CERAMIC CHIP 0.0033UF 10.00% 50V		
1769		AU	CAPACITOR		C7022	1-162-969-11	CERAMIC CHIP 0.0068UF 10.00% 25V		
1770		AU	CAPACITOR		C7023	1-162-969-11	CERAMIC CHIP 0.0068UF 10.00% 25V		
1771		AU	CAPACITOR		C7024	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
1772		AU	CAPACITOR		C7025	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1773		AU	CAPACITOR		C7026	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
1774		AU	CAPACITOR		C7027	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
1775		AU	CAPACITOR		C7028	1-127-820-11	CERAMIC CHIP 4.7UF 10% 16V		
1776		AU	CAPACITOR		C7029	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		

No.	#	Board	Type	$\Delta$ / <sup>*</sup>	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1777		AU	CAPACITOR		C7030	1-135-372-31	ELECT 470UF 20% 10V		
1778		AU	CAPACITOR		C7032	1-135-960-91	CERAMIC CHIP 10UF 10% 25V		
1779		AU	CAPACITOR		C7033	1-128-359-11	ELECT CHIP 100UF 20.00% 10V		
1780		AU	CAPACITOR		C7034	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
1781		AU	CAPACITOR		C7035	1-135-960-91	CERAMIC CHIP 10UF 10% 25V		
1782		AU	CAPACITOR		C7036	1-135-960-91	CERAMIC CHIP 10UF 10% 25V		
1783		AU	CAPACITOR		C7041	1-128-360-11	ELECT CHIP 220UF 20.00% 10V		
1784		AU	CAPACITOR		C7042	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
1785		AU	CAPACITOR		C7043	1-165-669-21	ELECT CHIP 220UF 20% 6.3V		
1786		AU	CAPACITOR		C7044	1-165-669-21	ELECT CHIP 220UF 20% 6.3V		
1787		AU	CAPACITOR		C7046	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1788		AU	CAPACITOR		C7048	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
1789		AU	CAPACITOR		C7049	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
1790		AU	CAPACITOR		C8000	1-128-357-11	ELECT CHIP 10UF 20.00% 16V		
1791		AU	CAPACITOR		C8001	1-128-357-11	ELECT CHIP 10UF 20.00% 16V		
1792		AU	CAPACITOR		C8002	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1793		AU	CAPACITOR		C8003	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1794		AU	CAPACITOR		C8005	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
1795		AU	CAPACITOR		C8006	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
1796		AU	CAPACITOR		C8007	1-128-357-11	ELECT CHIP 10UF 20.00% 16V		
1797		AU	CAPACITOR		C8008	1-128-357-11	ELECT CHIP 10UF 20.00% 16V		
1798		AU	CAPACITOR		C8009	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1799		AU	CAPACITOR		C8010	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1800		AU	CAPACITOR		C8011	1-117-681-11	ELECT CHIP 100UF 20.00% 16V		
1801		AU	CAPACITOR		C8012	1-128-357-11	ELECT CHIP 10UF 20.00% 16V		
1802		AU	CAPACITOR		C8013	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1803		AU	CAPACITOR		C8014	1-128-357-11	ELECT CHIP 10UF 20.00% 16V		
1804		AU	CAPACITOR		C8015	1-128-357-11	ELECT CHIP 10UF 20.00% 16V		
1805		AU	CAPACITOR		C8016	1-117-681-11	ELECT CHIP 100UF 20.00% 16V		
1806		AU	CAPACITOR		C8017	1-162-960-11	CERAMIC CHIP 220PF 10.00% 50V		
1807		AU	CAPACITOR		C8018	1-162-960-11	CERAMIC CHIP 220PF 10.00% 50V		
1808		AU	CAPACITOR		C8019	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
1809		AU	CAPACITOR		C8020	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
1810		AU	CAPACITOR		C8021	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
1811		AU	CAPACITOR		C8022	1-128-357-11	ELECT CHIP 10UF 20.00% 16V		
1812		AU	CAPACITOR		C8023	1-128-357-11	ELECT CHIP 10UF 20.00% 16V		
1813		AU	CAPACITOR		C8100	1-165-176-11	CERAMIC CHIP 0.047UF 10.00% 16V		
1814		AU	CAPACITOR		C8101	1-165-176-11	CERAMIC CHIP 0.047UF 10.00% 16V		
1815		AU	CAPACITOR		C8102	1-162-970-11	CERAMIC CHIP 0.01UF 5.00% 25V		
1816		AU	CAPACITOR		C8103	1-162-968-11	CERAMIC CHIP 0.0047UF 10.00% 50V		
1817		AU	CAPACITOR		C8104	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
1818		AU	CAPACITOR		C8105	1-128-536-11	ELECT CHIP 100UF 20.00% 25V		
1819		AU	CAPACITOR		C8106	1-163-989-11	CERAMIC CHIP 0.033UF 10.00% 25V		
1820		AU	CAPACITOR		C8107	1-162-967-11	CERAMIC CHIP 0.0033UF 10.00% 50V		
1821		AU	CAPACITOR		C8108	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V		
1822		AU	CAPACITOR		C8109	1-125-779-21	CERAMIC CHIP 0.022UF 5% 25V		
1823		AU	CAPACITOR		C8110	1-125-779-21	CERAMIC CHIP 0.022UF 5% 25V		
1824		AU	CAPACITOR		C8111	1-100-597-91	CERAMIC CHIP 0.1UF 10% 25V		
1825		AU	CAPACITOR		C8112	1-126-401-21	ELECT CHIP 1UF 20.00% 50V		
1826		AU	CAPACITOR		C8113	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
1827		AU	CAPACITOR		C8114	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
1828		AU	CAPACITOR		C8115	1-128-934-91	CERAMIC CHIP 0.33UF 20% 10V		
1829		AU	CAPACITOR		C8116	1-126-401-21	ELECT CHIP 1UF 20.00% 50V		
1830		AU	CAPACITOR		C8117	1-126-401-21	ELECT CHIP 1UF 20.00% 50V		
1831		AU	CAPACITOR		C8118	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
1832		AU	CAPACITOR		C8119	1-126-401-21	ELECT CHIP 1UF 20.00% 50V		
1833		AU	CAPACITOR		C8120	1-126-401-21	ELECT CHIP 1UF 20.00% 50V		
1834		AU	CAPACITOR		C8121	1-126-401-21	ELECT CHIP 1UF 20.00% 50V		
1835		AU	CAPACITOR		C8122	1-126-401-21	ELECT CHIP 1UF 20.00% 50V		
1836		AU	CAPACITOR		C8123	1-126-401-21	ELECT CHIP 1UF 20.00% 50V		
1837		AU	CAPACITOR		C8124	1-126-401-21	ELECT CHIP 1UF 20.00% 50V		
1838		AU	CAPACITOR		C8125	1-126-401-21	ELECT CHIP 1UF 20.00% 50V		
1839		AU	CAPACITOR		C8126	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
1840		AU	CAPACITOR		C8127	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
1841		AU	CAPACITOR		C8128	1-126-401-21	ELECT CHIP 1UF 20.00% 50V		
1842		AU	CAPACITOR		C8129	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1843		AU	CAPACITOR		C8130	1-125-779-21	CERAMIC CHIP 0.022UF 5% 25V		
1844		AU	CAPACITOR		C8131	1-125-779-21	CERAMIC CHIP 0.022UF 5% 25V		
1845		AU	CAPACITOR		C8132	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V		
1846		AU	CAPACITOR		C8133	1-162-967-11	CERAMIC CHIP 0.0033UF 10.00% 50V		
1847		AU	CAPACITOR		C8134	1-163-989-11	CERAMIC CHIP 0.033UF 10.00% 25V		
1848		AU	CAPACITOR		C8135	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
1849		AU	CAPACITOR		C8136	1-162-968-11	CERAMIC CHIP 0.0047UF 10.00% 50V		
1850		AU	CAPACITOR		C8137	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		

No.	#	Board	Type	$\Delta$ / <sup>*</sup>	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1851		AU	CAPACITOR		C8138	1-162-970-11	CERAMIC CHIP 0.01UF 5.00% 25V		
1852		AU	CAPACITOR		C8139	1-165-176-11	CERAMIC CHIP 0.047UF 10.00% 16V		
1853		AU	CAPACITOR		C8140	1-165-176-11	CERAMIC CHIP 0.047UF 10.00% 16V		
1854		AU	CAPACITOR		C8141	1-125-779-21	CERAMIC CHIP 0.022UF 5% 25V		
1855		AU	CAPACITOR		C8142	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1856		AU	CAPACITOR		C8143	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1857		AU	CAPACITOR		C8144	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1858		AU	CAPACITOR		C8145	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1859		AU	CAPACITOR		C8146	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1860		AU	CAPACITOR		C8147	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1861		AU	CAPACITOR		C8148	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1862		AU	CAPACITOR		C8149	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1863		AU	CAPACITOR		C8150	1-126-401-21	ELECT CHIP 1UF 20.00% 50V		
1864		AU	CAPACITOR		C8151	1-165-112-11	CERAMIC CHIP 0.33UF 16V		
1865		AU	CAPACITOR		C8152	1-164-345-11	CERAMIC CHIP 0.082UF 10.00% 25V		
1866		AU	CAPACITOR		C8153	1-164-345-11	CERAMIC CHIP 0.082UF 10.00% 25V		
1867		AU	CAPACITOR		C8154	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1868		AU	CAPACITOR		C8155	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1869		AU	CAPACITOR		C8300	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
1870		AU	CAPACITOR		C8301	1-164-227-11	CERAMIC CHIP 0.022UF 10.00% 25V		
1871		AU	CAPACITOR		C8302	1-164-227-11	CERAMIC CHIP 0.022UF 10.00% 25V		
1872		AU	CAPACITOR		C8303	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1873		AU	CAPACITOR		C8304	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V		
1874		AU	CAPACITOR		C8305	1-162-967-11	CERAMIC CHIP 0.0033UF 10.00% 50V		
1875		AU	CAPACITOR		C8306	1-162-968-11	CERAMIC CHIP 0.0047UF 10.00% 50V		
1876		AU	CAPACITOR		C8307	1-163-037-11	CERAMIC CHIP 0.022UF 10.00% 50V		
1877		AU	CAPACITOR		C8308	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
1878		AU	CAPACITOR		C8309	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
1879		AU	CAPACITOR		C8312	1-164-156-11	CERAMIC CHIP 0.1UF 25V		
1880		AU	CAPACITOR		C8313	1-164-156-11	CERAMIC CHIP 0.1UF 25V		
1881		AU	CAPACITOR		C8314	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
1882		AU	CAPACITOR		C8315	1-110-501-11	CERAMIC CHIP 0.33UF 10.00% 16V		
1883		AU	CAPACITOR		C8316	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
1884		AU	CAPACITOR		C8317	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
1885		AU	CAPACITOR		C8318	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
1886		AU	CAPACITOR		C8319	1-110-501-11	CERAMIC CHIP 0.33UF 10.00% 16V		
1887		AU	CAPACITOR		C8320	1-164-156-11	CERAMIC CHIP 0.1UF 25V		
1888		AU	CAPACITOR		C8321	1-164-156-11	CERAMIC CHIP 0.1UF 25V		
1889		AU	CAPACITOR		C8322	1-163-037-11	CERAMIC CHIP 0.022UF 10.00% 50V		
1890		AU	CAPACITOR		C8323	1-162-967-11	CERAMIC CHIP 0.0033UF 10.00% 50V		
1891		AU	CAPACITOR		C8324	1-162-968-11	CERAMIC CHIP 0.0047UF 10.00% 50V		
1892		AU	CAPACITOR		C8325	1-164-677-11	CERAMIC CHIP 0.033UF 10.00% 16V		
1893		AU	CAPACITOR		C8326	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V		
1894		AU	CAPACITOR		C8327	1-162-967-11	CERAMIC CHIP 0.0033UF 10.00% 50V		
1895		AU	CAPACITOR		C8328	1-126-603-11	ELECT CHIP 4.7UF 20.00% 35V		
1896		AU	CAPACITOR		C8329	1-126-603-11	ELECT CHIP 4.7UF 20.00% 35V		
1897		AU	CAPACITOR		C8330	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
1898		AU	CAPACITOR		C8331	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
1899		AU	CAPACITOR		C8332	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1900		AU	CAPACITOR		C8333	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1901		AU	CAPACITOR		C8334	1-126-603-11	ELECT CHIP 4.7UF 20.00% 35V		
1902		AU	CAPACITOR		C8335	1-126-603-11	ELECT CHIP 4.7UF 20.00% 35V		
1903		AU	CAPACITOR		C8336	1-163-809-11	CERAMIC CHIP 0.047UF 10.00% 25V		
1904		AU	CAPACITOR		C8337	1-163-809-11	CERAMIC CHIP 0.047UF 10.00% 25V		
1905		AU	CAPACITOR		C8338	1-117-681-11	ELECT CHIP 100UF 20.00% 16V		
1906		AU	CAPACITOR		C8339	1-164-156-11	CERAMIC CHIP 0.1UF 25V		
1907		AU	CAPACITOR		C8340	1-164-156-11	CERAMIC CHIP 0.1UF 25V		
1908		AU	CAPACITOR		C8341	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
1909		AU	CAPACITOR		C8342	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
1910		AU	CAPACITOR		C8343	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
1911		AU	CAPACITOR		C8500	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
1912		AU	CAPACITOR		C8501	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V		
1913		AU	CAPACITOR		C8502	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V		
1914		AU	CAPACITOR		C8503	1-100-743-91	CERAMIC CHIP 2.2UF 10% 16V		
1915		AU	CAPACITOR		C8504	1-100-743-91	CERAMIC CHIP 2.2UF 10% 16V		
1916		AU	CAPACITOR		C8505	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
1917		AU	CAPACITOR		C8506	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V		
1918		AU	CAPACITOR		C8507	1-107-823-11	CERAMIC CHIP 0.47UF 10.00% 16V		
1919		AU	CAPACITOR		C8508	1-107-823-11	CERAMIC CHIP 0.47UF 10.00% 16V		
1920		AU	CAPACITOR		C8509	1-100-633-21	ELECT CHIP 47UF 20% 35V		
1921		AU	CAPACITOR		C8510	1-100-633-21	ELECT CHIP 47UF 20% 35V		
1922		AU	CAPACITOR		C8511	1-100-633-21	ELECT CHIP 47UF 20% 35V		
1923		AU	CAPACITOR		C8512	1-100-633-21	ELECT CHIP 47UF 20% 35V		
1924		AU	CAPACITOR		C8513	1-117-713-21	ELECT CHIP 100UF 20.00% 50V		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1925		AU	CAPACITOR		C8514	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V		
1926		AU	CAPACITOR		C8515	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V		
1927		AU	CAPACITOR		C8516	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V		
1928		AU	CAPACITOR		C8517	1-100-701-11	ELECT 5600UF 20% 50V		
1929		AU	CAPACITOR		C8519	1-165-753-21	ELECT 820UF 20% 50V		
1930		AU	CAPACITOR		C8520	1-165-753-21	ELECT 820UF 20% 50V		
1931		AU	CAPACITOR		C8521	1-164-174-11	CERAMIC CHIP 0.0082UF 10.00% 25V		
1932		AU	CAPACITOR		C8522	1-164-174-11	CERAMIC CHIP 0.0082UF 10.00% 25V		
1933		AU	CAPACITOR		C8600	1-128-357-11	ELECT CHIP 10UF 20.00% 16V		
1934		AU	CAPACITOR		C8601	1-128-357-11	ELECT CHIP 10UF 20.00% 16V		
1935		AU	CAPACITOR		C8602	1-128-357-11	ELECT CHIP 10UF 20.00% 16V		
1936		AU	CAPACITOR		C8603	1-128-357-11	ELECT CHIP 10UF 20.00% 16V		
1937		AU	CAPACITOR		C8605	1-125-889-91	CERAMIC CHIP 2.2UF 10% 10V		
1938		AU	CAPACITOR		C8607	1-125-889-91	CERAMIC CHIP 2.2UF 10% 10V		
1939		AU	CAPACITOR		C8608	1-125-889-91	CERAMIC CHIP 2.2UF 10% 10V		
1940		AU	CAPACITOR		C8609	1-125-889-91	CERAMIC CHIP 2.2UF 10% 10V		
1941		AU	CAPACITOR		C8610	1-128-357-11	ELECT CHIP 10UF 20.00% 16V		
1942		AU	CAPACITOR		C8611	1-128-357-11	ELECT CHIP 10UF 20.00% 16V		
1943		AU	CAPACITOR		C8612	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
1944		AU	CAPACITOR		C8613	1-125-889-91	CERAMIC CHIP 2.2UF 10% 10V		
1945		AU	CAPACITOR		C8614	1-137-894-21	ELECT CHIP 470UF 20% 25V		
1946		AU	CAPACITOR		C8615	1-125-889-91	CERAMIC CHIP 2.2UF 10% 10V		
1947		AU	CAPACITOR		C8616	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
1948		AU	CAPACITOR		C8617	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
1949		AU	CAPACITOR		C8618	1-126-405-11	ELECT CHIP 10UF 20.00% 50V		
1950		AU	CAPACITOR		C8619	1-126-405-11	ELECT CHIP 10UF 20.00% 50V		
1951		AU	CAPACITOR		C8620	1-126-404-11	ELECT CHIP 4.7UF 20.00% 50V		
1952		AU	CAPACITOR		C8621	1-126-405-11	ELECT CHIP 10UF 20.00% 50V		
1953		AU	CAPACITOR		C8622	1-126-404-11	ELECT CHIP 4.7UF 20.00% 50V		
1954		AU	CAPACITOR		C8623	1-126-405-11	ELECT CHIP 10UF 20.00% 50V		
1955		AU	CAPACITOR		C8624	1-128-357-11	ELECT CHIP 10UF 20.00% 16V		
1956		AU	CAPACITOR		C8625	1-128-357-11	ELECT CHIP 10UF 20.00% 16V		
1957		AU	CAPACITOR		C8626	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
1958		AU	CAPACITOR		C8627	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
1959		AU	CAPACITOR		C8628	1-128-357-11	ELECT CHIP 10UF 20.00% 16V		
1960		AU	CAPACITOR		C8629	1-128-357-11	ELECT CHIP 10UF 20.00% 16V		
1961		AU	CAPACITOR		C8700	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
1962		AU	CAPACITOR		C8701	1-165-585-21	ELECT CHIP 47UF 20% 25V		
1963		AU	CAPACITOR		C8702	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
1964		AU	CAPACITOR		C8800	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1965		AU	CAPACITOR		C8801	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1966		AU	CONNECTOR		CN5500	1-794-283-21	PIN, CONNECTOR (FOR PWB) 40P		
1967		AU	CONNECTOR		CN5504	1-817-904-11	CONNECTOR, BOARD TO BOARD 100P		
1968		AU	CONNECTOR		CN7000	1-816-587-21	PIN, CONNECTOR (PC BOARD) 15P		
1969		AU	CONNECTOR	*	CN8500	1-764-250-11	PIN, CONNECTOR (PC BOARD) 4P		
1970		AU	DIODE		D5500	8-719-081-97	DIODE MMDL914T1		
1971		AU	DIODE		D5501	8-719-977-28	DIODE DTZ10B		
1972		AU	DIODE		D5502	8-719-064-03	DIODE HZU16B2TRF		
1973		AU	DIODE		D5503	8-719-064-03	DIODE HZU16B2TRF		
1974		AU	DIODE		D5504	8-719-081-97	DIODE MMDL914T1		
1975		AU	DIODE		D5505	8-719-081-97	DIODE MMDL914T1		
1976		AU	DIODE		D7001	6-500-579-01	DIODE PTZ-TE25-6.8B		
1977		AU	DIODE		D7002	6-500-294-01	DIODE PTZ-TE25-3.9B		
1978		AU	DIODE		D7003	6-500-295-01	DIODE PTZ-TE25-5.6B		
1979		AU	DIODE		D7004	8-719-081-99	DIODE MM3Z13VT1		
1980		AU	DIODE		D8000	8-719-800-76	DIODE 1SS226		
1981		AU	DIODE		D8001	8-719-800-76	DIODE 1SS226		
1982		AU	DIODE		D8501	6-500-253-01	DIODE RB053L-30TE25		
1983		AU	DIODE		D8504	6-500-253-01	DIODE RB053L-30TE25		
1984		AU	DIODE		D8600	8-719-081-97	DIODE MMDL914T1		
1985		AU	DIODE		D8602	8-719-081-97	DIODE MMDL914T1		
1986		AU	DIODE		D8700	8-719-081-97	DIODE MMDL914T1		
1987		AU	DIODE		D8701	8-719-066-11	DIODE 1PS184-115		
1988		AU	DIODE		D8702	8-719-081-34	DIODE RB160M-30TR		
1989		AU	DIODE		D8800	8-719-081-97	DIODE MMDL914T1		
1990		AU	FERRITE BEAD		FB5501	1-414-233-22	FERRITE 0UH		
1991		AU	FERRITE BEAD		FB5502	1-414-233-22	FERRITE 0UH		
1992		AU	FERRITE BEAD		FB5503	1-414-233-22	FERRITE 0UH		
1993		AU	FERRITE BEAD		FB5504	1-414-233-22	FERRITE 0UH		
1994		AU	FERRITE BEAD		FB7050	1-469-775-21	FERRITE 0UH		
1995		AU	FERRITE BEAD		FB7052	1-469-775-21	FERRITE 0UH		
1996		AU	FERRITE BEAD		FB7053	1-469-775-21	FERRITE 0UH		
1997		AU	FERRITE BEAD		FB7054	1-414-445-11	FERRITE 0UH		
1998		AU	FERRITE BEAD		FB7055	1-469-775-21	FERRITE 0UH		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1999		AU	IC		IC5500	6-703-225-01	IC S-80928CNMC-G8YT2G		
2000		AU	IC		IC7000	8-759-564-82	IC BA09ST-V5		
2001		AU	IC		IC7001	8-759-394-36	IC BA09T		
2002		AU	IC		IC7002	6-703-249-01	IC SN105233DBTR		
2003		AU	IC		IC7003	6-704-407-01	IC PQ1CZ41H2ZPH		
2004		AU	IC		IC7005	8-759-450-47	IC BA05T		
2005		AU	IC		IC8000	8-759-278-58	IC NJM4558V-TE2		
2006		AU	IC		IC8001	8-759-524-00	IC TC4052BF(EL,N)		
2007		AU	IC		IC8002	8-759-278-58	IC NJM4558V-TE2		
2008		AU	IC		IC8100	6-706-456-01	IC NJW1169FH1		
2009		AU	IC		IC8300	8-759-972-97	IC BA3823LS		
2010		AU	IC		IC8301	8-759-278-58	IC NJM4558V-TE2		
2011		AU	IC		IC8302	8-759-836-72	IC NJM2521V(TE2)		
2012		AU	IC		IC8303	8-759-836-72	IC NJM2521V(TE2)		
2013		AU	IC		IC8500	8-759-278-58	IC NJM4558V-TE2		
2014		AU	IC		IC8501	8-759-246-70	IC TA8216H		
2015		AU	IC		IC8600	8-759-524-00	IC TC4052BF(EL,N)		
2016		AU	IC		IC8601	8-759-359-49	IC NJM3414AV(TE2)		
2017		AU	IC		IC8602	8-759-278-58	IC NJM4558V-TE2		
2018		AU	IC		IC8700	6-703-225-01	IC S-80928CNMC-G8YT2G		
2019		AU	IC		IC8800	8-759-075-70	IC TA75S393F		
2020		AU	COIL		L5500	1-412-030-11	INDUCTOR 22UH		
2021		AU	COIL		L5501	1-412-030-11	INDUCTOR 22UH		
2022		AU	COIL		L5502	1-412-030-11	INDUCTOR 22UH		
2023		AU	COIL		L5503	1-412-030-11	INDUCTOR 22UH		
2024		AU	COIL		L7001	1-406-657-11	INDUCTOR 4.7UH		
2025		AU	COIL		L7002	1-400-323-21	INDUCTOR 47UH		
2026		AU	COIL		L7003	1-424-758-21	INDUCTOR 10UH		
2027		AU	COIL		L7004	1-424-758-21	INDUCTOR 10UH		
2028		AU	COIL		L7005	1-400-241-21	INDUCTOR 3UH		
2029		AU	COIL		L7006	1-400-241-21	INDUCTOR 3UH		
2030		AU	COIL		L8000	1-412-058-11	INDUCTOR 10UH		
2031		AU	COIL		L8500	1-406-977-21	INDUCTOR 100UH		
2032		AU	LEAD PIN	*	LP5501	4-042-408-02	PIN(45), WIRE		
2033		AU	LEAD PIN	*	LP5502	4-042-408-02	PIN(45), WIRE		
2034		AU	LEAD PIN	*	LP5503	4-042-408-02	PIN(45), WIRE		
2035		AU	PHOTO COUPLER		PH8600	8-719-053-15	IC PS2701-1-E3-L		
2036		AU	IC LINK	△	PS5500	1-533-674-11	IC LINK 0.5A 50V		
2037		AU	IC LINK	△	PS7000	1-533-593-31	IC LINK 2A 90V		
2038		AU	IC LINK	△	PS7001	1-533-596-21	IC LINK 4A 90V		
2039		AU	IC LINK	△	PS8500	1-533-595-31	IC LINK 3.15A 90V		
2040		AU	TRANSISTOR		Q5500	6-550-549-01	TRANSISTOR DTC114EUAFT106		
2041		AU	TRANSISTOR		Q5501	6-550-549-01	TRANSISTOR DTC114EUAFT106		
2042		AU	TRANSISTOR		Q5502	6-550-585-01	TRANSISTOR 2PC4081R-115		
2043		AU	TRANSISTOR		Q5503	6-550-586-01	TRANSISTOR 2PA1576R-115		
2044		AU	TRANSISTOR		Q5504	6-550-586-01	TRANSISTOR 2PA1576R-115		
2045		AU	TRANSISTOR		Q5505	6-550-585-01	TRANSISTOR 2PC4081R-115		
2046		AU	TRANSISTOR		Q5506	6-550-585-01	TRANSISTOR 2PC4081R-115		
2047		AU	TRANSISTOR		Q5507	6-550-585-01	TRANSISTOR 2PC4081R-115		
2048		AU	TRANSISTOR		Q5508	6-550-585-01	TRANSISTOR 2PC4081R-115		
2049		AU	TRANSISTOR		Q5509	6-550-585-01	TRANSISTOR 2PC4081R-115		
2050		AU	TRANSISTOR		Q5510	6-550-585-01	TRANSISTOR 2PC4081R-115		
2051		AU	TRANSISTOR		Q5511	6-550-586-01	TRANSISTOR 2PA1576R-115		
2052		AU	TRANSISTOR		Q5513	6-550-549-01	TRANSISTOR DTC114EUAFT106		
2053		AU	TRANSISTOR		Q5515	6-550-549-01	TRANSISTOR DTC114EUAFT106		
2054		AU	TRANSISTOR		Q5517	6-550-585-01	TRANSISTOR 2PC4081R-115		
2055		AU	TRANSISTOR		Q5518	6-550-586-01	TRANSISTOR 2PA1576R-115		
2056		AU	TRANSISTOR		Q7000	6-550-222-01	TRANSISTOR IRF7335D1-TR		
2057		AU	TRANSISTOR		Q7001	6-550-222-01	TRANSISTOR IRF7335D1-TR		
2058		AU	TRANSISTOR		Q7002	8-729-907-00	TRANSISTOR DTC114EU		
2059		AU	TRANSISTOR		Q7003	8-729-054-36	TRANSISTOR UPA1716G-E2		
2060		AU	TRANSISTOR		Q8000	8-729-905-35	TRANSISTOR 2SC4081-R		
2061		AU	TRANSISTOR		Q8001	6-550-076-01	TRANSISTOR MUN5213T1		
2062		AU	TRANSISTOR		Q8002	6-550-076-01	TRANSISTOR MUN5213T1		
2063		AU	TRANSISTOR		Q8100	8-729-044-58	TRANSISTOR SI2304DS-T1		
2064		AU	TRANSISTOR		Q8102	6-550-076-01	TRANSISTOR MUN5213T1		
2065		AU	TRANSISTOR		Q8301	8-729-044-58	TRANSISTOR SI2304DS-T1		
2066		AU	TRANSISTOR		Q8501	6-550-586-01	TRANSISTOR 2PA1576R-115		
2067		AU	TRANSISTOR		Q8600	8-729-920-21	TRANSISTOR DTC314TK-T-146		
2068		AU	TRANSISTOR		Q8601	8-729-920-21	TRANSISTOR DTC314TK-T-146		
2069		AU	TRANSISTOR		Q8602	8-729-044-58	TRANSISTOR SI2304DS-T1		
2070		AU	TRANSISTOR		Q8603	8-729-044-58	TRANSISTOR SI2304DS-T1		
2071		AU	TRANSISTOR		Q8604	8-729-044-58	TRANSISTOR SI2304DS-T1		
2072		AU	TRANSISTOR		Q8605	8-729-044-58	TRANSISTOR SI2304DS-T1		

No.	#	Board	Type	$\Delta$ / <sup>*</sup>	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
2073		AU	TRANSISTOR		Q8606	8-729-907-00	TRANSISTOR DTC114EU		
2074		AU	TRANSISTOR		Q8700	6-550-076-01	TRANSISTOR MUN5213T1		
2075		AU	TRANSISTOR		Q8701	6-550-076-01	TRANSISTOR MUN5213T1		
2076		AU	TRANSISTOR		Q8702	6-550-076-01	TRANSISTOR MUN5213T1		
2077		AU	TRANSISTOR		Q8703	6-550-585-01	TRANSISTOR 2PC4081R-115		
2078		AU	TRANSISTOR		Q8705	6-550-585-01	TRANSISTOR 2PC4081R-115		
2079		AU	TRANSISTOR		Q8706	6-550-586-01	TRANSISTOR 2PA1576R-115		
2080		AU	TRANSISTOR		Q8708	6-550-586-01	TRANSISTOR 2PA1576R-115		
2081		AU	TRANSISTOR		Q8709	6-550-076-01	TRANSISTOR MUN5213T1		
2082		AU	RESISTOR		R5506	1-216-833-11	METAL CHIP 10K 5% 1/10W		
2083		AU	RESISTOR		R5507	1-216-828-11	METAL CHIP 3.9K 5% 1/10W		
2084		AU	RESISTOR		R5508	1-216-821-11	METAL CHIP 1K 5% 1/10W		
2085		AU	RESISTOR		R5509	1-216-821-11	METAL CHIP 1K 5% 1/10W		
2086		AU	RESISTOR		R5510	1-216-857-11	METAL CHIP 1M 5% 1/10W		
2087		AU	RESISTOR		R5511	1-216-864-11	SHORT CHIP 0		
2088		AU	RESISTOR		R5512	1-216-828-11	METAL CHIP 3.9K 5% 1/10W		
2089		AU	RESISTOR		R5513	1-216-809-11	METAL CHIP 100 5% 1/10W		
2090		AU	RESISTOR		R5514	1-216-821-11	METAL CHIP 1K 5% 1/10W		
2091		AU	RESISTOR		R5515	1-216-864-11	SHORT CHIP 0		
2092		AU	RESISTOR		R5516	1-216-826-11	METAL CHIP 2.7K 5% 1/10W		
2093		AU	RESISTOR		R5517	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
2094		AU	RESISTOR		R5518	1-216-809-11	METAL CHIP 100 5% 1/10W		
2095		AU	RESISTOR		R5519	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
2096		AU	RESISTOR		R5520	1-218-867-11	RES-CHIP 6.8K 0.5% 1/10W		
2097		AU	RESISTOR		R5521	1-216-857-11	METAL CHIP 1M 5% 1/10W		
2098		AU	RESISTOR		R5522	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
2099		AU	RESISTOR		R5523	1-216-836-11	METAL CHIP 18K 5% 1/10W		
2100		AU	RESISTOR		R5524	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
2101		AU	RESISTOR		R5525	1-216-826-11	METAL CHIP 2.7K 5% 1/10W		
2102		AU	RESISTOR		R5526	1-216-821-11	METAL CHIP 1K 5% 1/10W		
2103		AU	RESISTOR		R5527	1-216-839-11	METAL CHIP 33K 5% 1/10W		
2104		AU	RESISTOR		R5528	1-216-833-11	METAL CHIP 10K 5% 1/10W		
2105		AU	RESISTOR		R5530	1-216-839-11	METAL CHIP 33K 5% 1/10W		
2106		AU	RESISTOR		R5532	1-216-833-11	METAL CHIP 10K 5% 1/10W		
2107		AU	RESISTOR		R5533	1-216-864-11	SHORT CHIP 0		
2108		AU	RESISTOR		R5534	1-216-819-11	METAL CHIP 680 5% 1/10W		
2109		AU	RESISTOR		R5535	1-216-837-11	METAL CHIP 22K 5% 1/10W		
2110		AU	RESISTOR		R5536	1-216-809-11	METAL CHIP 100 5% 1/10W		
2111		AU	RESISTOR		R5537	1-216-809-11	METAL CHIP 100 5% 1/10W		
2112		AU	RESISTOR		R5538	1-216-809-11	METAL CHIP 100 5% 1/10W		
2113		AU	RESISTOR		R5539	1-216-864-11	SHORT CHIP 0		
2114		AU	RESISTOR		R5540	1-216-821-11	METAL CHIP 1K 5% 1/10W		
2115		AU	RESISTOR		R5541	1-216-864-11	SHORT CHIP 0		
2116		AU	RESISTOR		R5543	1-216-864-11	SHORT CHIP 0		
2117		AU	RESISTOR		R5544	1-216-813-11	METAL CHIP 220 5% 1/10W		
2118		AU	RESISTOR		R5546	1-216-821-11	METAL CHIP 1K 5% 1/10W		
2119		AU	RESISTOR		R5547	1-216-864-11	SHORT CHIP 0		
2120		AU	RESISTOR		R5548	1-216-864-11	SHORT CHIP 0		
2121		AU	RESISTOR		R5549	1-216-864-11	SHORT CHIP 0		
2122		AU	RESISTOR		R5550	1-218-692-11	METAL CHIP 1K 0.5% 1/10W		
2123		AU	RESISTOR		R5551	1-218-690-11	METAL CHIP 820 0.5% 1/10W		
2124		AU	RESISTOR		R5552	1-216-817-11	METAL CHIP 470 5% 1/10W		
2125		AU	RESISTOR		R5554	1-216-817-11	METAL CHIP 470 5% 1/10W		
2126		AU	RESISTOR		R5560	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
2127		AU	RESISTOR		R5563	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
2128		AU	RESISTOR		R5565	1-216-295-91	SHORT CHIP 0		
2129		AU	RESISTOR		R5566	1-216-833-11	METAL CHIP 10K 5% 1/10W		
2130		AU	RESISTOR		R5567	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
2131		AU	RESISTOR		R5568	1-216-828-11	METAL CHIP 3.9K 5% 1/10W		
2132		AU	RESISTOR		R5569	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
2133		AU	RESISTOR		R5570	1-216-821-11	METAL CHIP 1K 5% 1/10W		
2134		AU	RESISTOR		R5571	1-216-821-11	METAL CHIP 1K 5% 1/10W		
2135		AU	RESISTOR		R5572	1-216-295-91	SHORT CHIP 0		
2136		AU	RESISTOR		R5574	1-216-295-91	SHORT CHIP 0		
2137		AU	RESISTOR		R5575	1-216-295-91	SHORT CHIP 0		
2138		AU	RESISTOR		R5578	1-218-288-11	METAL CHIP 300 5% 1/10W		
2139		AU	RESISTOR		R5579	1-218-288-11	METAL CHIP 300 5% 1/10W		
2140		AU	RESISTOR		R5580	1-216-864-11	SHORT CHIP 0		
2141		AU	RESISTOR		R5581	1-216-864-11	SHORT CHIP 0		
2142		AU	RESISTOR		R5582	1-216-845-11	METAL CHIP 100K 5% 1/10W		
2143		AU	RESISTOR		R5583	1-218-871-11	METAL CHIP 10K 0.5% 1/10W		
2144		AU	RESISTOR		R5588	1-216-295-91	SHORT CHIP 0		
2145		AU	RESISTOR		R5593	1-216-819-11	METAL CHIP 680 5% 1/10W		
2146		AU	RESISTOR		R5594	1-216-295-91	SHORT CHIP 0		



No.	#	Board	Type	$\Delta$ / <sup>*</sup>	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
2147		AU	RESISTOR		R5595	1-216-295-91	SHORT CHIP 0		
2148		AU	RESISTOR		R5598	1-216-295-91	SHORT CHIP 0		
2149		AU	RESISTOR		R5599	1-216-295-91	SHORT CHIP 0		
2150		AU	RESISTOR		R5604	1-216-295-91	SHORT CHIP 0		
2151		AU	RESISTOR		R5605	1-216-295-91	SHORT CHIP 0		
2152		AU	RESISTOR		R5606	1-216-847-11	METAL CHIP 150K 5% 1/10W		
2153		AU	RESISTOR		R5608	1-216-295-91	SHORT CHIP 0		
2154		AU	RESISTOR		R5609	1-216-295-91	SHORT CHIP 0		
2155		AU	RESISTOR		R7000	1-216-295-91	SHORT CHIP 0		
2156		AU	RESISTOR		R7001	1-218-871-11	METAL CHIP 10K 0.5% 1/10W		
2157		AU	RESISTOR		R7002	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W		
2158		AU	RESISTOR		R7003	1-216-841-11	METAL CHIP 47K 5% 1/10W		
2159		AU	RESISTOR		R7004	1-216-841-11	METAL CHIP 47K 5% 1/10W		
2160		AU	RESISTOR		R7005	1-216-821-11	METAL CHIP 1K 5% 1/10W		
2161		AU	RESISTOR		R7006	1-218-857-11	METAL CHIP 2.7K 0.5% 1/10W		
2162		AU	RESISTOR		R7007	1-216-821-11	METAL CHIP 1K 5% 1/10W		
2163		AU	RESISTOR		R7008	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
2164		AU	RESISTOR		R7009	1-218-857-11	METAL CHIP 2.7K 0.5% 1/10W		
2165		AU	RESISTOR		R7010	1-218-835-11	METAL CHIP 330 0.5% 1/10W		
2166		AU	RESISTOR		R7011	1-218-856-11	METAL CHIP 2.4K 0.5% 1/10W		
2167		AU	RESISTOR		R7012	1-216-864-11	SHORT CHIP 0		
2168		AU	RESISTOR		R7013	1-218-835-11	METAL CHIP 330 0.5% 1/10W		
2169		AU	RESISTOR		R7014	1-218-881-11	METAL CHIP 27K 0.5% 1/10W		
2170		AU	RESISTOR		R7015	1-218-883-11	METAL CHIP 33K 0.5% 1/10W		
2171		AU	RESISTOR		R7016	1-216-841-11	METAL CHIP 47K 5% 1/10W		
2172		AU	RESISTOR		R7017	1-216-864-11	SHORT CHIP 0		
2173		AU	RESISTOR		R7018	1-218-887-11	METAL CHIP 47K 0.5% 1/10W		
2174		AU	RESISTOR		R7019	1-218-887-11	METAL CHIP 47K 0.5% 1/10W		
2175		AU	RESISTOR		R7020	1-218-860-11	METAL CHIP 3.6K 0.5% 1/10W		
2176		AU	RESISTOR		R7021	1-218-847-11	METAL CHIP 1K 0.5% 1/10W		
2177		AU	RESISTOR		R7022	1-216-295-91	SHORT CHIP 0		
2178		AU	RESISTOR		R7023	1-216-295-91	SHORT CHIP 0		
2179		AU	RESISTOR		R7026	1-216-799-11	METAL CHIP 15 5% 1/10W		
2180		AU	RESISTOR		R7027	1-216-799-11	METAL CHIP 15 5% 1/10W		
2181		AU	RESISTOR		R7029	1-216-295-91	SHORT CHIP 0		
2182		AU	RESISTOR		R7030	1-216-295-91	SHORT CHIP 0		
2183		AU	RESISTOR		R7032	1-216-295-91	SHORT CHIP 0		
2184		AU	RESISTOR		R7034	1-216-295-91	SHORT CHIP 0		
2185		AU	RESISTOR		R7035	1-216-847-11	METAL CHIP 150K 5% 1/10W		
2186		AU	RESISTOR		R7036	1-216-839-11	METAL CHIP 33K 5% 1/10W		
2187		AU	RESISTOR		R7041	1-218-871-11	METAL CHIP 10K 0.5% 1/10W		
2188		AU	RESISTOR		R7042	1-218-859-11	METAL CHIP 3.3K 0.5% 1/10W		
2189		AU	RESISTOR		R7051	1-216-295-91	SHORT CHIP 0		
2190		AU	RESISTOR		R7052	1-216-295-91	SHORT CHIP 0		
2191		AU	RESISTOR		R7053	1-216-295-91	SHORT CHIP 0		
2192		AU	RESISTOR		R7054	1-216-295-91	SHORT CHIP 0		
2193		AU	RESISTOR		R7055	1-216-295-91	SHORT CHIP 0		
2194		AU	RESISTOR		R8000	1-216-821-11	METAL CHIP 1K 5% 1/10W		
2195		AU	RESISTOR		R8001	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
2196		AU	RESISTOR		R8002	1-218-847-11	METAL CHIP 1K 0.5% 1/10W		
2197		AU	RESISTOR		R8003	1-218-847-11	METAL CHIP 1K 0.5% 1/10W		
2198		AU	RESISTOR		R8004	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
2199		AU	RESISTOR		R8005	1-216-821-11	METAL CHIP 1K 5% 1/10W		
2200		AU	RESISTOR		R8006	1-216-841-11	METAL CHIP 47K 5% 1/10W		
2201		AU	RESISTOR		R8007	1-216-841-11	METAL CHIP 47K 5% 1/10W		
2202		AU	RESISTOR		R8008	1-216-841-11	METAL CHIP 47K 5% 1/10W		
2203		AU	RESISTOR		R8009	1-216-841-11	METAL CHIP 47K 5% 1/10W		
2204		AU	RESISTOR		R8010	1-216-841-11	METAL CHIP 47K 5% 1/10W		
2205		AU	RESISTOR		R8011	1-216-841-11	METAL CHIP 47K 5% 1/10W		
2206		AU	RESISTOR		R8012	1-216-841-11	METAL CHIP 47K 5% 1/10W		
2207		AU	RESISTOR		R8013	1-216-841-11	METAL CHIP 47K 5% 1/10W		
2208		AU	RESISTOR		R8014	1-216-841-11	METAL CHIP 47K 5% 1/10W		
2209		AU	RESISTOR		R8015	1-216-837-11	METAL CHIP 22K 5% 1/10W		
2210		AU	RESISTOR		R8016	1-216-841-11	METAL CHIP 47K 5% 1/10W		
2211		AU	RESISTOR		R8017	1-216-821-11	METAL CHIP 1K 5% 1/10W		
2212		AU	RESISTOR		R8018	1-216-815-11	METAL CHIP 330 5% 1/10W		
2213		AU	RESISTOR		R8019	1-216-815-11	METAL CHIP 330 5% 1/10W		
2214		AU	RESISTOR		R8020	1-216-841-11	METAL CHIP 47K 5% 1/10W		
2215		AU	RESISTOR		R8021	1-216-841-11	METAL CHIP 47K 5% 1/10W		
2216		AU	RESISTOR		R8022	1-216-821-11	METAL CHIP 1K 5% 1/10W		
2217		AU	RESISTOR		R8023	1-216-821-11	METAL CHIP 1K 5% 1/10W		
2218		AU	RESISTOR		R8026	1-216-833-11	METAL CHIP 10K 5% 1/10W		
2219		AU	RESISTOR		R8027	1-216-833-11	METAL CHIP 10K 5% 1/10W		
2220		AU	RESISTOR		R8100	1-216-838-11	METAL CHIP 27K 5% 1/10W		

No.	#	Board	Type	$\Delta$ / <sup>*</sup>	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
2221		AU	RESISTOR		R8101	1-216-809-11	METAL CHIP 100 5% 1/10W		
2222		AU	RESISTOR		R8102	1-216-809-11	METAL CHIP 100 5% 1/10W		
2223		AU	RESISTOR		R8103	1-216-833-11	METAL CHIP 10K 5% 1/10W		
2224		AU	RESISTOR		R8104	1-216-833-11	METAL CHIP 10K 5% 1/10W		
2225		AU	RESISTOR		R8105	1-216-833-11	METAL CHIP 10K 5% 1/10W		
2226		AU	RESISTOR		R8106	1-218-741-11	RES-CHIP 110K 0.5% 1/10W		
2227		AU	RESISTOR		R8107	1-216-838-11	METAL CHIP 27K 5% 1/10W		
2228		AU	RESISTOR		R8108	1-216-832-11	METAL CHIP 8.2K 5% 1/10W		
2229		AU	RESISTOR		R8109	1-216-843-11	METAL CHIP 68K 5% 1/10W		
2230		AU	RESISTOR		R8110	1-216-836-11	METAL CHIP 18K 5% 1/10W		
2231		AU	RESISTOR		R8111	1-216-830-11	METAL CHIP 5.6K 5% 1/10W		
2232		AU	RESISTOR		R8112	1-216-842-11	METAL CHIP 56K 5% 1/10W		
2233		AU	RESISTOR		R8113	1-216-834-11	METAL CHIP 12K 5% 1/10W		
2234		AU	RESISTOR		R8114	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
2235		AU	RESISTOR		R8115	1-216-853-11	METAL CHIP 470K 5% 1/10W		
2236		AU	RESISTOR		R8116	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
2237		AU	RESISTOR		R8117	1-216-838-11	METAL CHIP 27K 5% 1/10W		
2238		AU	RESISTOR		R8119	1-216-864-11	SHORT CHIP 0		
2239		AU	RESISTOR		R8121	1-216-864-11	SHORT CHIP 0		
2240		AU	RESISTOR		R8123	1-216-864-11	SHORT CHIP 0		
2241		AU	RESISTOR		R8124	1-216-864-11	SHORT CHIP 0		
2242		AU	RESISTOR		R8126	1-216-838-11	METAL CHIP 27K 5% 1/10W		
2243		AU	RESISTOR		R8127	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
2244		AU	RESISTOR		R8131	1-216-853-11	METAL CHIP 470K 5% 1/10W		
2245		AU	RESISTOR		R8132	1-216-833-11	METAL CHIP 10K 5% 1/10W		
2246		AU	RESISTOR		R8300	1-216-834-11	METAL CHIP 12K 5% 1/10W		
2247		AU	RESISTOR		R8301	1-216-833-11	METAL CHIP 10K 5% 1/10W		
2248		AU	RESISTOR		R8302	1-216-823-11	METAL CHIP 1.5K 5% 1/10W		
2249		AU	RESISTOR		R8303	1-216-841-11	METAL CHIP 47K 5% 1/10W		
2250		AU	RESISTOR		R8304	1-216-841-11	METAL CHIP 47K 5% 1/10W		
2251		AU	RESISTOR		R8305	1-216-821-11	METAL CHIP 1K 5% 1/10W		
2252		AU	RESISTOR		R8306	1-216-845-11	METAL CHIP 100K 5% 1/10W		
2253		AU	RESISTOR		R8307	1-216-845-11	METAL CHIP 100K 5% 1/10W		
2254		AU	RESISTOR		R8308	1-216-809-11	METAL CHIP 100 5% 1/10W		
2255		AU	RESISTOR		R8309	1-216-809-11	METAL CHIP 100 5% 1/10W		
2256		AU	RESISTOR		R8310	1-216-837-11	METAL CHIP 22K 5% 1/10W		
2257		AU	RESISTOR		R8311	1-216-837-11	METAL CHIP 22K 5% 1/10W		
2258		AU	RESISTOR		R8312	1-216-841-11	METAL CHIP 47K 5% 1/10W		
2259		AU	RESISTOR		R8313	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
2260		AU	RESISTOR		R8314	1-216-833-11	METAL CHIP 10K 5% 1/10W		
2261		AU	RESISTOR		R8315	1-216-833-11	METAL CHIP 10K 5% 1/10W		
2262		AU	RESISTOR		R8316	1-216-841-11	METAL CHIP 47K 5% 1/10W		
2263		AU	RESISTOR		R8317	1-216-821-11	METAL CHIP 1K 5% 1/10W		
2264		AU	RESISTOR		R8318	1-216-832-11	METAL CHIP 8.2K 5% 1/10W		
2265		AU	RESISTOR		R8319	1-216-841-11	METAL CHIP 47K 5% 1/10W		
2266		AU	RESISTOR		R8320	1-216-821-11	METAL CHIP 1K 5% 1/10W		
2267		AU	RESISTOR		R8321	1-216-832-11	METAL CHIP 8.2K 5% 1/10W		
2268		AU	RESISTOR		R8322	1-216-841-11	METAL CHIP 47K 5% 1/10W		
2269		AU	RESISTOR		R8323	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
2270		AU	RESISTOR		R8324	1-216-841-11	METAL CHIP 47K 5% 1/10W		
2271		AU	RESISTOR		R8325	1-216-821-11	METAL CHIP 1K 5% 1/10W		
2272		AU	RESISTOR		R8326	1-216-823-11	METAL CHIP 1.5K 5% 1/10W		
2273		AU	RESISTOR		R8327	1-216-841-11	METAL CHIP 47K 5% 1/10W		
2274		AU	RESISTOR		R8328	1-216-864-11	SHORT CHIP 0		
2275		AU	RESISTOR		R8329	1-216-864-11	SHORT CHIP 0		
2276		AU	RESISTOR		R8330	1-216-838-11	METAL CHIP 27K 5% 1/10W		
2277		AU	RESISTOR		R8331	1-216-838-11	METAL CHIP 27K 5% 1/10W		
2278		AU	RESISTOR		R8332	1-218-289-11	METAL CHIP 510 5% 1/10W		
2279		AU	RESISTOR		R8334	1-216-838-11	METAL CHIP 27K 5% 1/10W		
2280		AU	RESISTOR		R8335	1-216-838-11	METAL CHIP 27K 5% 1/10W		
2281		AU	RESISTOR		R8337	1-218-289-11	METAL CHIP 510 5% 1/10W		
2282		AU	RESISTOR		R8338	1-216-837-11	METAL CHIP 22K 5% 1/10W		
2283		AU	RESISTOR		R8340	1-216-837-11	METAL CHIP 22K 5% 1/10W		
2284		AU	RESISTOR		R8343	1-216-827-11	METAL CHIP 3.3K 5% 1/10W		
2285		AU	RESISTOR		R8344	1-216-827-11	METAL CHIP 3.3K 5% 1/10W		
2286		AU	RESISTOR		R8345	1-216-821-11	METAL CHIP 1K 5% 1/10W		
2287		AU	RESISTOR		R8346	1-216-821-11	METAL CHIP 1K 5% 1/10W		
2288		AU	RESISTOR		R8347	1-216-833-11	METAL CHIP 10K 5% 1/10W		
2289		AU	RESISTOR		R8348	1-216-830-11	METAL CHIP 5.6K 5% 1/10W		
2290		AU	RESISTOR		R8349	1-216-830-11	METAL CHIP 5.6K 5% 1/10W		
2291		AU	RESISTOR		R8350	1-216-830-11	METAL CHIP 5.6K 5% 1/10W		
2292		AU	RESISTOR		R8351	1-216-830-11	METAL CHIP 5.6K 5% 1/10W		
2293		AU	RESISTOR		R8504	1-216-864-11	SHORT CHIP 0		
2294		AU	RESISTOR		R8505	1-216-833-11	METAL CHIP 10K 5% 1/10W		

No.	#	Board	Type	$\Delta$ / <sup>*</sup>	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
2295		AU	RESISTOR		R8506	1-216-833-11	METAL CHIP 10K 5% 1/10W		
2296		AU	RESISTOR		R8507	1-216-834-11	METAL CHIP 12K 5% 1/10W		
2297		AU	RESISTOR		R8508	1-216-833-11	METAL CHIP 10K 5% 1/10W		
2298		AU	RESISTOR		R8509	1-216-845-11	METAL CHIP 100K 5% 1/10W		
2299		AU	RESISTOR		R8510	1-216-845-11	METAL CHIP 100K 5% 1/10W		
2300		AU	RESISTOR		R8511	1-216-864-11	SHORT CHIP 0		
2301		AU	RESISTOR		R8512	1-216-845-11	METAL CHIP 100K 5% 1/10W		
2302		AU	RESISTOR		R8513	1-216-845-11	METAL CHIP 100K 5% 1/10W		
2303		AU	RESISTOR		R8514	1-216-864-11	SHORT CHIP 0		
2304		AU	RESISTOR		R8515	1-218-867-11	RES-CHIP 6.8K 0.5% 1/10W		
2305		AU	RESISTOR		R8516	1-218-867-11	RES-CHIP 6.8K 0.5% 1/10W		
2306		AU	RESISTOR		R8517	1-216-864-11	SHORT CHIP 0		
2307		AU	RESISTOR		R8518	1-216-798-11	METAL CHIP 12 5% 1/10W		
2308		AU	RESISTOR		R8519	1-216-798-11	METAL CHIP 12 5% 1/10W		
2309		AU	RESISTOR		R8520	1-216-295-91	SHORT CHIP 0		
2310		AU	RESISTOR		R8521	1-216-295-91	SHORT CHIP 0		
2311		AU	RESISTOR		R8522	1-216-798-11	METAL CHIP 12 5% 1/10W		
2312		AU	RESISTOR		R8523	1-216-798-11	METAL CHIP 12 5% 1/10W		
2313		AU	RESISTOR		R8525	1-216-798-11	METAL CHIP 12 5% 1/10W		
2314		AU	RESISTOR		R8526	1-216-798-11	METAL CHIP 12 5% 1/10W		
2315		AU	RESISTOR		R8527	1-216-798-11	METAL CHIP 12 5% 1/10W		
2316		AU	RESISTOR		R8528	1-216-798-11	METAL CHIP 12 5% 1/10W		
2317		AU	RESISTOR		R8529	1-216-798-11	METAL CHIP 12 5% 1/10W		
2318		AU	RESISTOR		R8534	1-216-798-11	METAL CHIP 12 5% 1/10W		
2319		AU	RESISTOR		R8535	1-216-821-11	METAL CHIP 1K 5% 1/10W		
2320		AU	RESISTOR		R8536	1-216-821-11	METAL CHIP 1K 5% 1/10W		
2321		AU	RESISTOR		R8600	1-216-841-11	METAL CHIP 47K 5% 1/10W		
2322		AU	RESISTOR		R8601	1-216-841-11	METAL CHIP 47K 5% 1/10W		
2323		AU	RESISTOR		R8602	1-216-841-11	METAL CHIP 47K 5% 1/10W		
2324		AU	RESISTOR		R8603	1-216-841-11	METAL CHIP 47K 5% 1/10W		
2325		AU	RESISTOR		R8604	1-216-841-11	METAL CHIP 47K 5% 1/10W		
2326		AU	RESISTOR		R8605	1-216-841-11	METAL CHIP 47K 5% 1/10W		
2327		AU	RESISTOR		R8606	1-216-841-11	METAL CHIP 47K 5% 1/10W		
2328		AU	RESISTOR		R8607	1-216-841-11	METAL CHIP 47K 5% 1/10W		
2329		AU	RESISTOR		R8608	1-216-841-11	METAL CHIP 47K 5% 1/10W		
2330		AU	RESISTOR		R8609	1-216-841-11	METAL CHIP 47K 5% 1/10W		
2331		AU	RESISTOR		R8610	1-216-864-11	SHORT CHIP 0		
2332		AU	RESISTOR		R8611	1-216-833-11	METAL CHIP 10K 5% 1/10W		
2333		AU	RESISTOR		R8612	1-216-833-11	METAL CHIP 10K 5% 1/10W		
2334		AU	RESISTOR		R8613	1-216-864-11	SHORT CHIP 0		
2335		AU	RESISTOR		R8614	1-216-821-11	METAL CHIP 1K 5% 1/10W		
2336		AU	RESISTOR		R8615	1-218-747-11	RES-CHIP 200K 0.5% 1/10W		
2337		AU	RESISTOR		R8616	1-216-864-11	SHORT CHIP 0		
2338		AU	RESISTOR		R8617	1-216-833-11	METAL CHIP 10K 5% 1/10W		
2339		AU	RESISTOR		R8618	1-216-833-11	METAL CHIP 10K 5% 1/10W		
2340		AU	RESISTOR		R8619	1-216-864-11	SHORT CHIP 0		
2341		AU	RESISTOR		R8620	1-216-841-11	METAL CHIP 47K 5% 1/10W		
2342		AU	RESISTOR		R8621	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
2343		AU	RESISTOR		R8622	1-216-841-11	METAL CHIP 47K 5% 1/10W		
2344		AU	RESISTOR		R8623	1-216-835-11	METAL CHIP 15K 5% 1/10W		
2345		AU	RESISTOR		R8624	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
2346		AU	RESISTOR		R8625	1-216-835-11	METAL CHIP 15K 5% 1/10W		
2347		AU	RESISTOR		R8626	1-216-864-11	SHORT CHIP 0		
2348		AU	RESISTOR		R8627	1-216-833-11	METAL CHIP 10K 5% 1/10W		
2349		AU	RESISTOR		R8628	1-216-833-11	METAL CHIP 10K 5% 1/10W		
2350		AU	RESISTOR		R8629	1-216-818-11	METAL CHIP 560 5% 1/10W		
2351		AU	RESISTOR		R8630	1-216-818-11	METAL CHIP 560 5% 1/10W		
2352		AU	RESISTOR		R8631	1-216-818-11	METAL CHIP 560 5% 1/10W		
2353		AU	RESISTOR		R8632	1-216-818-11	METAL CHIP 560 5% 1/10W		
2354		AU	RESISTOR		R8633	1-216-818-11	METAL CHIP 560 5% 1/10W		
2355		AU	RESISTOR		R8634	1-216-818-11	METAL CHIP 560 5% 1/10W		
2356		AU	RESISTOR		R8635	1-216-818-11	METAL CHIP 560 5% 1/10W		
2357		AU	RESISTOR		R8636	1-216-818-11	METAL CHIP 560 5% 1/10W		
2358		AU	RESISTOR		R8637	1-216-818-11	METAL CHIP 560 5% 1/10W		
2359		AU	RESISTOR		R8638	1-216-818-11	METAL CHIP 560 5% 1/10W		
2360		AU	RESISTOR		R8639	1-216-818-11	METAL CHIP 560 5% 1/10W		
2361		AU	RESISTOR		R8640	1-216-818-11	METAL CHIP 560 5% 1/10W		
2362		AU	RESISTOR		R8641	1-216-809-11	METAL CHIP 100 5% 1/10W		
2363		AU	RESISTOR		R8642	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
2364		AU	RESISTOR		R8643	1-216-845-11	METAL CHIP 100K 5% 1/10W		
2365		AU	RESISTOR		R8644	1-216-821-11	METAL CHIP 1K 5% 1/10W		
2366		AU	RESISTOR		R8645	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
2367		AU	RESISTOR		R8646	1-216-821-11	METAL CHIP 1K 5% 1/10W		
2368		AU	RESISTOR		R8647	1-216-845-11	METAL CHIP 100K 5% 1/10W		

No.	#	Board	Type	$\Delta$ / <sup>*</sup>	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
2369		AU	RESISTOR		R8648	1-216-813-11	METAL CHIP 220 5% 1/10W		
2370		AU	RESISTOR		R8649	1-216-813-11	METAL CHIP 220 5% 1/10W		
2371		AU	RESISTOR		R8651	1-216-833-11	METAL CHIP 10K 5% 1/10W		
2372		AU	RESISTOR		R8652	1-216-839-11	METAL CHIP 33K 5% 1/10W		
2373		AU	RESISTOR		R8653	1-216-827-11	METAL CHIP 3.3K 5% 1/10W		
2374		AU	RESISTOR		R8654	1-216-839-11	METAL CHIP 33K 5% 1/10W		
2375		AU	RESISTOR		R8655	1-216-836-11	METAL CHIP 18K 5% 1/10W		
2376		AU	RESISTOR		R8656	1-216-833-11	METAL CHIP 10K 5% 1/10W		
2377		AU	RESISTOR		R8657	1-216-836-11	METAL CHIP 18K 5% 1/10W		
2378		AU	RESISTOR		R8658	1-216-864-11	SHORT CHIP 0		
2379		AU	RESISTOR		R8659	1-216-833-11	METAL CHIP 10K 5% 1/10W		
2380		AU	RESISTOR		R8660	1-216-833-11	METAL CHIP 10K 5% 1/10W		
2381		AU	RESISTOR		R8662	1-216-828-11	METAL CHIP 3.9K 5% 1/10W		
2382		AU	RESISTOR		R8663	1-216-834-11	METAL CHIP 12K 5% 1/10W		
2383		AU	RESISTOR		R8664	1-216-828-11	METAL CHIP 3.9K 5% 1/10W		
2384		AU	RESISTOR		R8665	1-216-834-11	METAL CHIP 12K 5% 1/10W		
2385		AU	RESISTOR		R8666	1-216-864-11	SHORT CHIP 0		
2386		AU	RESISTOR		R8667	1-216-864-11	SHORT CHIP 0		
2387		AU	RESISTOR		R8701	1-216-833-11	METAL CHIP 10K 5% 1/10W		
2388		AU	RESISTOR		R8702	1-216-821-11	METAL CHIP 1K 5% 1/10W		
2389		AU	RESISTOR		R8703	1-216-833-11	METAL CHIP 10K 5% 1/10W		
2390		AU	RESISTOR		R8705	1-216-833-11	METAL CHIP 10K 5% 1/10W		
2391		AU	RESISTOR		R8706	1-218-855-11	METAL CHIP 2.2K 0.5% 1/10W		
2392		AU	RESISTOR		R8707	1-218-861-11	METAL CHIP 3.9K 0.5% 1/10W		
2393		AU	RESISTOR		R8708	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
2394		AU	RESISTOR		R8709	1-216-833-11	METAL CHIP 10K 5% 1/10W		
2395		AU	RESISTOR		R8711	1-216-295-91	SHORT CHIP 0		
2396		AU	RESISTOR		R8713	1-216-821-11	METAL CHIP 1K 5% 1/10W		
2397		AU	RESISTOR		R8714	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
2398		AU	RESISTOR		R8800	1-218-860-11	METAL CHIP 3.6K 0.5% 1/10W		
2399		AU	RESISTOR		R8801	1-218-895-11	METAL CHIP 100K 0.5% 1/10W		
2400		AU	RESISTOR		R8802	1-218-895-11	METAL CHIP 100K 0.5% 1/10W		
2401		AU	RESISTOR		R8803	1-218-893-11	METAL CHIP 82K 0.5% 1/10W		
2402		AU	RESISTOR		R8804	1-218-887-11	METAL CHIP 47K 0.5% 1/10W		
2403		AU	RESISTOR		R8805	1-216-809-11	METAL CHIP 100 5% 1/10W		
2404		AU	RESISTOR		R8806	1-216-842-11	METAL CHIP 56K 5% 1/10W		
2405		AU	RESISTOR		R8807	1-216-845-11	METAL CHIP 100K 5% 1/10W		
2406		AU	TRANSFORMER		T5500	1-437-982-11	SOUND INPUT TRANSFORMER		
2407		AU	THERMISTOR		TH8800	1-804-503-21	THERMISTOR		
2408		AU	TUNER		TU5500	8-598-593-60	TUNER, FSS BTF-WA421		
2409		AU	VARISTOR		VD5500	1-803-974-21	VARISTOR, CHIP (1608)		
2410		AU	VARISTOR		VD5501	1-803-974-21	VARISTOR, CHIP (1608)		
2411		AU	VARISTOR		VD8600	1-801-925-21	VARISTOR, CHIP (1608)		
2412		AU	VARISTOR		VD8601	1-801-925-21	VARISTOR, CHIP (1608)		
2413		AU	VARISTOR		VD8602	1-801-925-21	VARISTOR, CHIP (1608)		

