


KLV-L23M1

SERVICE MANUAL

AEP Model

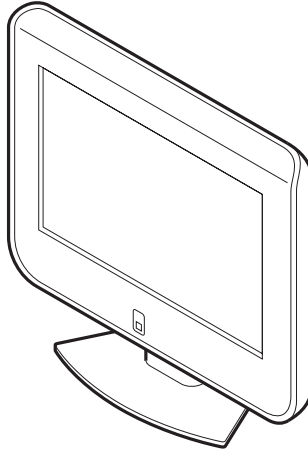

AT2 CHASSIS

SPECIFICATIONS

Display Unit:

Power Requirement:

220–240 V AC, 50 Hz

Screen Size:

23 inches

Approx. 58.4 cm measured diagonally

Display Resolution:

1,366 dots (horizontal) × 768 lines (vertical)

Power Consumption:

89 W

Standby Power Consumption:

0.7 W or less

Dimensions (w × h × d):

Approx. 605 × 525 × 242 mm (with stand)

Approx. 605 × 475 × 102 mm (without stand)

Weight:

Approx. 11.6 kg (with stand)

Approx. 10.0 kg (without stand)

Panel System:

LCD (Liquid Crystal Display) Panel

TV System:

Depending on your country/region selection:

B/G/H, D/K, L, I

Colour System:

PAL, SECAM

NTSC 3.58, 4.43 (only Video In)

Aerial:

75 ohms external terminal for VHF/UHF

Channel Coverage:

VHF: E2–E12

UHF: E21–E69


CATV: S1–S20

HYPER: S21–S41


D/K: R1–R12, R21–R69

L: F2–F10, B–Q, F21–F69

I: UHF B21–B69

Terminals: 1

21-pin Scart connector (CENELEC standard) including audio/video input, RGB input, and TV audio/video output.

 2 (SMARTLINK)

21-pin Scart connector (CENELEC standard) including audio/video input, S video input, selectable audio/video output, and SmartLink interface.

 3

Component input (phono jacks)

Y: 1 Vp-p, 75 ohms, 0.3V negative sync

Pb: 0.7 Vp-p, 75 ohms

Pr: 0.7 Vp-p, 75 ohms

 3

Audio input (phono jacks)

Impedance: 47 kilo ohms

 4

S video input (4-pin mini DIN)

 4

Video input (phono jack)

 4

Audio input (phono jacks)

Impedance: 47 kilo ohms



Audio output (Left/Right) (phono jacks)



Headphones jack


LCD Colour TV

SONY®

Sound Output:

4.0 W + 4.0 W

Accessories Supplied:

- Remote control
RM-Y1102 (1)
- Size AA batteries (R6 type) (2)
- Coaxial cable (1)
- Mains lead (Type C-6) (1)
- Mains lead (Type BF) (1)
-  Mainslead Type BF may not be supplied depending on the country.

Optional Accessory:

- Wall-Mount Bracket SU-W210

Other Features:

- Teletext, Fasttext and TOPtext
- Sleep Timer
- SmartLink (Direct link between your TV and a compatible VCR or DVD recorder. For more information on SmartLink, please refer to the instruction manual of your VCR or DVD recorder.)
- TV system autodetection
- Auto Format
- Screen Memo
- NexTView (depending on availability of service)

SAFETY CHECK-OUT

After correcting the original service problem, perform the following safety checks before releasing the set to the customer:

1. Check the area of your repair for unsoldered or poorly-soldered connections. Check the entire board surface for solder splashes and bridges.
2. Check the interboard wiring to ensure that no wires are “pinched” or contact high-wattage resistors.
3. Check that all control knobs, shields, covers, ground straps, and mounting hardware have been replaced. Be absolutely certain that you have replaced all the insulators.
4. Look for unauthorized replacement parts, particularly transistors, that were installed during a previous repair. Point them out to the customer and recommend their replacement.
5. Look for parts which, though functioning, show obvious signs of deterioration. Point them out to the customer and recommend their replacement.
6. Check the line cords for cracks and abrasion. Recommend the replacement of any such line cord to the customer.
7. Check the antenna terminals, metal trim, “metallized” knobs, screws, and all other exposed metal parts for AC Leakage. Check leakage as described right.

LEAKAGE TEST

The AC leakage from any exposed metal part to earth ground and from all exposed metal parts to any exposed metal part having a return to chassis, must not exceed 0.5 mA (500 microamperes).

Leakage current can be measured by any one of three methods.

1. A commercial leakage tester, such as the Simpson 229 or RCA WT-540A. Follow the manufacturers’ instructions to use these instruments.
2. A battery-operated AC milliammeter. The Data Precision 245 digital multimeter is suitable for this job.
3. Measuring the voltage drop across a resistor by means of a VOM or battery-operated AC voltmeter. The “limit” indication is 0.75 V, so analog meters must have an accurate low-voltage scale. The Simpson 250 and Sanwa SH-63Trd are examples of a passive VOMs that are suitable. Nearly all battery operated digital multimeters that have a 2 V AC range are suitable. (See Fig. A)

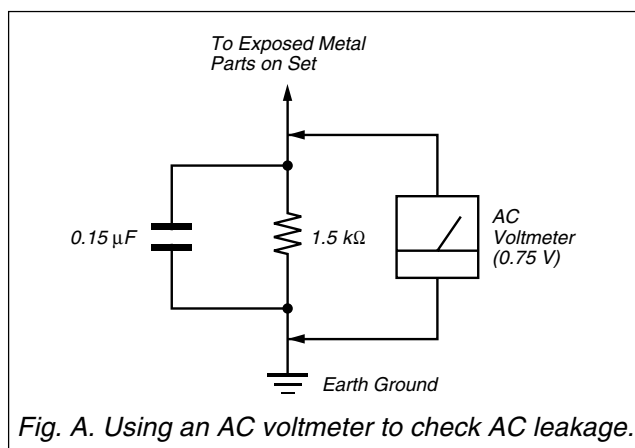


Fig. A. Using an AC voltmeter to check AC leakage.

WARNING!!

SAFETY-RELATED COMPONENT WARNING!!
COMPONENTS IDENTIFIED BY SHADING AND MARK \triangle ON THE SCHEMATIC DIAGRAMS, EXPLODED VIEWS AND IN THE PARTS LIST ARE CRITICAL FOR SAFE OPERATION. REPLACE THESE COMPONENTS WITH SONY PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL OR IN SUPPLEMENTS PUBLISHED BY SONY. CIRCUIT ADJUSTMENTS THAT ARE CRITICAL FOR SAFE OPERATION ARE IDENTIFIED IN THIS MANUAL. FOLLOW THESE PROCEDURES WHENEVER CRITICAL COMPONENTS ARE REPLACED OR IMPROPER OPERATION IS SUSPECTED.

AVERTISSEMENT!!


ATTENTION AUX COMPOSANTS RELATIFS À LA SÉCURITÉ!!
LES COMPOSANTS IDENTIFIÉS PAR UNE TRAME ET UNE MARQUE \triangle SONT CRITIQUES POUR LA SÉCURITÉ. NE LES REMPLACER QUE PAR UNE PIÈCE PORTANT LE NUMÉRO SPECIFIÉ. LES RÉGLAGES DE CIRCUIT DONT L'IMPORTANCE EST CRITIQUE POUR LA SÉCURITÉ DU FONCTIONNEMENT SONT IDENTIFIÉS DANS LE PRÉSENT MANUEL. SUIVRE CES PROCÉDURES LORS DE CHAQUE REMPLACEMENT DE COMPOSANTS CRITIQUES, OU LORSQU'UN MAUVAIS FONCTIONNEMENT EST SUSPECTÉ.

TABLE OF CONTENTS


1. DISASSEMBLY	1-1
1-1. STAND REMOVAL	1-1
1-2. REAR CABINET ASSY REMOVAL	1-1
1-3. G2 BOARD REMOVAL	1-2
1-4. U1 BOARD REMOVAL	1-2
1-5. TU AND U2 BOARDS REMOVAL	1-3
1-6. A AND B BOARDS REMOVAL	1-3
1-7. LCD PANEL REMOVAL	1-4
1-8. H1 BOARD REMOVAL	1-5
1-9. H2 BOARD REMOVAL	1-5
2. ADJUSTMENT	2-1
2-1. AGING CONDITION	2-1
2-2. WHITE BALANCE ADJUSTMENT	2-1
2-2-1. White balance of Color temperature “Cool” ..	2-1
2-2-2. White balance of Color temperature “Normal” ..	2-1
2-2-3. White balance of Color temperature “Warm” ..	2-2
3. DIAGRAMS	3-1
3-1. BLOCK DIAGRAMS	3-1
3-2. FRAME DIAGRAMS	3-5
3-3. CIRCUIT BOARDS LOCATION	3-6
3-4. SCHEMATIC DIAGRAMS AND PRINTED WIRING BOARDS	3-6
(1) Schematic Diagrams of A Board	3-7
(2) Schematic Diagrams of B Board	3-14
(3) Schematic Diagrams of G2 Board	3-20
(4) Schematic Diagram of H1 and H2 Boards	3-22
(5) Schematic Diagrams of TU and U2 Boards ..	3-23
(6) Schematic Diagrams of U1 Board	3-24
3-5. SEMICONDUCTORS	3-25
4. EXPLODED VIEWS	4-1
4-1. CABINET ASSY AND STAND	4-2
4-2. CHASSIS-1	4-3
4-3. CHASSIS-2	4-4
4-4. BEZEL ASSY	4-5
4-5. PACKING MATERIALS	4-6
5. ELECTRICAL PARTS LIST	5-1

SECTION 1 DISASSEMBLY


1-1. STAND REMOVAL

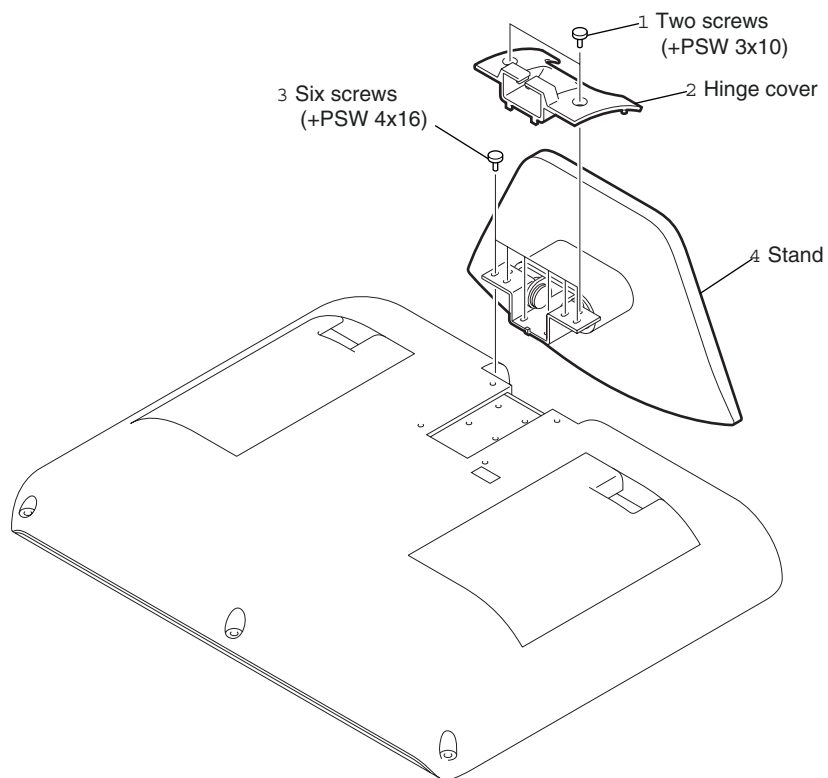


1-2. REAR CABINET ASSY REMOVAL

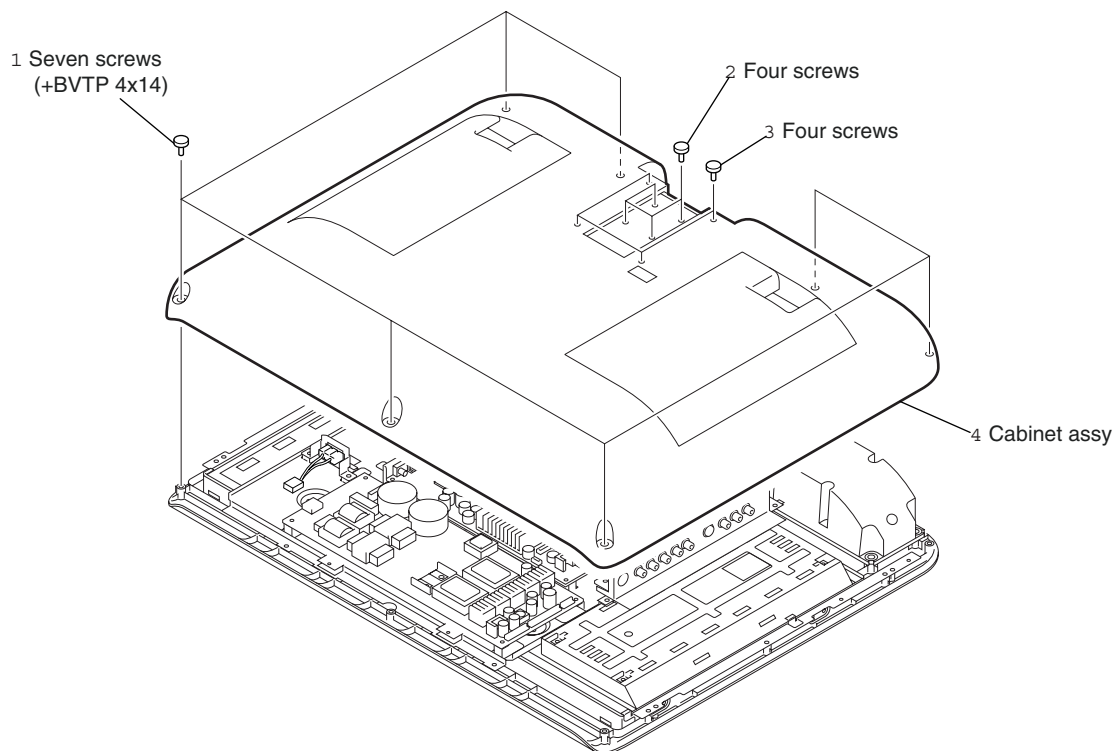


1-3. G2 BOARD REMOVAL

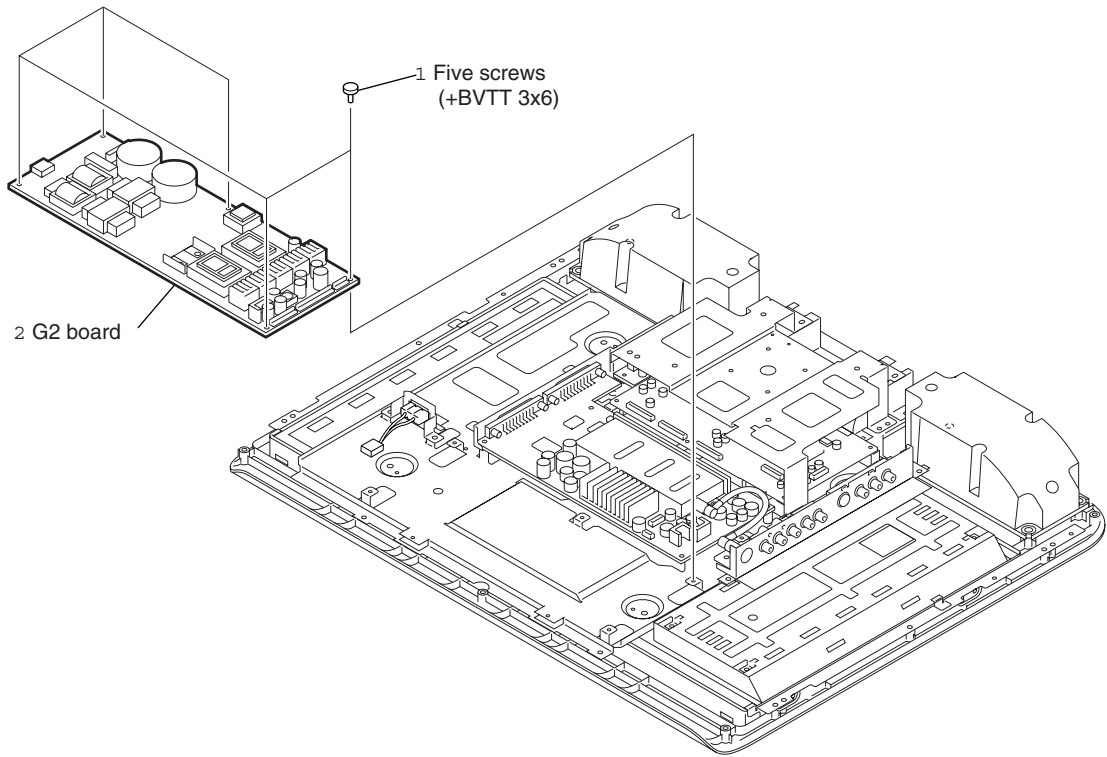


1-4. U1 BOARD REMOVAL

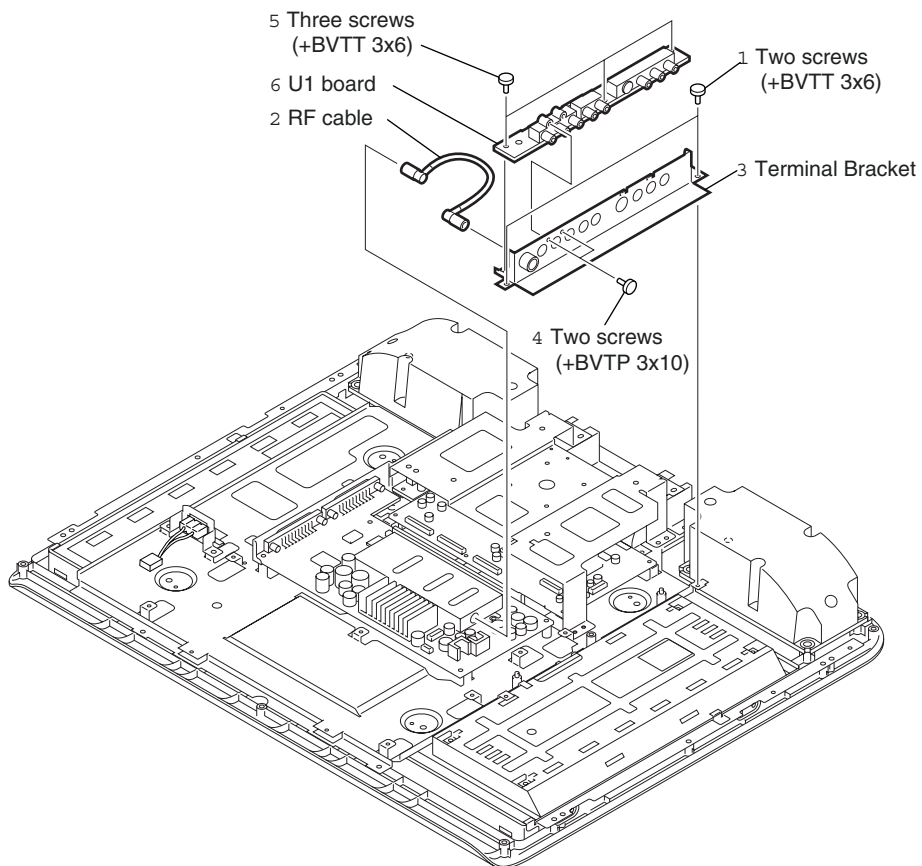


1-5. TU AND U2 BOARDS REMOVAL

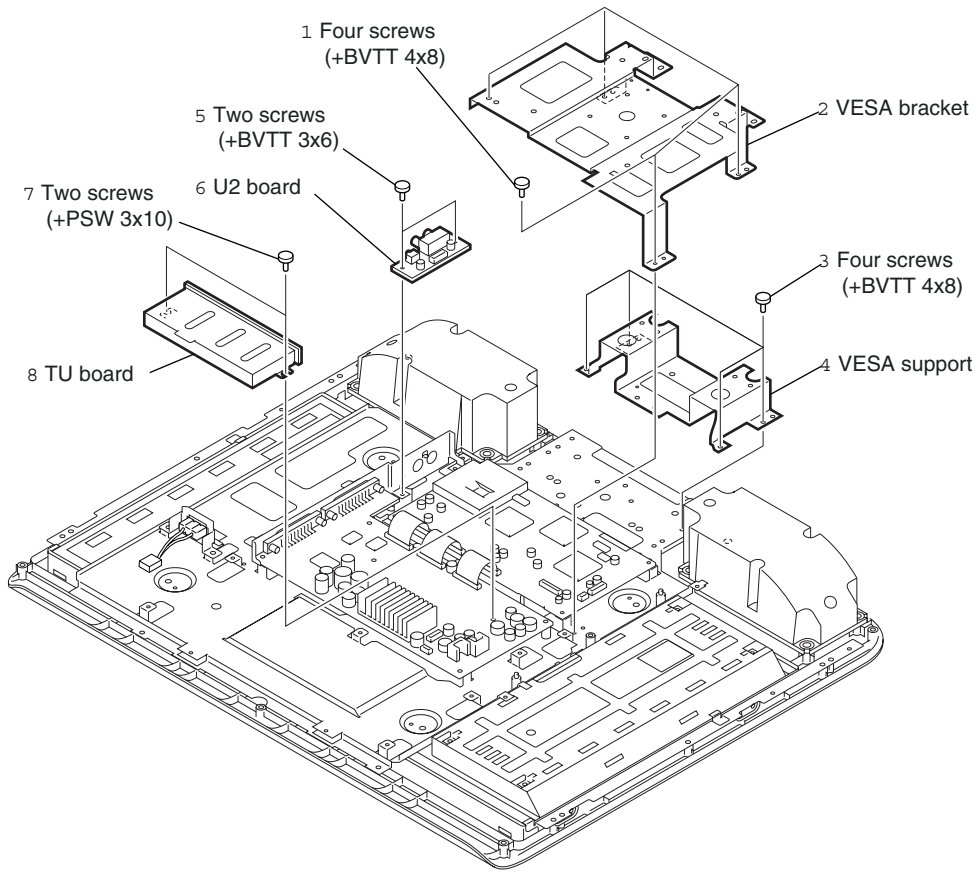


1-6. A AND B BOARDS REMOVAL

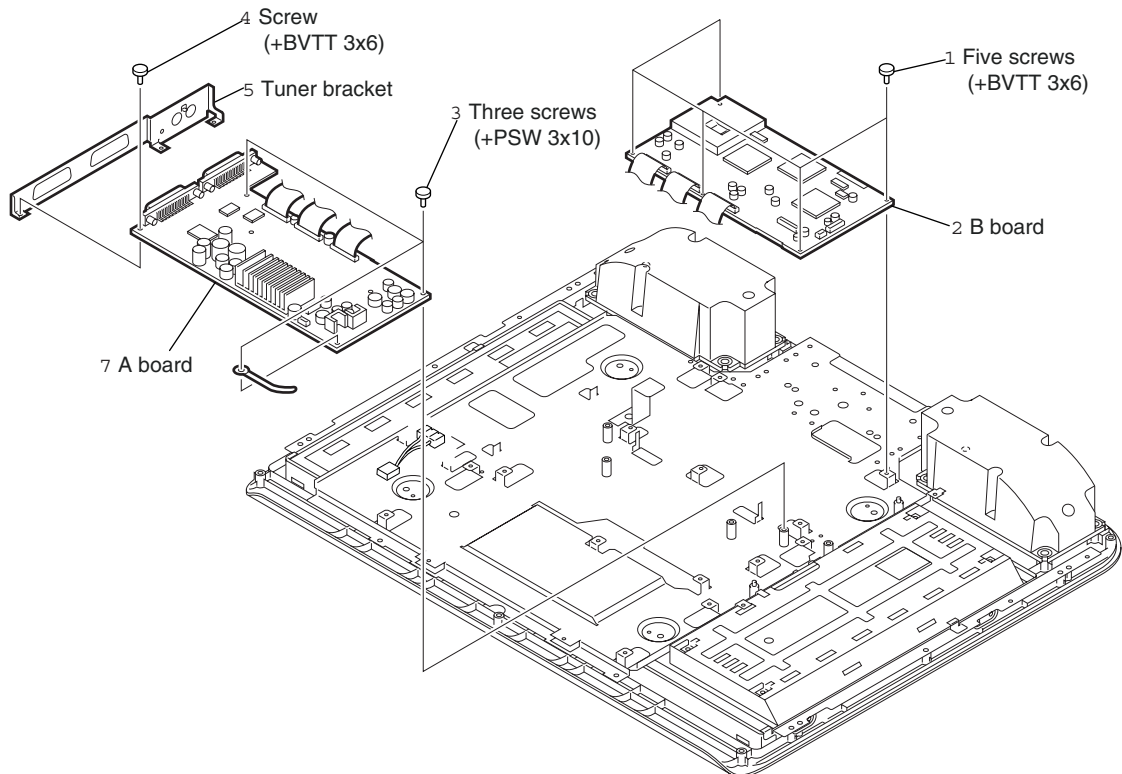


1-7. LCD PANEL REMOVAL

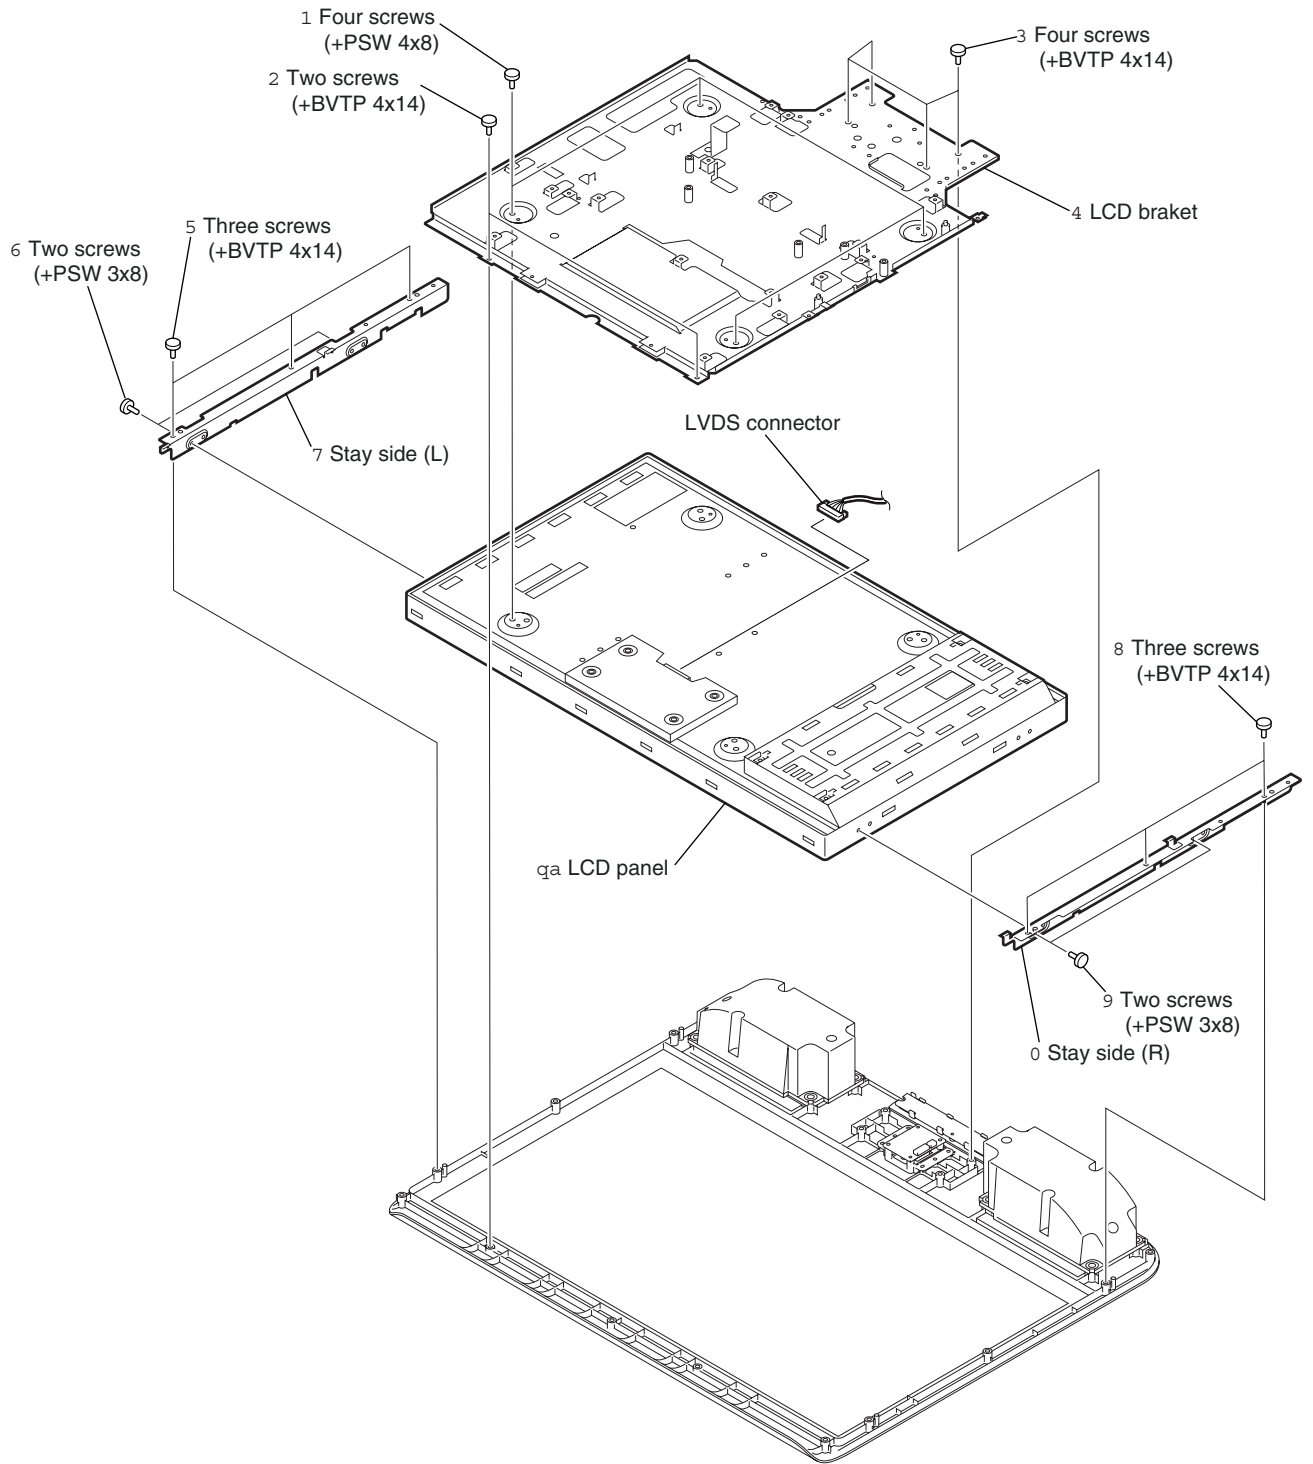

1-8. H1 BOARD REMOVAL

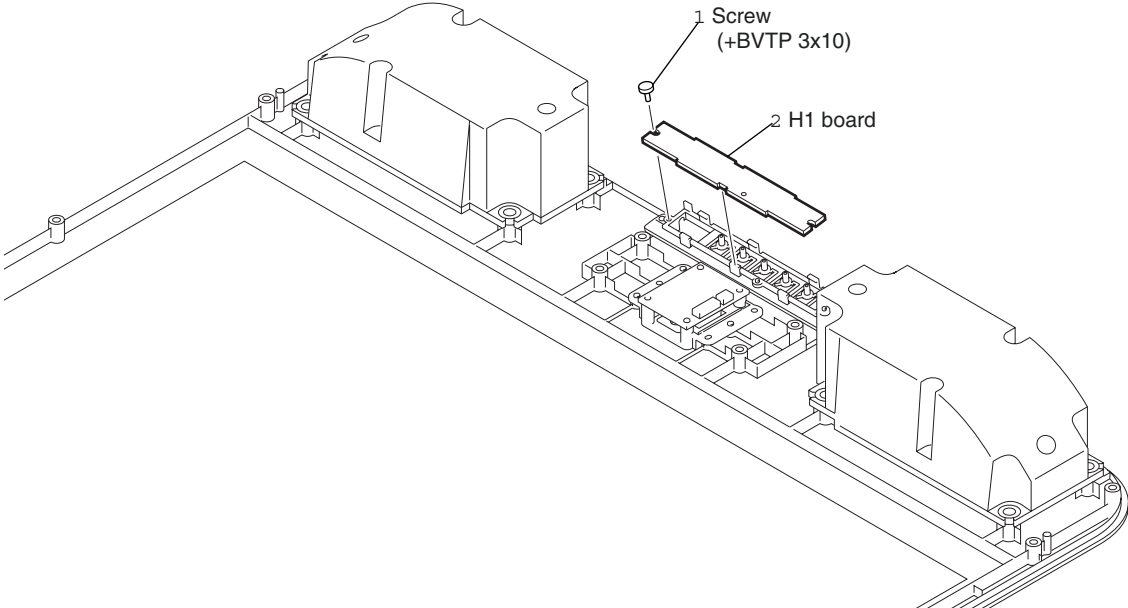

1-9. H2 BOARD REMOVAL

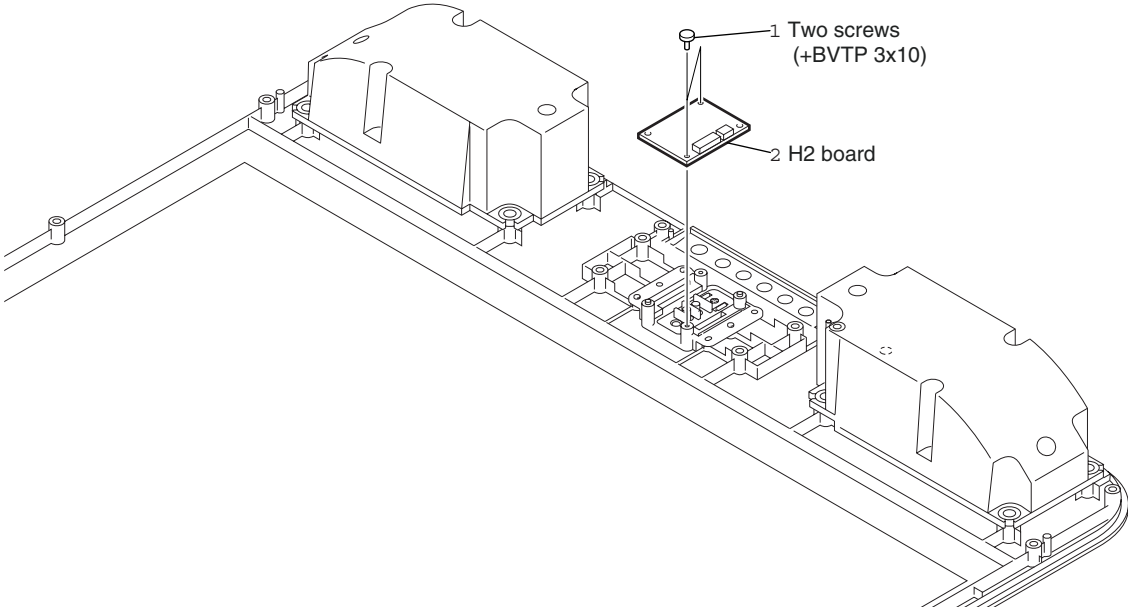

SECTION 2 ADJUSTMENTS

2-1. AGING CONDITION

Power supply : 220-240 V (50Hz)
 Time : More than 10 minutes
 Temperature : 22°C ~ 28°C
 Luminance : On aging mode setting

Note:

After aging, if power was shut down until W/B adjustment, shall be adjusted W/B after aging more than 30 second.

2-2. WHITE BALANCE ADJUSTMENT

This adjustment shall be used ECS.

2-2-1. White balance of Color temperature “Cool”

1. Set following items.

Item	Data
PICTURE_MODE	2 (Personal)
CONTRAST	100 (Max)
BRIGHTNESS	50 (Center)
COLOR_TONE	0 (Cool)
DYNA_PICT	0
DC_TRAN	0
GAMMA	9
U_BACKLIGHT	10 (Max)
ECO_MODE	1 (Standard)

Note:

DON'T DO ANY SAVE.

2. Input 70 IRE gray full field signal in Video input. (AV2)
3. Adjust R_DRIVE, B_DRIVE until High light adjustment value.
4. Input 20 IRE gray full field signal in Video input. (AV2)

<High light adjustment value (for Cool)>

	Items	Setting data	KLV-L23M1	
			x	range
Init Value	R_DRIVE	128	0.2727	0.8JND
	G_DRIVE	128	0.2749	
	B_DRIVE	128	–	
	R_BKG	128	–	N/A
	G_BKG	128		
	B_BKG	128		

5. Adjust R_BKG, B_BKG until Low light adjustment value.
 After adjustment, the biggest value register of BKG 3 registers (R_BKG, G_BKG, B_BKG) should be “128”.

<Low light adjustment value (for Cool)>

	KLV-L23M1	range
x	0.2727	1.0JND
y	0.2749	
Y	–	N/A

6. Repeat step 2~5 until it is High and Low light adjustment value.
7. Do “Color Save”.

2-2-2. White balance of Color temperature “Normal”

1. Set following items.

Item	Data
PICTURE_MODE	2 (Personal)
CONTRAST	100 (Max)
BRIGHTNESS	50 (Center)
COLOR_TONE	1 (Cool)
DYNA_PICT	0
DC_TRAN	0
GAMMA	9
U_BACKLIGHT	10 (Max)
ECO_MODE	1 (Standard)

Note:

DON'T DO ANY SAVE.

2. Input 70 IRE gray full field signal in Video input. (AV2)
3. Adjust R_DRIVE, B_DRIVE until High light adjustment value.

<High light adjustment value (for Normal)>

	Items	Setting data	KLV-L23M1	
			x	range
Init Value	R_DRIVE	128	0.2788	0.8JND
	G_DRIVE	128	0.2824	
	B_DRIVE	128	–	
	R_BKG	128	–	N/A
	G_BKG	128		
	B_BKG	128		

4. Input 20 IRE gray full field signal in Video input. (AV2)
5. Adjust R_BKG, B_BKG until Low light adjustment value.
 After adjustment, the biggest value register of BKG 3 registers (R_BKG, G_BKG, B_BKG) should be “128”.

<Low light adjustment value (for Normal)>

	KLV-L23M1	range
x	0.2788	1.0JND
y	0.2724	
Y	–	N/A

6. Repeat step 2~5 until it is High and Low light adjustment value.
7. Do “Color Save”.

2-2-3. White balance of Color temperature “Warm”

1. Set following items.

Item	Data
PICTURE_MODE	2 (Personal)
CONTRAST	100 (Max)
BRIGHTNESS	50 (Center)
COLOR_TONE	2 (Warm)
DYNA_PICT	0
DC_TRAN	0
GAMMA	9
U_BACKLIGHT	10 (Max)
ECO_MODE	1 (Standard)

Note:

DON'T DO ANY SAVE.

2. Input 70 IRE gray full field signal in Video input. (AV2)
3. Adjust R_DRIVE, B_DRIVE until High light adjustment value.

<High light adjustment value (for Warm)>

		Items	Setting data	KLV-L23M1	range
Init Value		R_DRIVE	128	x	0.2875
		G_DRIVE	128	y	0.2925
		B_DRIVE	128	Y	–
		R_BKG	128		0.8JND
		G_BKG	128		
		B_BKG	128		N/A

4. Input 20 IRE gray full field signal in Video input. (AV2)
5. Adjust R_BKG, B_BKG until Low light adjustment value.
After adjustment, the biggest value register of BKG 3 registers (R_BKG,G_BKG,B_BKG) should be “128”.


<Low light adjustment value (for Warm)>

		KLV-L32M1	range
x	0.2875		1.0JND
y	0.2925		
Y	–		N/A


6. Repeat step 2~5 until it is in High and Low light adjustment value.
7. Do “Color Save”.

**SECTION 3
DIAGRAMS**


3-1. BLOCK DIAGRAMS

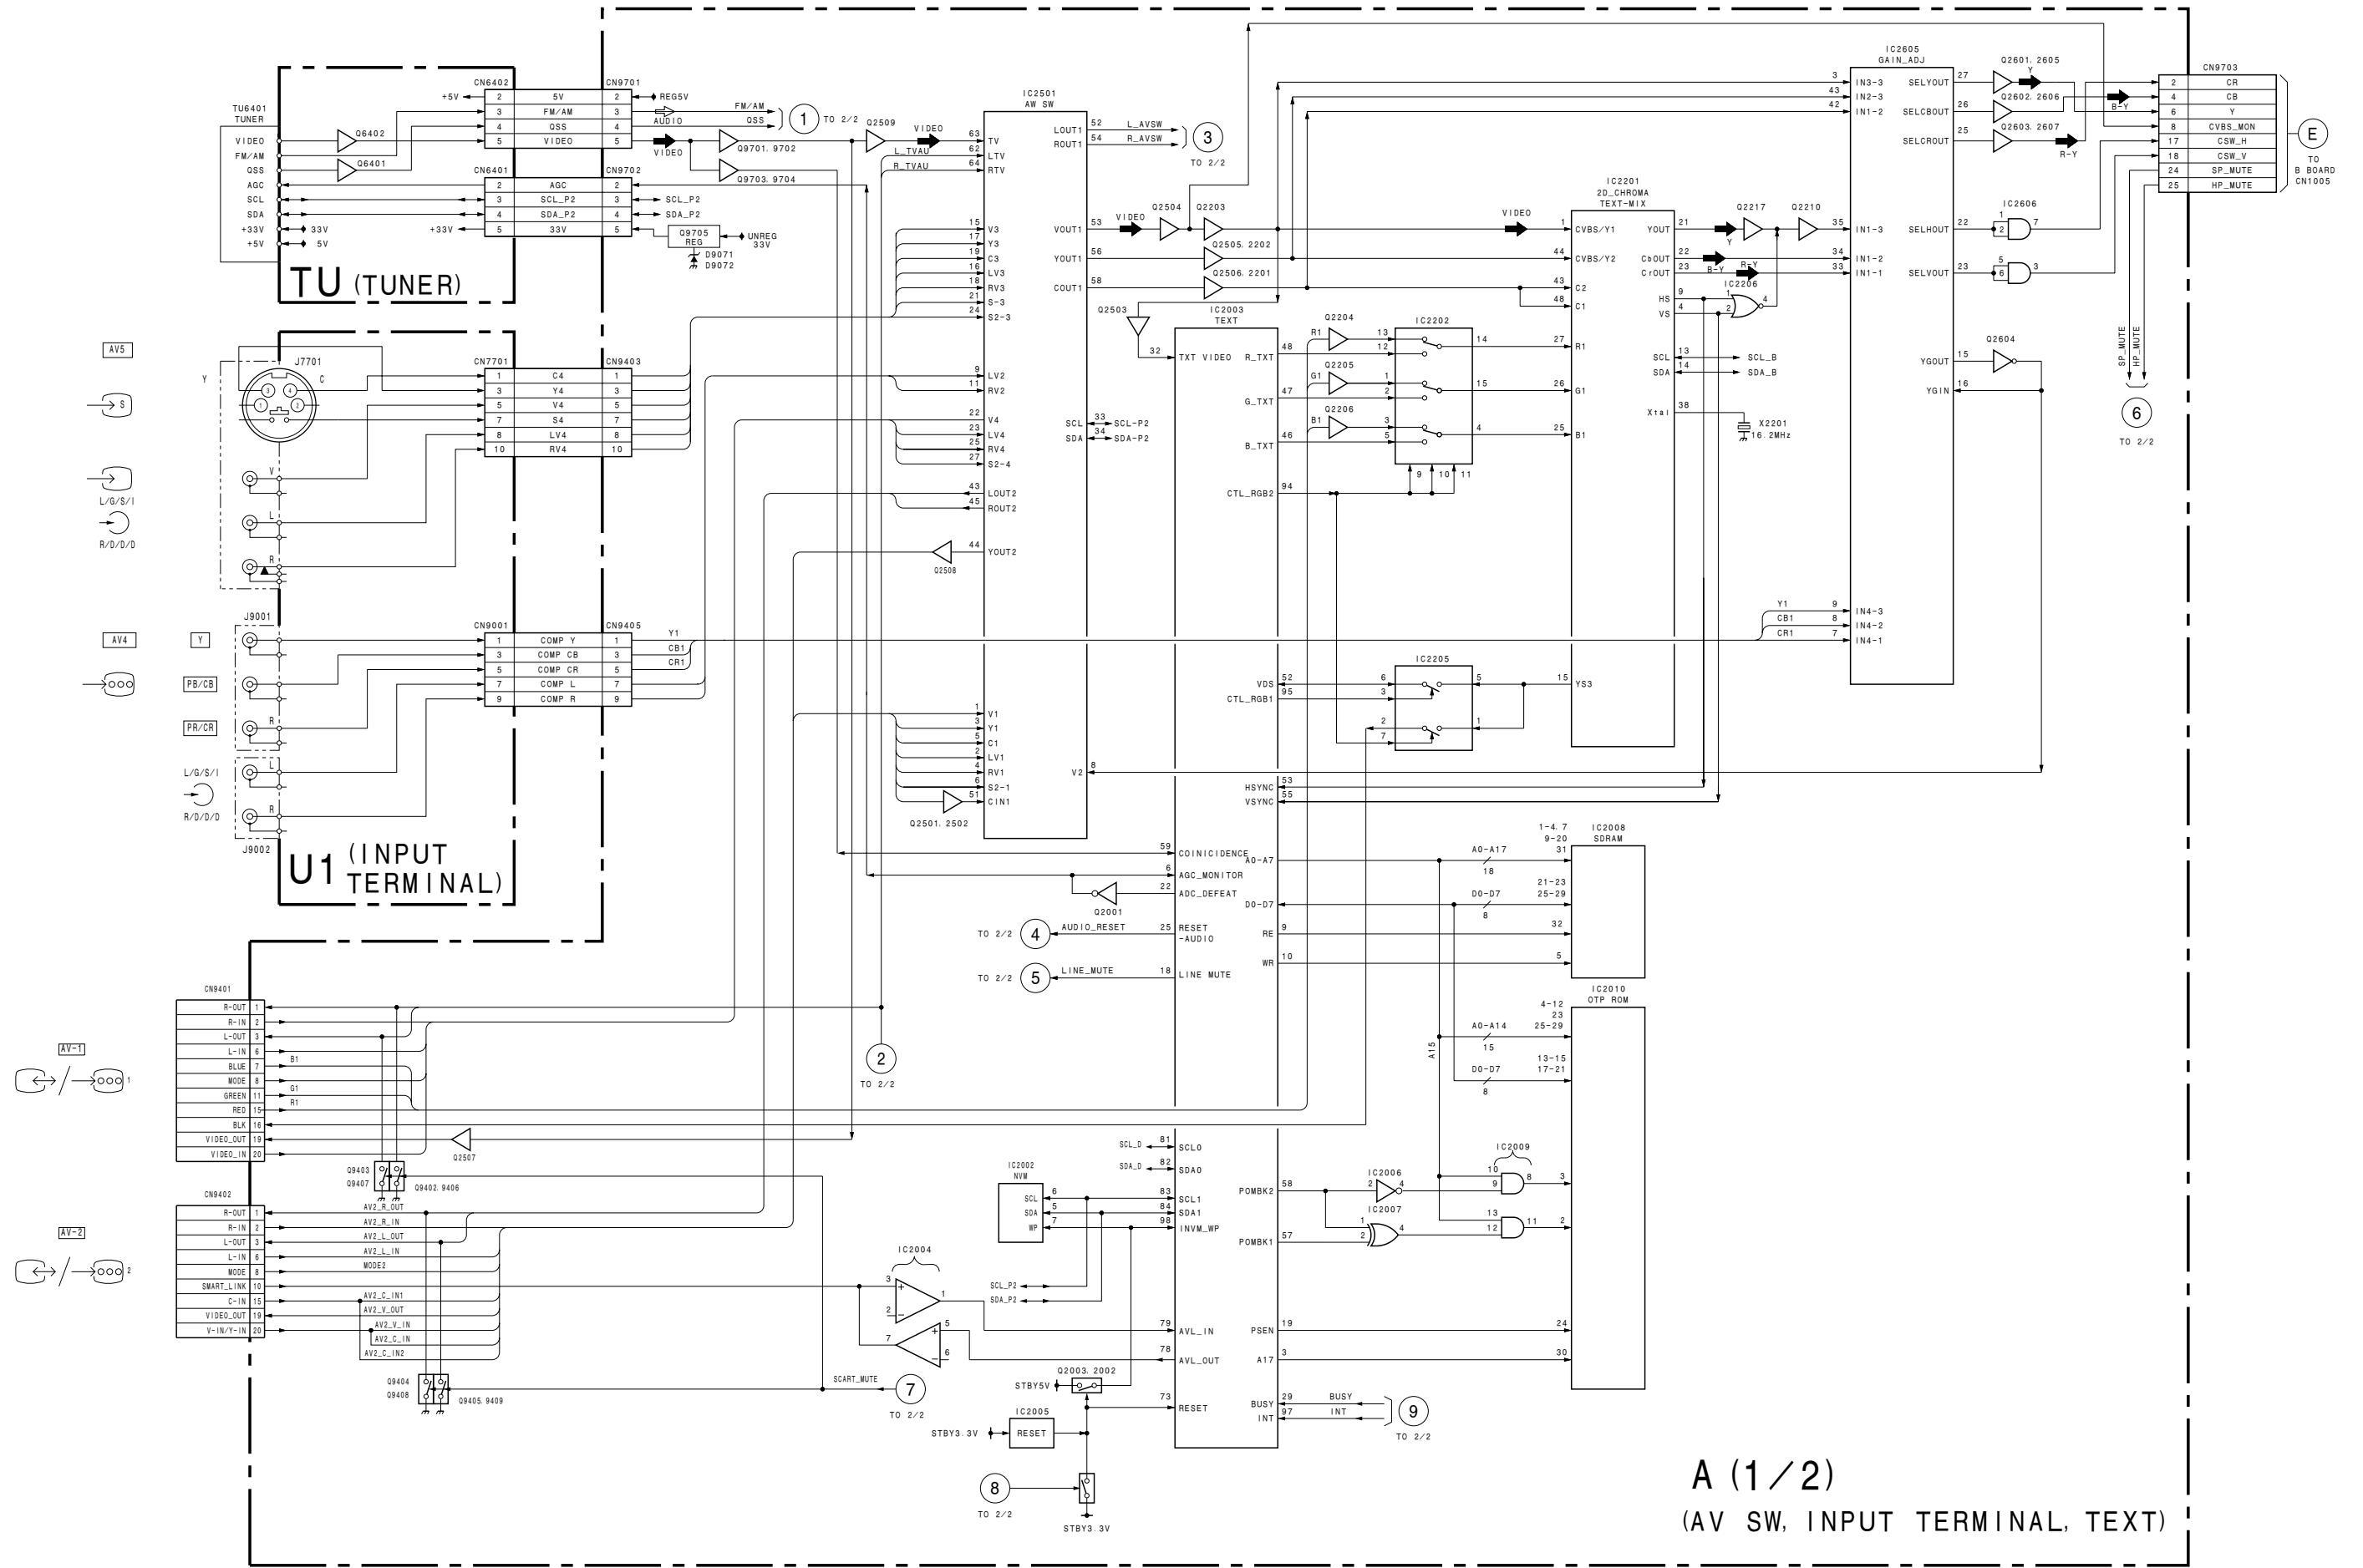


A (1/2)
(AV SW, INPUT TERMINAL, TEXT)

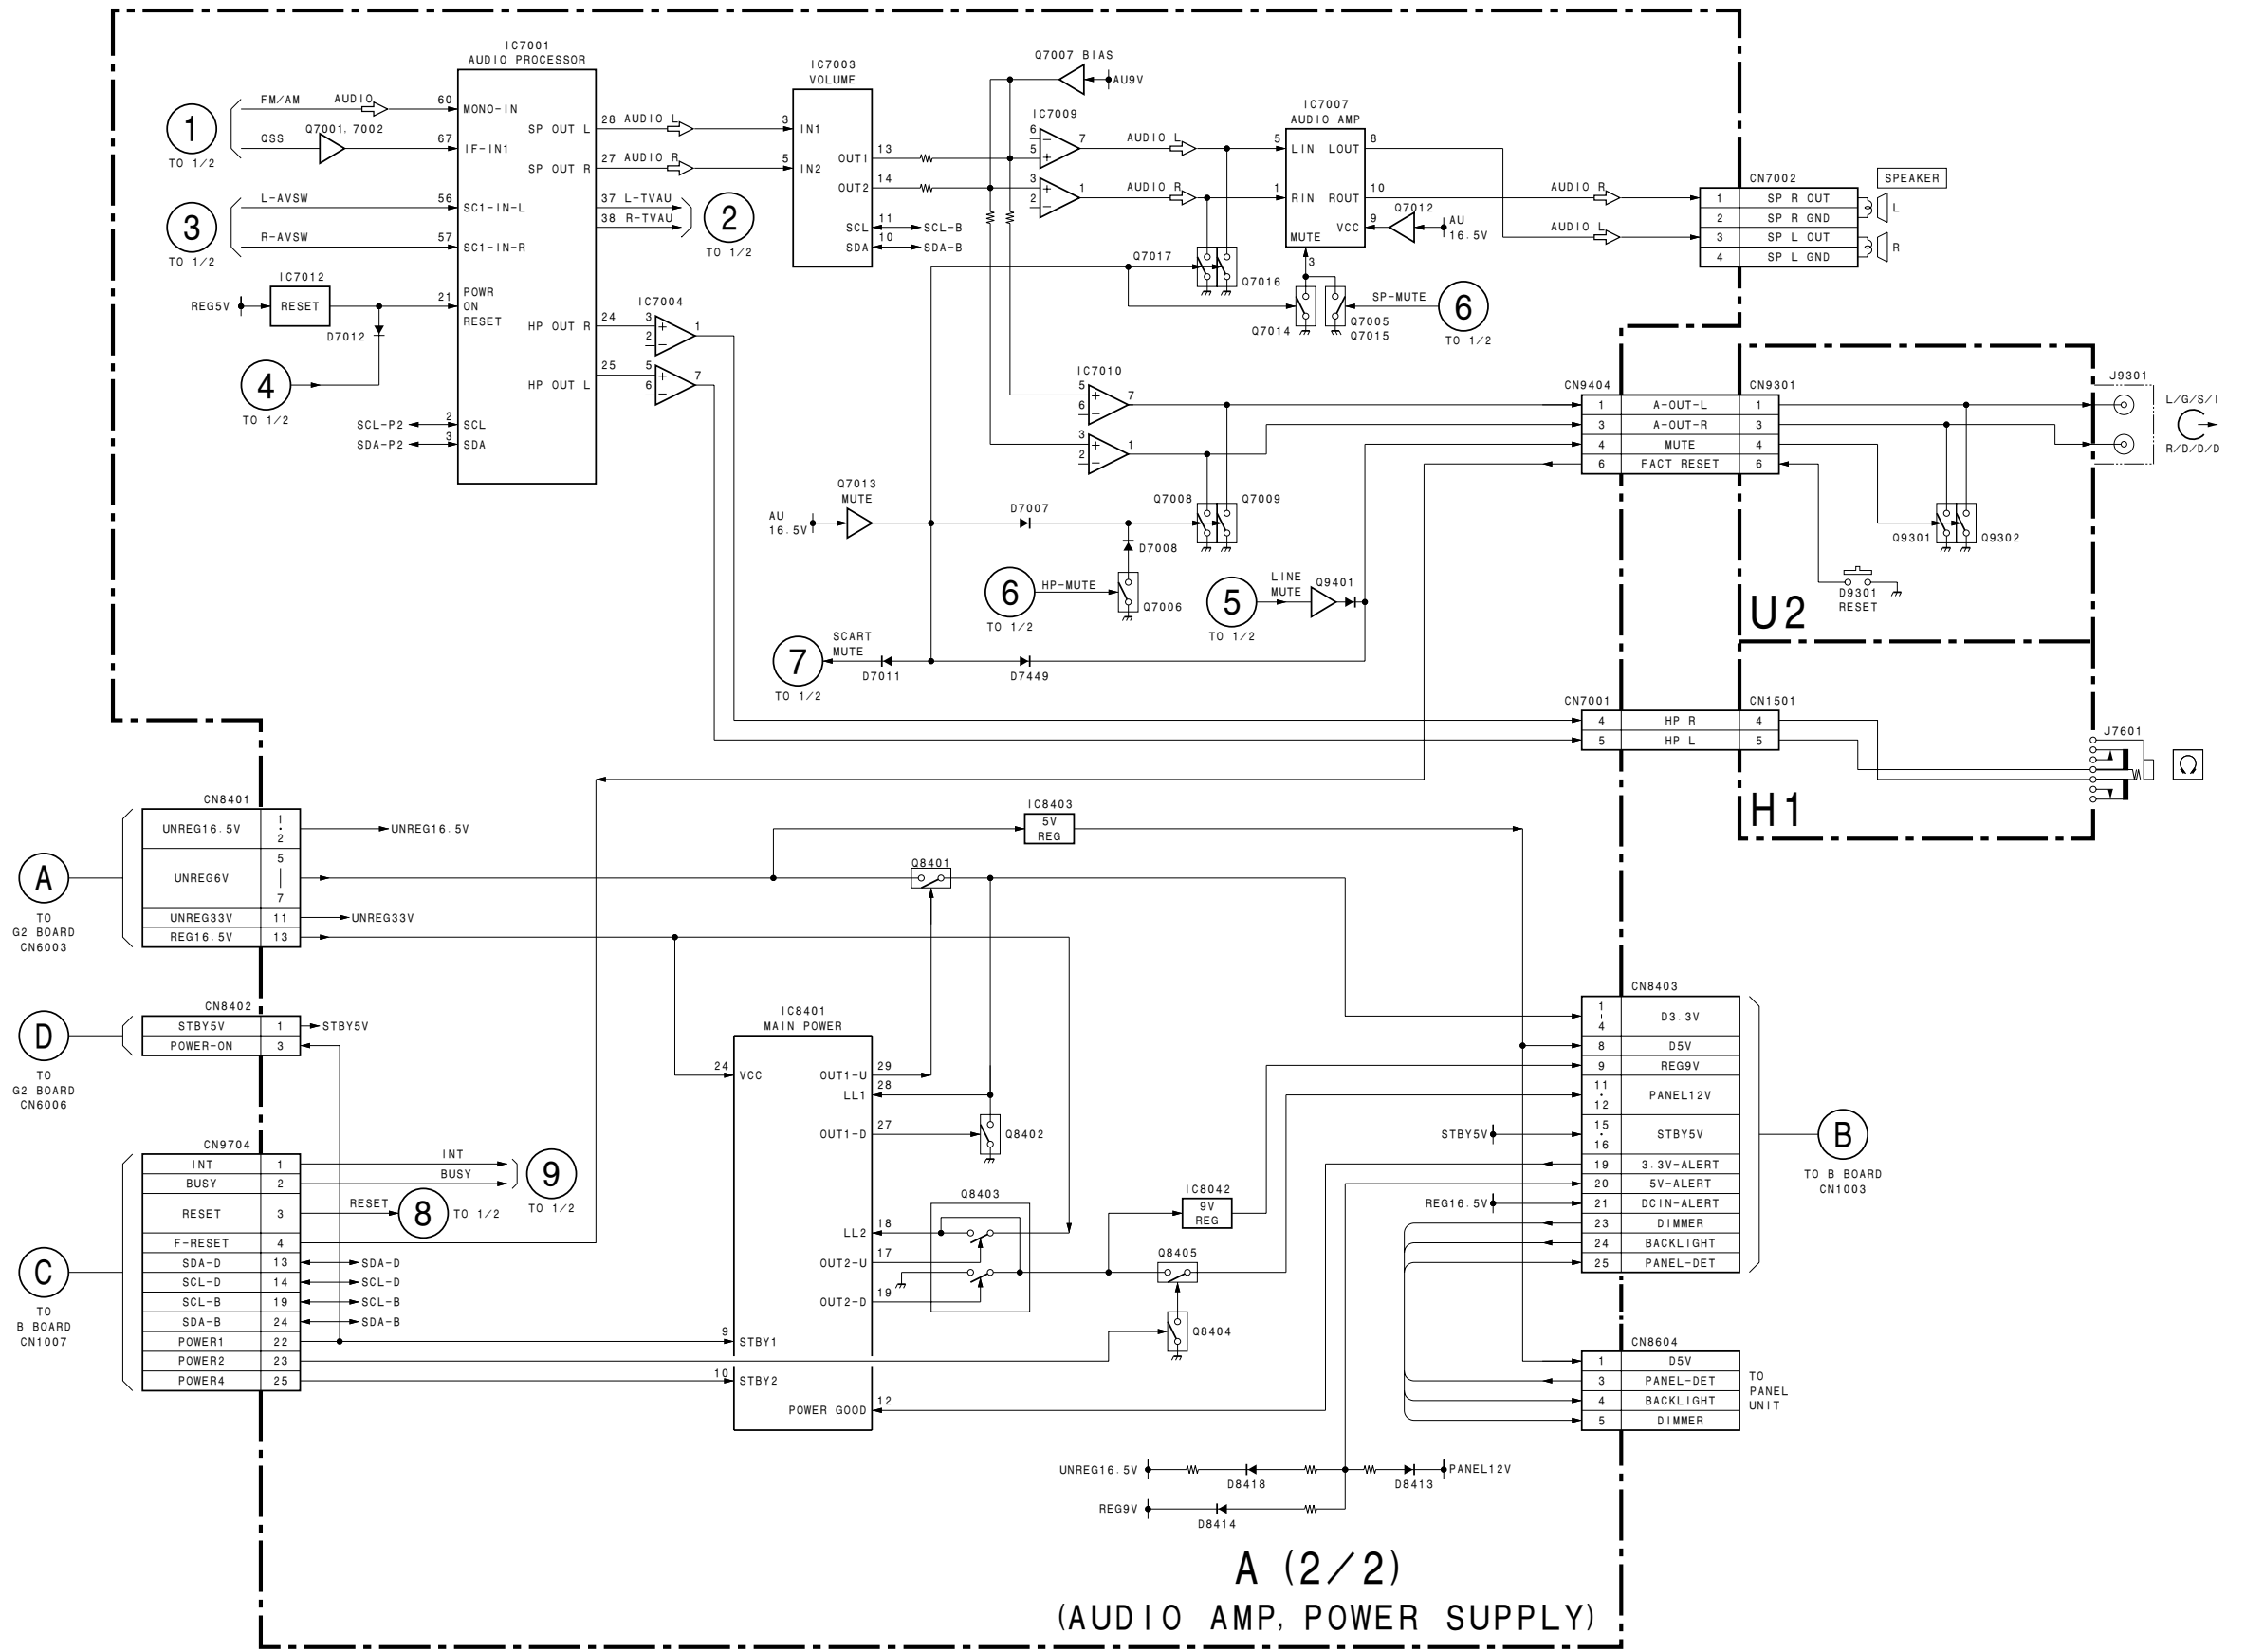


A (2/2)
(AUDIO AMP, POWER SUPPLY)

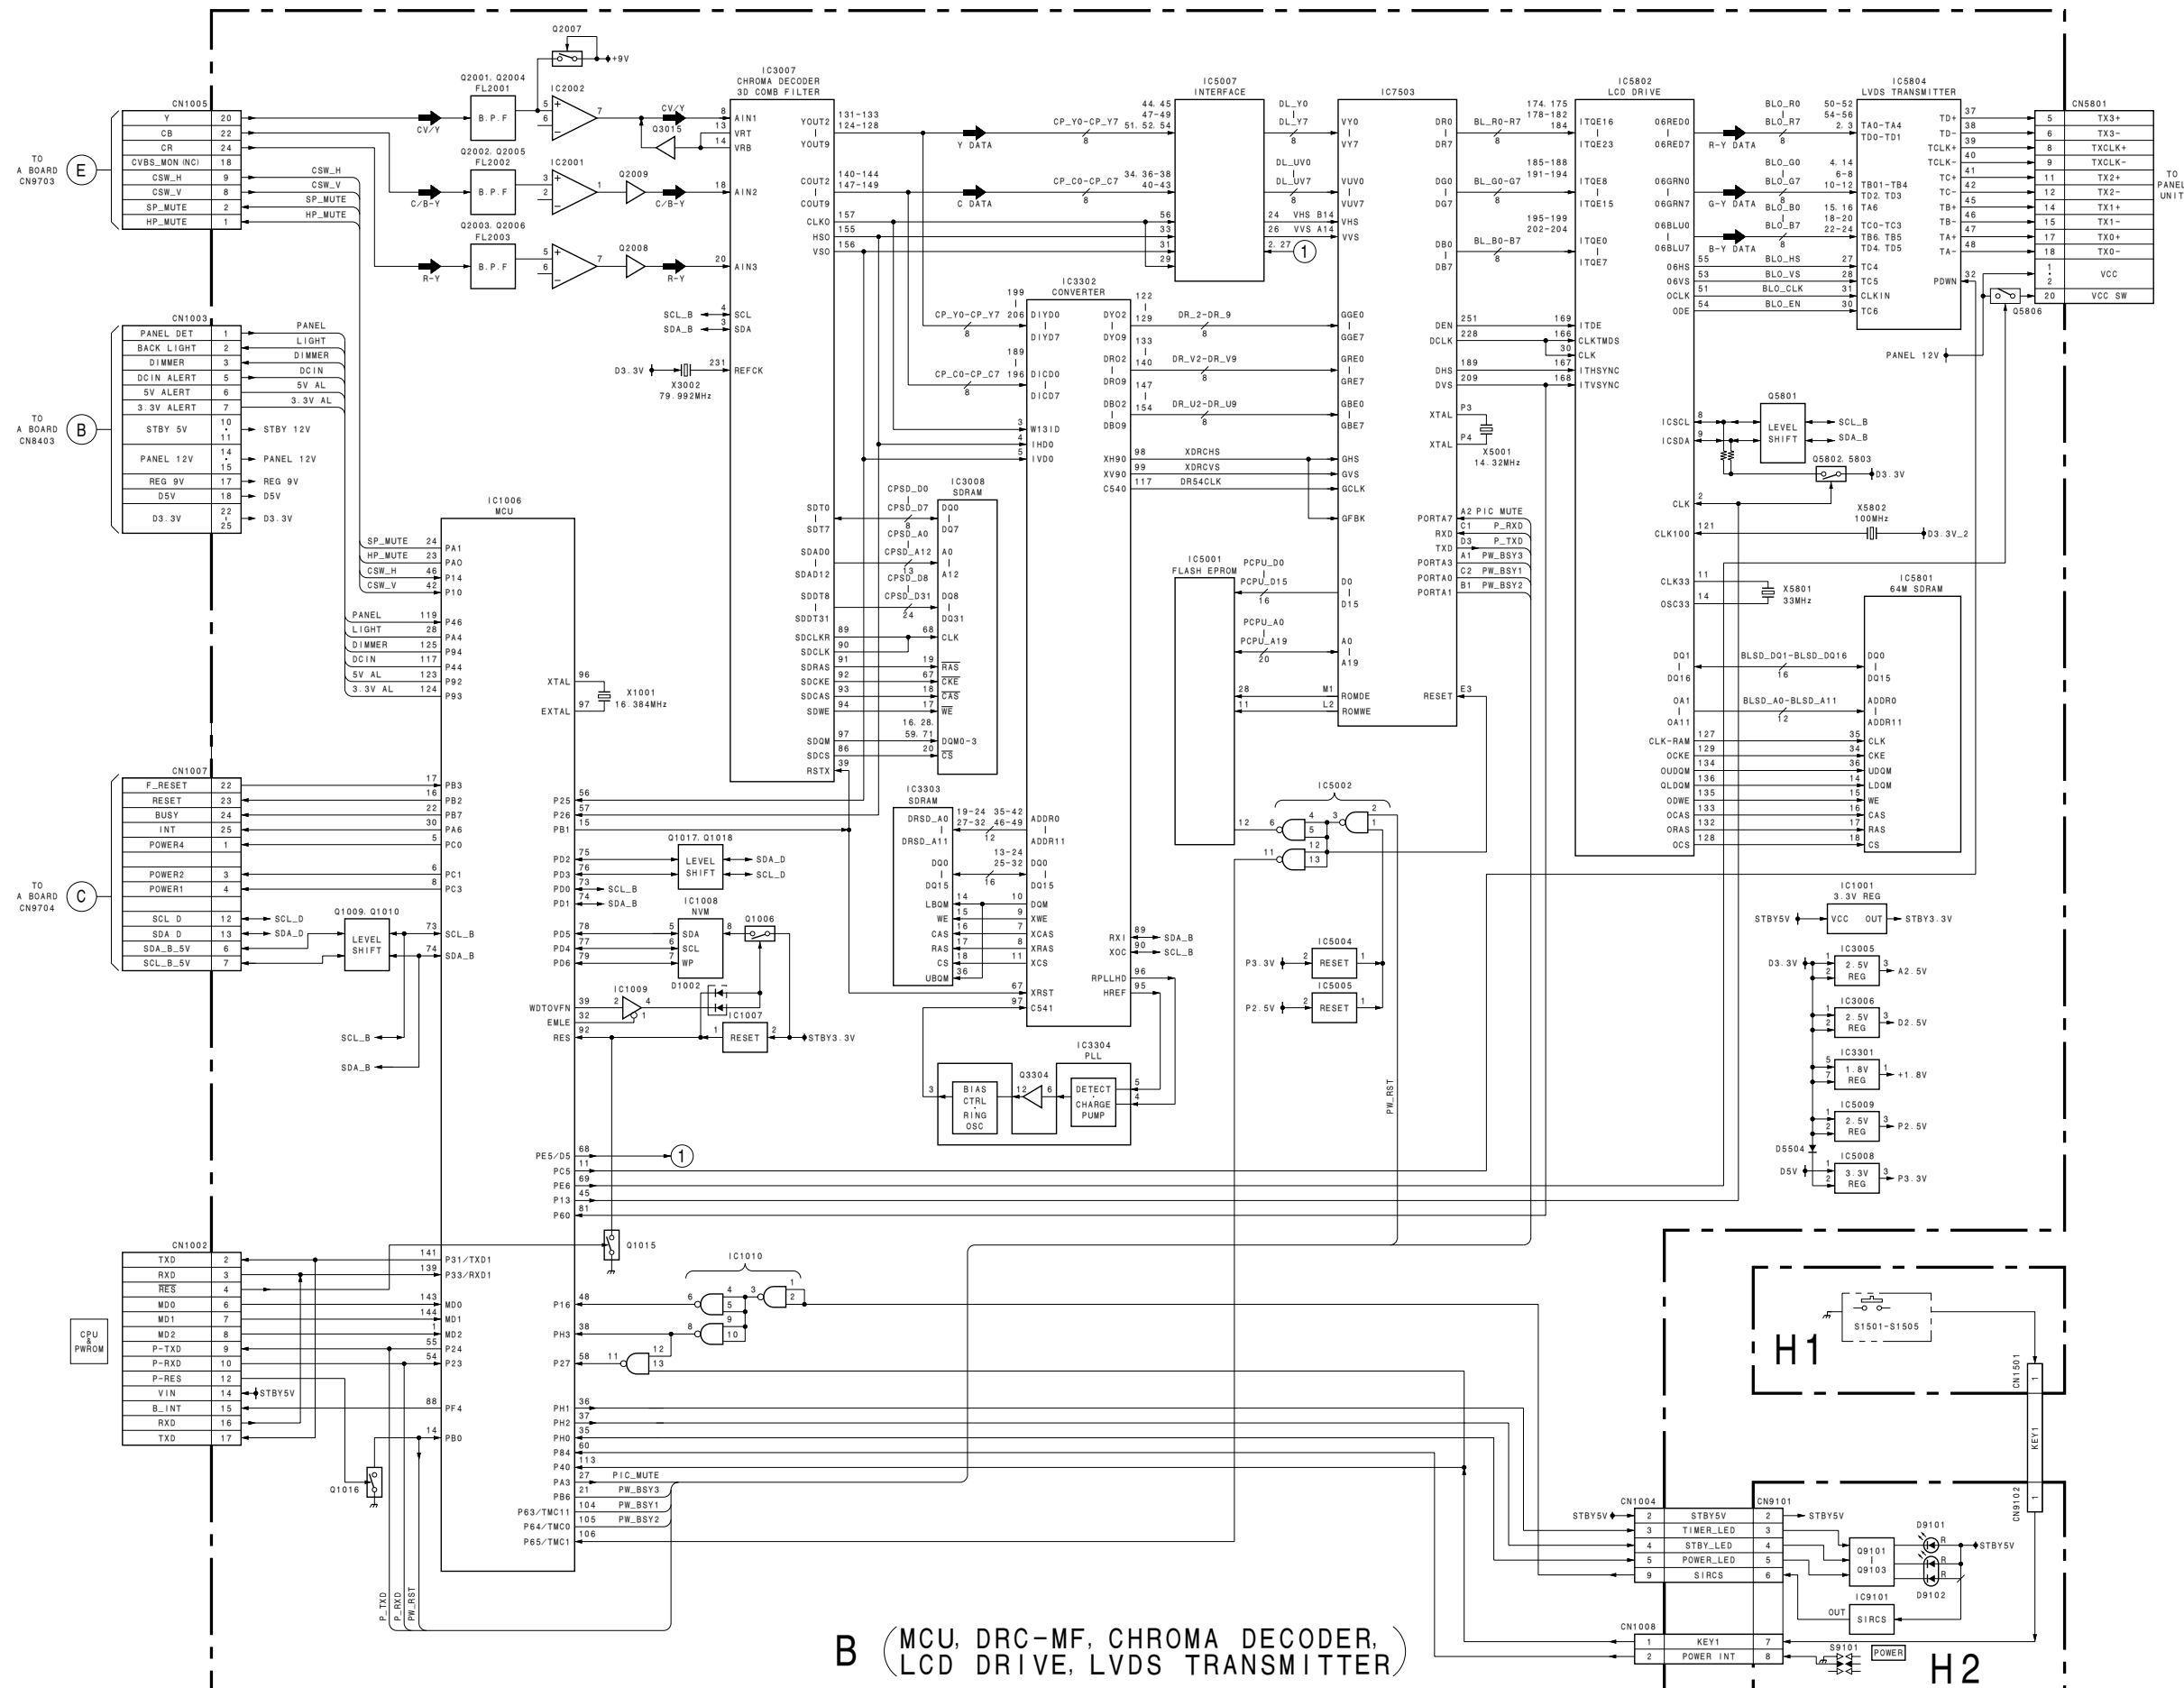


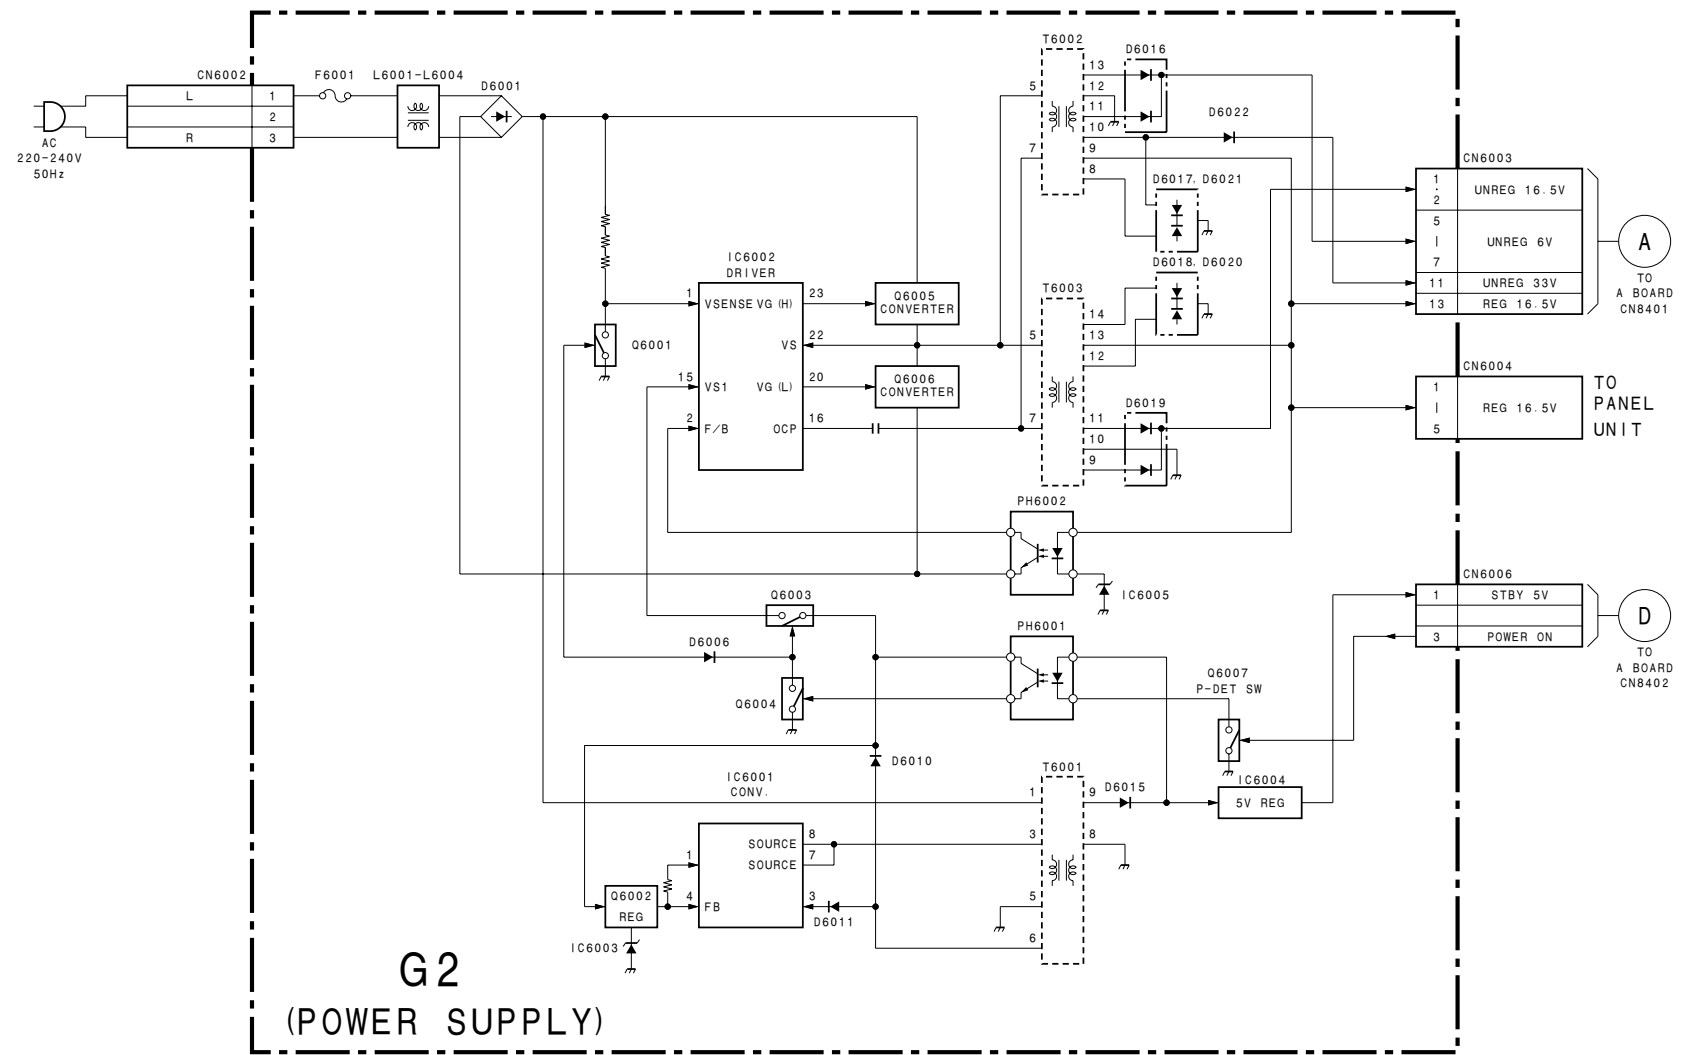

3-2. FRAME DIAGRAMS

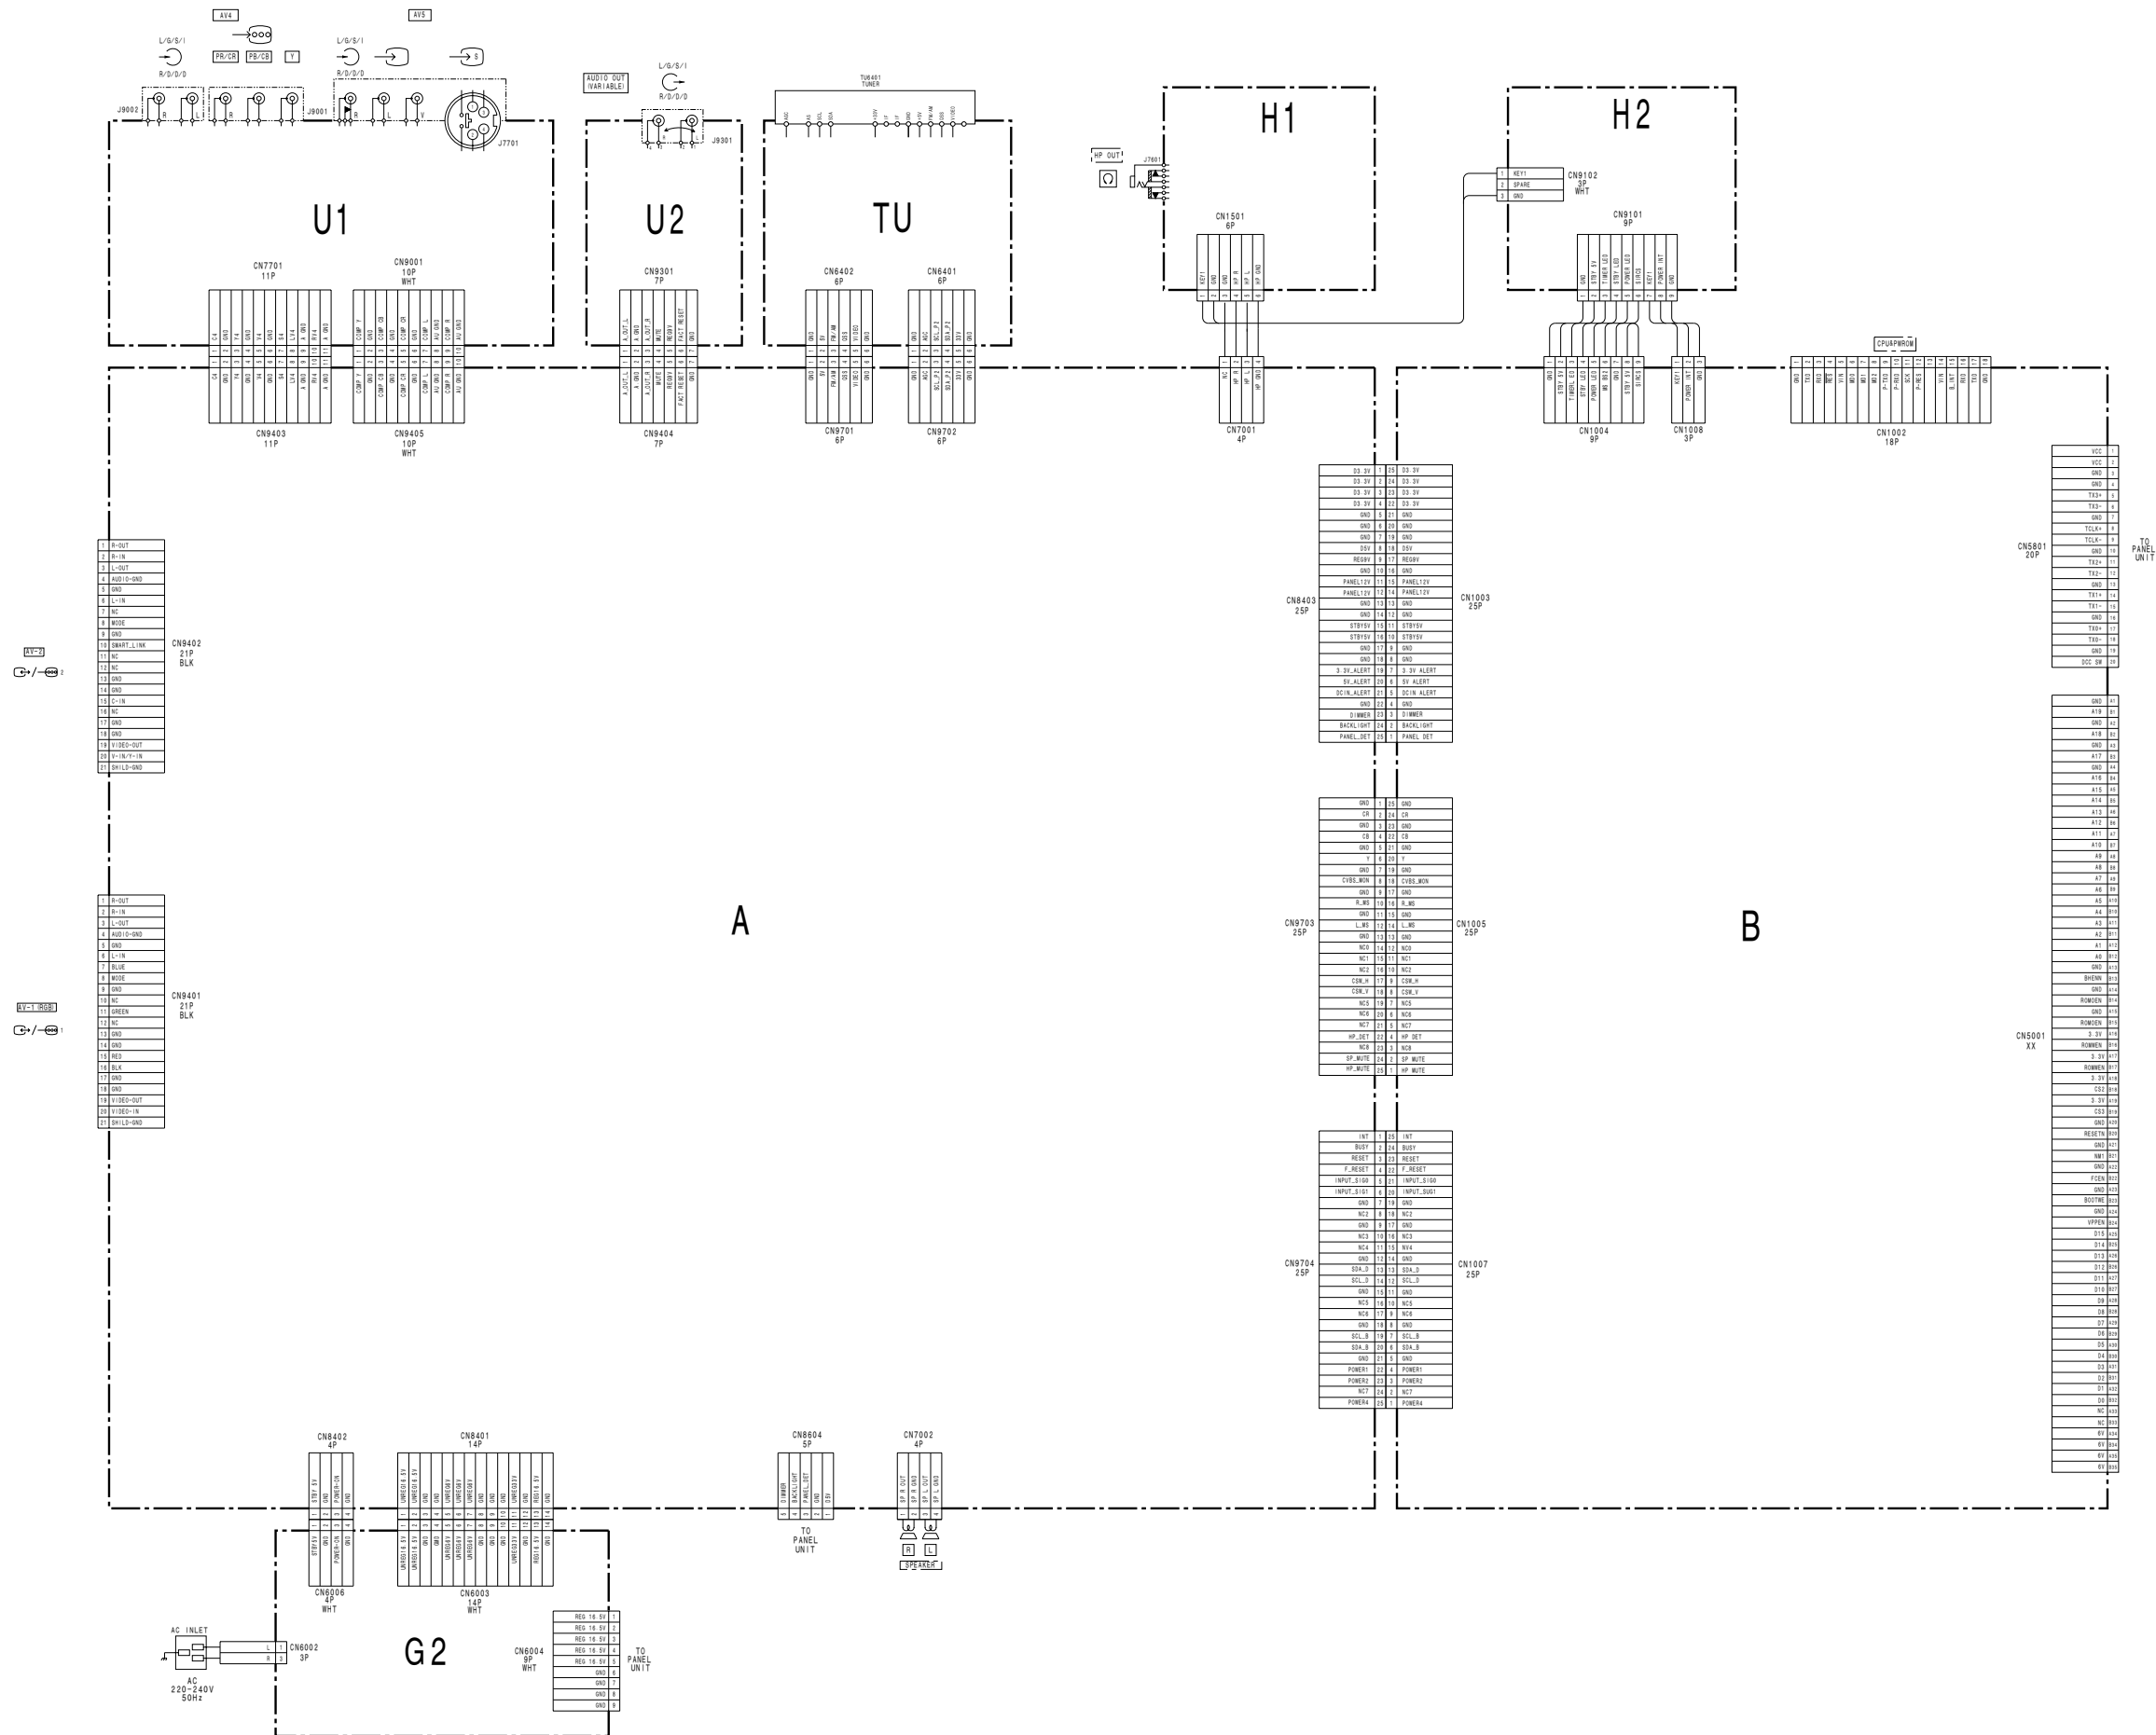

3-3. CIRCUIT BOARDS LOCATION

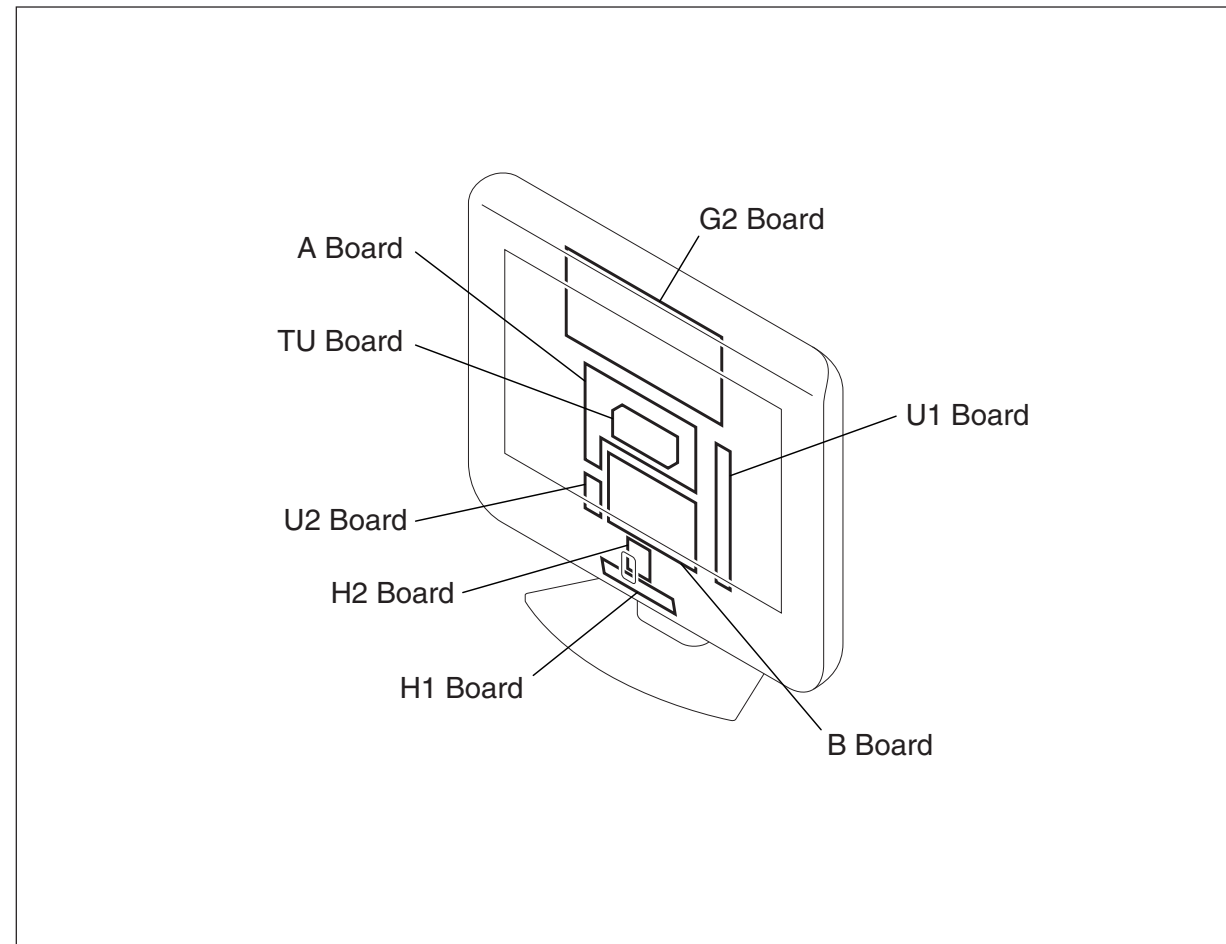

3-4. SCHEMATIC DIAGRAMS AND PRINTED WIRING BOARDS

Note:

- All capacitors are in μF unless otherwise noted. (pF : $\mu\mu\text{F}$)
Capacitors without voltage indication are all 50 V.
- Indication of resistance, which does not have one for rating electrical power, is as follows.

Pitch: 5 mm

Rating electrical power 1/4 W (CHIP : 1/10 W)

- All resistors are in ohms.
- : nonflammable resistor.
- : fusible resistor.
- : internal component.
- : panel designation, and adjustment for repair.
- All variable and adjustable resistors have characteristic curve B, unless otherwise noted.
- : earth-ground.
- : earth-chassis.
- When replacing the part in below table, be sure to perform the related adjustment.
- All voltages are in V.
- Readings are taken with a 10 M digital multimeter.
- Readings are taken with a color-bar signal input.
- Voltage variations may be noted due to normal production tolerances.
- * : Can not be measured.
- : Circled numbers are waveform references.
- : B + bus.
- : B - bus.
- : Signal path.

Note: The components identified by shading and mark \triangle are critical for safety. Replace only with part number specified.

Note: Les composants identifiés par un tramé et une marque \triangle sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.


Terminal name of semiconductors in silk screen printed circuit (*)



	Device	Printed symbol	Terminal name	Circuit
①	Transistor		Collector Base Emitter	
②	Transistor		Collector Base Emitter	
③	Diode		Cathode Anode	
④	Diode		Cathode Anode (NC)	
⑤	Diode		Cathode Anode (NC)	
⑥	Diode		Common Anode Cathode	
⑦	Diode		Common Anode Cathode	
⑧	Diode		Common Anode Anode	
⑨	Diode		Common Anode Anode	
⑩	Diode		Common Cathode Cathode	
⑪	Diode		Common Cathode Cathode	
⑫	Diode		Anode Cathode Anode Cathode	
⑬	Transistor (FET)		Drain Source Gate	
⑭	Transistor (FET)		Drain Source Gate	
⑮	Transistor (FET)		Source Drain Gate	
⑯	Transistor		Emitter Collector Base	
⑰	Transistor		C2(B)E1 E2(B)C1	
⑱	Transistor		C1(B)E2 E1(B)C2	
⑲	Transistor		C1(B)E2 E1(B)C2	
⑳	Transistor		C1(B)E2 E1(B)C2	
㉑	Transistor		E2(B)E1 C2(B)C1(B2)	
㉒	Transistor		(B2) B1 E1 E2 C1 C2	
㉓	Transistor		(B2) E2 E1 B1 C2 C1	
-	Discrete semiconductor			

(Chip semiconductors that are not actually used are included.)

Ver.1.6


(1) Schematic Diagrams of A Board

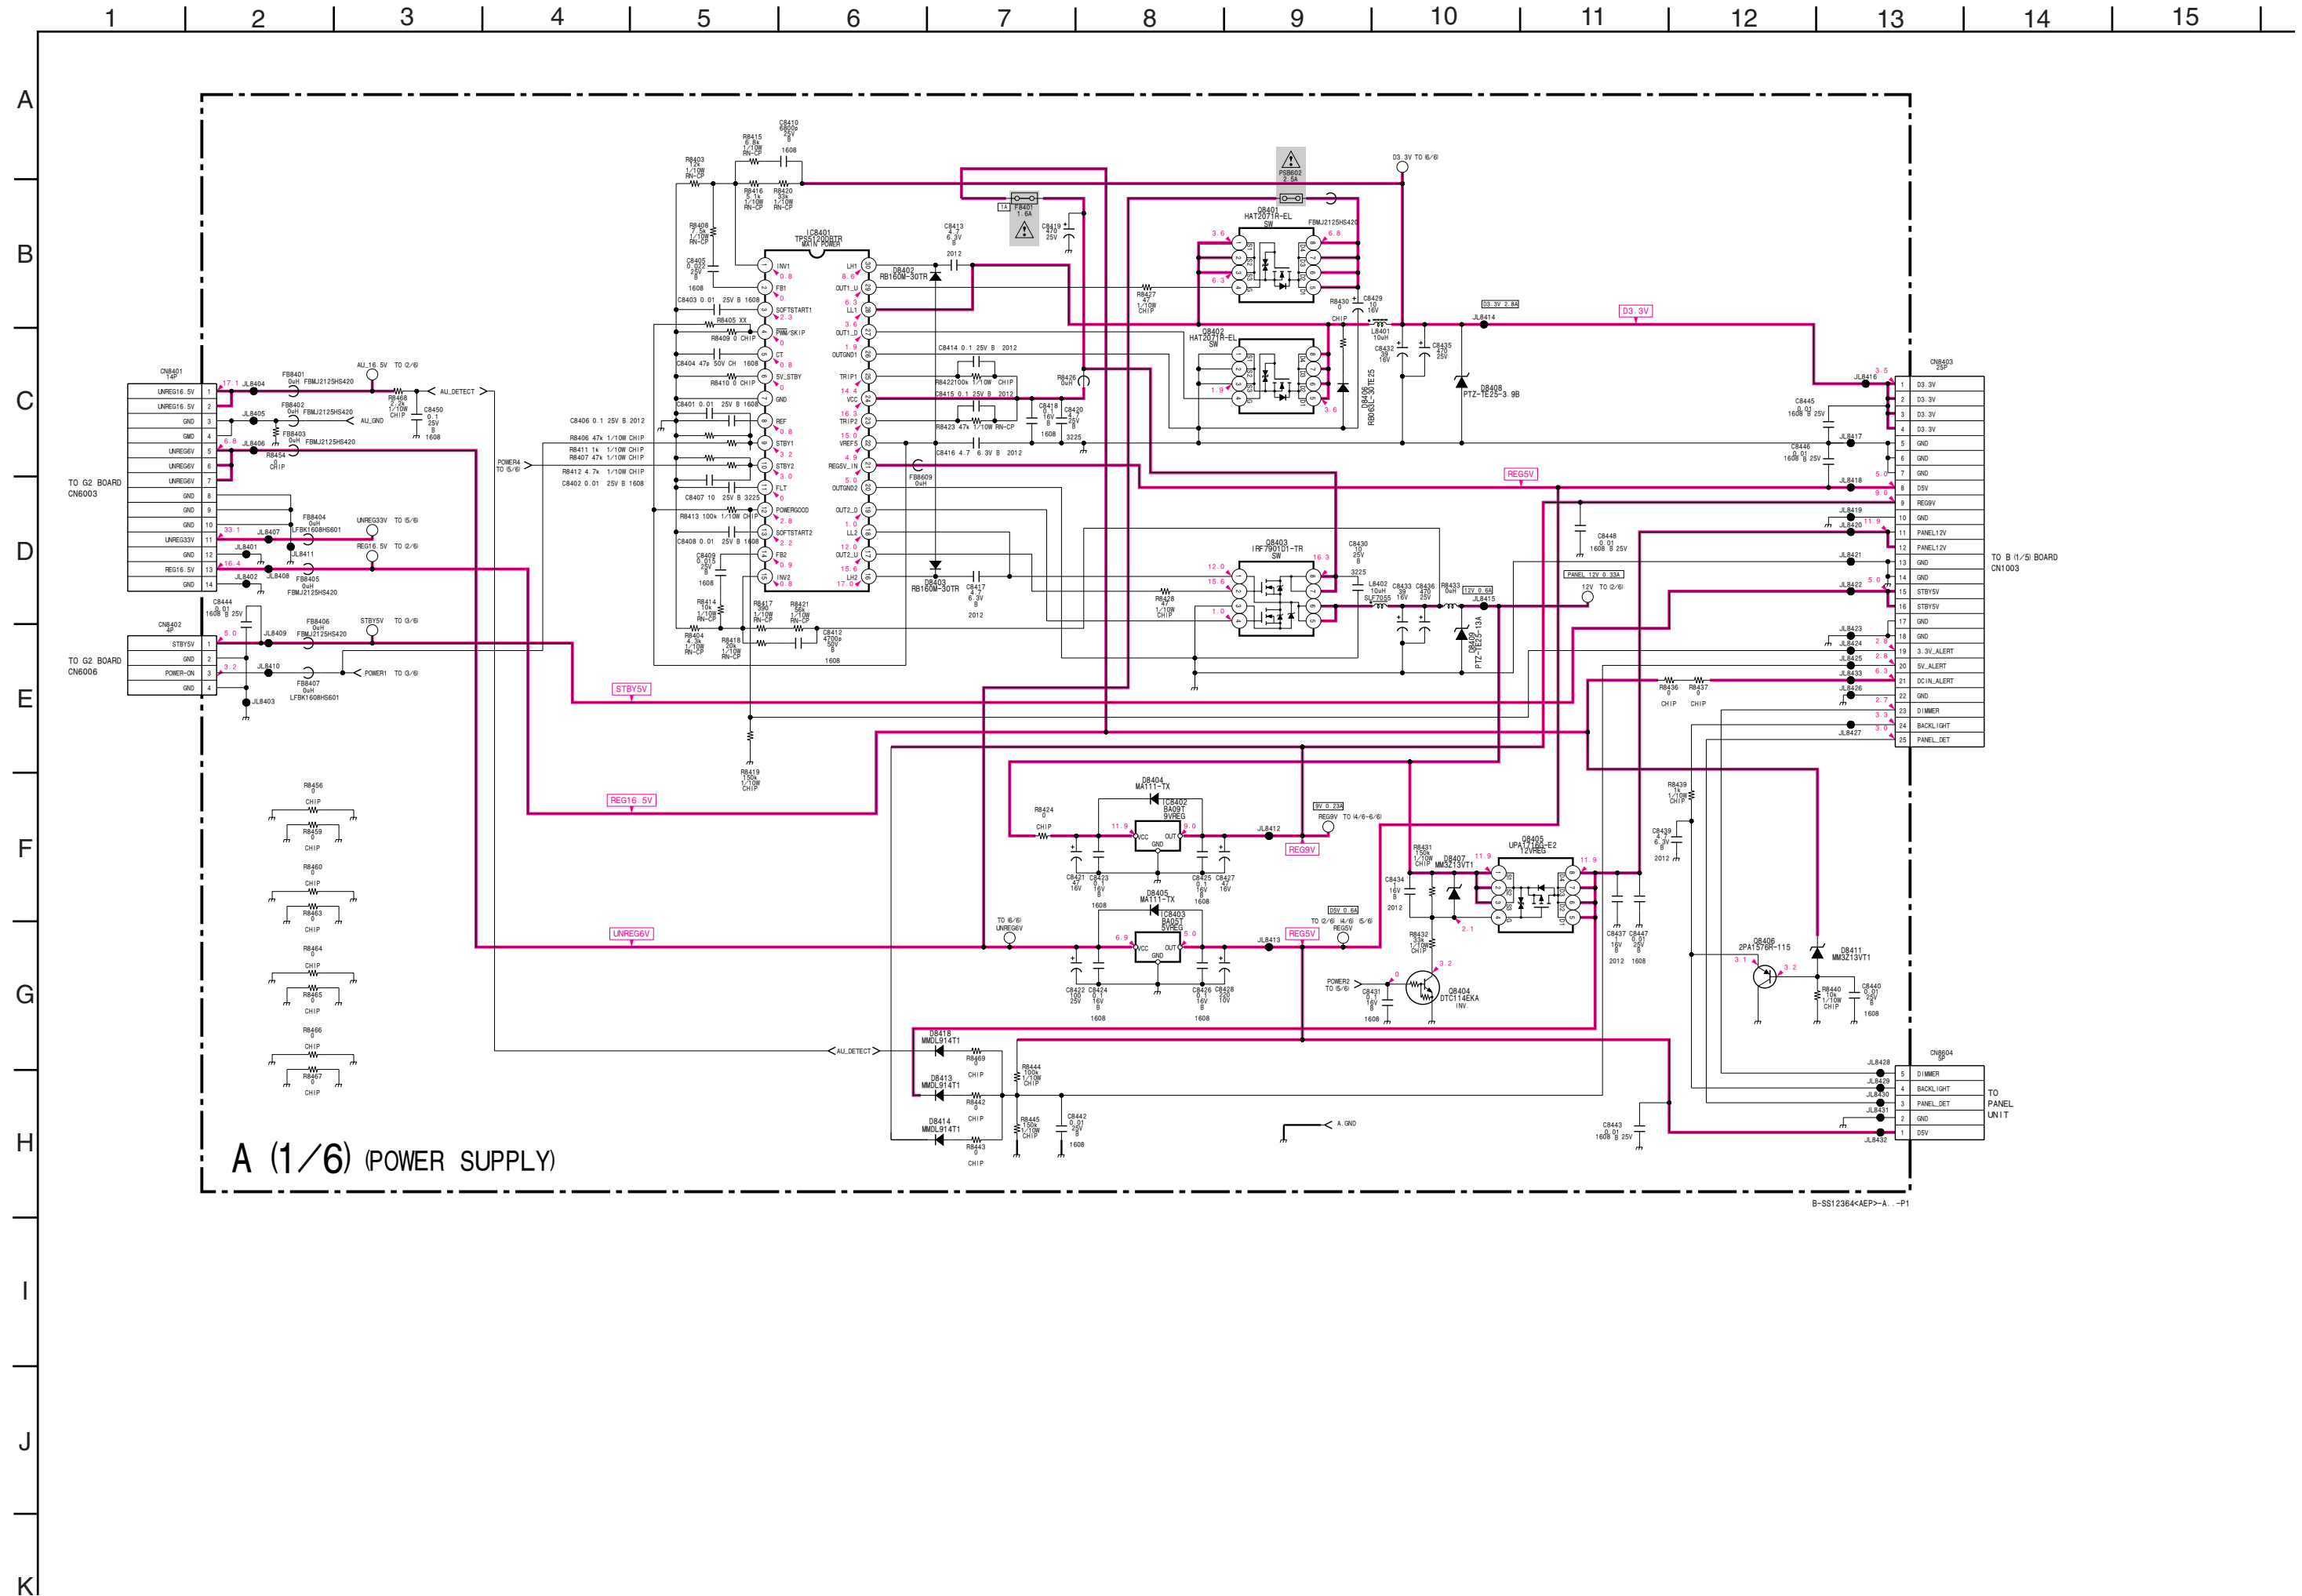

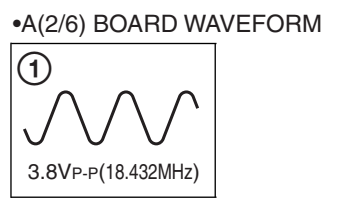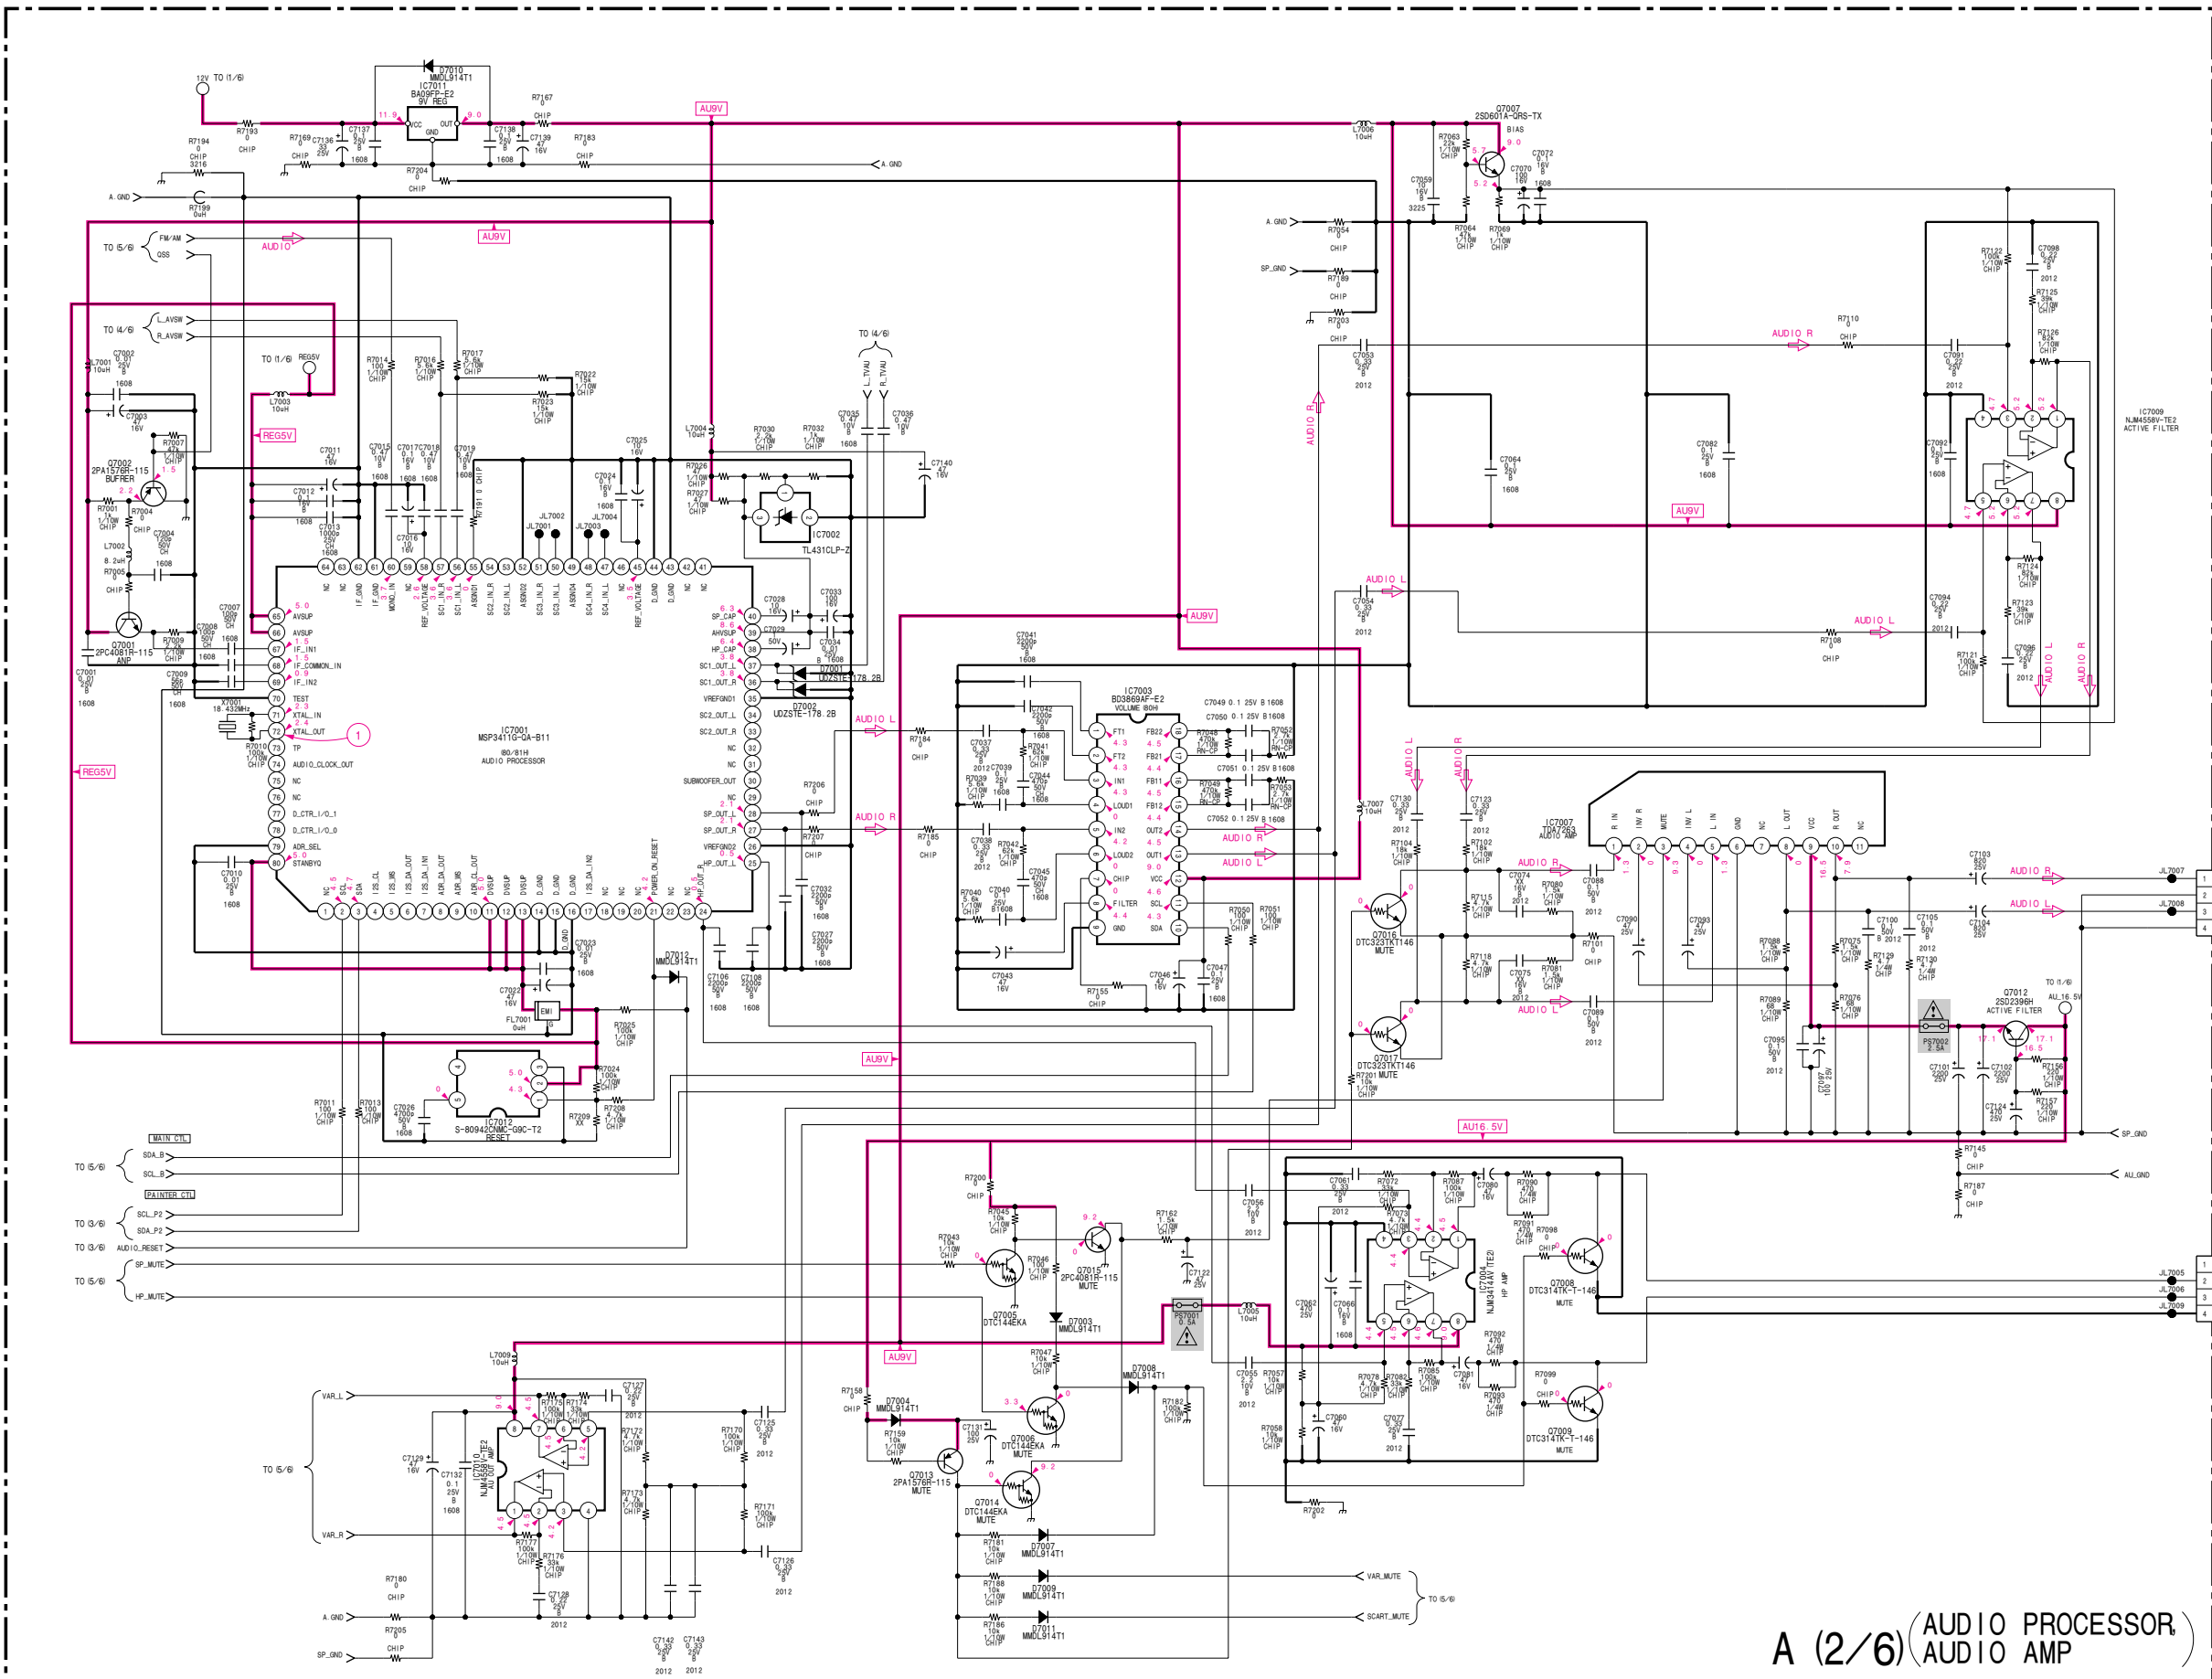


A (2/6) (AUDIO PROCESSOR)
AUDIO AMP


B-SS123644AEP>A...P2

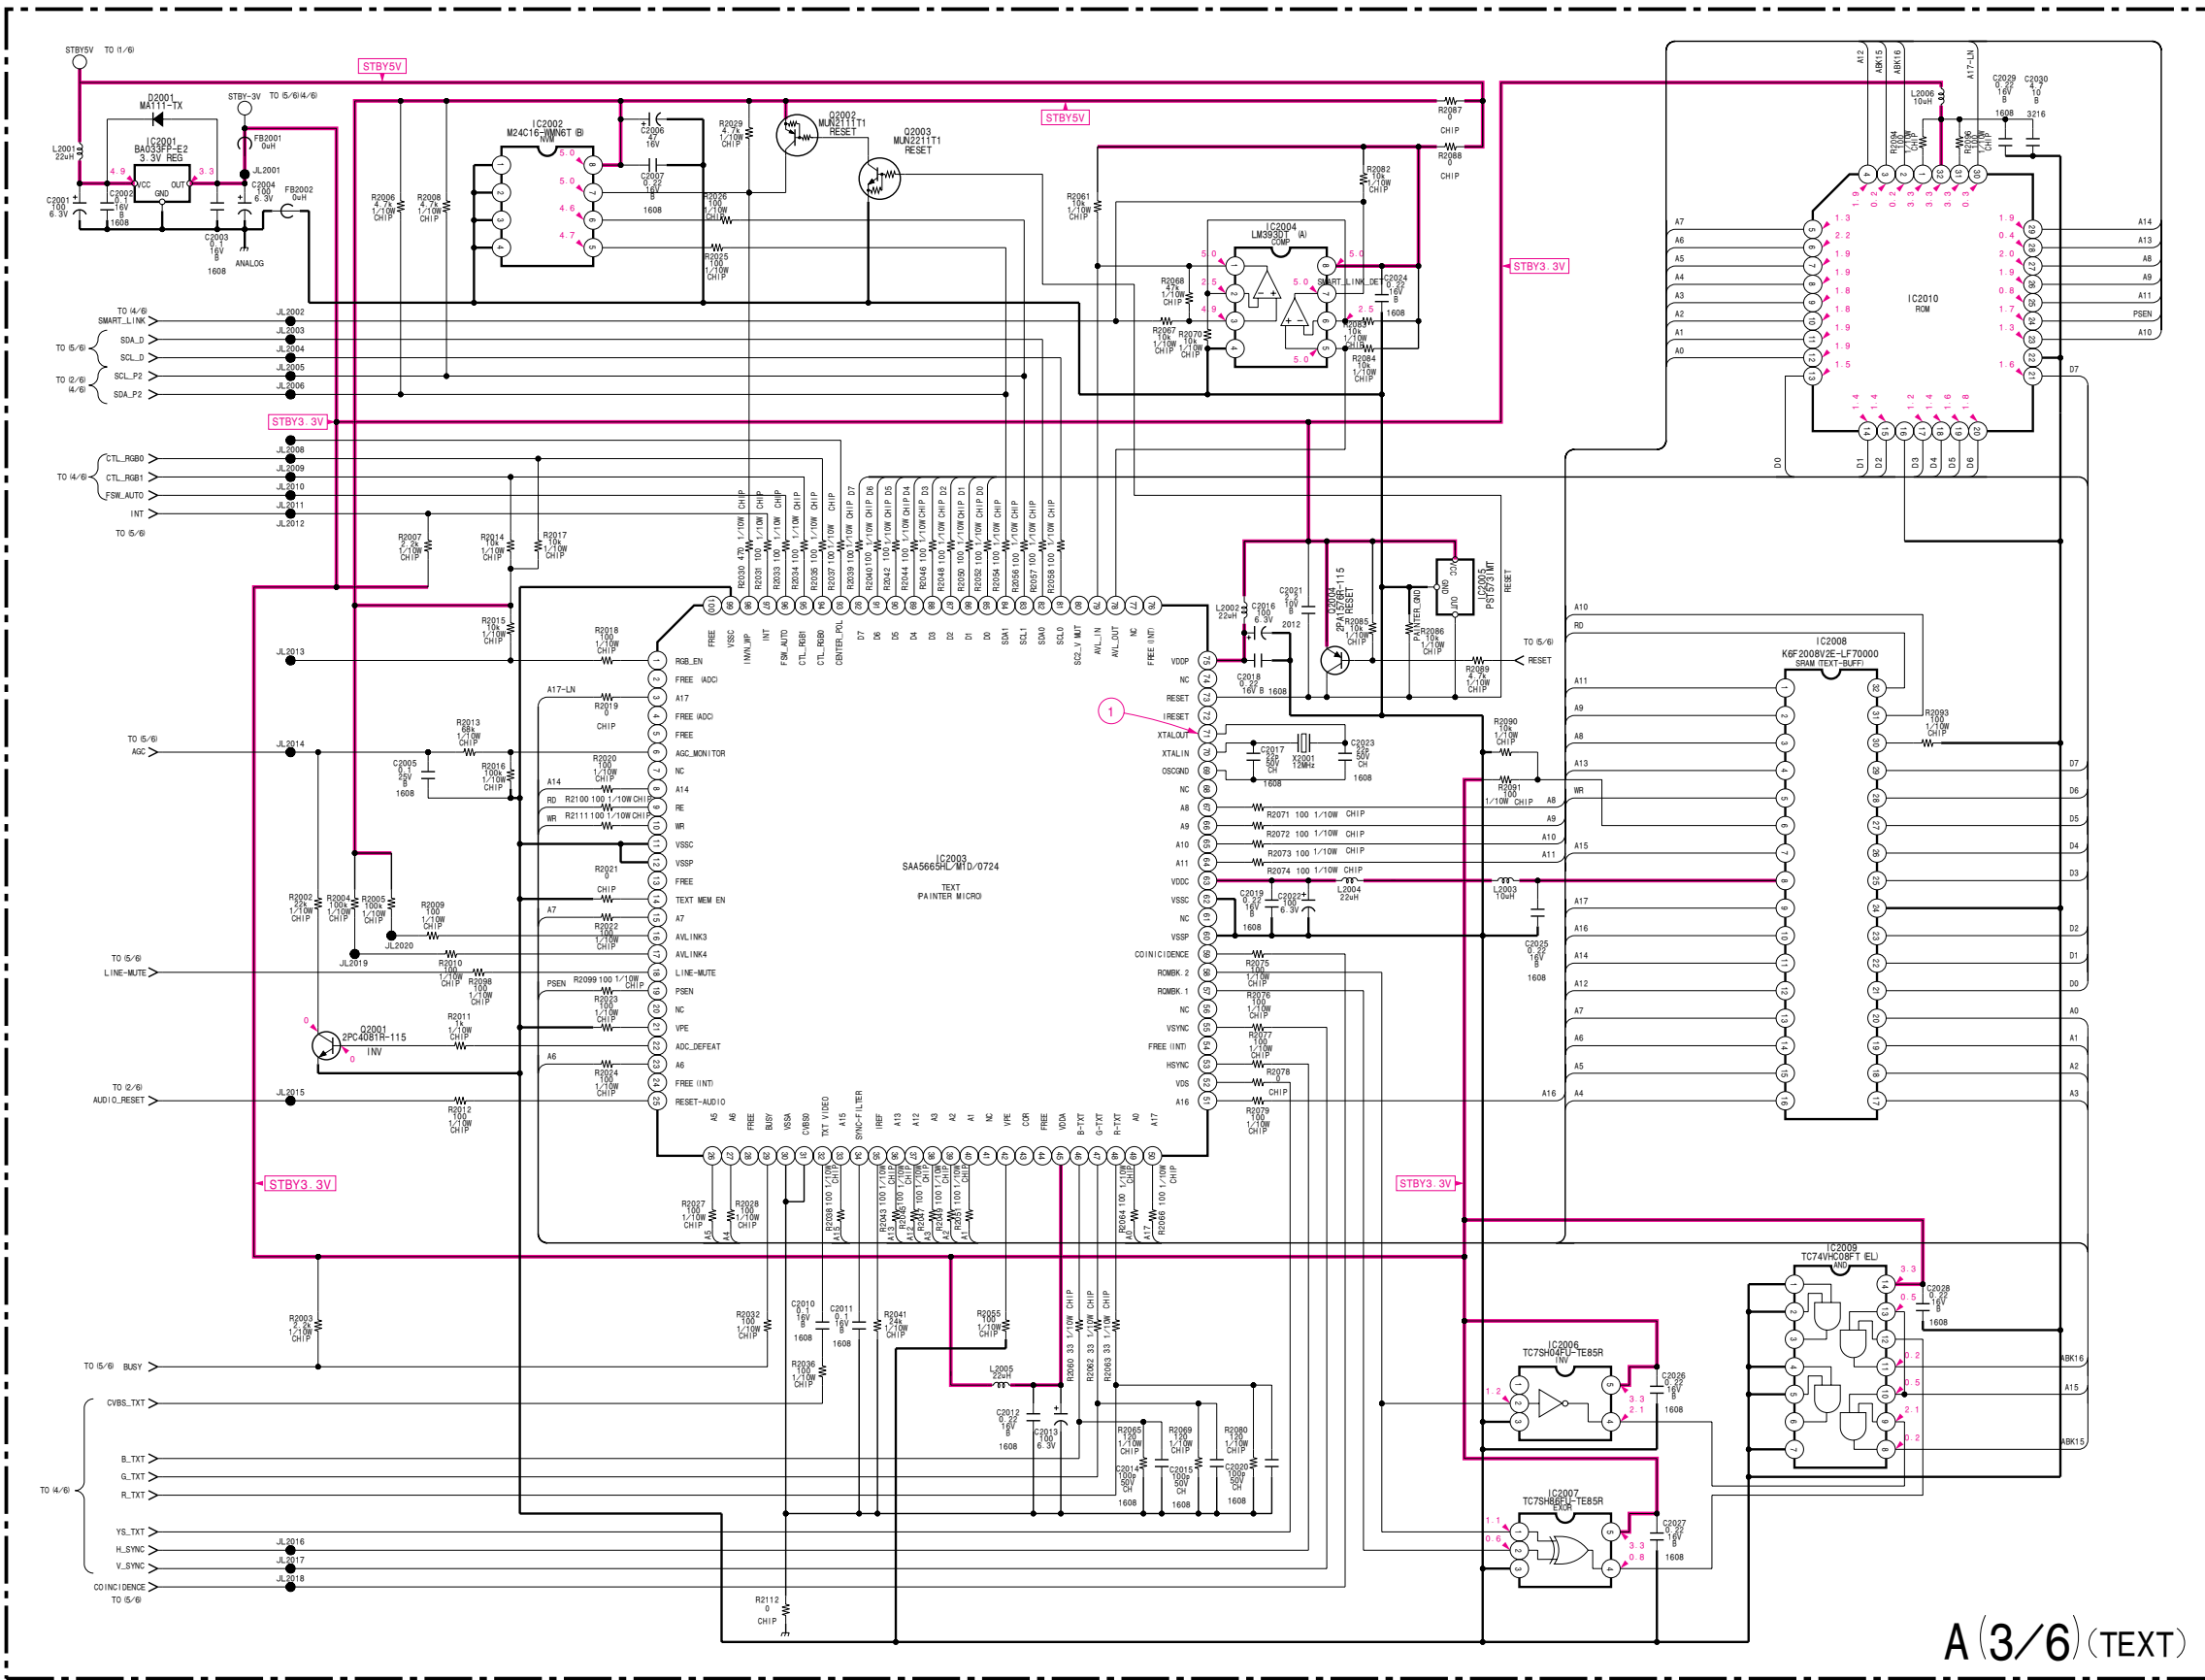

•A(3/6) BOARD WAVEFORM




A(3/6)(TEXT)

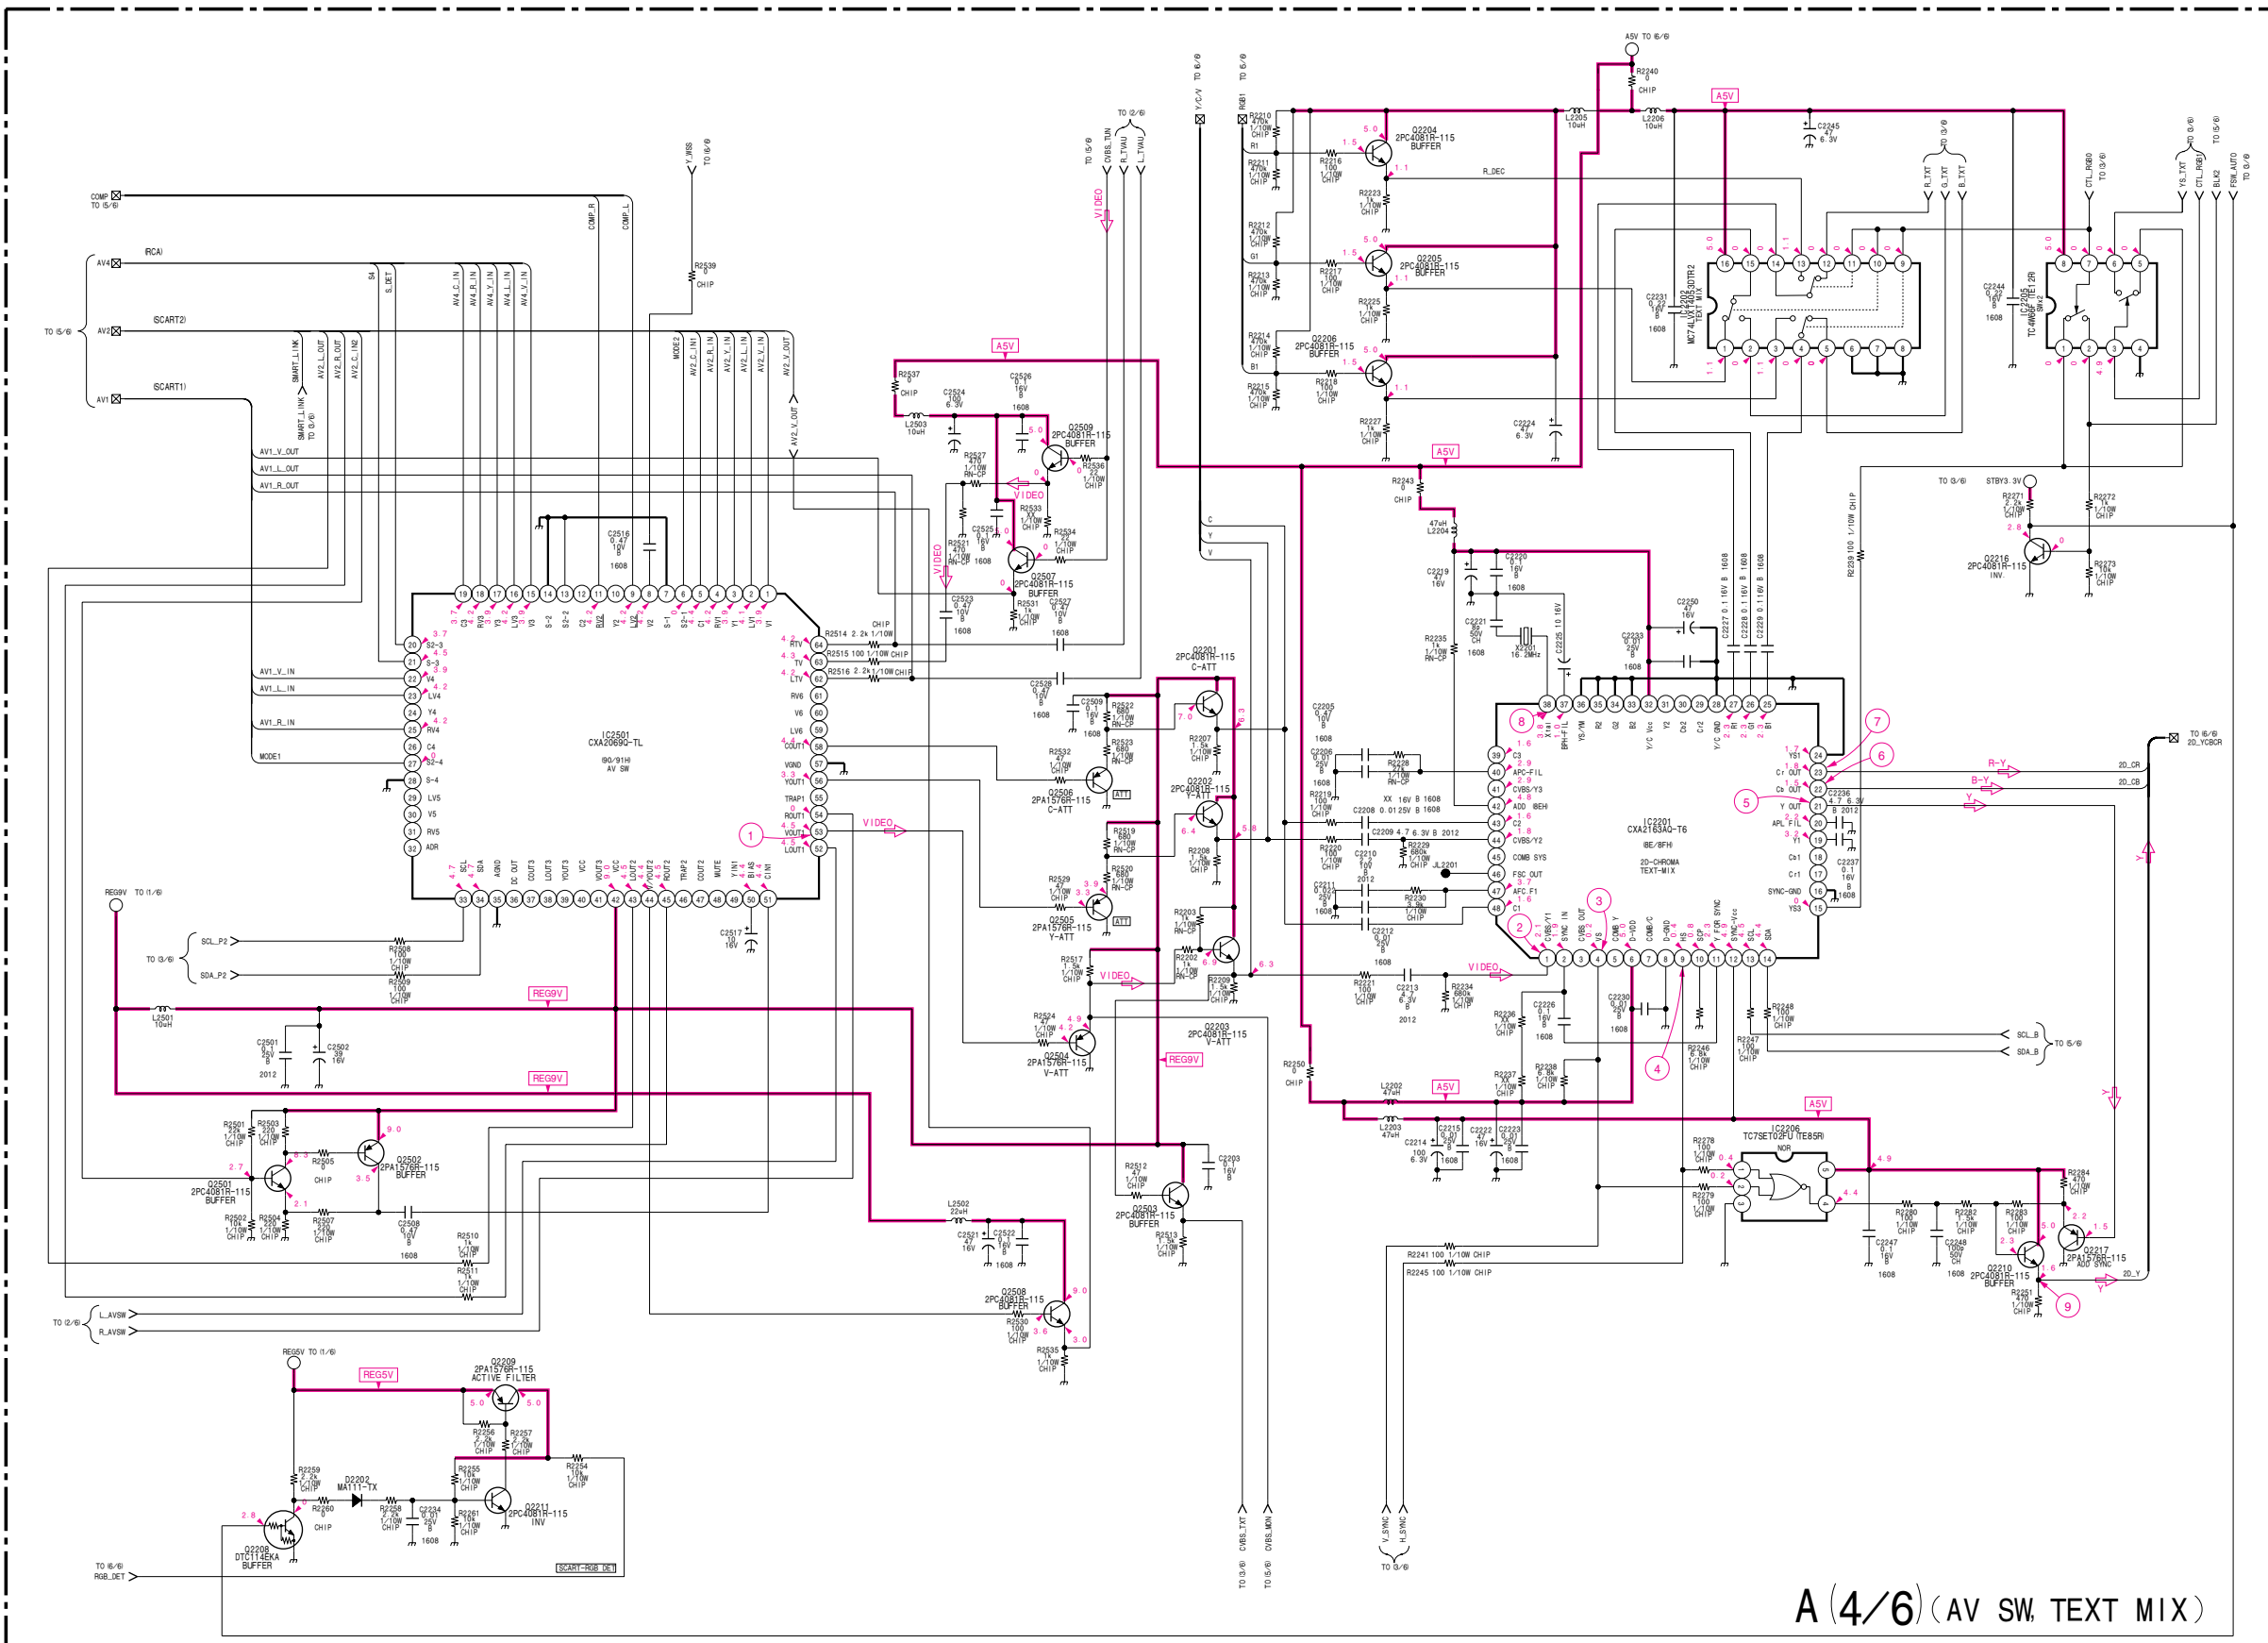



A(4/6) (AV SW. TEXT MIX)

•A(4/6) BOARD WAVEFORMS

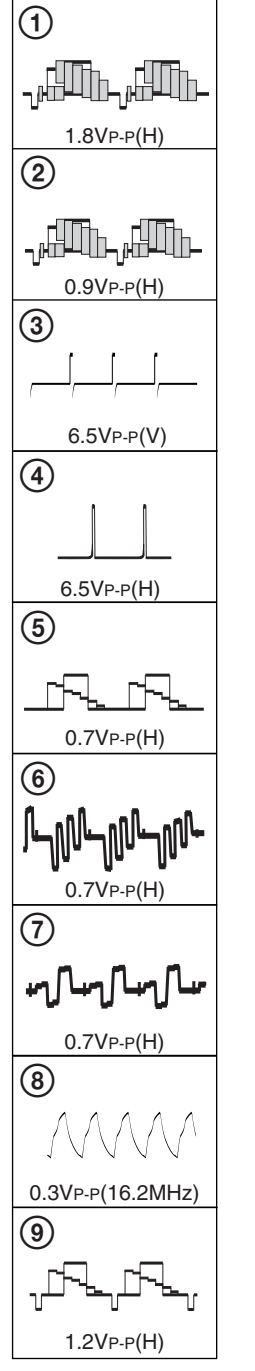



B-5512364-AEP>A...-P4

•A(5/6) BOARD WAVEFORMS

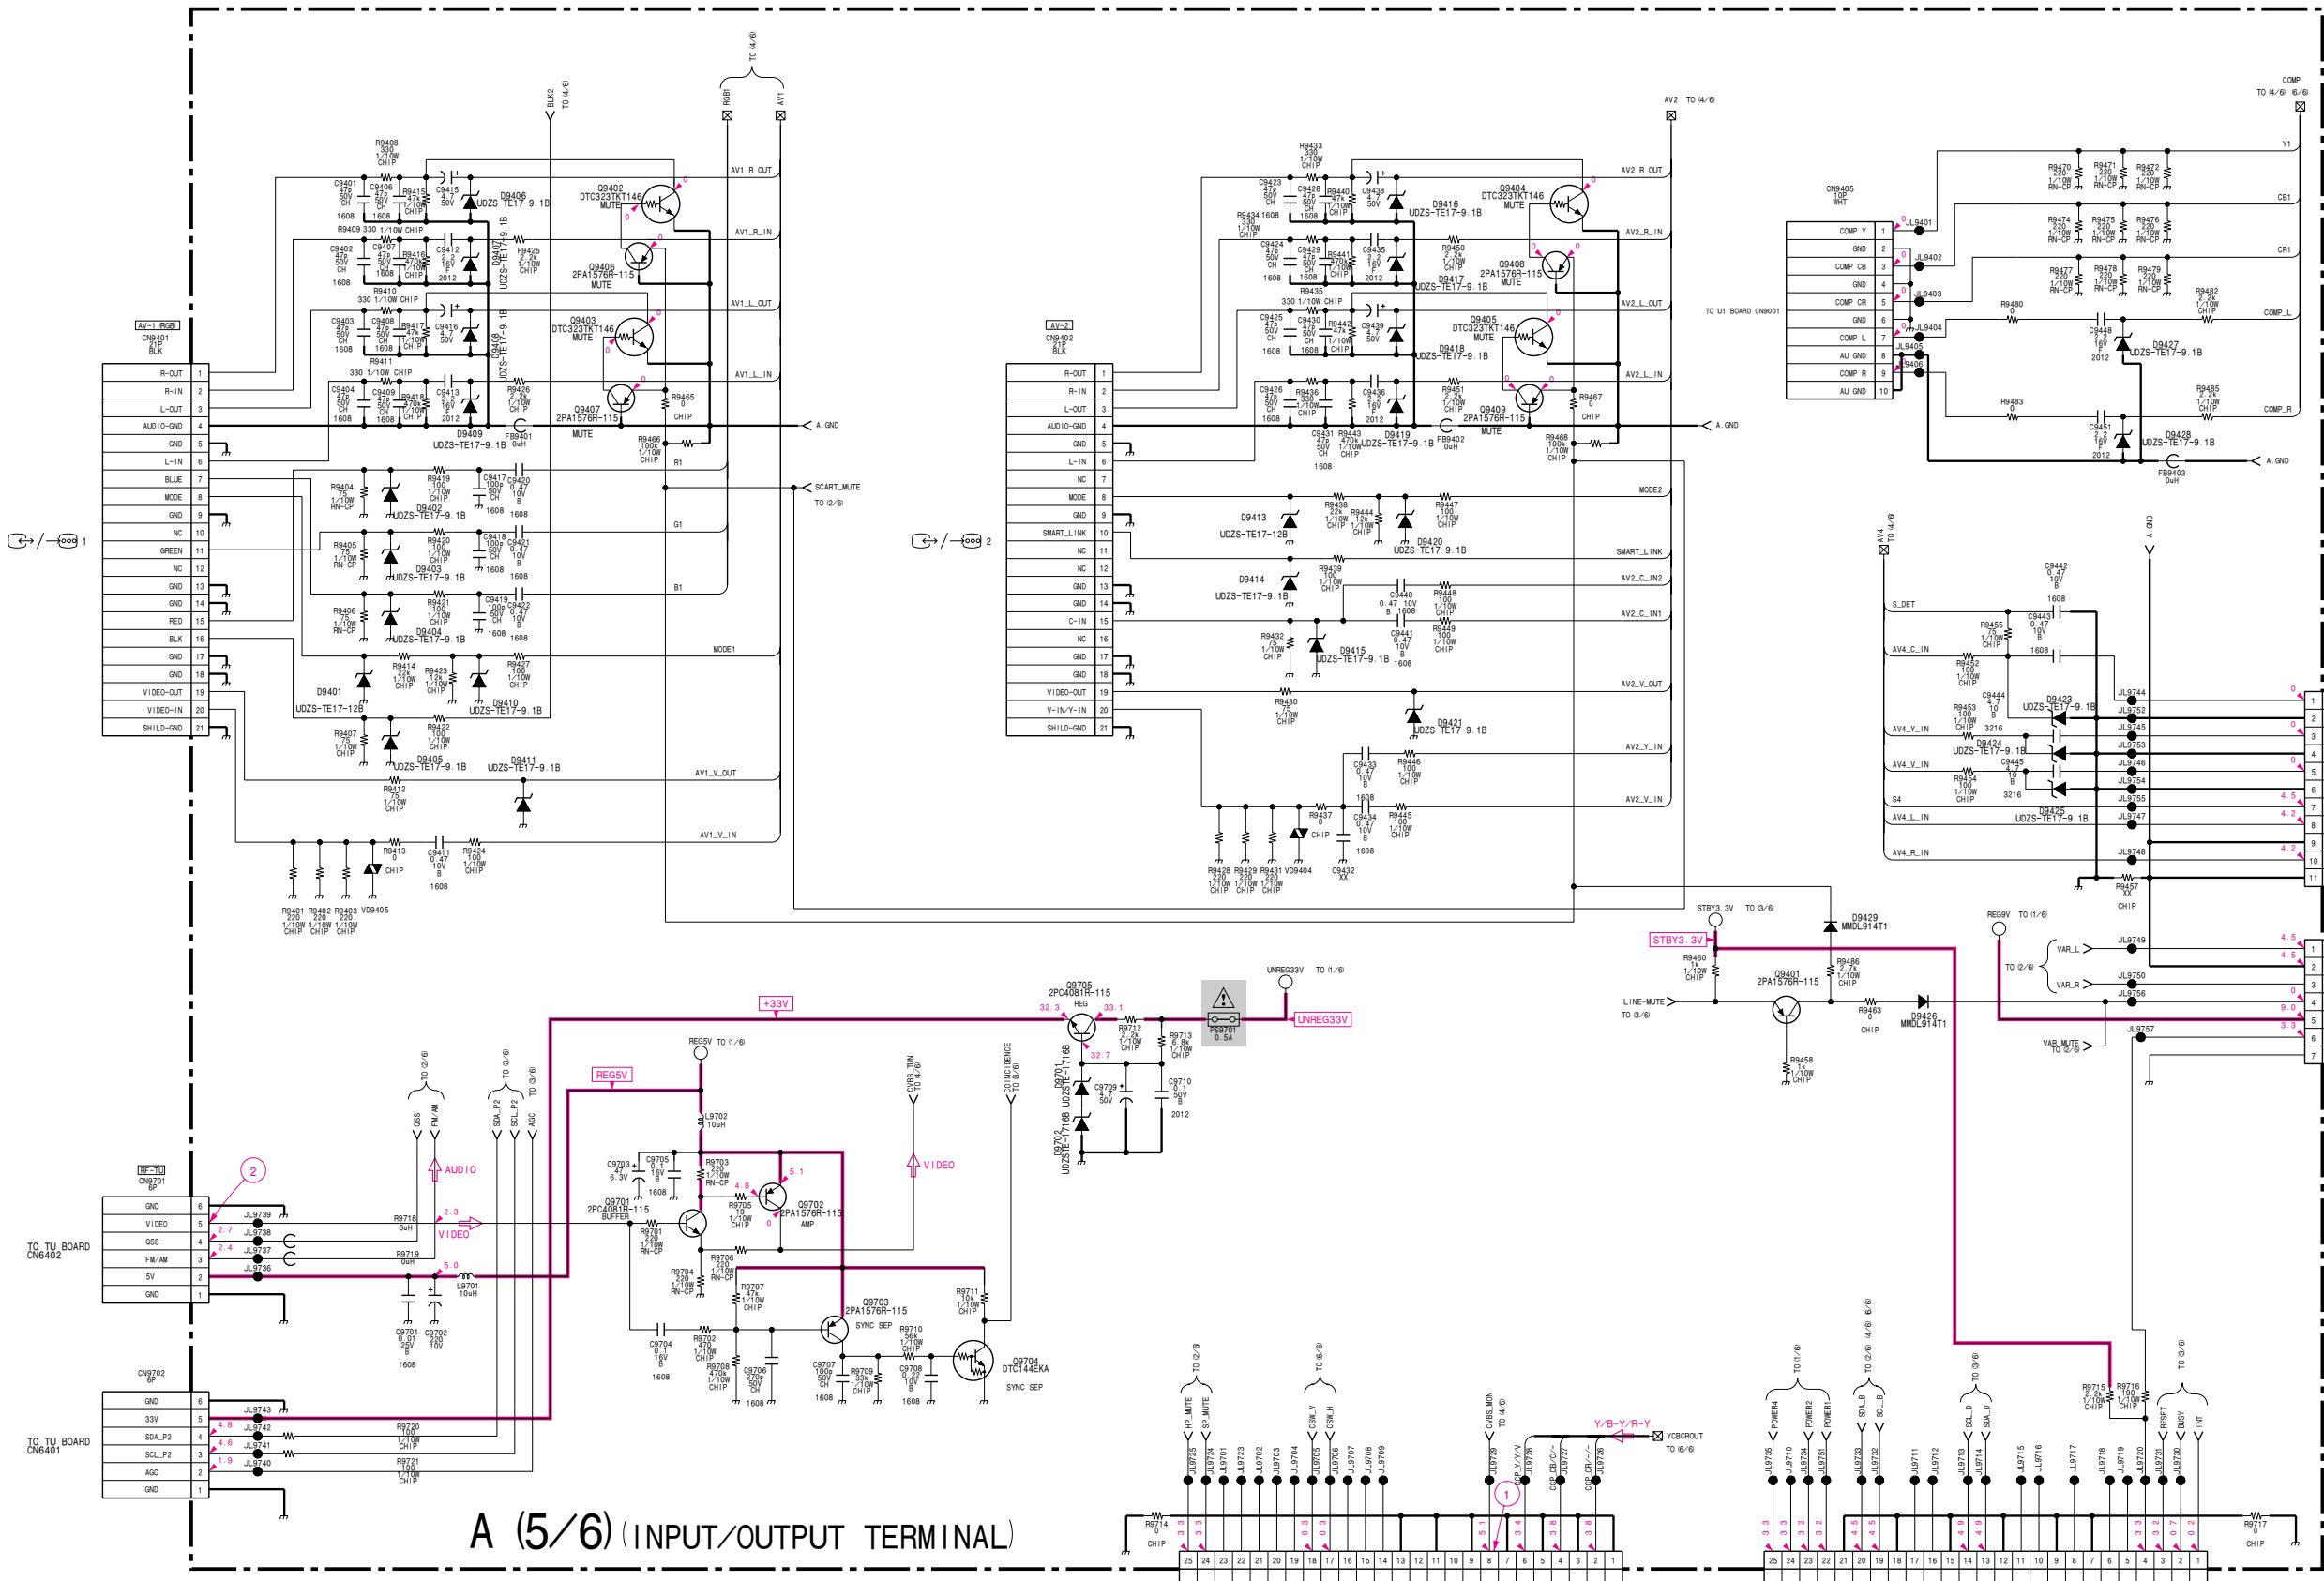

A (5/6) (INPUT/OUTPUT TERMINAL)




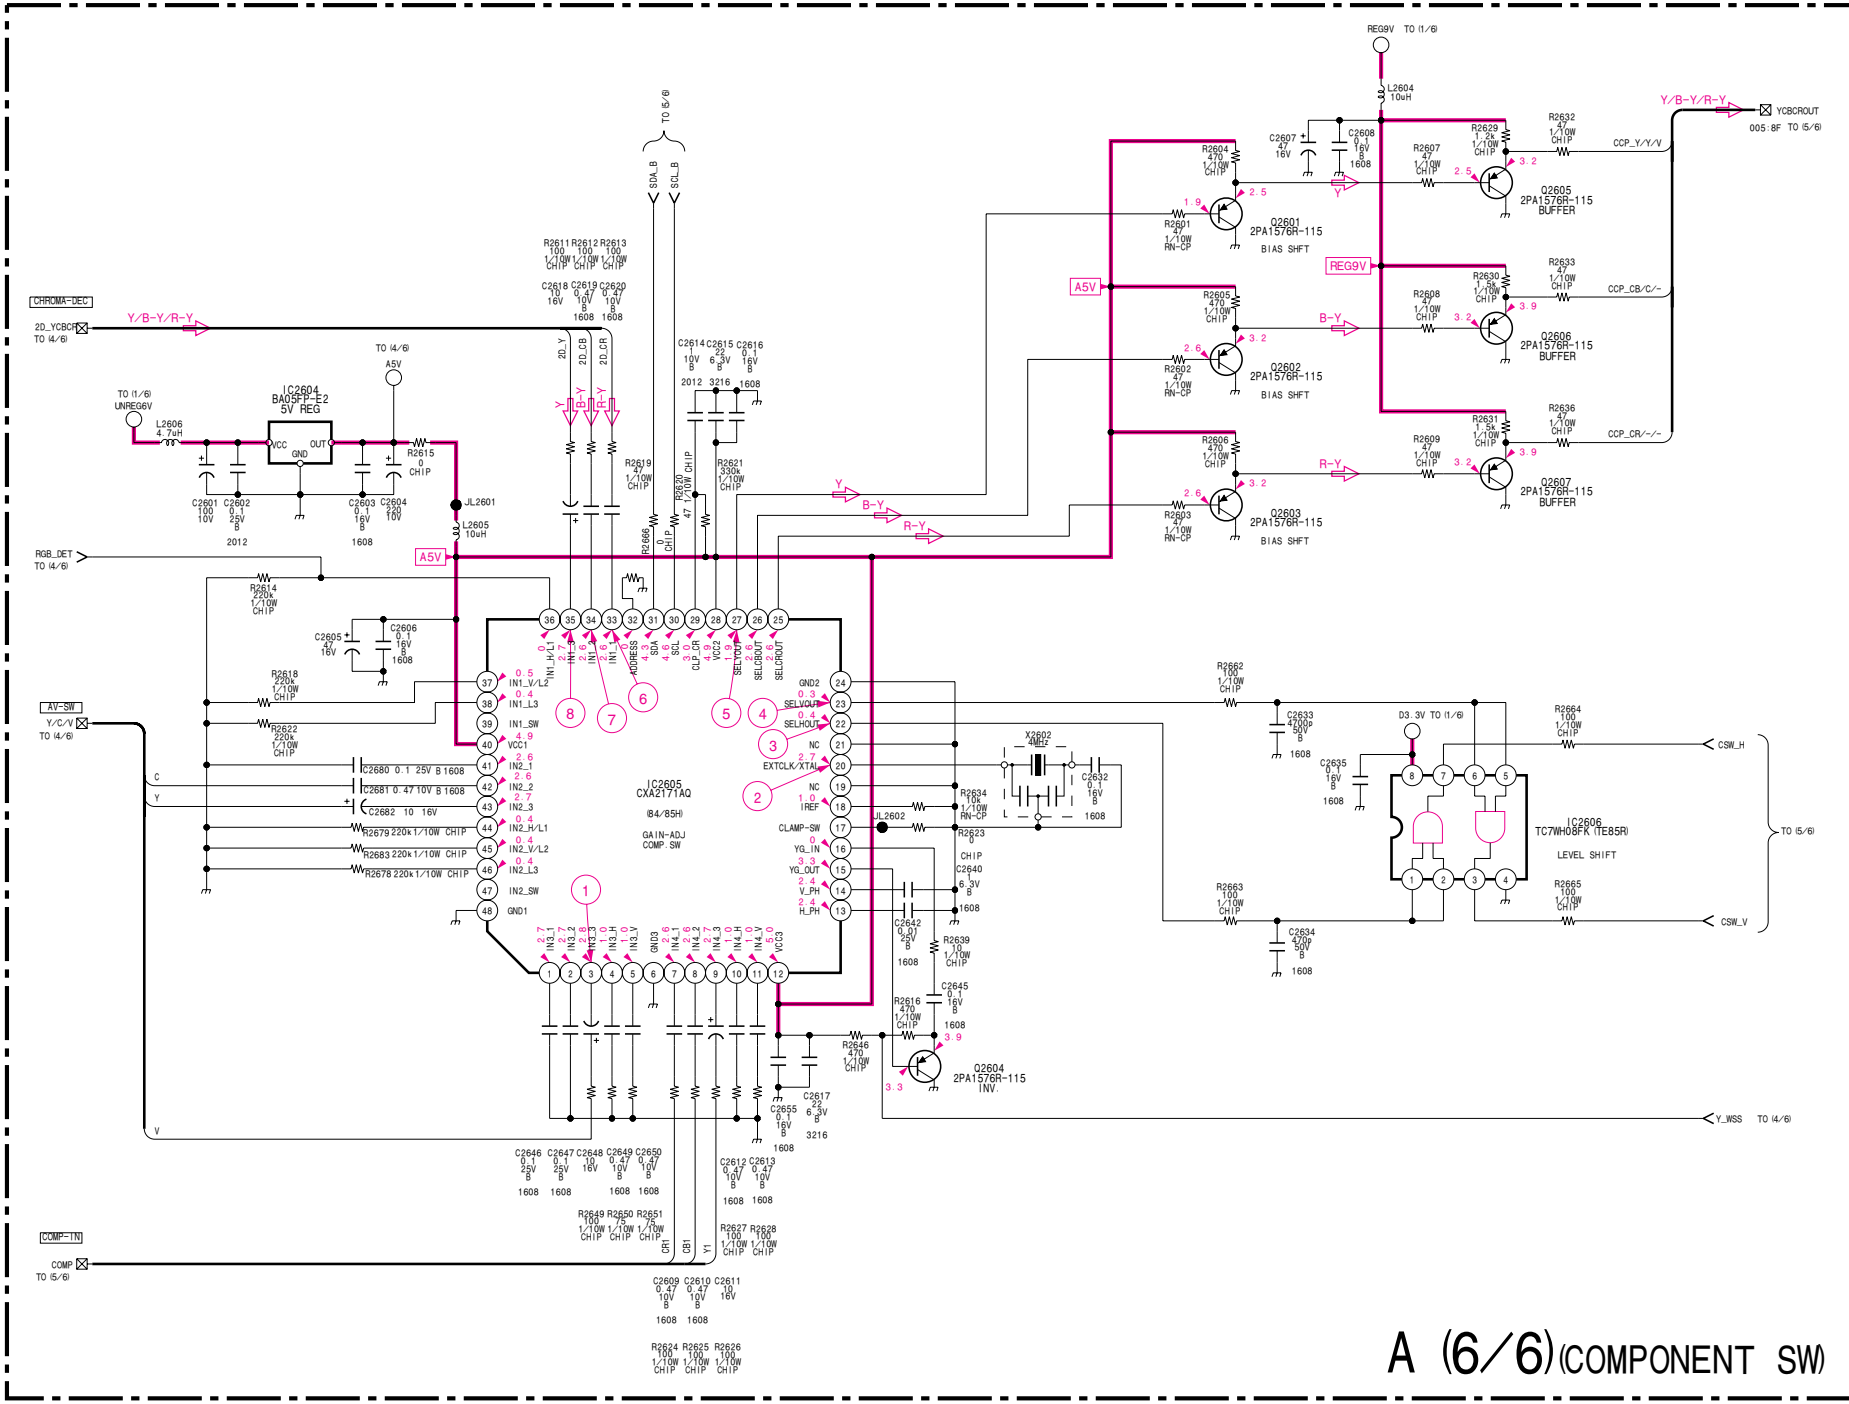


A (6/6) COMPONENT SW

B-SS12364<AEP>-A...-P6


•A(6/6) BOARD WAVEFORMS

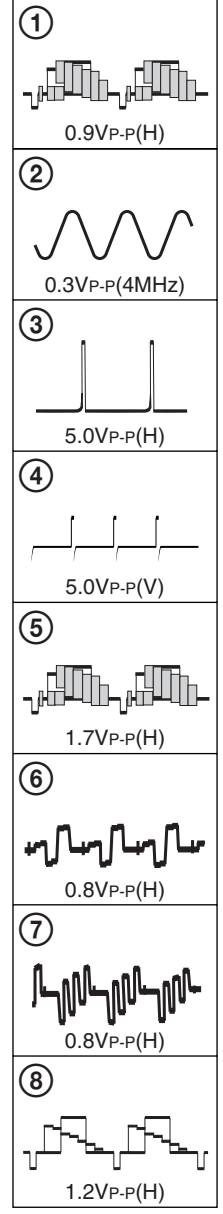

(2) Schematic Diagrams of B Board


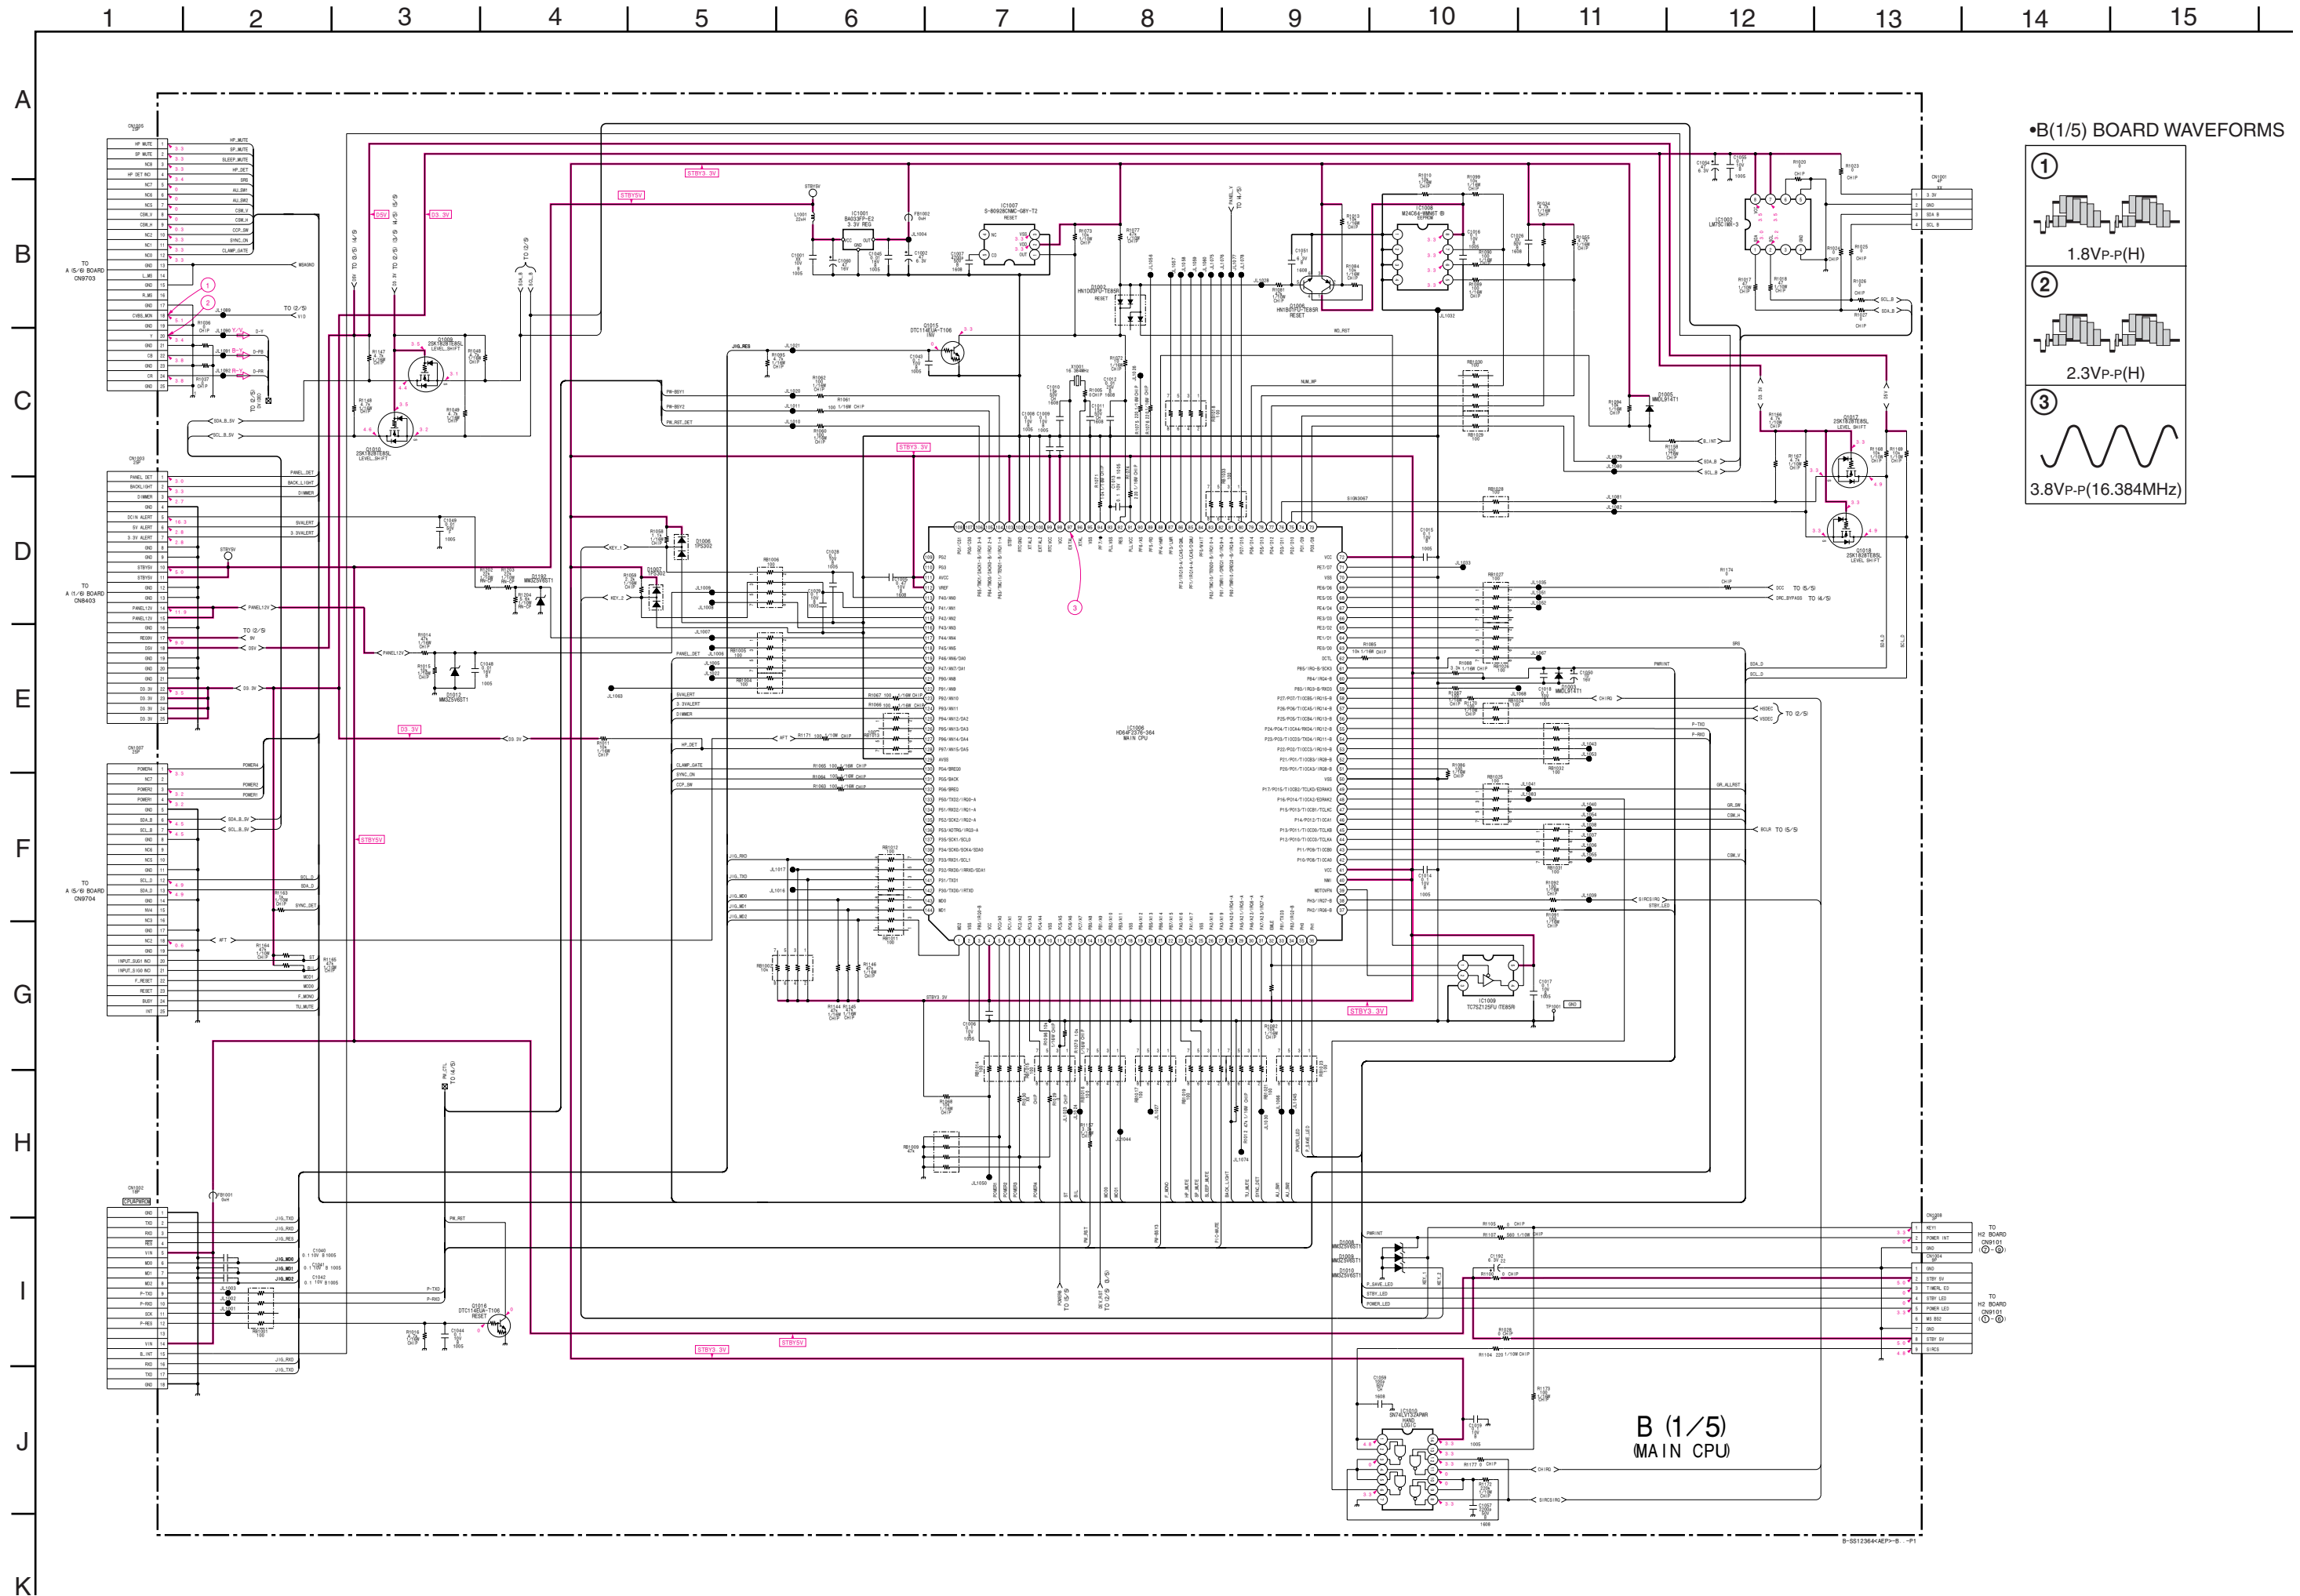


•B(1/5) BOARD WAVEFORMS

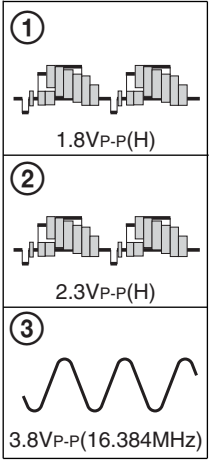


B (1/5)
MAIN CPU

•B(2/5) BOARD WAVEFORMS

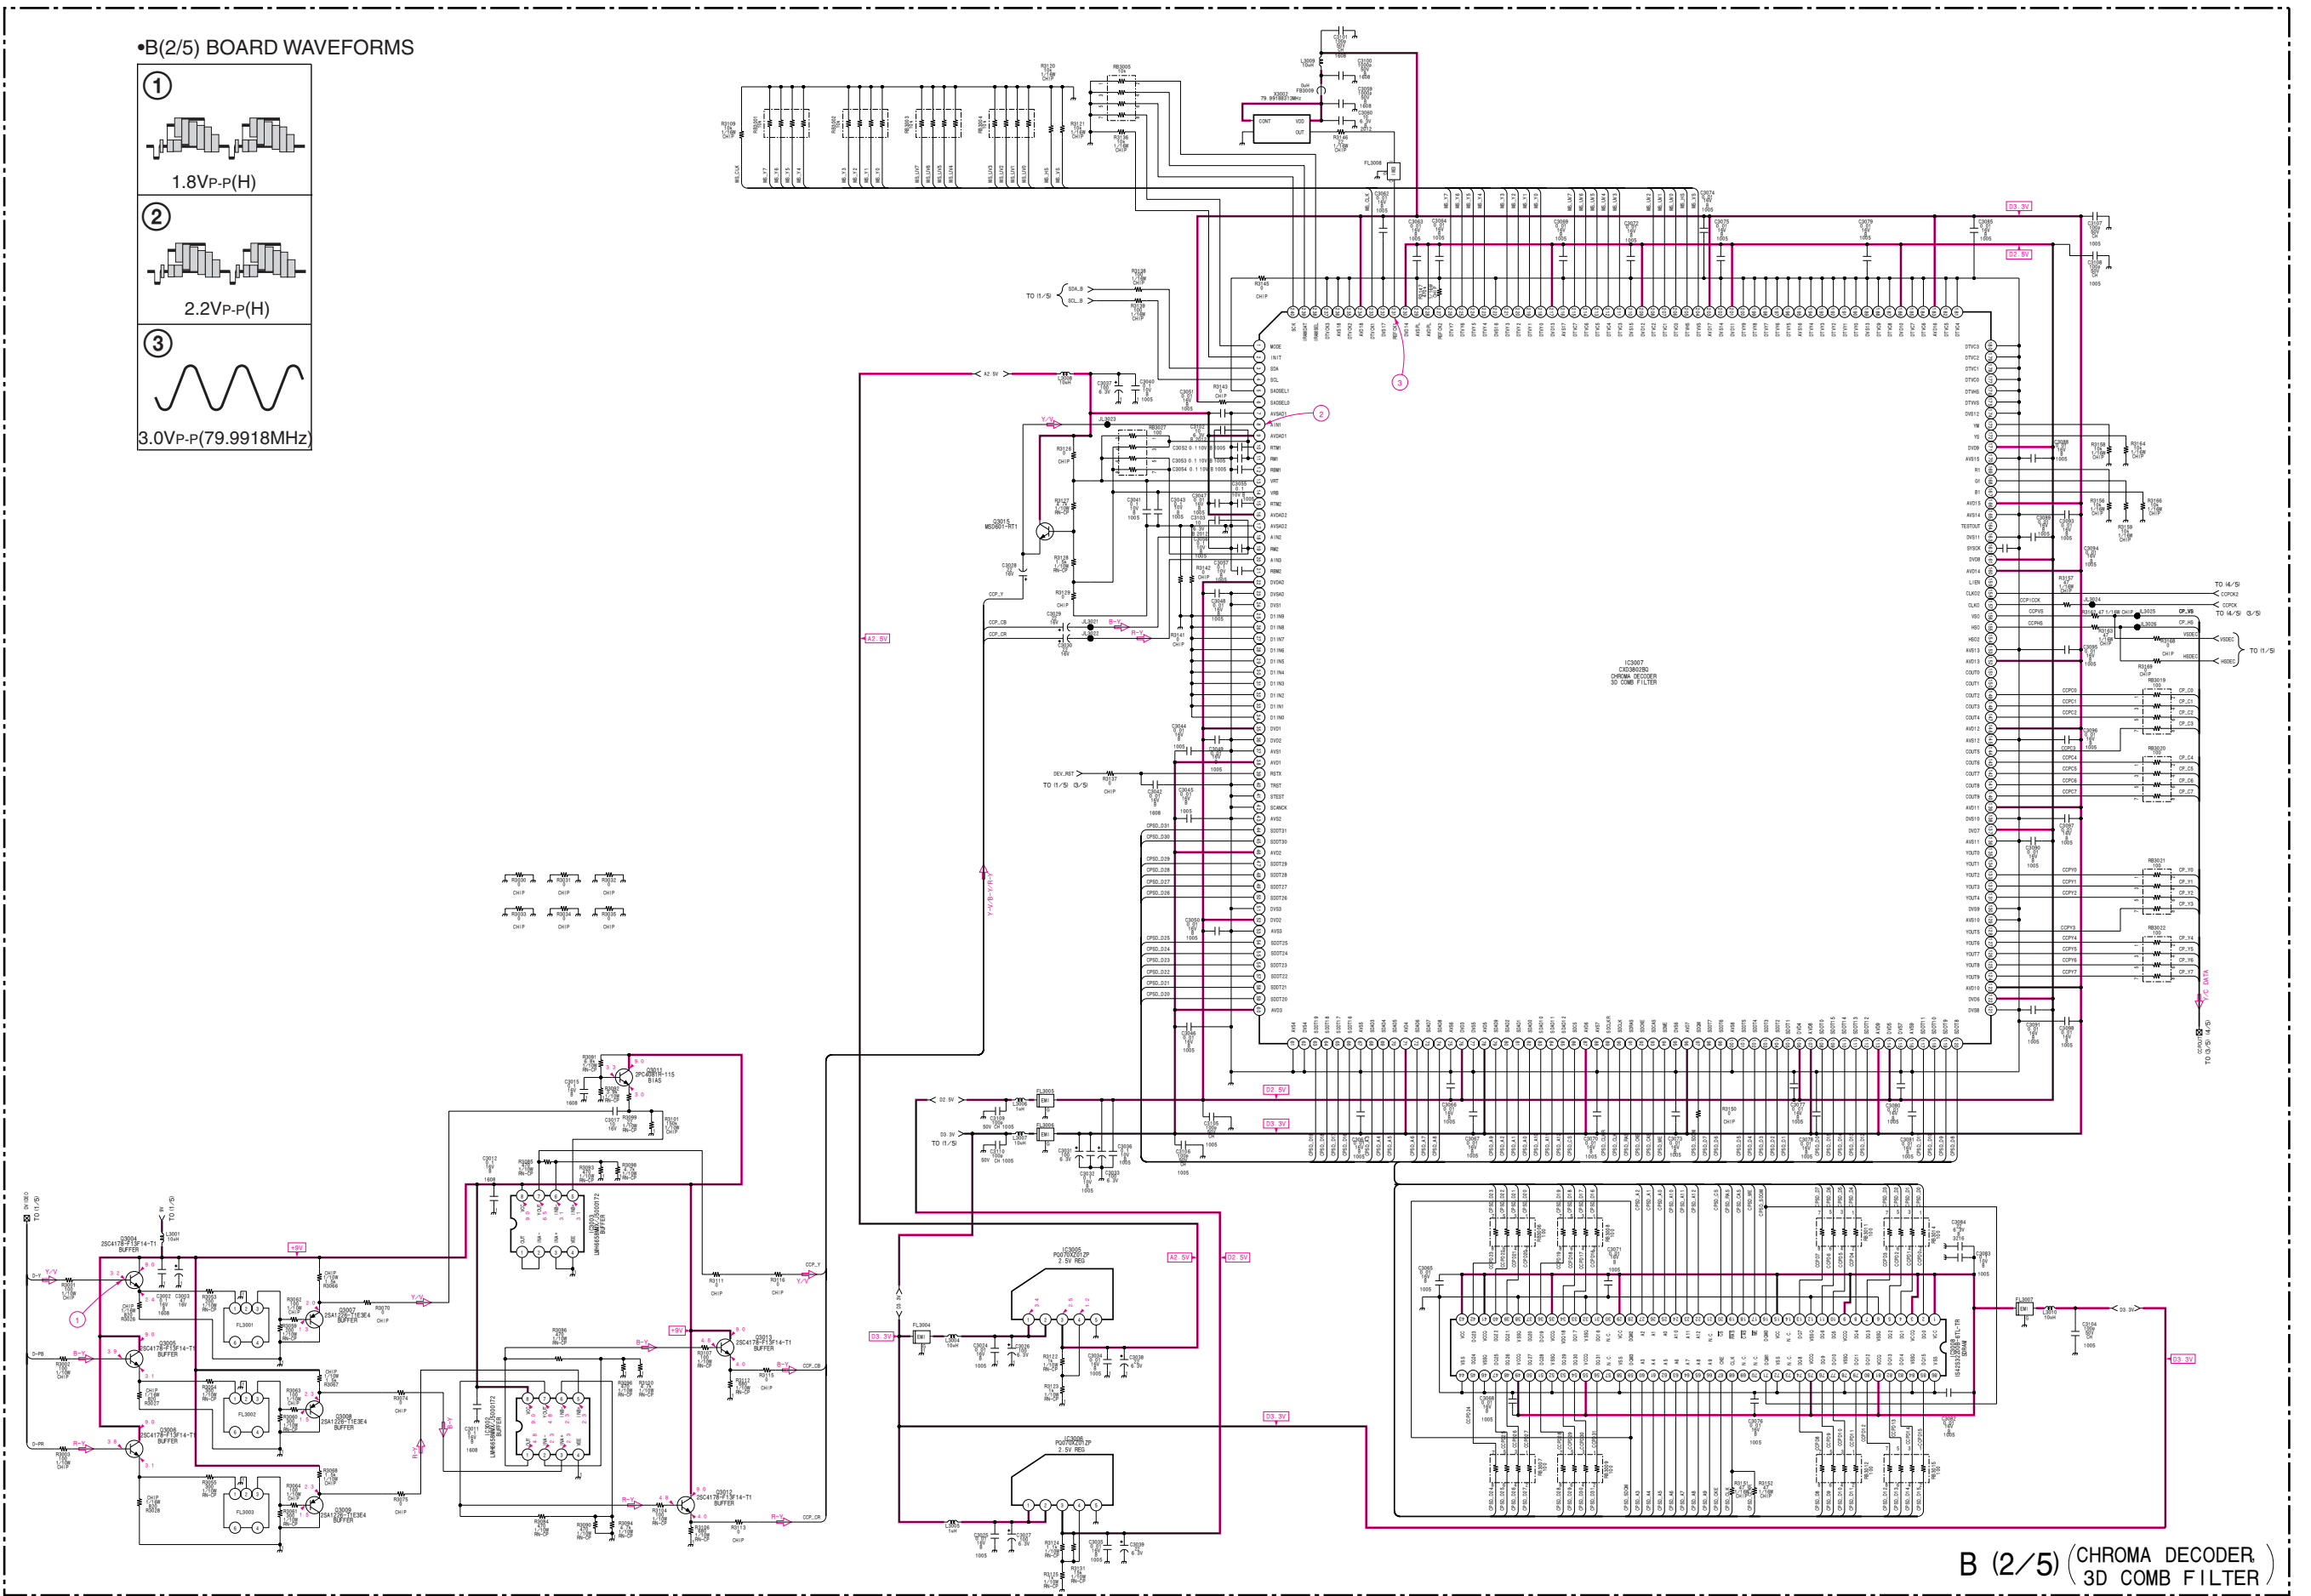
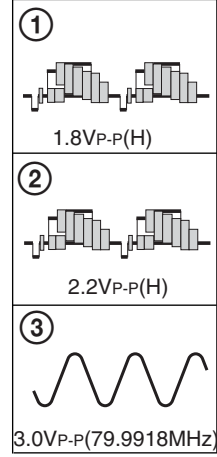


B (2/5) (CHROMA DECODER) 3D COMB FILTER

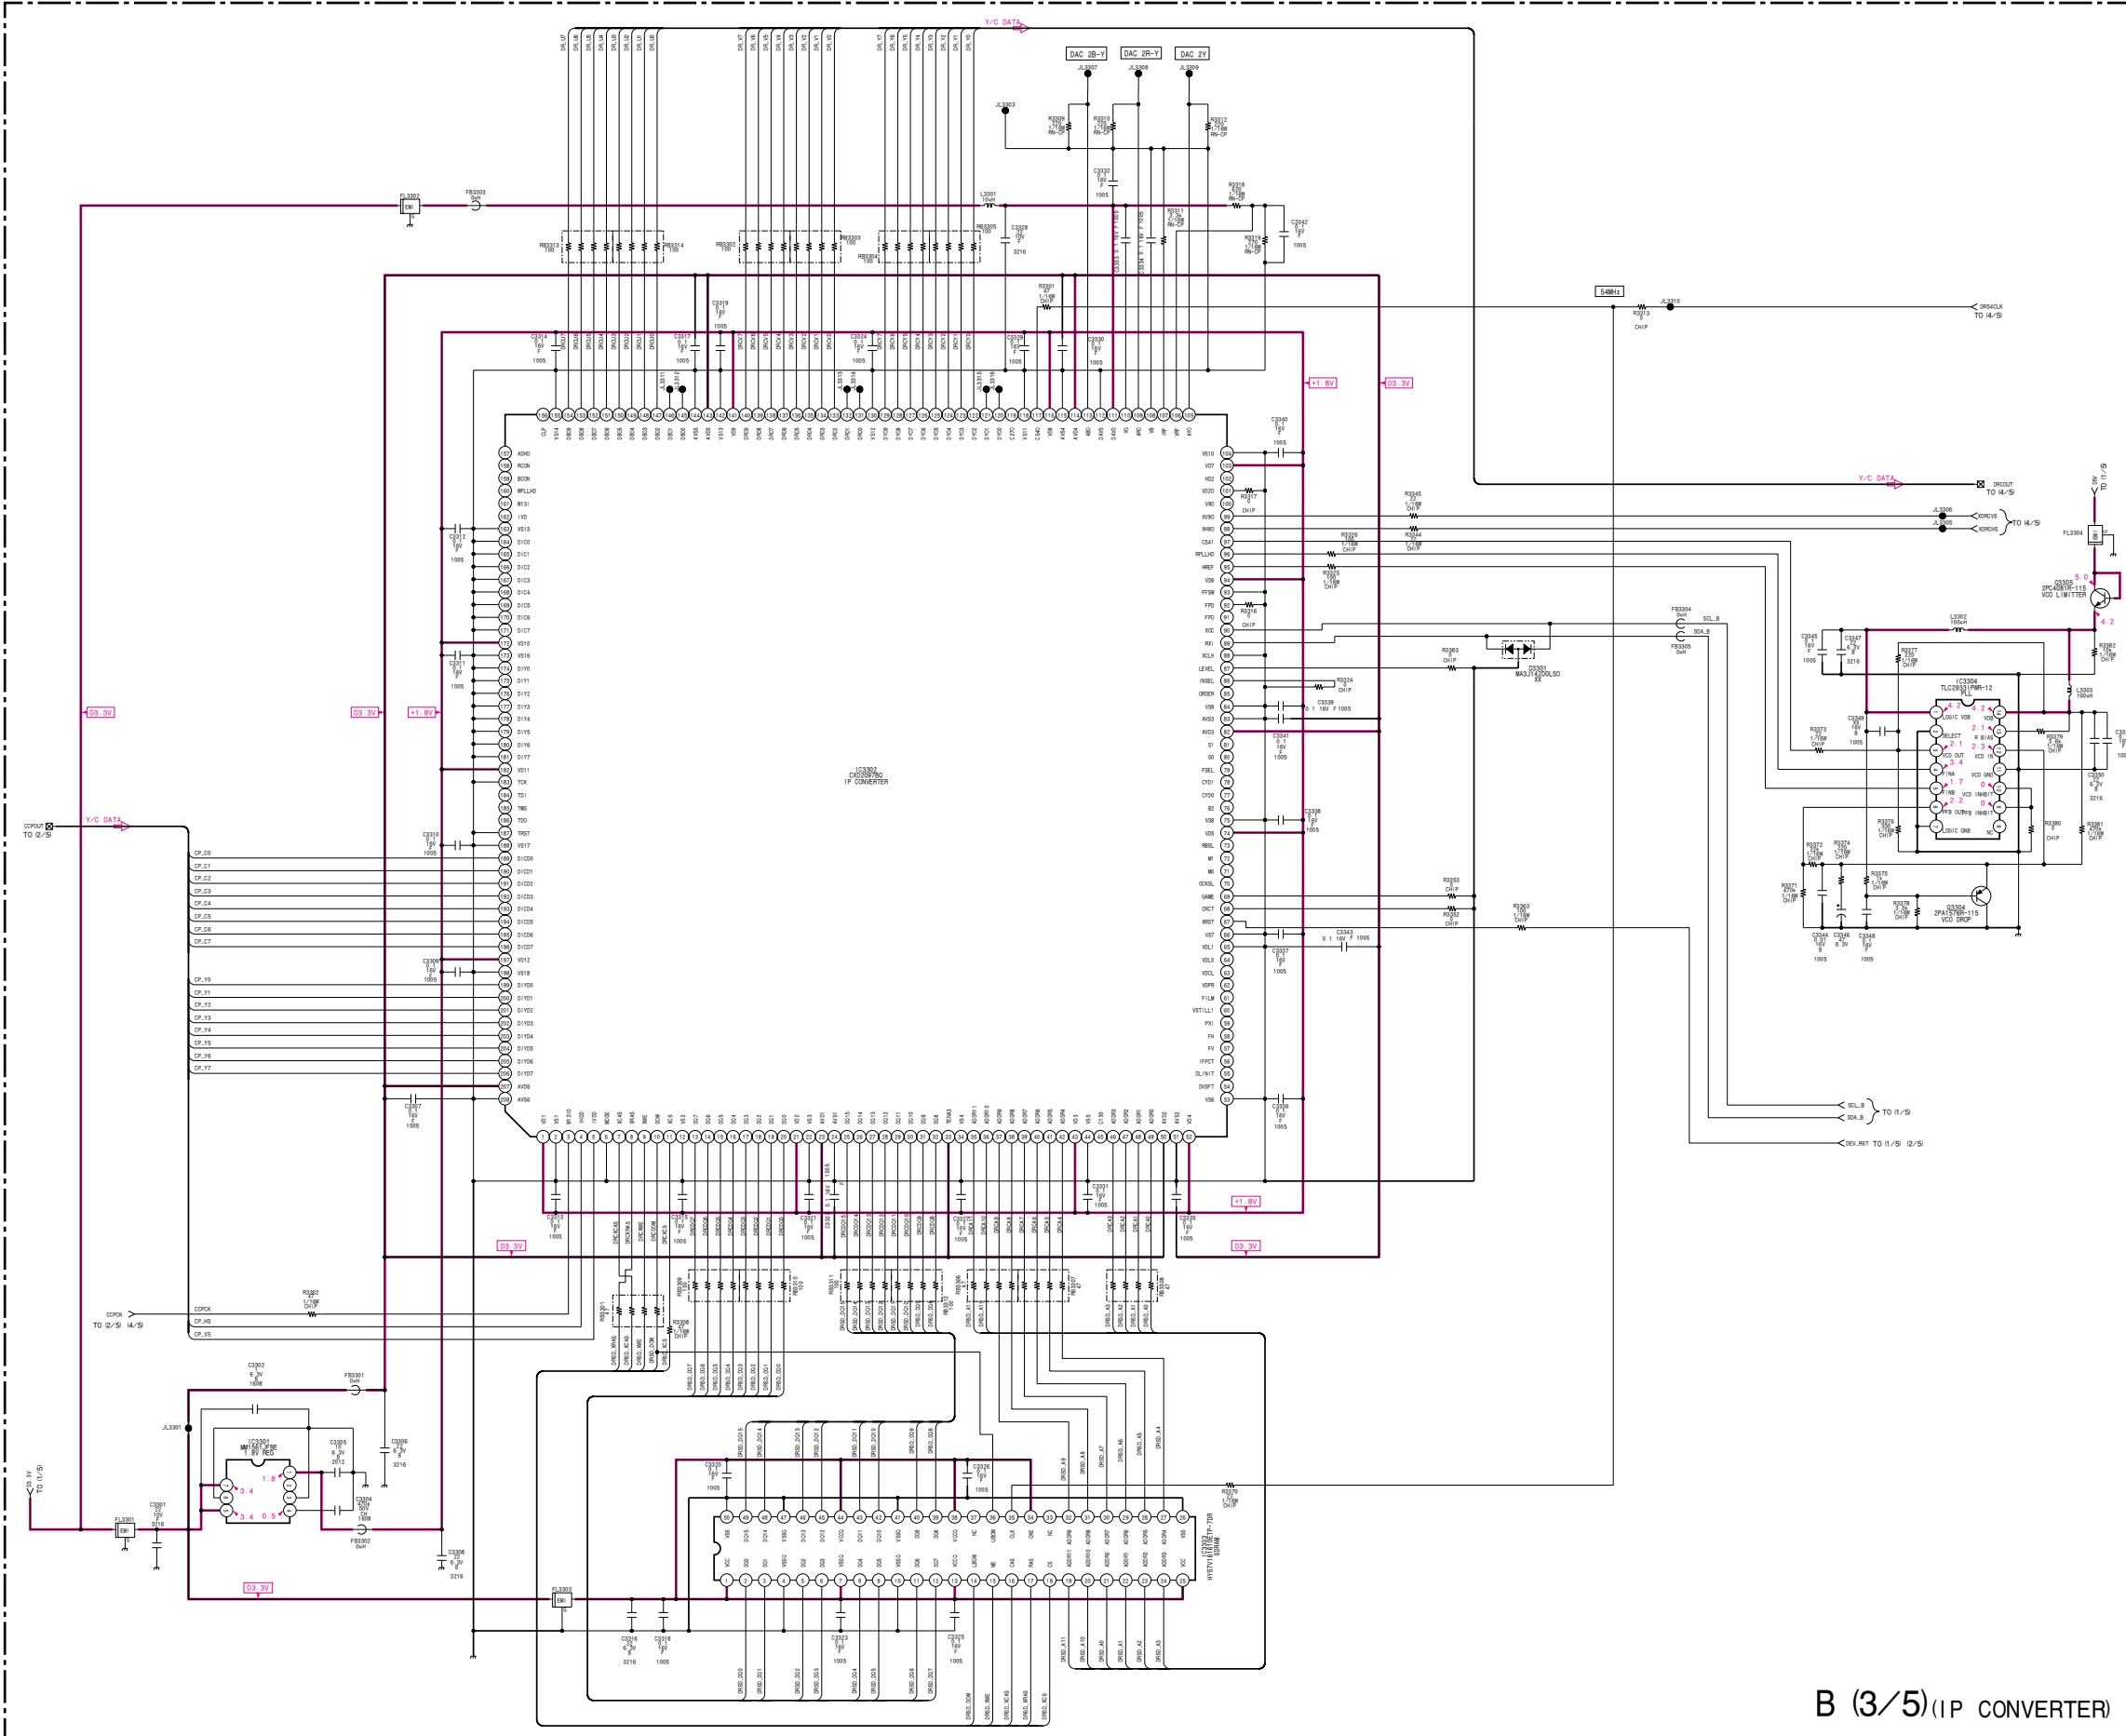

B (3/5) (IP CONVERTER)



•B(4/5) BOARD WAVEFORM

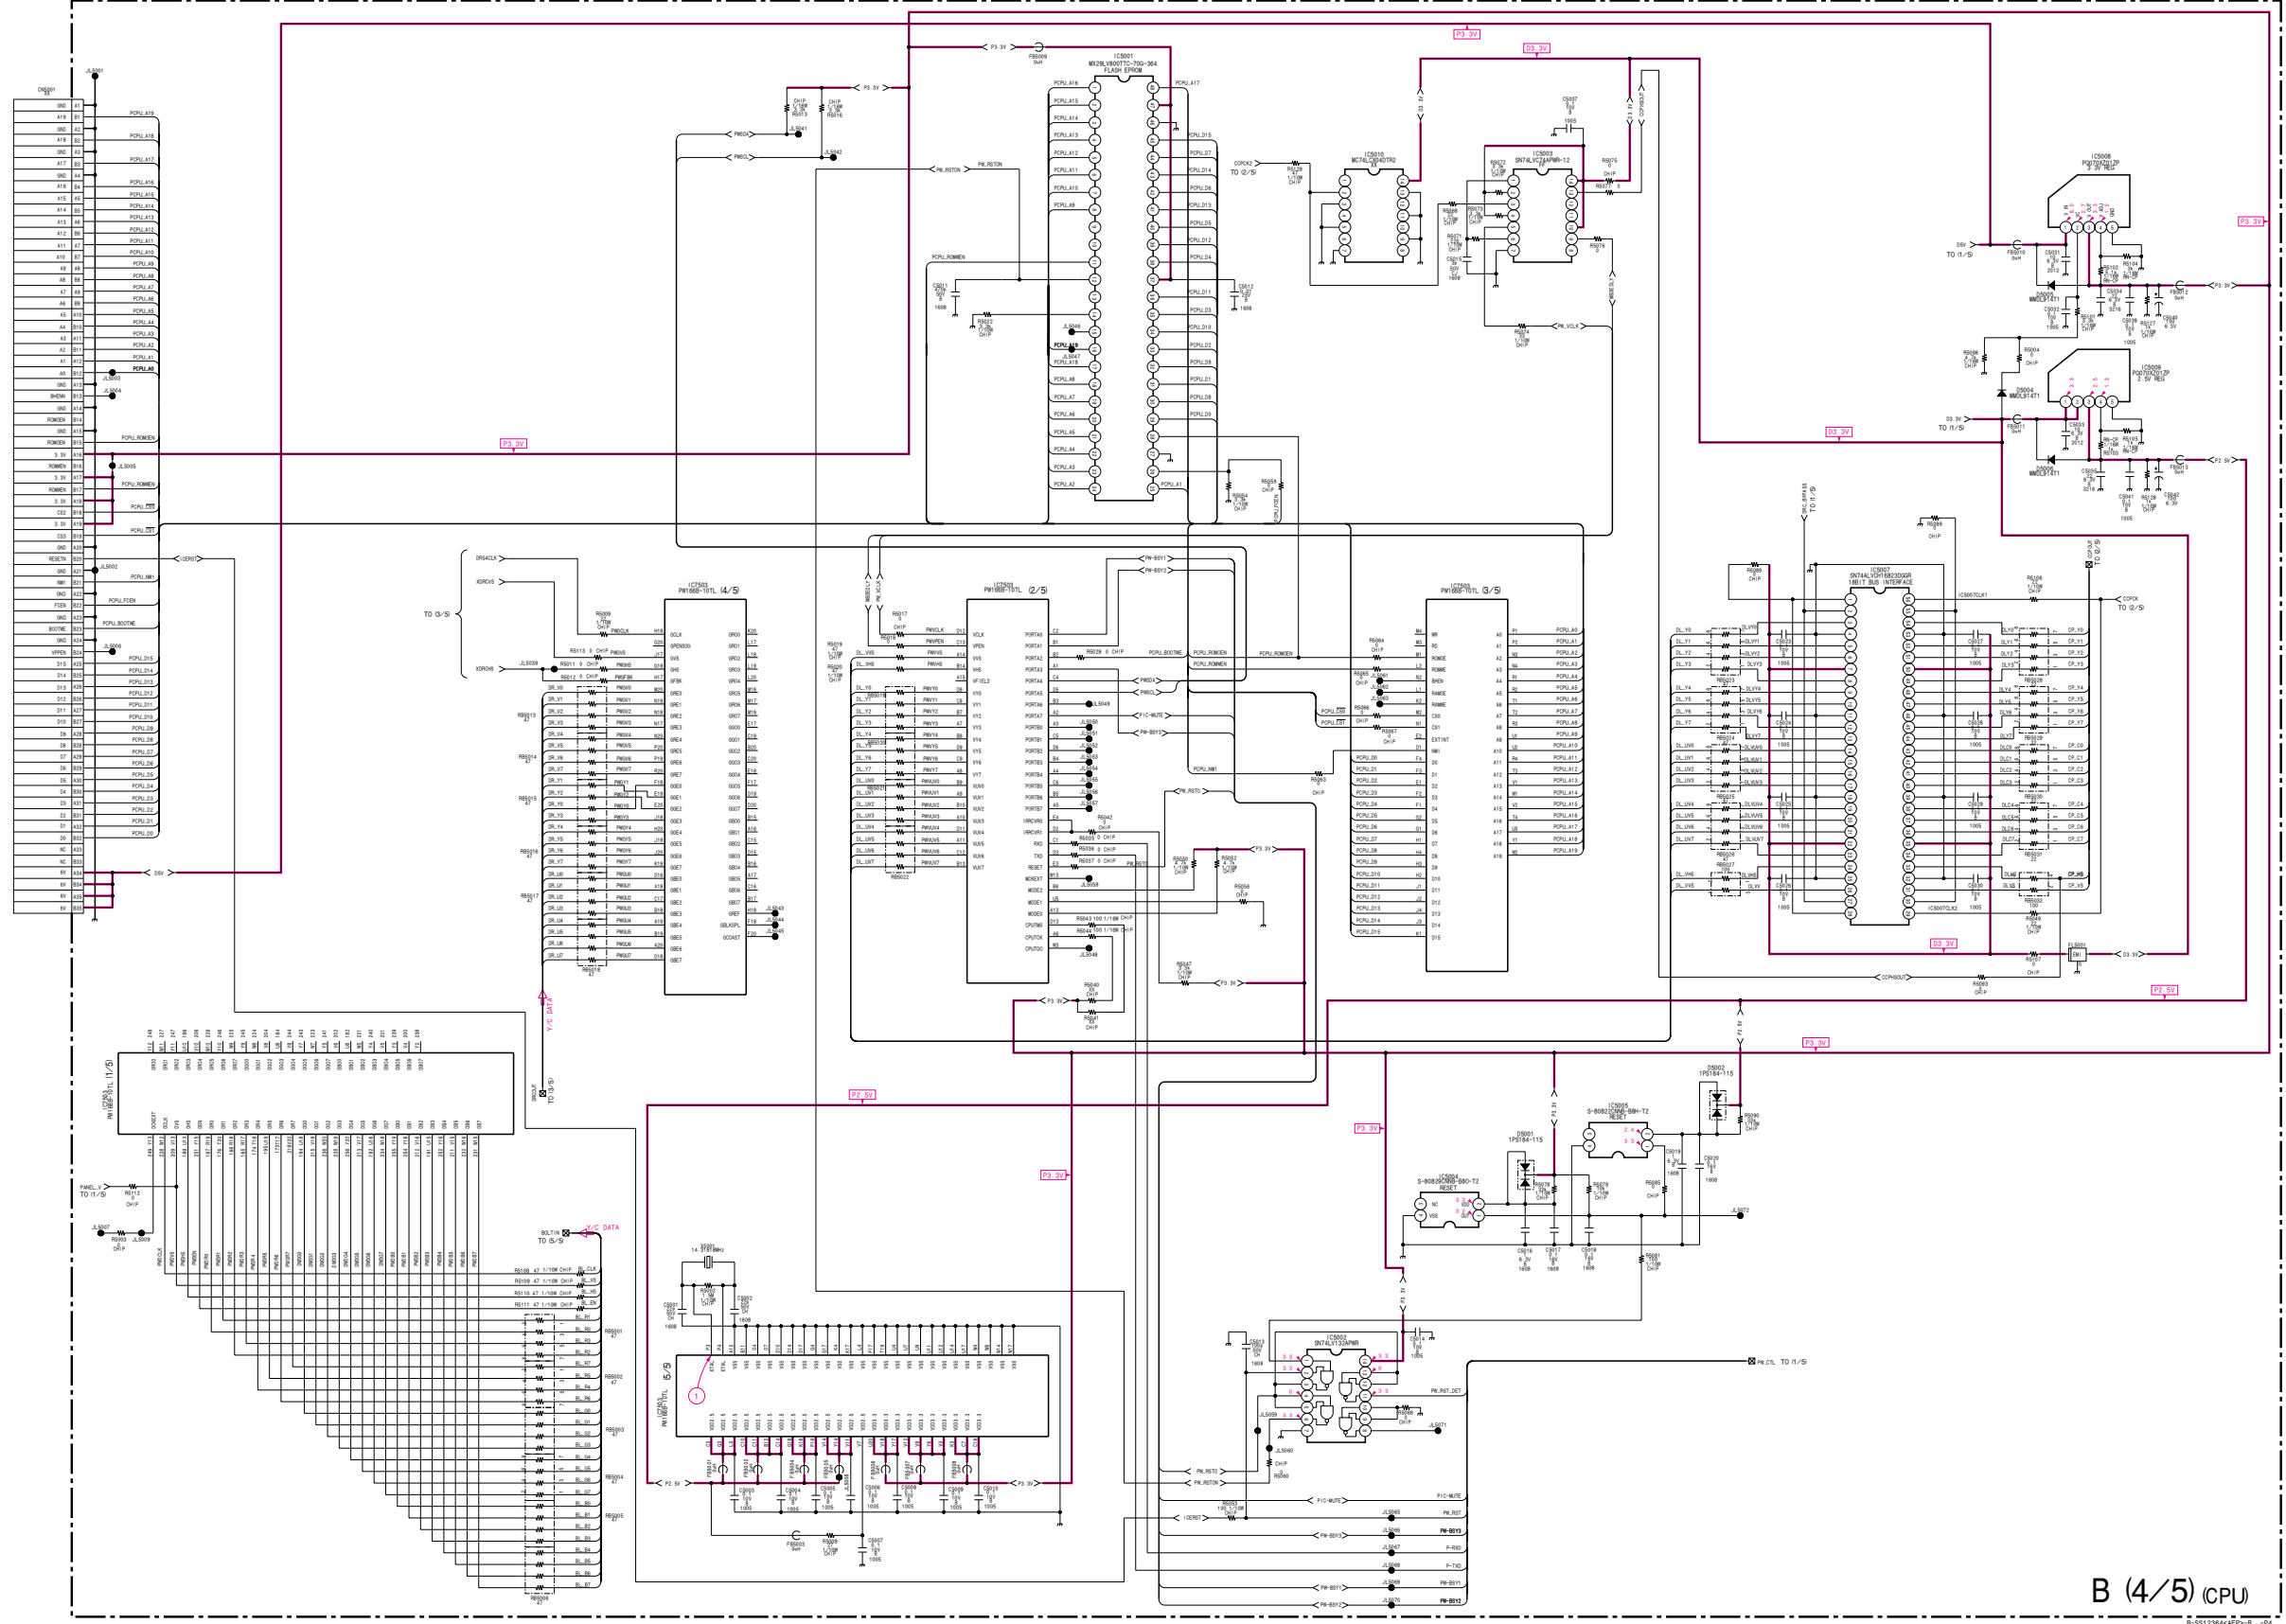

B (4/5) CPU

©-S112364-REP-5-B -P4

•B(5/5) BOARD WAVEFORMS

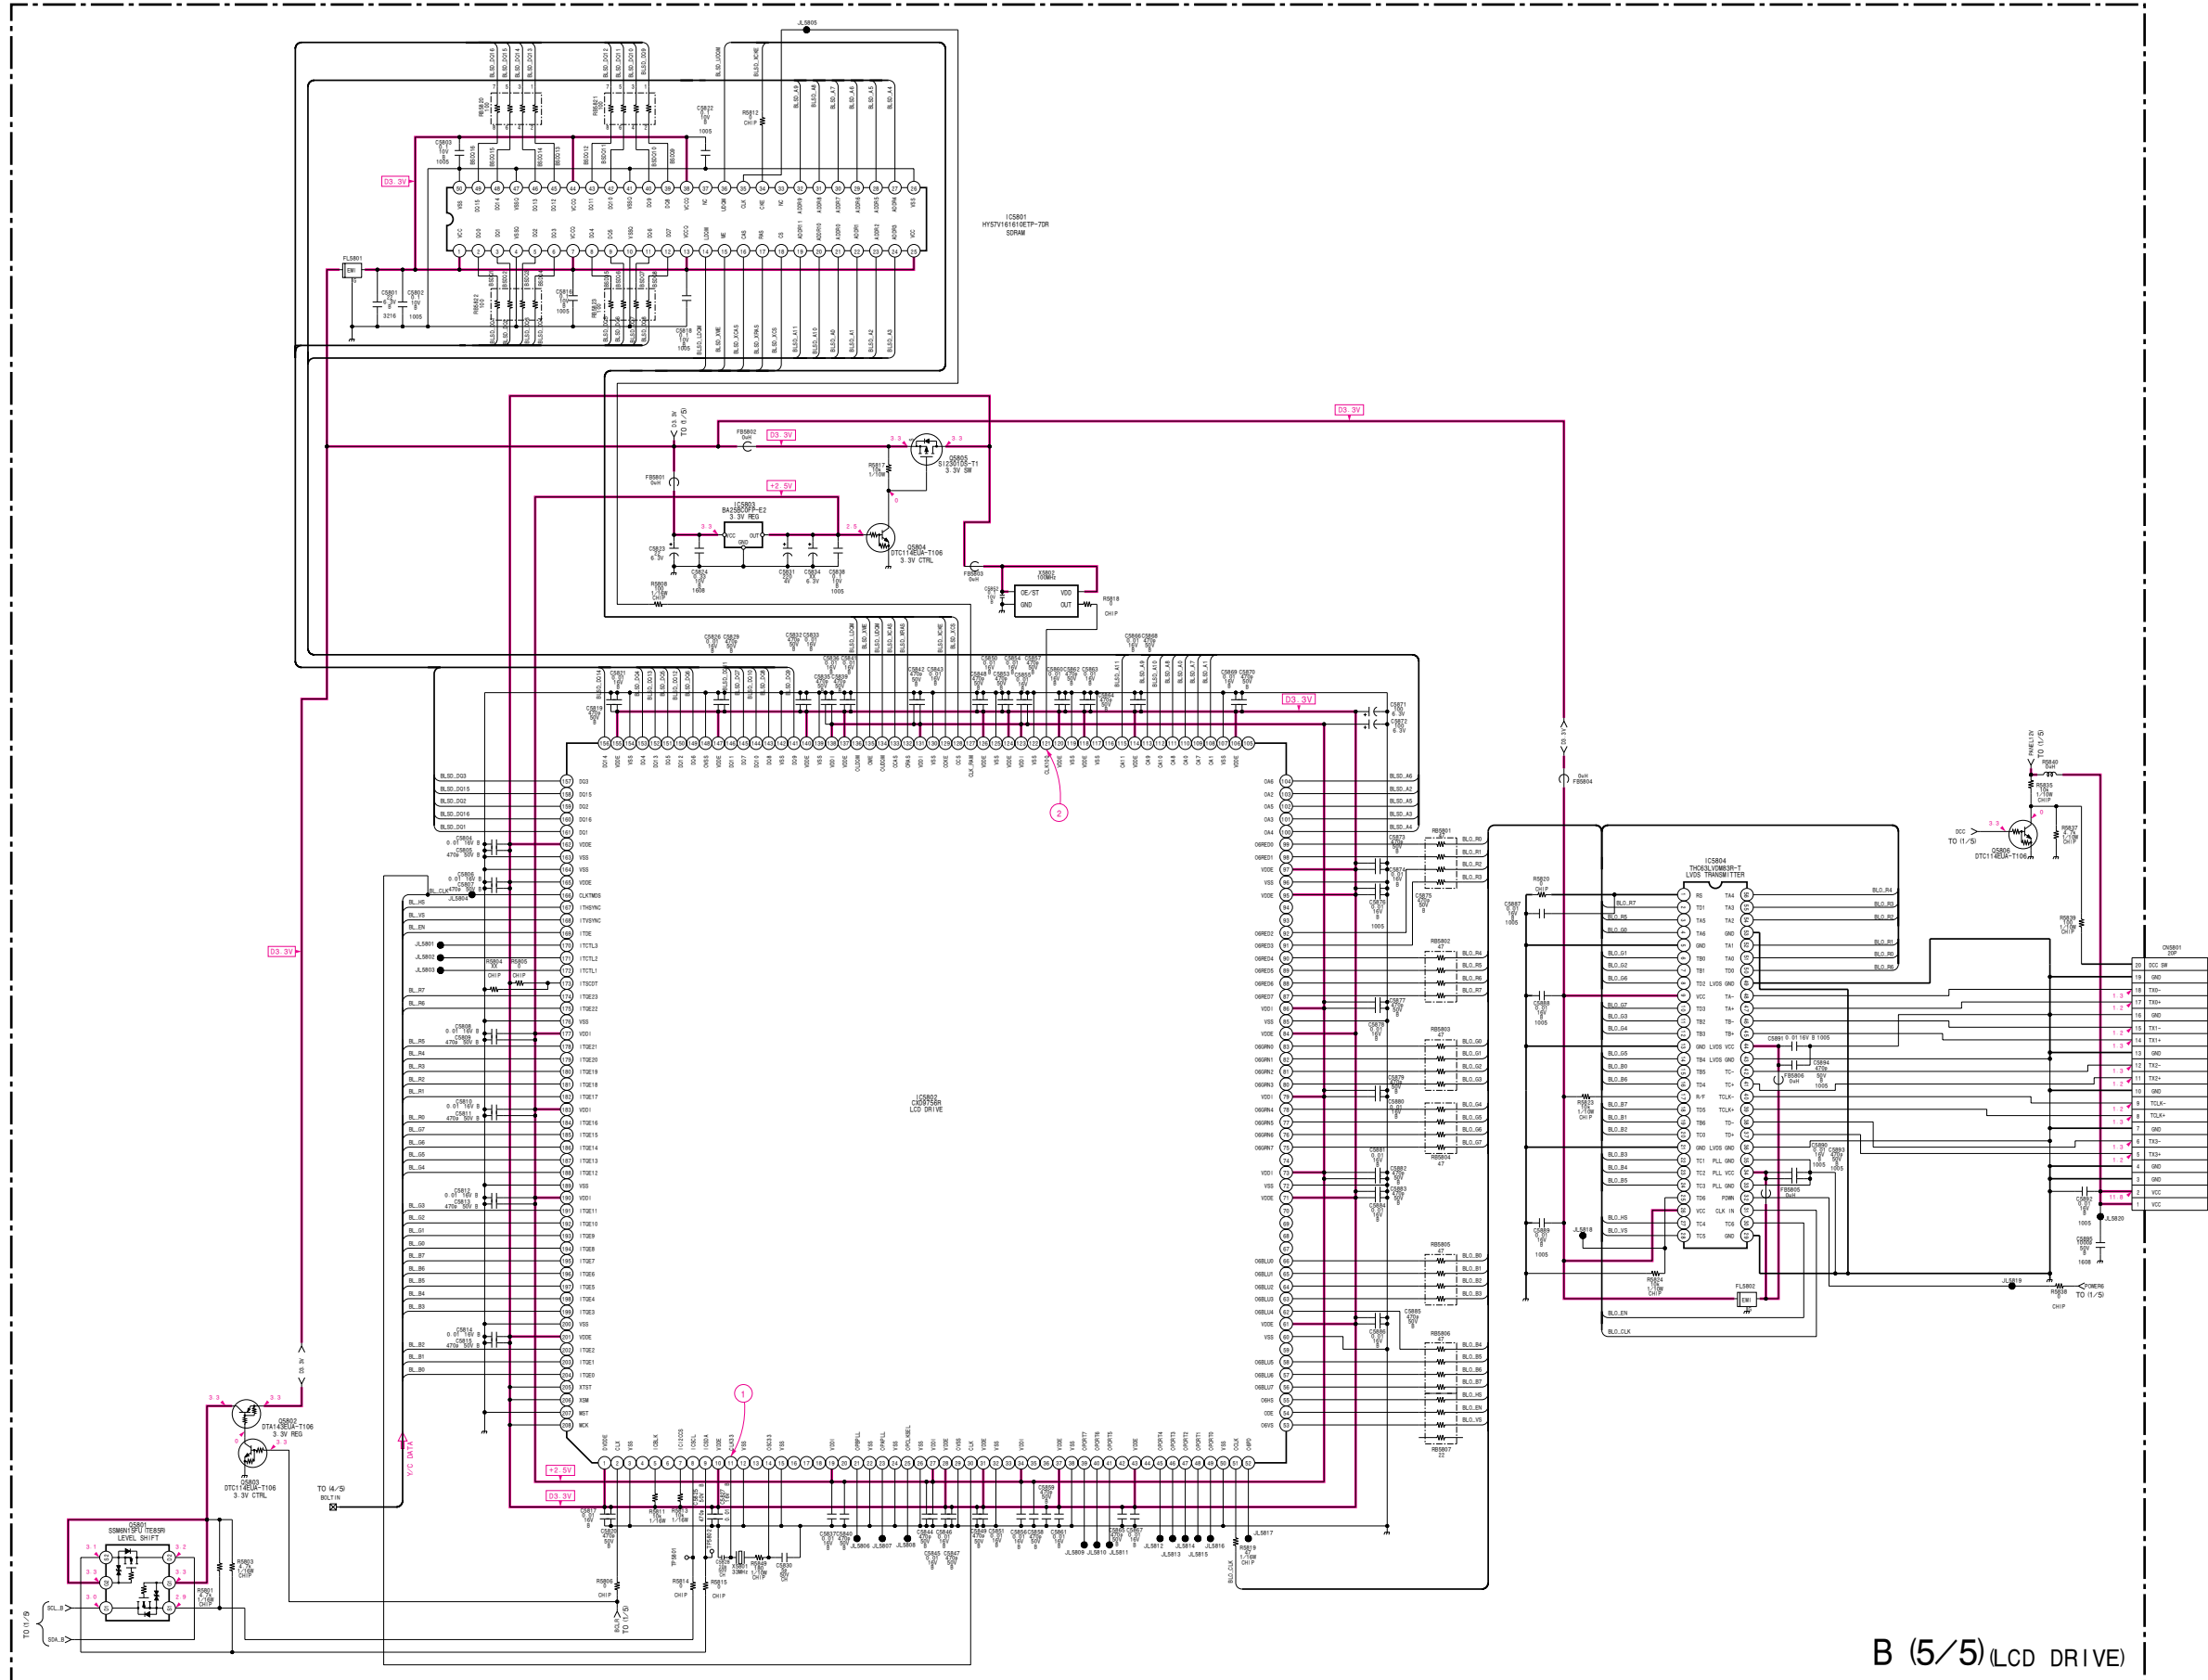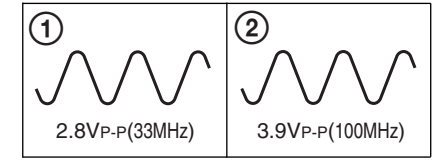


B (5/5) LCD DRIVE


B

[MAIN CPU, CHROMA DECODER, 3D COMB FILTER, IP CONVERTER, CPU]

— B BOARD —

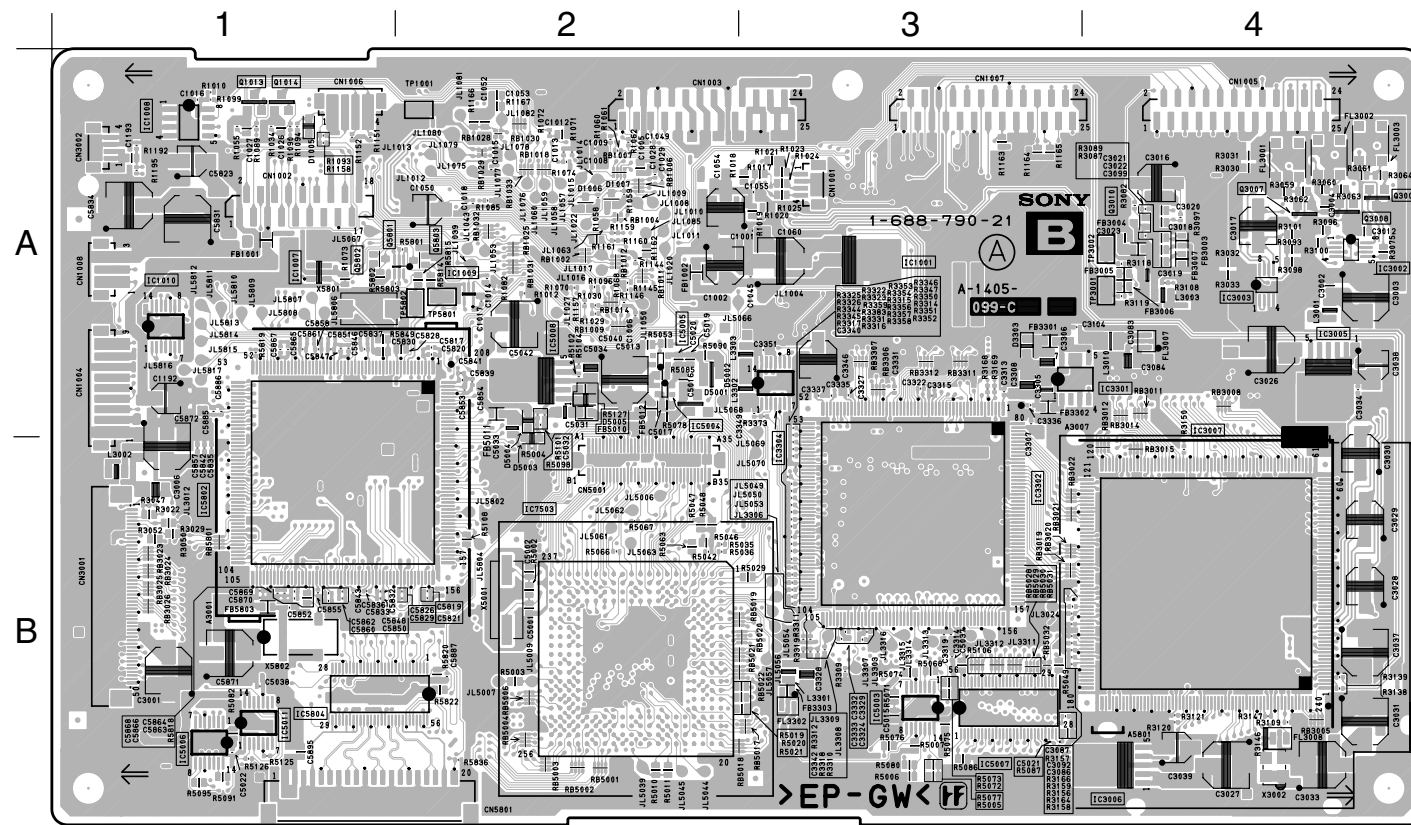

<COMPONENT SIDE>

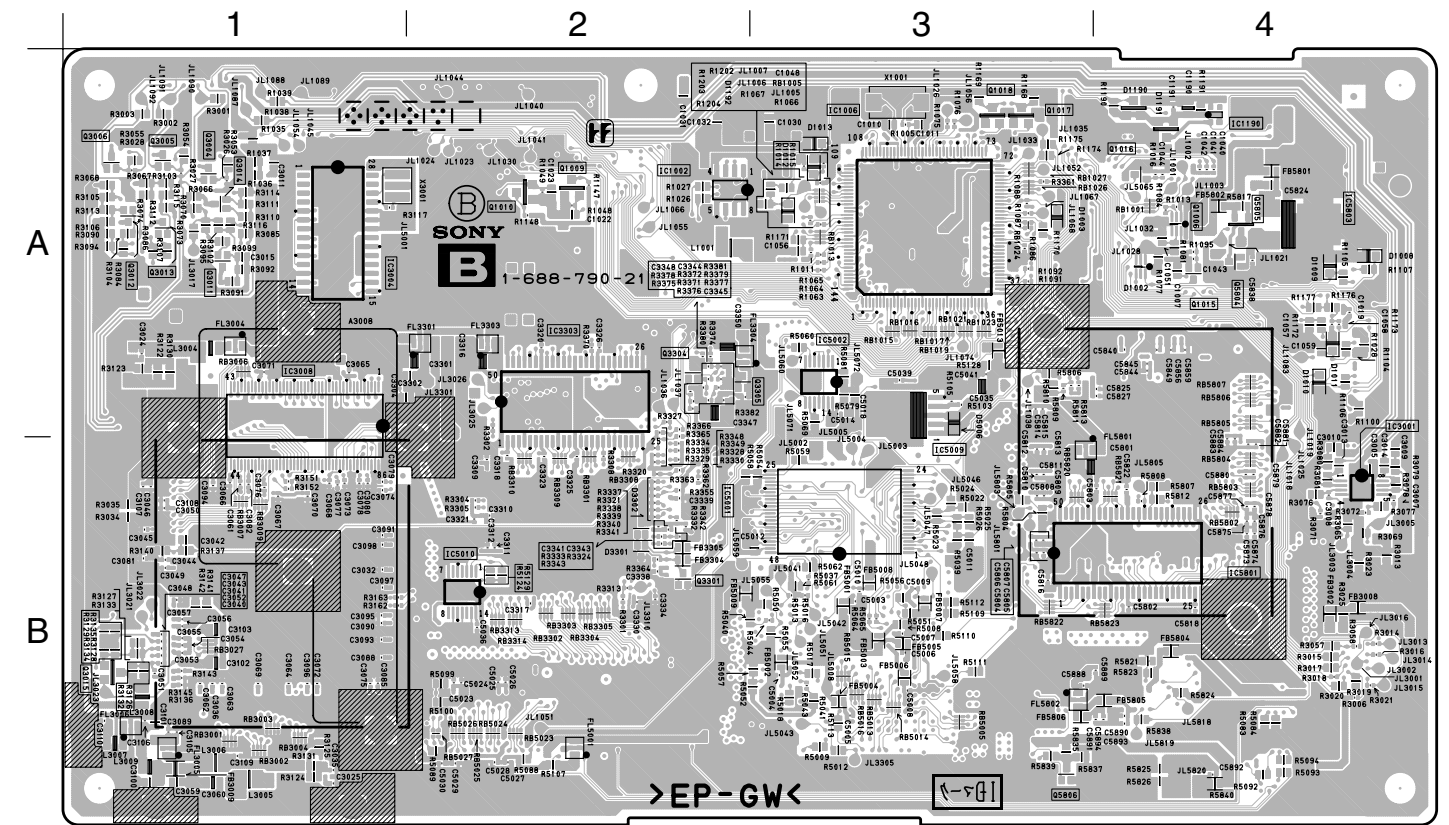

<CONDUCTOR SIDE>


• B BOARD SEMICONDUCTOR LOCATION

IC		IC		Q		DIODE	
(Component Side)	(Conductor Side)					(Component Side)	(Conductor Side) *
IC1001	A-3	IC5003	B-3	Q1018	A-3 ⑬	D1002	A-4 -
IC1002		IC5004	A-2	Q3004	A-1 ②	D1003	A-3 ③
IC1006	A-3	IC5005	A-2	Q3005	A-1 ②	D1005	A-1 ⑥
IC1007	A-1	IC5007	B-3	Q3006	A-1 ②	D1006	A-2 ⑦
IC1008	A-1	IC5008	A-2	Q3007	A-4 ②	D1007	A-2 ⑦
IC1009	A-2	IC5009	A-3	Q3008	A-4 ②	D1008	A-4 ③
IC1010	A-1	IC5801	B-4	Q3009	A-4 ②	D1009	A-4 ⑥
IC3002	A-4	IC5802	B-1	Q3011	A-1 ②	D1010	A-4 ③
IC3003	A-4	IC5803	A-4	Q3012	A-1 ②	D1012	A-3 ③
IC3005	A-4	IC5804	B-1	Q3013	A-1 ②	D1192	A-3 ③
IC3006	A-4	IC7503	B-2	Q3015	B-1 ②	D5001	A-2 ⑥
IC3007	B-4			Q3304	A-2 ②	D5002	A-2 ⑥
IC3008	A-1			Q3305	A-2 ②	D5004	A-2 ③
IC3301	A-3			Q5801	A-1 -	D5005	A-2 ③
IC3302	B-3			Q5802	A-1 ②	D5006	A-3 ③
IC3303	A-2			Q5803	A-2 ②		
IC3304	A-3			Q5804	A-4 ②		
IC5001	B-3			Q5805	A-4 ⑬		
IC5002	A-3			Q5806	B-3 ②		

TRANSISTOR		Q	
(Component Side)	(Conductor Side) *		
Q1006	A-4 ⑬	Q1018	A-3 ⑬
Q1009	A-2 ⑬	Q3004	A-1 ②
Q1010	A-2 ⑬	Q3005	A-1 ②
Q1015	A-4 ②	Q3006	A-1 ②
Q1016	A-4 ②	Q3007	A-4 ②
Q1017	A-3 ⑬	Q3008	A-4 ②

*: Refer to Terminal name of semiconductors in silk screen printed circuit (see page 3-6)


(3) Schematic Diagrams of G2 Board

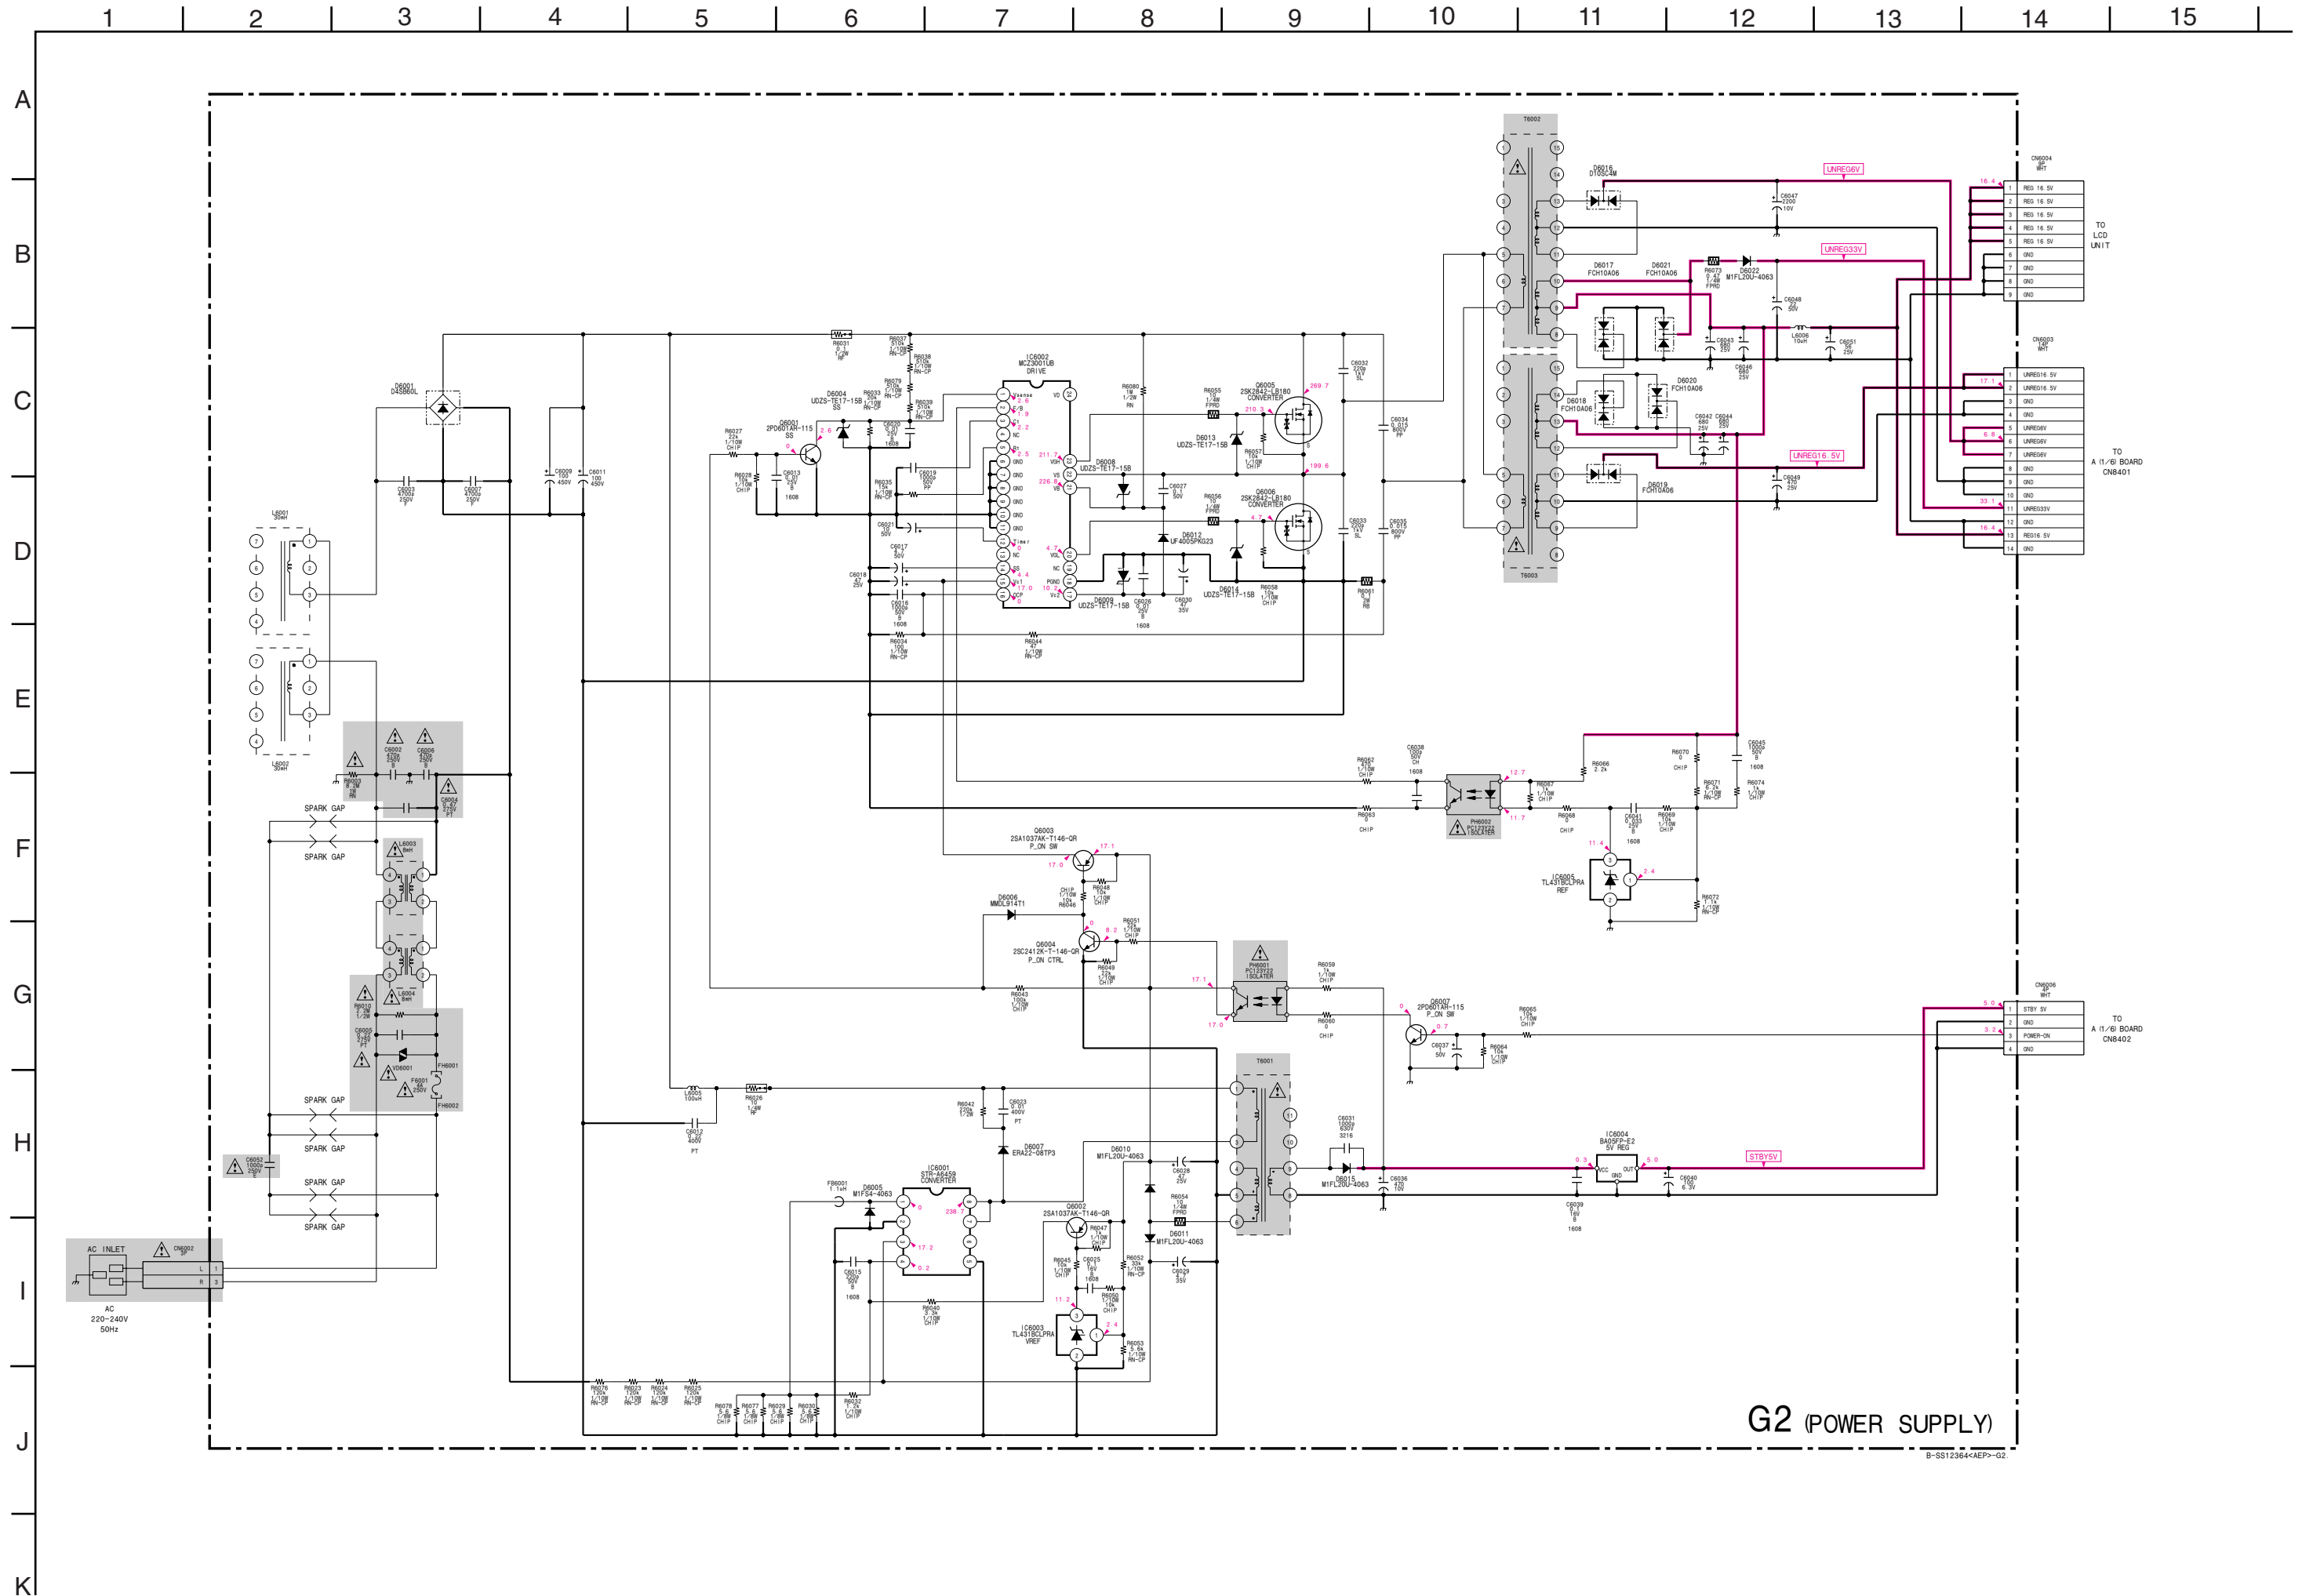


G2 (POWER SUPPLY)

B-SS12384-AEP--G2

— G2 BOARD —

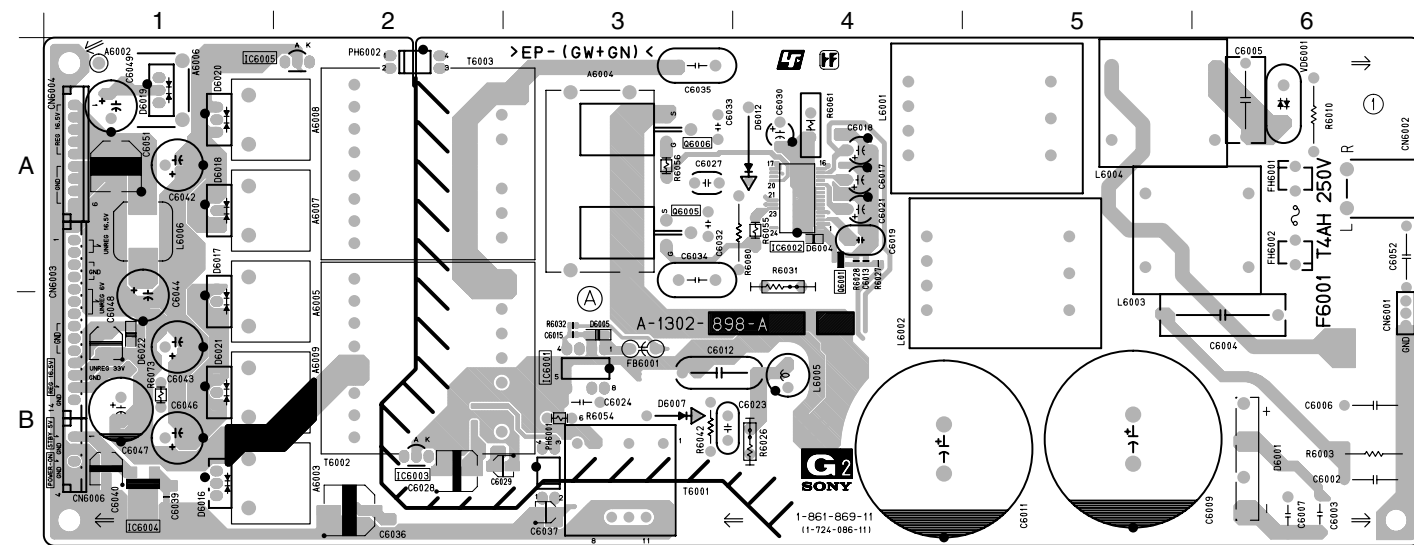

<COMPONENT SIDE>

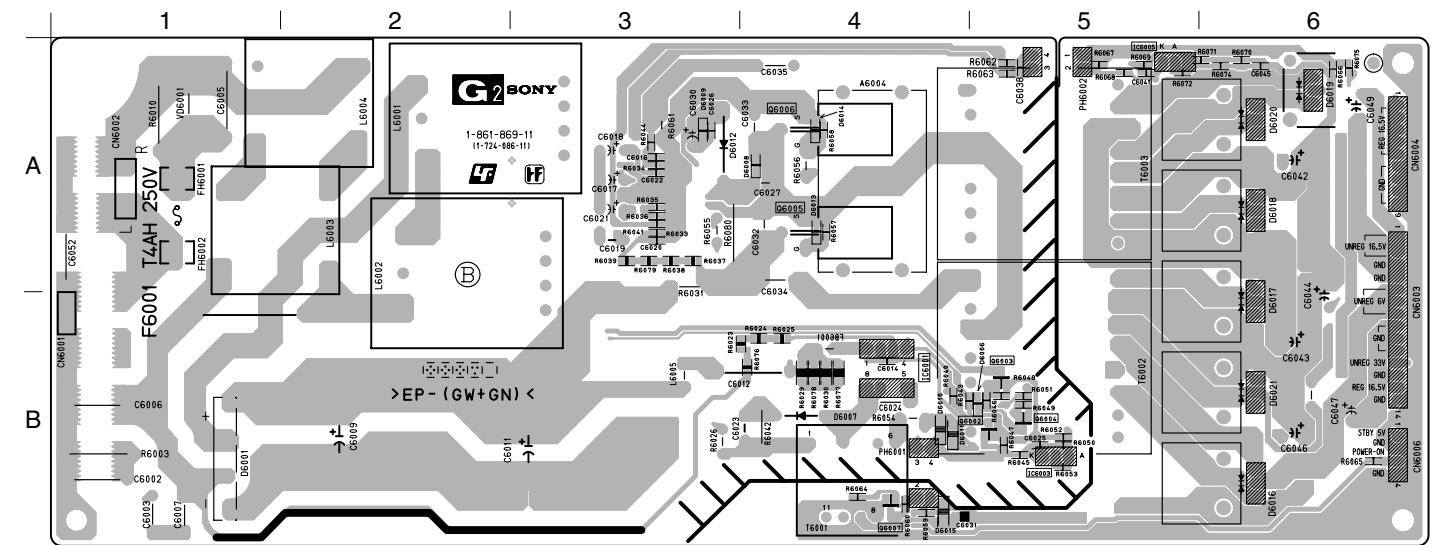



<CONDUCTOR SIDE>

• G2 BOARD SEMICONDUCTOR LOCATION

IC	TRANSISTOR		DIODE		D6012	A-4	-
	(Component Side)	(Conductor Side)	(Component Side)	(Conductor Side)			
IC6001	B-2	Q6001	B-5	D6001	B-6	-	
IC6002	A-4	Q6002	B-5	D6004	A-4	③	
IC6003	B-2B-1	Q6003	B-5	D6005	B-3	③	
IC6004	A-2	Q6004	A-3	D6006	B-5	③	
IC6005	A-4	Q6005	A-3	D6007	B-3	-	
		Q6006	B-4	D6008	A-4	③	
		Q6007		D6009	A-3	③	
				D6010	B-4	③	
				D6011	B-4	③	


*: Refer to Terminal name of semiconductors in silk screen printed circuit (see page 3-6)

(4) Schematic Diagram of H1 and H2 Boards

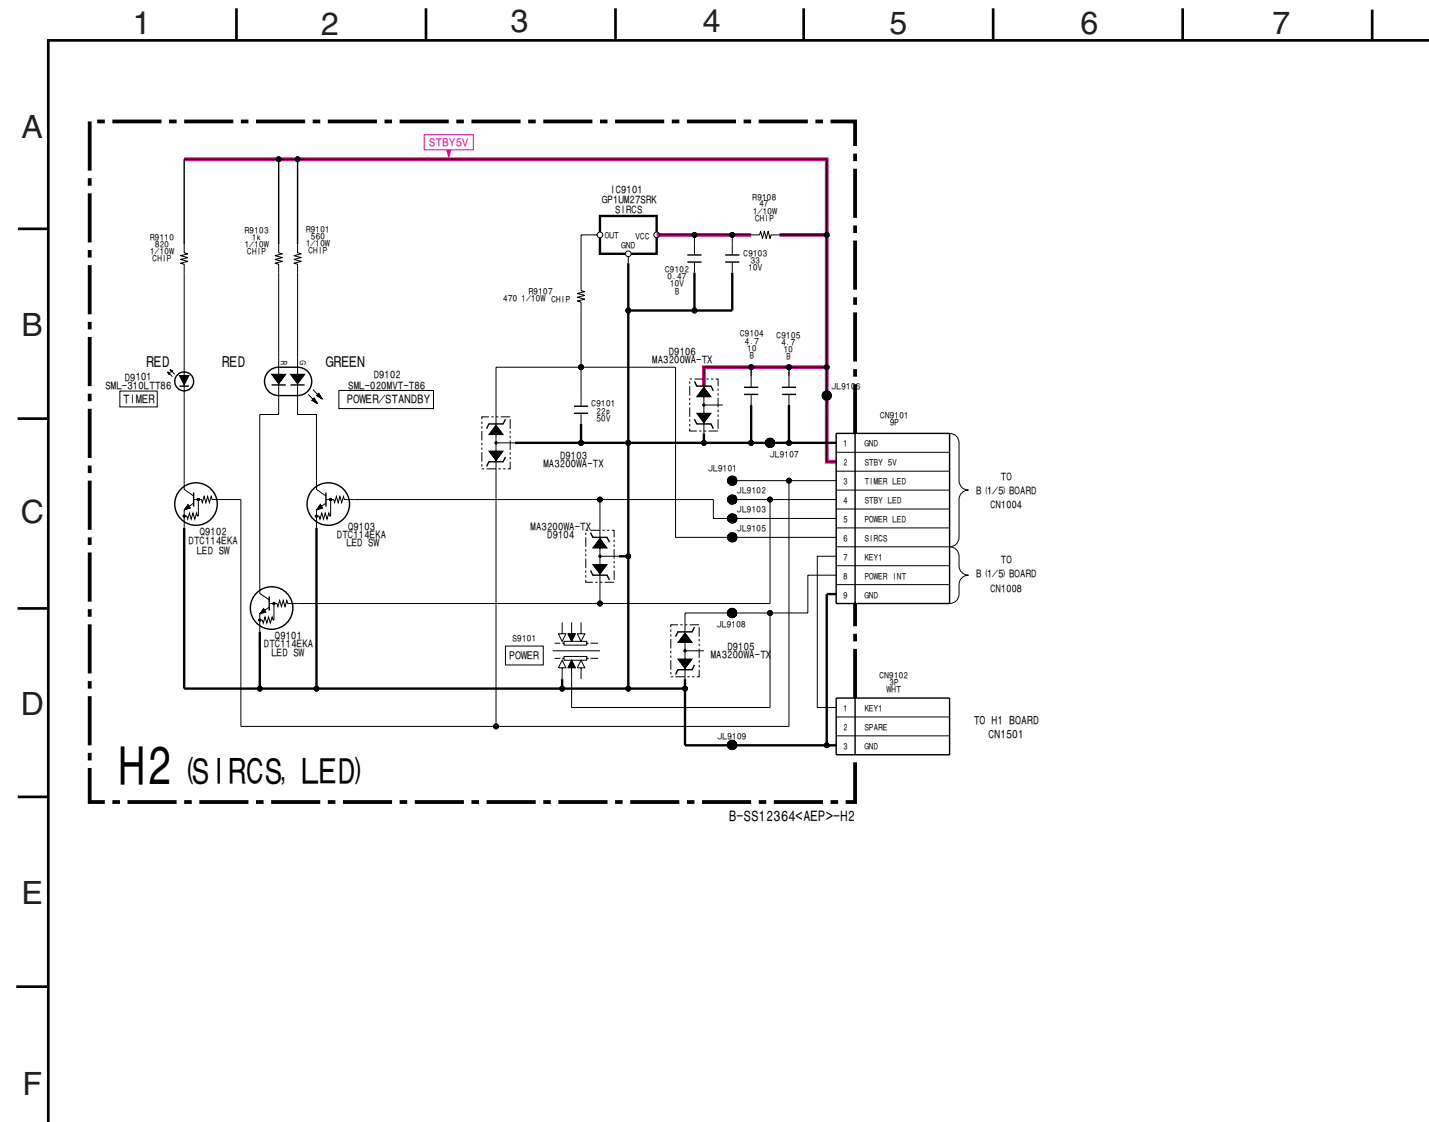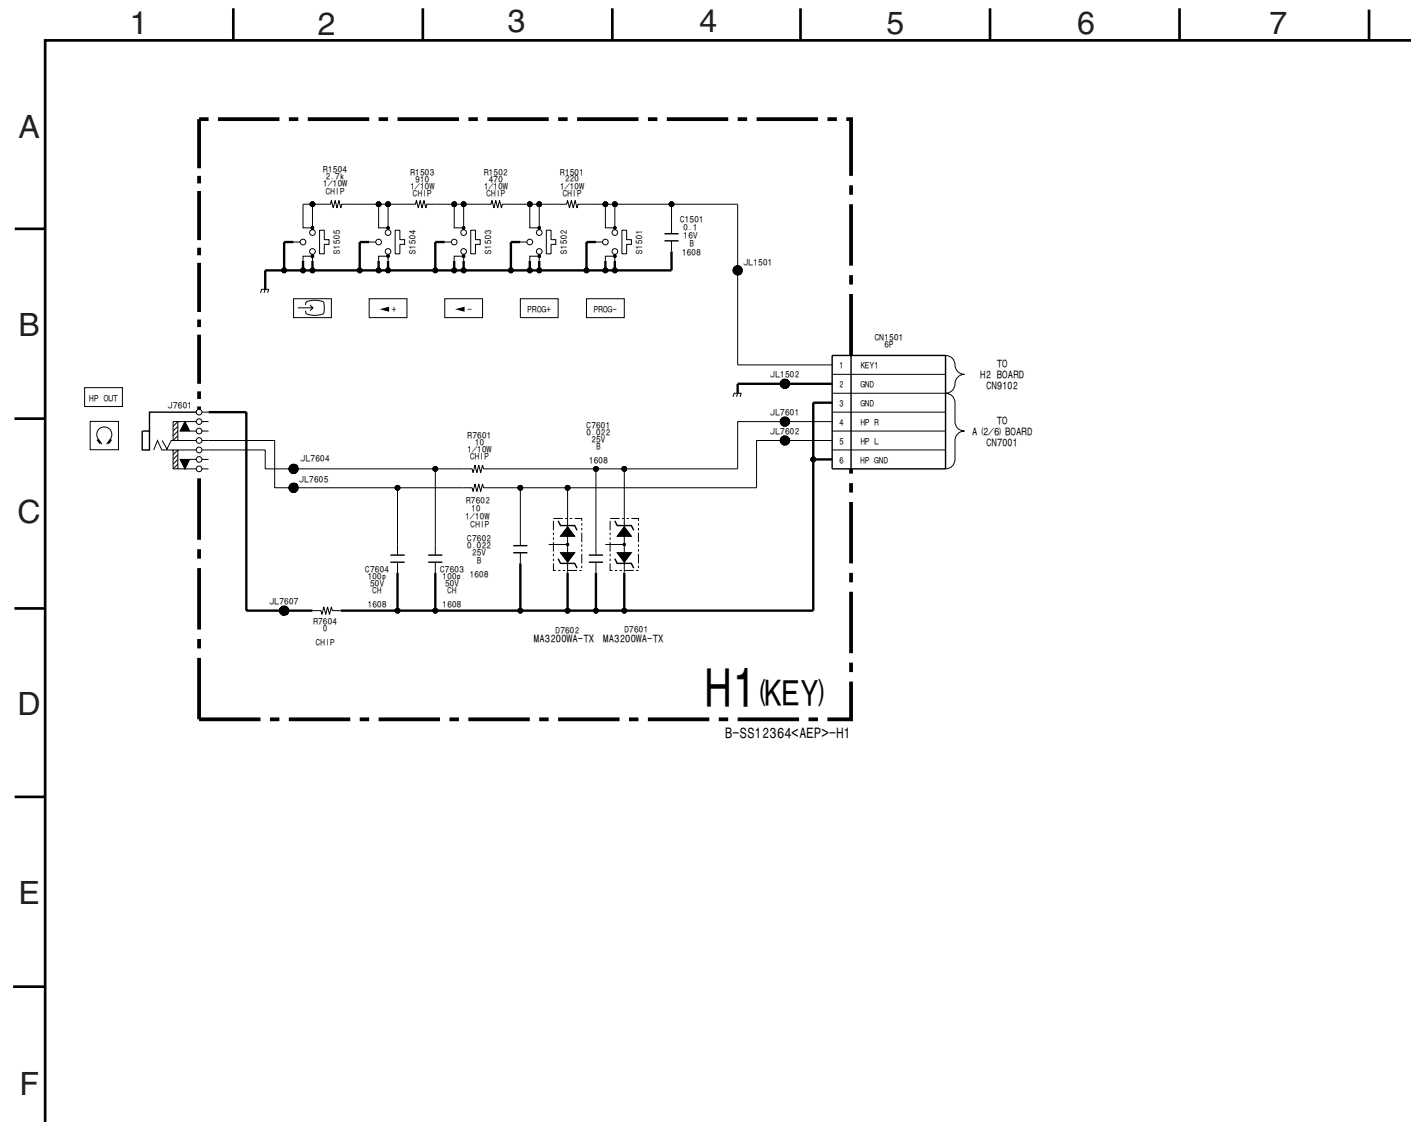


H1 [KEY]

— H1 BOARD —

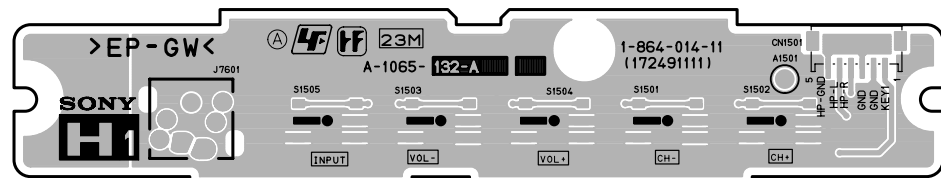

<COMPONENT SIDE>

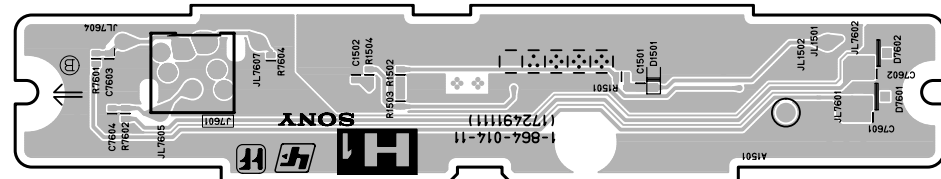

<CONDUCTOR SIDE>


• H1 BOARD SEMICONDUCTOR LOCATION

Ref.	*
D7601, D7602	①


*: Refer to Terminal name of semiconductors in silk screen printed circuit (see page 3-6)

H2 [LED, SIRCS]

— H2 BOARD —

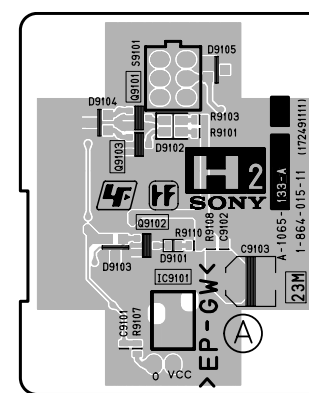

<COMPONENT SIDE>

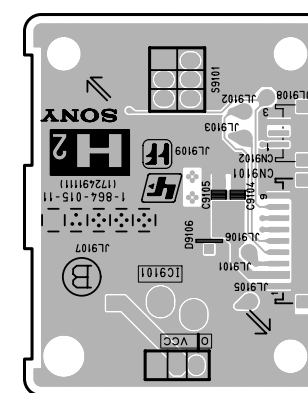



<CONDUCTOR SIDE>

• H2 BOARD SEMICONDUCTOR LOCATION


Ref.	*
Q9101-Q9103	②
D9101	③
D9102	-
D9103-D9106	④

*: Refer to Terminal name of semiconductors in silk screen printed circuit (see page 3-6)


(5) Schematic Diagrams of TU and U2 Boards

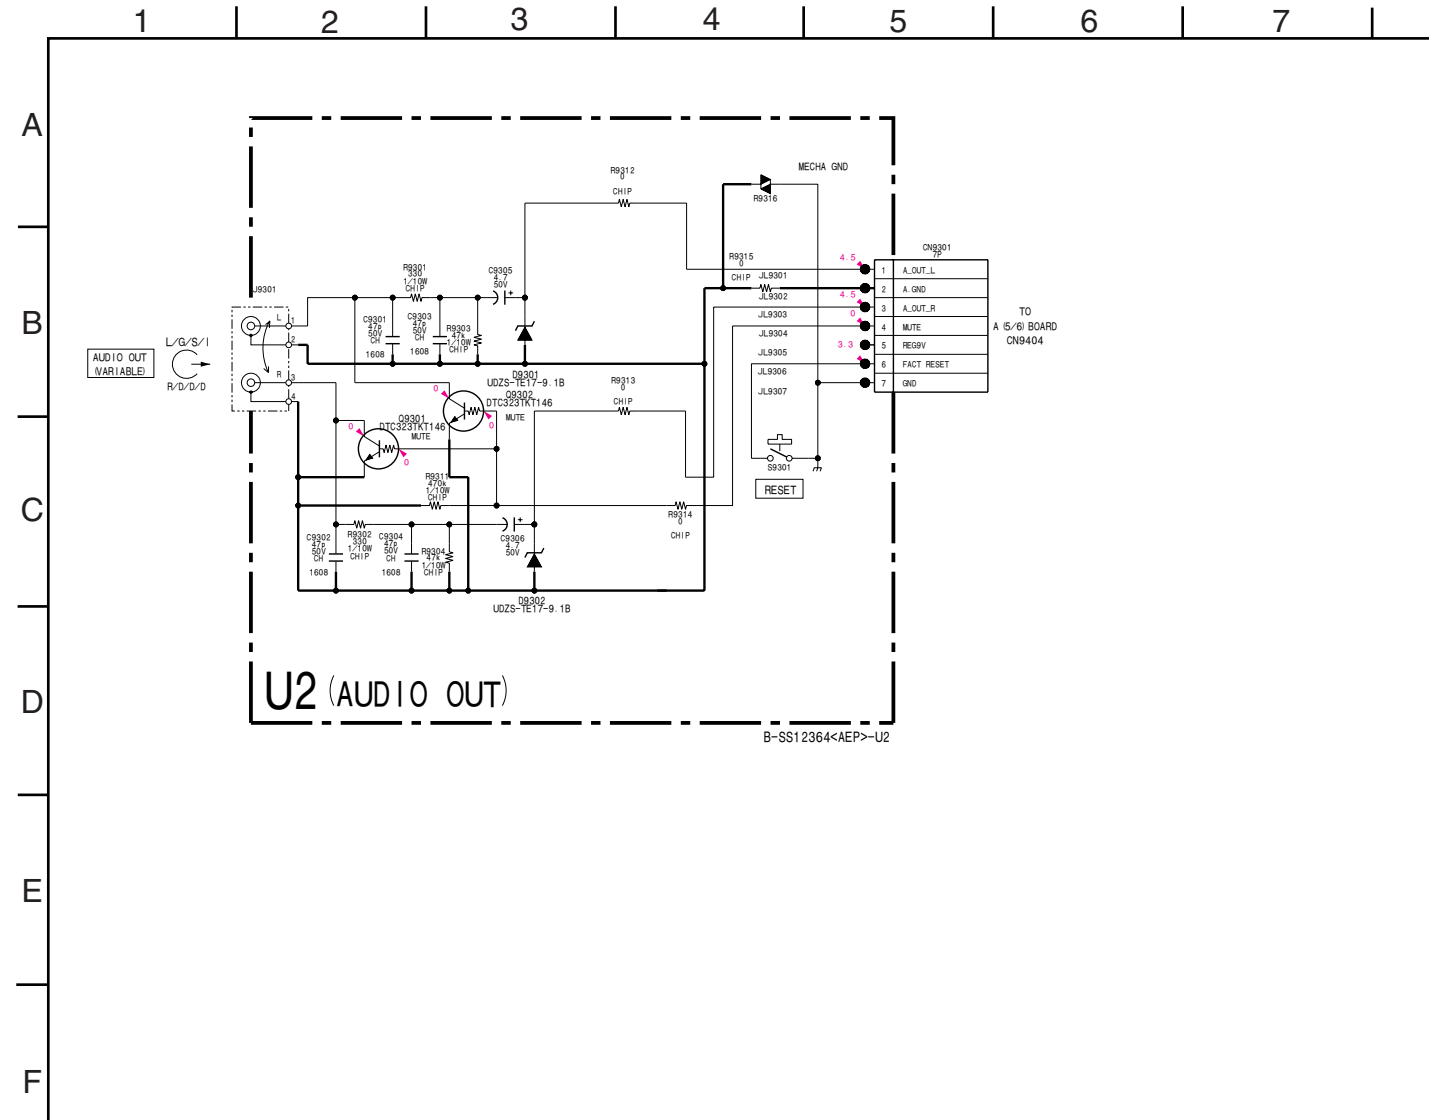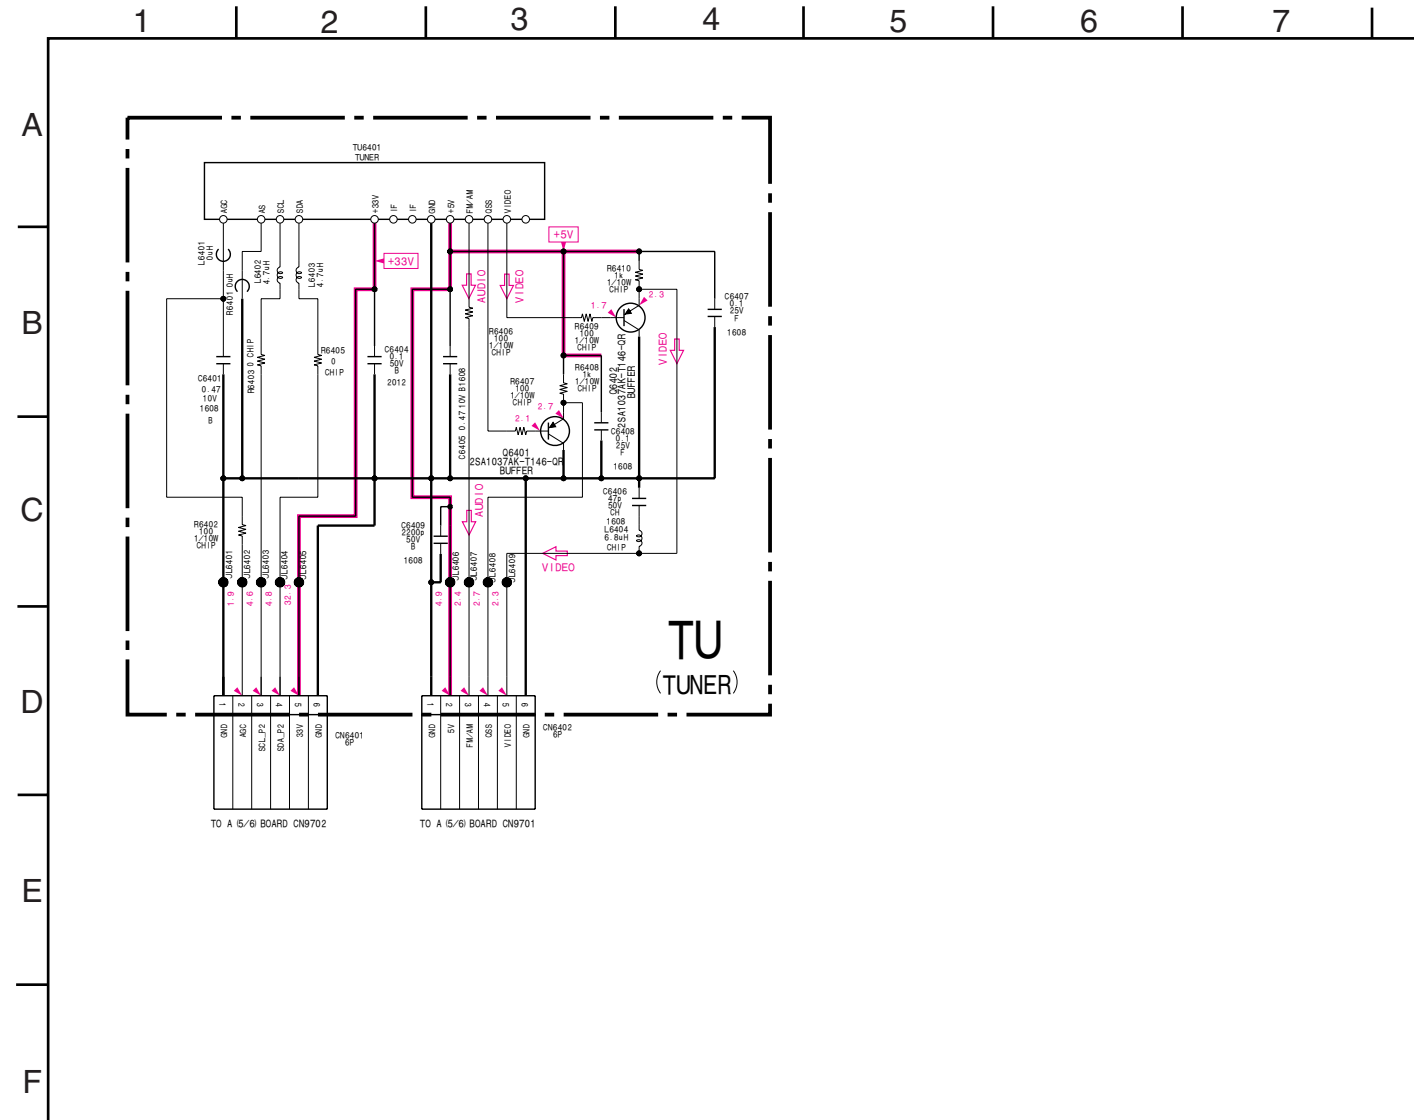

TU [TUNER]
— TU BOARD —

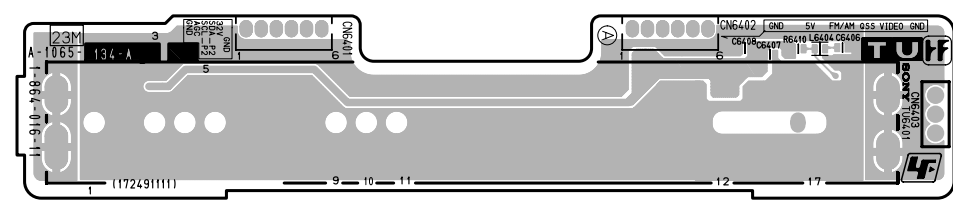

<COMPONENT SIDE>

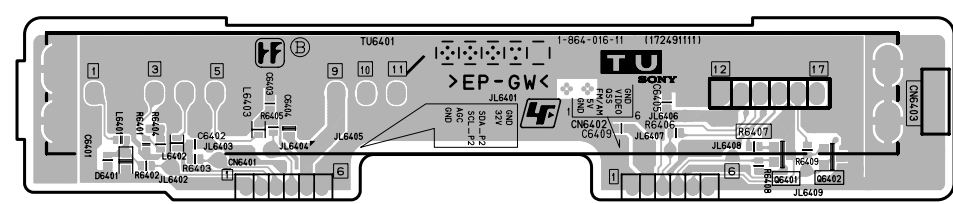


<CONDUCTOR SIDE>

• TU BOARD SEMICONDUCTOR LOCATION


Ref.	*
Q6401, Q6402	②

*: Refer to Terminal name of semiconductors in silk screen printed circuit (see page 3-6)

U2 [AUDIO OUT]
— U2 BOARD —

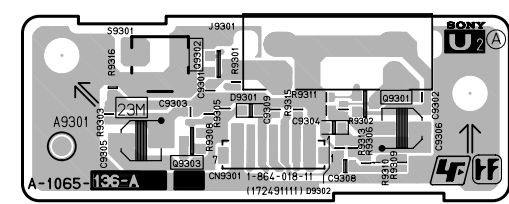

<COMPONENT SIDE>

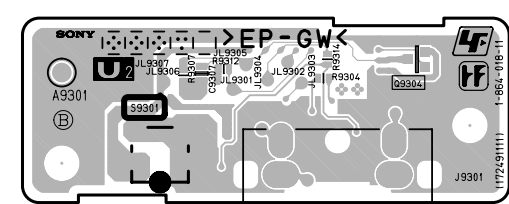


<CONDUCTOR SIDE>

• U2 BOARD SEMICONDUCTOR LOCATION

Ref.	*
Q9301, Q9302	②
D9301, D9302	③


*: Refer to Terminal name of semiconductors in silk screen printed circuit (see page 3-6)

(6) Schematic Diagrams of U1 Board

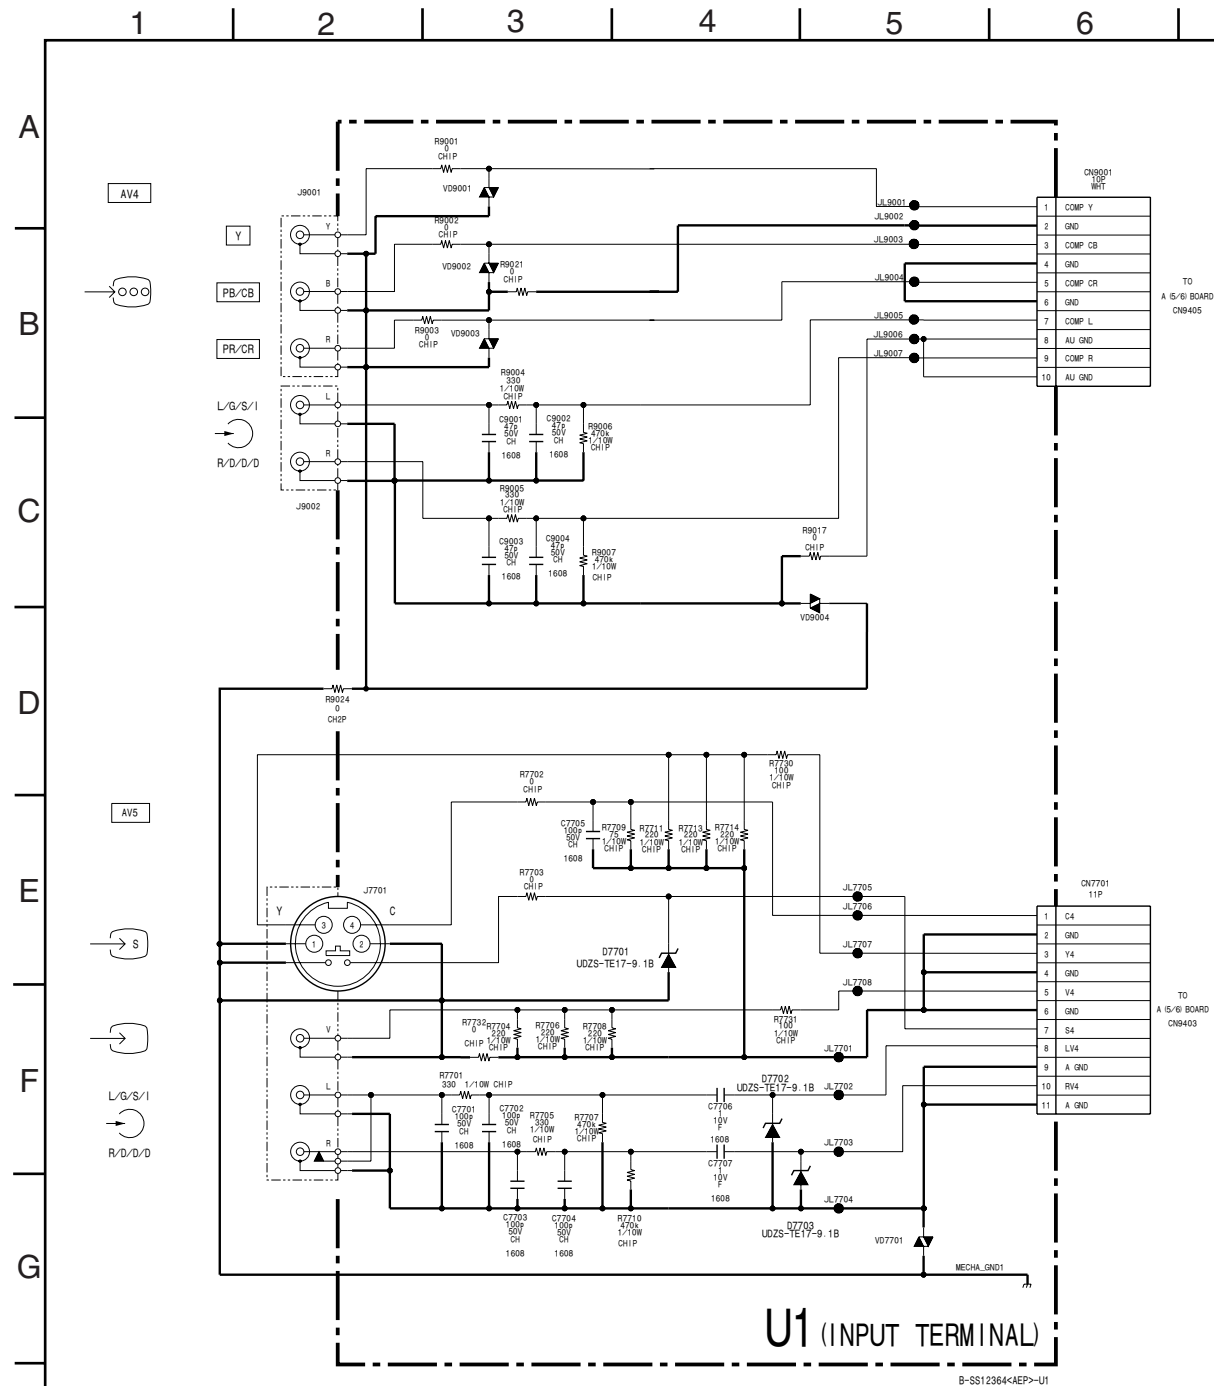


U1 [INPUT TERMINAL]

— U1 BOARD —

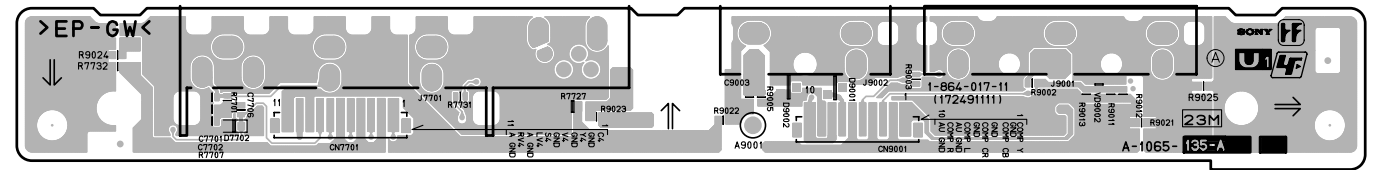

<COMPONENT SIDE>

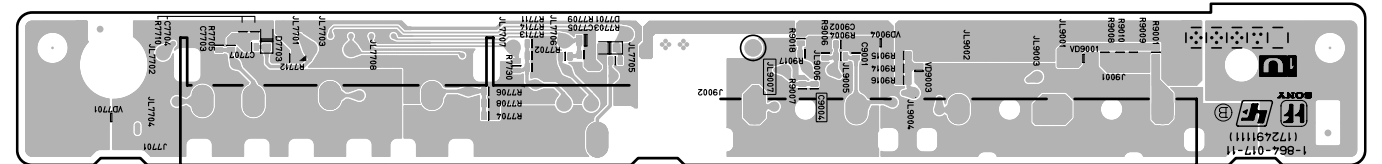

<CONDUCTOR SIDE>

• U1 BOARD SEMICONDUCTOR LOCATION


Ref.	*
D7701-D7703	③

*: Refer to Terminal name of semiconductors in silk screen printed circuit (see page 3-6)

3-5. SEMICONDUCTORS


IC

BA033FP-E2
BA05FP-E2
BA09FP-E2
S-80928CNMC-G8YT2G
S-80942CNMC-G9CT2G
TC7SET02FU(TE85R)
TC7SH04FU-TE85R
TC7SH86FU-TE85R
TC7SZ125FU(TE85R)




5Pin CHIP


BA05T
BA09T



BA25BC0FP-E2




BD3869AF-E2




18Pin SOP

CXA2069Q-TL




CXA2163AQ-T6
CXA2171AQ




48Pin QFP

CXD2097BQ
CXD9756R




208Pin QFP

CXD3802BQ




240Pin QFP

HD64F2376-364
HD64F2377-364




144Pin QFP

HY57V161610ETP-7DR




50Pin SOP

IS42S32200B-6TL-TR
MT48LC2M32B2P-6-Y14W




86Pin SOP

K6F2008V2E-LF70000




32Pin SOP

L88M05T-FA-TL




LM393DT (A)
LM75CIMX-3
LMH6658MMX/J5000172
M24C16-WMN6T(B)
M24C64-WMN6T(B)
NJM3414AV(TE2)
NJM4558V-TE2
TC4W66F(TE12R)
TC7WH08FK(TE85R)




8Pin SOP

MC74LVXT4053DTR2




16Pin SOP

MCZ3001UB




24Pin SOP


MM1561JFBE



MSP3411G-QA-B11




MX29LV800TTC-70G-364




48Pin SOP


PQ070XZ01ZP



PST573IMT




PW166B-10TL




256Pin PGA

S-80822CNNB-B8HT2G
S-80829CNNB-B8OT2G




SAA5665HL/M1D/0724




100Pin QFP

SN74ALVCH16823DGGR
THC63LVDM83R-T




56Pin SOP

SN74LV132APWR
SN74LVC74APWR-12
TC74VHC08FT(EL)
TLC2933IPWR-12




14Pin SOP

STR-A6459




8Pin DIP


TDA7263




TL431BCLPRA



TL431CLP-Z



TPS5120DBTR




30Pin SOP

UPC1093J-1-T




TRANSISTOR


DTA143EUA-T106
DTC114EUA-T106
DTC144EKA
DTC144EKA-T146
DTC314TK-T-146
DTC323TK
DTC323TKT146
MSD601-RT1
MUN2111T1
MUN2211T1
UN2111
UN2211
2PA1576R-115
2PC4081R-115
2PD601AR-115
2SA1037AK-T146-QR
2SA1037AK-T146-R
2SA1226-E4
2SA1226-T1E3E4
2SC1623-L5L6
2SC2412K-T-146-QR
2SC4178-F13F14-T1
2SC4178-F14
2SD601A-Q
2SD601A-QRS-TX
2SD601A-Q-TX




DTC114EKA-T146
DTC114EU




HAT2071R-EL
UPA1716G-E2




HN1B01FU-TE85R




IRF7901D1-TR



SI2301DS-T1
2SK1828
2SK1828TE85L



SSM6N15FU(TE85R)



2SD2396H




2SK2842-LB180



DIODE

D10SC4M



D4SB60L




ERA22-08
ERA22-08TP3




FCH10A06



HN1D03FU-TE85L
HN1D03FU-TE85R




MA111-TX
MMDL914T1
RD5.6SB-T1
UDZSTE-1712B
UDZSTE-1715B
UDZSTE-1716B
UDZSTE-178.2B
UDZSTE-179.1B
UDZ-TE-17-8.2B




MA3200WA-TX




SML-020MVT-T86




**MM3Z13VT1
MM3Z5V6ST1**




SML-310LTT86




**M1FL20U-4063
RB160M-30TR**




M1FS4-4063




**PTZ-TE25-13A
PTZ-TE25-3.9B
RB063L-30TE25**




UF4005PKG23



1PS184-115



1PS302



SECTION 4 EXPLODED VIEWS


NOTE:

The components identified \triangle marked are critical for safety.
Replace only with the part number specified.

Les composants identifiés par la marque \triangle sont critiques pour la sécurité.
Ne les remplacer que par une pièce portant le numéro spécifié.


- Items with no part number and no description are not stocked because they are seldom required for routine service.
- The construction parts of an assembled part are indicated with a collation number in the remark column.
- Items marked " * " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

4-1. CABINET ASSY AND STAND

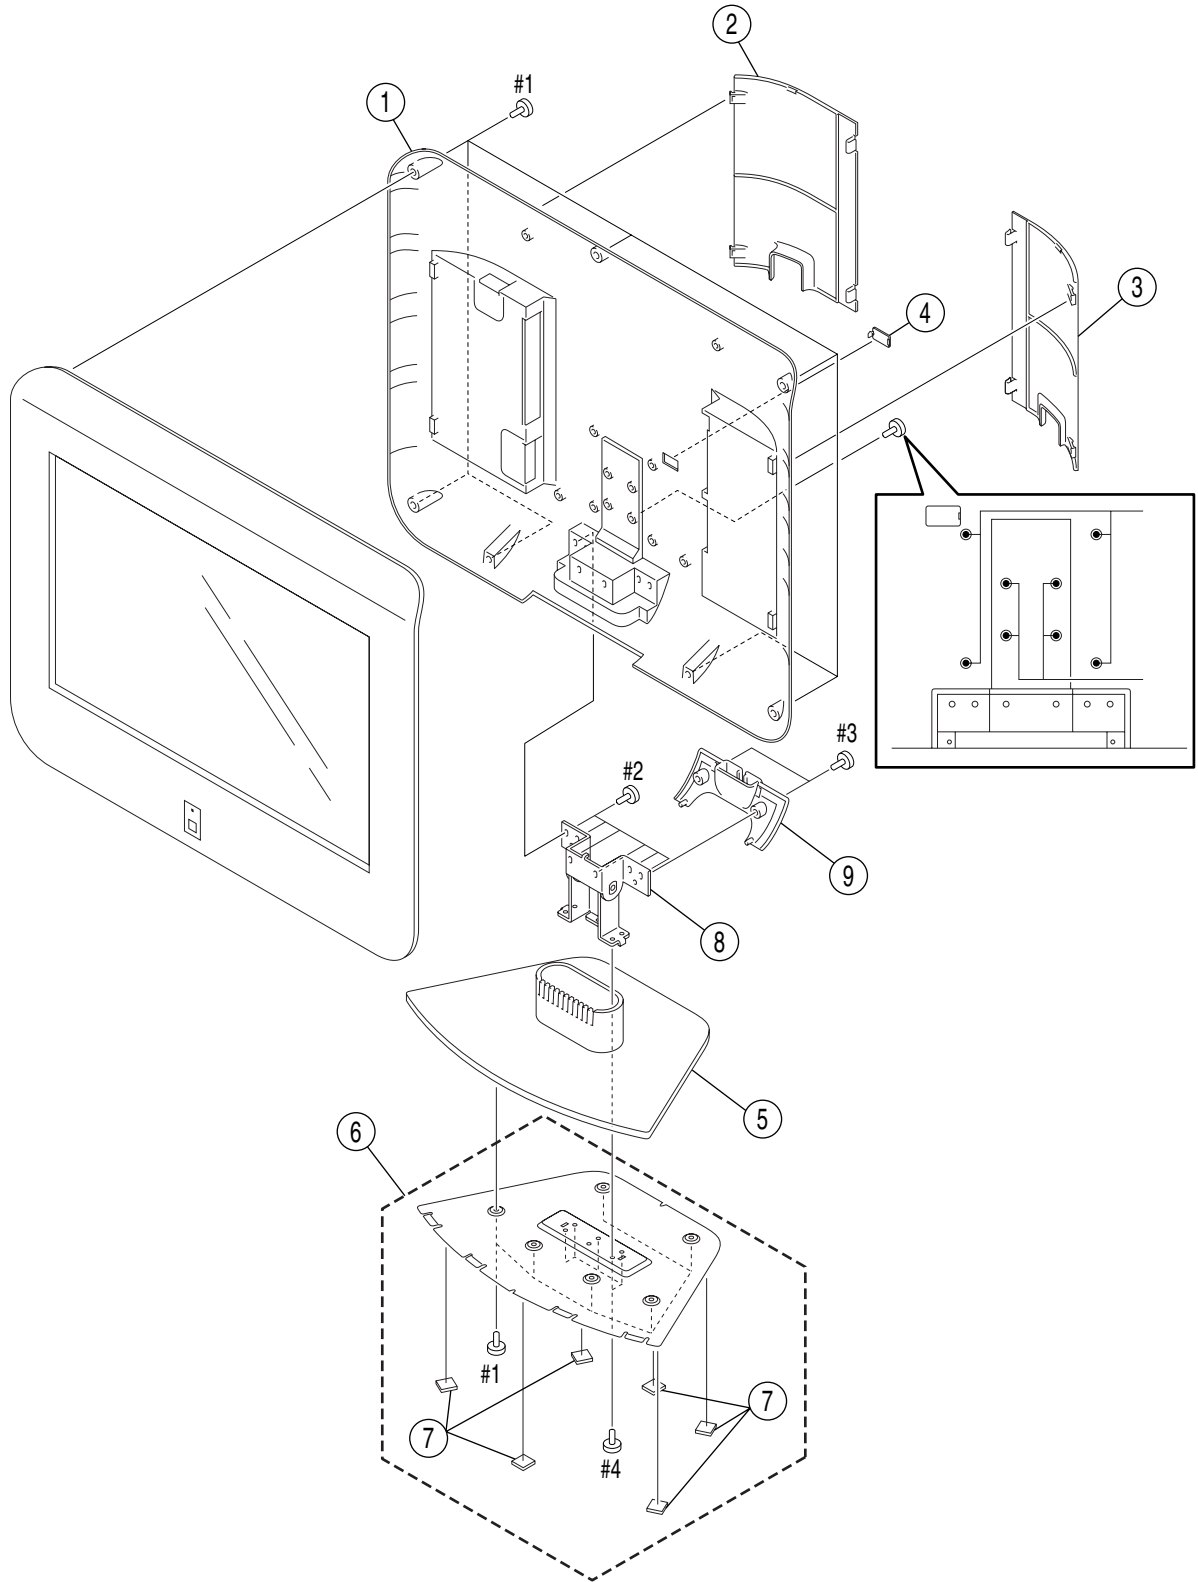

REF. No.	PART No.	DESCRIPTIONRE	MARK	REF. No.	PART No.	DESCRIPTIONRE	MARK
1	X-2023-297-1	CABINET ASSY (Slirver)		6	X-2023-182-1	BASE PLATE ASSY	7
	X-2023-294-1	CABINET ASSY (Black)		7	4-101-439-01	FOOT, STAND	
2	X-2023-179-1	CABLE COVER (L) ASSY (Slirver)		8	2-109-222-01	HINGE	
	X-2023-292-1	CABLE COVER (L) ASSY (Black)		9	2-109-570-01	COVER,HINGE (Slirver)	
3	X-2023-180-1	CABLE COVER (R) ASSY (Slirver)			2-109-570-11	COVER,HINGE (Black)	
	X-2023-295-1	CABLE COVER (R) ASSY (Black)		#1	7-685-662-79	SCREW +BVTP 4X14, TYPE 2, IT-3	
4	4-094-922-31	COVER, ECS (15V) (Slirver)		#2	7-682-965-01	SCREW +PSW 4X16	
	4-094-922-41	COVER, ECS (15V) (Black)		#3	7-682-949-09	SCREW +PSW 3X10	
5	2-109-117-01	BASE,STAND		#4	7-682-962-01	SCREW +PSW 4X10	


4-2. CHASSIS-1

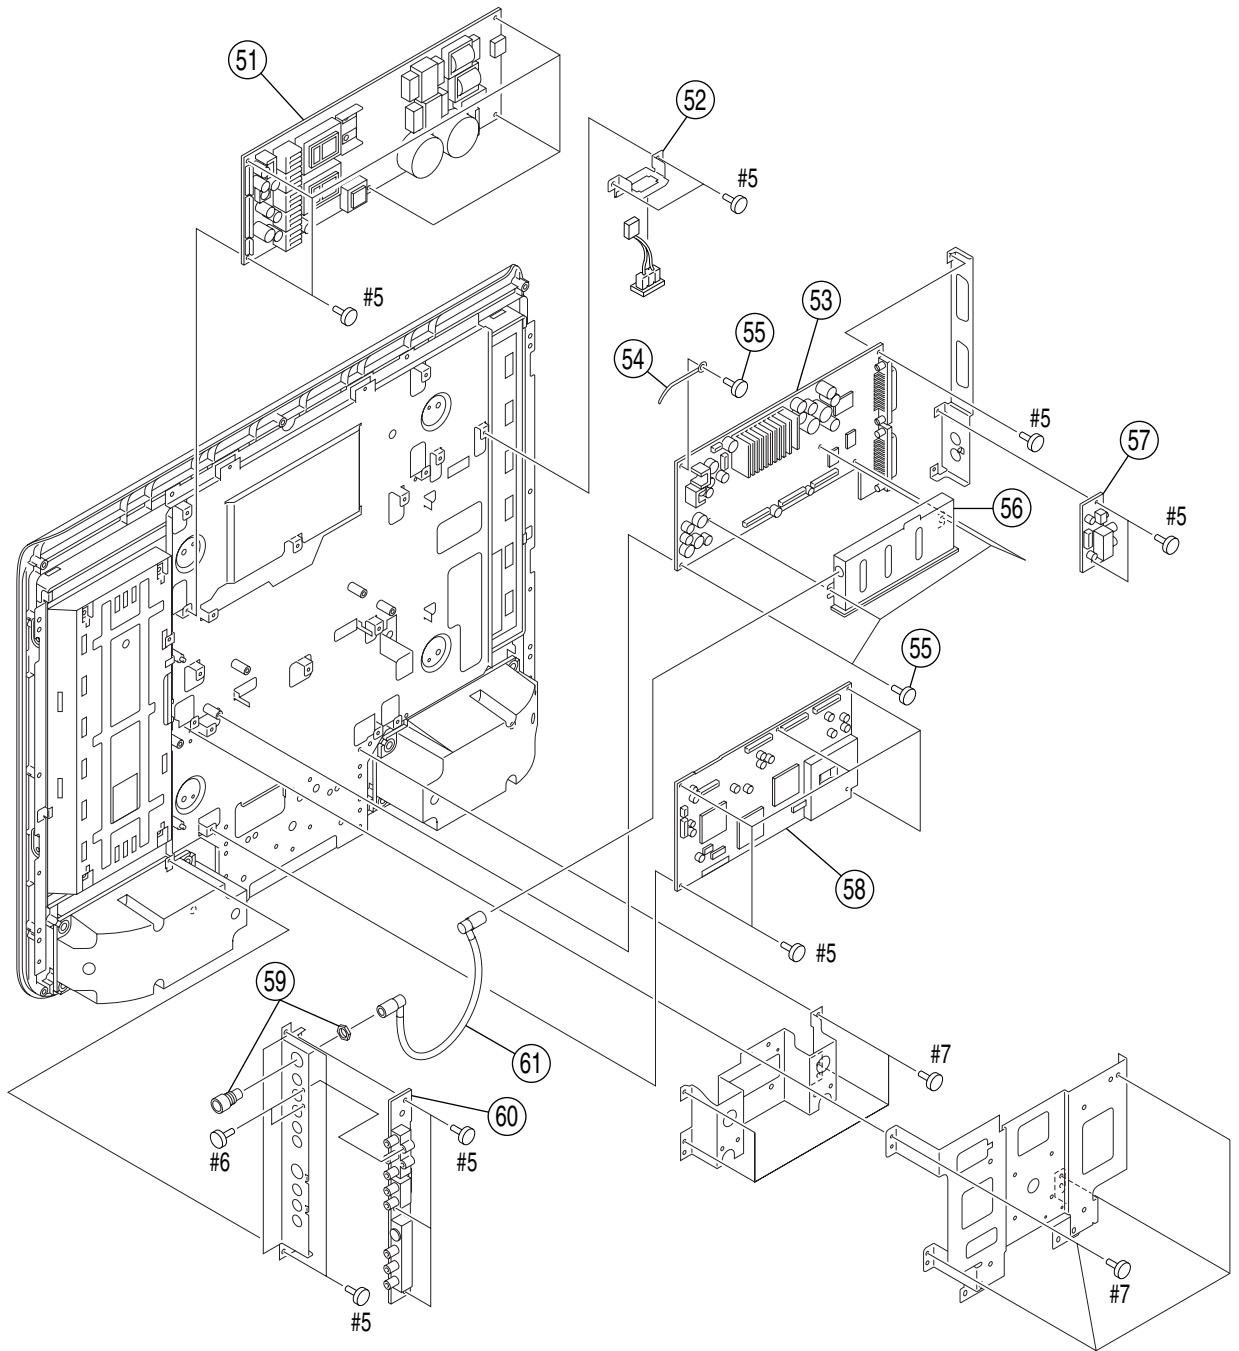

REF. No.	PART No.	DESCRIPTIONRE	MARK
51	* A-1073-464-A	G2 COMPL	
52	* X-4042-886-1	BRACKET, TERMINAL (C) ASSY	
53	* A-1065-131-A	A MOUNT	
54	* 4-662-796-01	CLIP, COACHING	
55	4-382-854-71	SCREW (M3X10) , P, SW (+)	
56	* A-1065-134-A	TU MOUNT	
57	* A-1065-136-A	U2 MOUNT	
58	* A-1073-463-A	B COMPL	
59	1-694-971-11	COAXIAL CONVERSION CONNECTOR	
60	* A-1065-135-A	U1 MOUNT	

REF. No.	PART No.	DESCRIPTIONRE	MARK
61	1-829-361-41	CABLE, RF	
#5	7-685-871-01	SCREW +BVTT 3X6 (S)	
#6	7-685-647-79	SCREW +BVTP 3X10 TYPE2 N-S	
#7	7-685-881-09	SCREW +BVTT 4X8 (S)	


4-3. CHASSIS-2

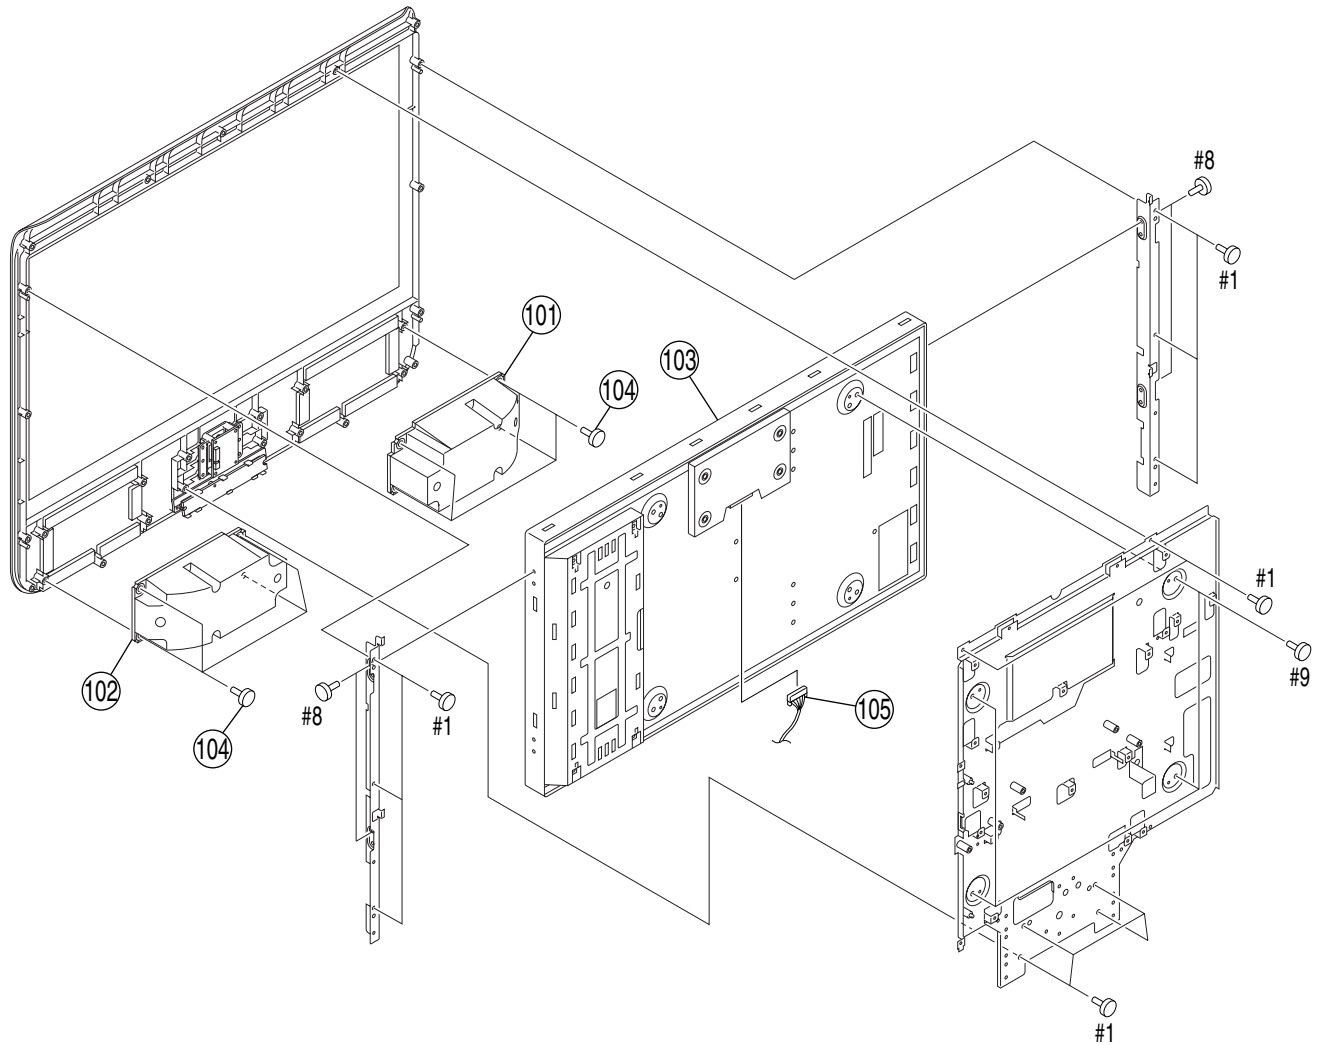

REF. No.	PART No.	DESCRIPTIONRE	MARK
101	1-825-954-11	LOUDSPEAKER (L)	
102	1-825-954-21	LOUDSPEAKER (R)	
103	1-805-663-11	LCD PANEL (23INCH WXGA+TFT)	
104	4-302-404-11	SCREW,WASHER HEAD (+P 4X16)	
105	1-900-283-43	LVDS CONNECTOR	


REF. No.	PART No.	DESCRIPTIONRE	MARK
#1	7-685-662-79	SCREW +BVTP 4X14 TYPE2 IT-3	
#8	7-682-948-01	SCREW +PSW 3X8	
#9	7-682-961-01	SCREW +PSW 4X8	

4-4. BEZEL ASSY

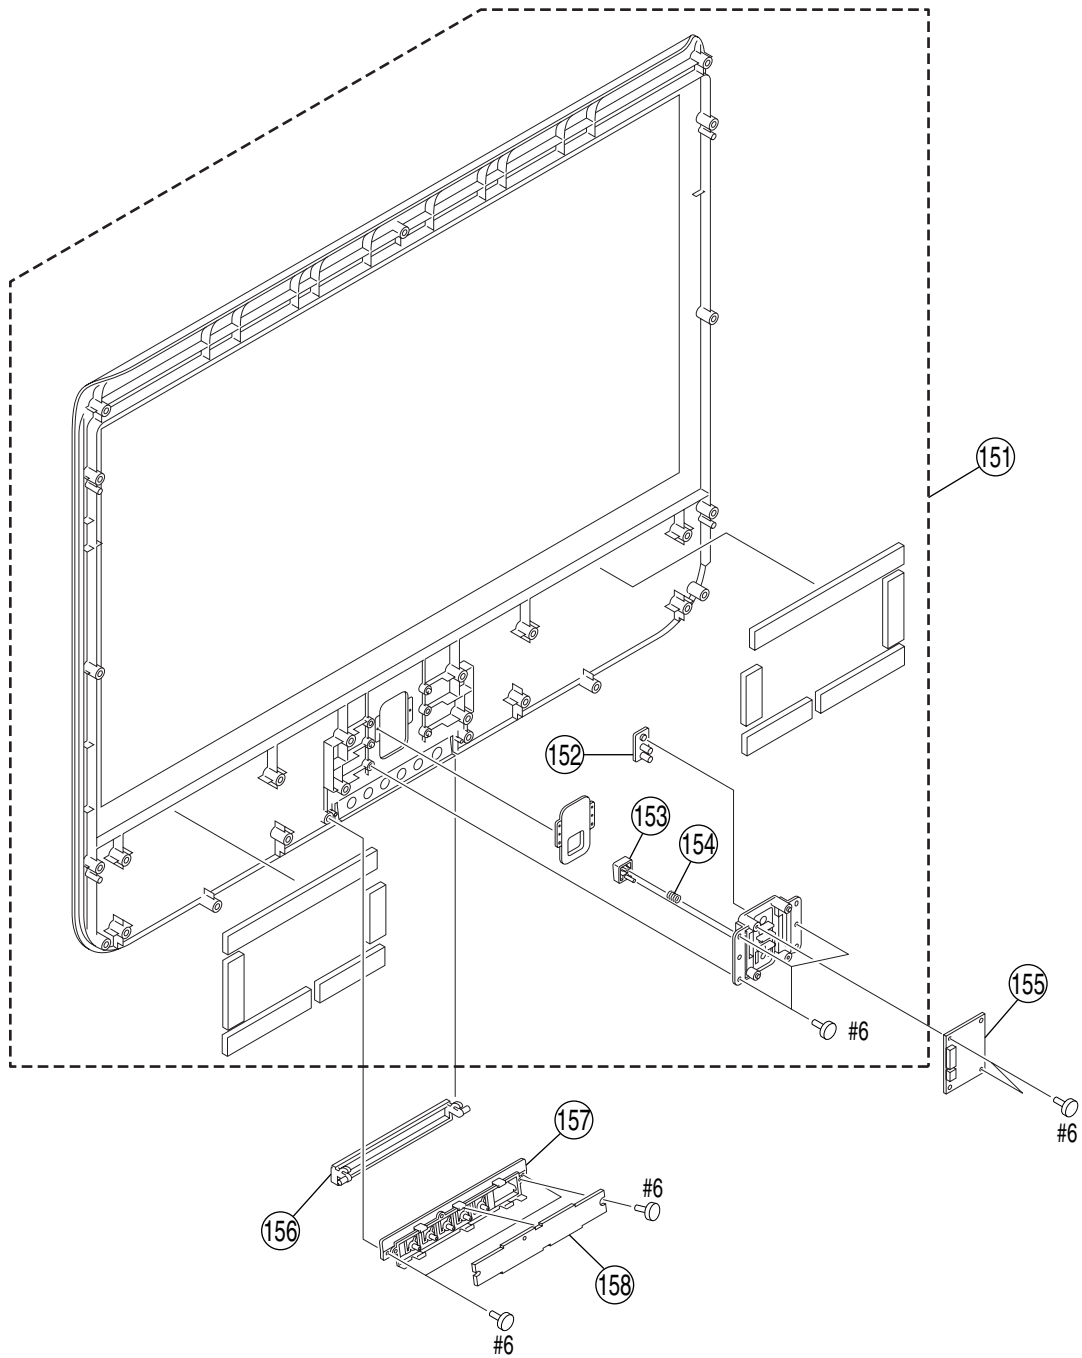

REF. No.	PART No.	DESCRIPTIONRE	MARK	REF. No.	PART No.	DESCRIPTIONRE	MARK
151	X-2023-296-1	BEZEL ASSY (Slilver)	152-154	156	2-109-106-21	DOOR, CONTROL (Slilver)	
	X-2023-293-1	BEZEL ASSY (Black)	152-154		2-109-106-11	DOOR, CONTROL (Black)	
152	2-021-783-01	GUIDE, LED		157	2-109-107-01	BRACKET, MULTI BUTTON (Slilver)	
153	2-021-791-02	BUTTON, POWER (Slilver)			2-109-107-11	BRACKET, MULTI BUTTON (Black)	
	2-021-791-12	BUTTON, POWER (Black)		158	* A-1065-132-A	H1 MOUNT	
154	2-109-058-01	SPRING, COMPRESSION		#6	7-685-647-79	SCREW +BVTP 3X10 TYPE2 N-S	
155	* A-1065-133-A	H2 MOUNT					

4-5. PACKING MATERIALS

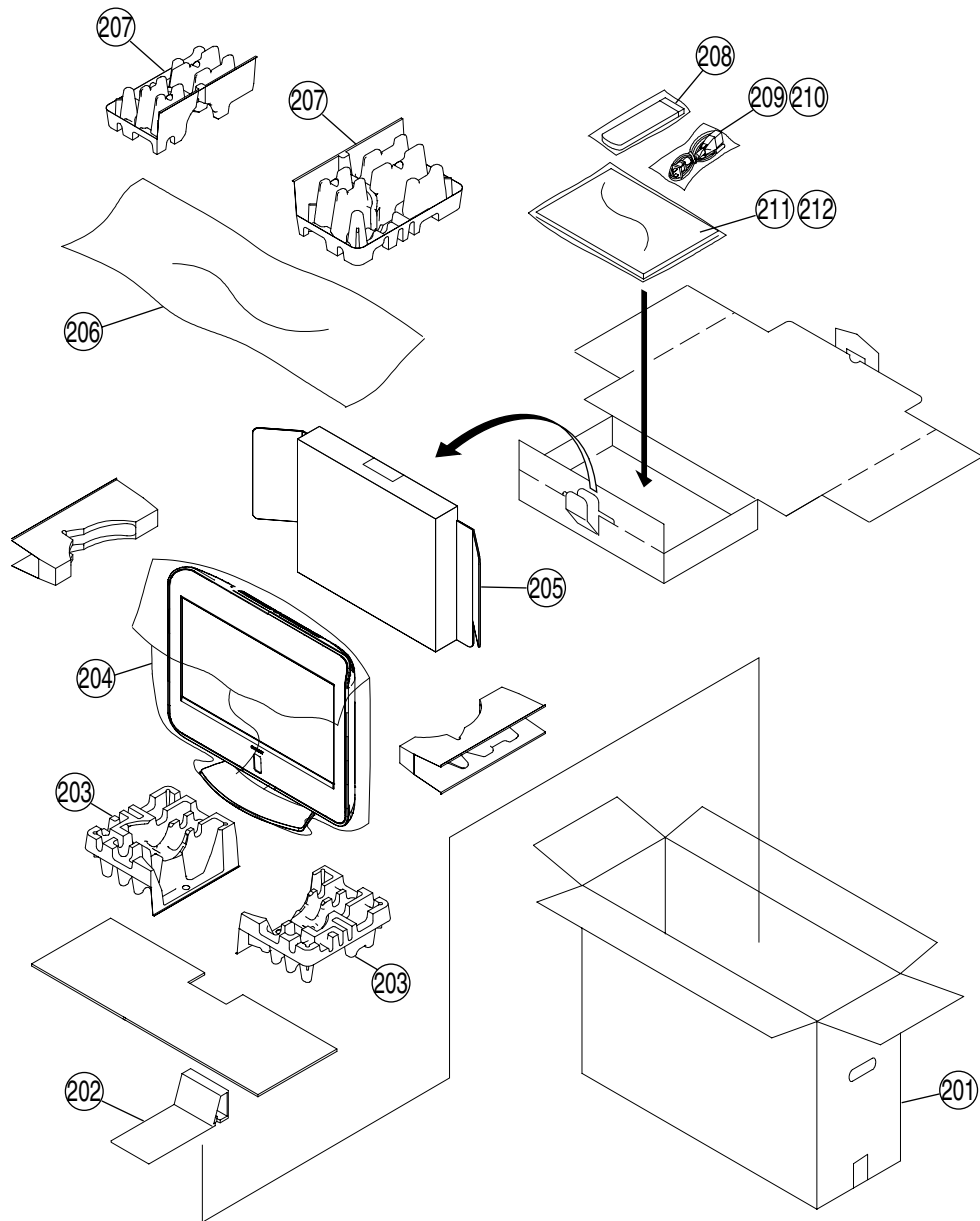

REF. No.	PART No.	DESCRIPTIONRE	MARK
201	* 2-178-636-01	INDIVIDUAL CARTON (Black)	
	* 2-178-617-01	INDIVIDUAL CARTON (Silver)	
202	* 2-178-621-01	STAND PAD	
203	* 2-178-619-01	CUSHION (LOWER)	
204	* 4-101-087-02	BAG, PROTECTION	
205	* 2-178-620-01	BOX, ACCESSORY	
206	* 2-178-622-01	SHEET, PROTECTION	
207	* 2-178-618-01	CUSHION (UPPER)	
208	1-478-209-11	STANDARD TYPE COMMANDER (RM-Y1102)	
209	1-769-175-21	CABLE, ANTENNA (WITH FILTER)	
210	△ 1-827-479-11	POWER-SUPPLY CORD (WITH FILTER)	
	△ 1-827-482-11	POWER-SUPPLY CORD	

REF. No.	PART No.	DESCRIPTIONRE	MARK
211	2-176-409-11	MANUAL INSTRUCTION (DE/FR/GB/NL)	
	2-176-409-21	MANUAL INSTRUCTION (ES/IT/PL/PT)	
	2-176-409-31	MANUAL INSTRUCTION (DK/FI/RU/SE)	
212	2-178-614-11	QUICK SETUP GUIDE (DE/FR/GB/NL)	
	2-178-614-21	QUICK SETUP GUIDE (ES/IT/PL/PT)	
	2-178-614-31	QUICK SETUP GUIDE (DK/FI/RU/SE)	

SECTION 5 ELECTRICAL PARTS LIST

NOTE:

The components identified \triangle marked are critical for safety.
Replace only with the part number specified.

Les composants identifiés par la marque \triangle sont critiques pour la sécurité.
Ne les remplacer que par une pièce portant le numéro spécifié.

When indicating parts by reference number, please include the board name.

- All variable and adjustable resistors have characteristic curve B, unless otherwise noted.
- Items marked " * " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

RESISTORS

- All resistors are in ohms
- F : nonflammable

No.	#	Board	Type	Δ / [*]	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1		A	CAPACITOR		C2001	1-126-392-11	ELECT CHIP 100UF 20.00% 6.3V		
2		A	CAPACITOR		C2002	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
3		A	CAPACITOR		C2003	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
4		A	CAPACITOR		C2004	1-126-392-11	ELECT CHIP 100UF 20.00% 6.3V		
5		A	CAPACITOR		C2005	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
6		A	CAPACITOR		C2006	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
7		A	CAPACITOR		C2007	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
8		A	CAPACITOR		C2010	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
9		A	CAPACITOR		C2011	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
10		A	CAPACITOR		C2012	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
11		A	CAPACITOR		C2013	1-126-392-11	ELECT CHIP 100UF 20.00% 6.3V		
12		A	CAPACITOR		C2014	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
13		A	CAPACITOR		C2015	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
14		A	CAPACITOR		C2016	1-126-392-11	ELECT CHIP 100UF 20.00% 6.3V		
15		A	CAPACITOR		C2017	1-162-919-11	CERAMIC CHIP 22PF 5.00% 50V		
16		A	CAPACITOR		C2018	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
17		A	CAPACITOR		C2019	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
18		A	CAPACITOR		C2020	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
19		A	CAPACITOR		C2021	1-125-889-91	CERAMIC CHIP 2.2UF 10% 10V		
20		A	CAPACITOR		C2022	1-126-392-11	ELECT CHIP 100UF 20.00% 6.3V		
21		A	CAPACITOR		C2023	1-162-919-11	CERAMIC CHIP 22PF 5.00% 50V		
22		A	CAPACITOR		C2024	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
23		A	CAPACITOR		C2025	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
24		A	CAPACITOR		C2026	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
25		A	CAPACITOR		C2027	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
26		A	CAPACITOR		C2028	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
27		A	CAPACITOR		C2029	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
28		A	CAPACITOR		C2030	1-115-566-11	CERAMIC CHIP 4.7UF 10.00% 10V		
29		A	CAPACITOR		C2203	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
30		A	CAPACITOR		C2205	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
31		A	CAPACITOR		C2206	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
32		A	CAPACITOR		C2208	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
33		A	CAPACITOR		C2209	1-127-760-11	CERAMIC CHIP 4.7UF 10% 6.3V		
34		A	CAPACITOR		C2210	1-125-889-91	CERAMIC CHIP 2.2UF 10% 10V		
35		A	CAPACITOR		C2211	1-164-227-11	CERAMIC CHIP 0.022UF 10.00% 25V		
36		A	CAPACITOR		C2212	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
37		A	CAPACITOR		C2213	1-127-760-11	CERAMIC CHIP 4.7UF 10% 6.3V		
38		A	CAPACITOR		C2214	1-126-392-11	ELECT CHIP 100UF 20.00% 6.3V		
39		A	CAPACITOR		C2215	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
40		A	CAPACITOR		C2216	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
41		A	CAPACITOR		C2219	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
42		A	CAPACITOR		C2220	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
43		A	CAPACITOR		C2221	1-162-913-11	CERAMIC CHIP 8PF 0.50PF 50V		
44		A	CAPACITOR		C2222	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
45		A	CAPACITOR		C2223	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
46		A	CAPACITOR		C2224	1-126-205-11	ELECT CHIP 47UF 20.00% 6.3V		
47		A	CAPACITOR		C2225	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
48		A	CAPACITOR		C2226	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
49		A	CAPACITOR		C2227	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
50		A	CAPACITOR		C2228	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
51		A	CAPACITOR		C2229	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
52		A	CAPACITOR		C2230	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
53		A	CAPACITOR		C2231	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
54		A	CAPACITOR		C2233	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
55		A	CAPACITOR		C2234	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
56		A	CAPACITOR		C2236	1-127-760-11	CERAMIC CHIP 4.7UF 10% 6.3V		
57		A	CAPACITOR		C2237	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
58		A	CAPACITOR		C2244	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
59		A	CAPACITOR		C2245	1-126-205-11	ELECT CHIP 47UF 20.00% 6.3V		
60		A	CAPACITOR		C2247	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
61		A	CAPACITOR		C2248	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
62		A	CAPACITOR		C2250	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
63		A	CAPACITOR		C2501	1-164-004-11	CERAMIC CHIP 0.1UF 10.00% 25V		
64		A	CAPACITOR		C2502	1-135-346-21	ELECT CHIP 39UF 20% 16V		
65		A	CAPACITOR		C2508	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
66		A	CAPACITOR		C2509	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
67		A	CAPACITOR		C2516	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
68		A	CAPACITOR		C2517	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
69		A	CAPACITOR		C2521	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
70		A	CAPACITOR		C2522	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
71		A	CAPACITOR		C2523	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
72		A	CAPACITOR		C2524	1-126-392-11	ELECT CHIP 100UF 20.00% 6.3V		
73		A	CAPACITOR		C2525	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
74		A	CAPACITOR		C2526	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		

No.	#	Board	Type	Δ / [*]	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
75		A	CAPACITOR		C2527	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
76		A	CAPACITOR		C2528	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
77		A	CAPACITOR		C2601	1-131-661-21	ELECT CHIP 100UF 20% 10V		
78		A	CAPACITOR		C2602	1-164-004-11	CERAMIC CHIP 0.1UF 10.00% 25V		
79		A	CAPACITOR		C2603	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
80		A	CAPACITOR		C2604	1-128-360-11	ELECT CHIP 220UF 20.00% 10V		
81		A	CAPACITOR		C2605	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
82		A	CAPACITOR		C2606	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
83		A	CAPACITOR		C2607	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
84		A	CAPACITOR		C2608	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
85		A	CAPACITOR		C2609	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
86		A	CAPACITOR		C2610	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
87		A	CAPACITOR		C2611	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
88		A	CAPACITOR		C2612	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
89		A	CAPACITOR		C2613	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
90		A	CAPACITOR		C2614	1-109-982-11	CERAMIC CHIP 1UF 10.00% 10V		
91		A	CAPACITOR		C2615	1-100-159-91	CERAMIC CHIP 22UF 10% 6.3V		
92		A	CAPACITOR		C2616	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
93		A	CAPACITOR		C2617	1-100-159-91	CERAMIC CHIP 22UF 10% 6.3V		
94		A	CAPACITOR		C2618	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
95		A	CAPACITOR		C2619	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
96		A	CAPACITOR		C2620	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
97		A	CAPACITOR		C2632	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
98		A	CAPACITOR		C2633	1-162-968-11	CERAMIC CHIP 0.0047UF 10.00% 50V		
99		A	CAPACITOR		C2634	1-162-962-11	CERAMIC CHIP 470PF 10.00% 50V		
100		A	CAPACITOR		C2635	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
101		A	CAPACITOR		C2640	1-125-837-91	CERAMIC CHIP 1UF 10% 6.3V		
102		A	CAPACITOR		C2642	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
103		A	CAPACITOR		C2645	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
104		A	CAPACITOR		C2646	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
105		A	CAPACITOR		C2647	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
106		A	CAPACITOR		C2648	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
107		A	CAPACITOR		C2649	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
108		A	CAPACITOR		C2650	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
109		A	CAPACITOR		C2655	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
110		A	CAPACITOR		C2680	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
111		A	CAPACITOR		C2681	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
112		A	CAPACITOR		C2682	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
113		A	CAPACITOR		C7001	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
114		A	CAPACITOR		C7002	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
115		A	CAPACITOR		C7003	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
116		A	CAPACITOR		C7004	1-162-928-11	CERAMIC CHIP 120PF 5.00% 50V		
117		A	CAPACITOR		C7007	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
118		A	CAPACITOR		C7008	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
119		A	CAPACITOR		C7009	1-162-924-11	CERAMIC CHIP 56PF 5.00% 50V		
120		A	CAPACITOR		C7010	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
121		A	CAPACITOR		C7011	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
122		A	CAPACITOR		C7012	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
123		A	CAPACITOR		C7013	1-115-416-11	CERAMIC CHIP 0.001UF 5.00% 25V		
124		A	CAPACITOR		C7015	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
125		A	CAPACITOR		C7016	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
126		A	CAPACITOR		C7017	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
127		A	CAPACITOR		C7018	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
128		A	CAPACITOR		C7019	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
129		A	CAPACITOR		C7022	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
130		A	CAPACITOR		C7023	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
131		A	CAPACITOR		C7024	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
132		A	CAPACITOR		C7025	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
133		A	CAPACITOR		C7026	1-162-968-11	CERAMIC CHIP 0.0047UF 10.00% 50V		
134		A	CAPACITOR		C7027	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V		
135		A	CAPACITOR		C7028	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
136		A	CAPACITOR		C7029	1-126-193-11	ELECT CHIP 1UF 20.00% 50V		
137		A	CAPACITOR		C7032	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V		
138		A	CAPACITOR		C7033	1-117-681-11	ELECT CHIP 100UF 20.00% 16V		
139		A	CAPACITOR		C7034	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
140		A	CAPACITOR		C7035	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
141		A	CAPACITOR		C7036	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
142		A	CAPACITOR		C7037	1-100-163-91	CERAMIC CHIP 0.33UF 10% 25V		
143		A	CAPACITOR		C7038	1-100-163-91	CERAMIC CHIP 0.33UF 10% 25V		
144		A	CAPACITOR		C7039	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
145		A	CAPACITOR		C7040	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
146		A	CAPACITOR		C7041	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V		
147		A	CAPACITOR		C7042	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V		
148		A	CAPACITOR		C7043	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		

No.	#	Board	Type	Δ / [*]	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
149		A	CAPACITOR		C7044	1-164-315-11	CERAMIC CHIP 470PF 5.00% 50V		
150		A	CAPACITOR		C7045	1-164-315-11	CERAMIC CHIP 470PF 5.00% 50V		
151		A	CAPACITOR		C7046	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
152		A	CAPACITOR		C7047	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
153		A	CAPACITOR		C7049	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
154		A	CAPACITOR		C7050	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
155		A	CAPACITOR		C7051	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
156		A	CAPACITOR		C7052	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
157		A	CAPACITOR		C7053	1-100-163-91	CERAMIC CHIP 0.33UF 10% 25V		
158		A	CAPACITOR		C7054	1-100-163-91	CERAMIC CHIP 0.33UF 10% 25V		
159		A	CAPACITOR		C7055	1-125-889-91	CERAMIC CHIP 2.2UF 10% 10V		
160		A	CAPACITOR		C7056	1-125-889-91	CERAMIC CHIP 2.2UF 10% 10V		
161		A	CAPACITOR		C7059	1-127-692-11	CERAMIC CHIP 10UF 10% 16V		
162		A	CAPACITOR		C7060	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
163		A	CAPACITOR		C7061	1-100-163-91	CERAMIC CHIP 0.33UF 10% 25V		
164		A	CAPACITOR		C7062	1-137-894-21	ELECT CHIP 470UF 20% 25V		
165		A	CAPACITOR		C7064	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
166		A	CAPACITOR		C7066	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
167		A	CAPACITOR		C7070	1-117-681-11	ELECT CHIP 100UF 20.00% 16V		
168		A	CAPACITOR		C7072	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
169		A	CAPACITOR		C7077	1-100-163-91	CERAMIC CHIP 0.33UF 10% 25V		
170		A	CAPACITOR		C7080	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
171		A	CAPACITOR		C7081	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
172		A	CAPACITOR		C7082	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
173		A	CAPACITOR		C7088	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V		
174		A	CAPACITOR		C7089	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V		
175		A	CAPACITOR		C7090	1-165-585-21	ELECT CHIP 47UF 20% 25V		
176		A	CAPACITOR		C7091	1-115-340-11	CERAMIC CHIP 0.22UF 10.00% 25V		
177		A	CAPACITOR		C7092	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
178		A	CAPACITOR		C7093	1-165-585-21	ELECT CHIP 47UF 20% 25V		
179		A	CAPACITOR		C7094	1-115-340-11	CERAMIC CHIP 0.22UF 10.00% 25V		
180		A	CAPACITOR		C7095	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V		
181		A	CAPACITOR		C7096	1-115-340-11	CERAMIC CHIP 0.22UF 10.00% 25V		
182		A	CAPACITOR		C7097	1-128-526-11	ELECT 100UF 20.00% 25V		
183		A	CAPACITOR		C7098	1-115-340-11	CERAMIC CHIP 0.22UF 10.00% 25V		
184		A	CAPACITOR		C7100	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V		
185		A	CAPACITOR		C7101	1-107-890-11	ELECT 2200UF 20.00% 25V		
186		A	CAPACITOR		C7102	1-107-890-11	ELECT 2200UF 20.00% 25V		
187		A	CAPACITOR		C7103	1-131-976-11	ELECT 820UF 20% 25V		
188		A	CAPACITOR		C7104	1-131-976-11	ELECT 820UF 20% 25V		
189		A	CAPACITOR		C7105	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V		
190		A	CAPACITOR		C7106	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V		
191		A	CAPACITOR		C7108	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V		
192		A	CAPACITOR		C7122	1-165-585-21	ELECT CHIP 47UF 20% 25V		
193		A	CAPACITOR		C7123	1-100-163-91	CERAMIC CHIP 0.33UF 10% 25V		
194		A	CAPACITOR		C7124	1-128-528-11	ELECT 470UF 20.00% 25V		
195		A	CAPACITOR		C7125	1-100-163-91	CERAMIC CHIP 0.33UF 10% 25V		
196		A	CAPACITOR		C7126	1-100-163-91	CERAMIC CHIP 0.33UF 10% 25V		
197		A	CAPACITOR		C7127	1-115-340-11	CERAMIC CHIP 0.22UF 10.00% 25V		
198		A	CAPACITOR		C7128	1-115-340-11	CERAMIC CHIP 0.22UF 10.00% 25V		
199		A	CAPACITOR		C7129	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
200		A	CAPACITOR		C7130	1-100-163-91	CERAMIC CHIP 0.33UF 10% 25V		
201		A	CAPACITOR		C7131	1-128-536-11	ELECT CHIP 100UF 20.00% 25V		
202		A	CAPACITOR		C7132	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
203		A	CAPACITOR		C7136	1-126-397-11	ELECT CHIP 33UF 20.00% 25V		
204		A	CAPACITOR		C7137	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
205		A	CAPACITOR		C7138	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
206		A	CAPACITOR		C7139	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
207		A	CAPACITOR		C7140	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
208		A	CAPACITOR		C7142	1-100-163-91	CERAMIC CHIP 0.33UF 10% 25V		
209		A	CAPACITOR		C7143	1-100-163-91	CERAMIC CHIP 0.33UF 10% 25V		
210		A	CAPACITOR		C8401	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
211		A	CAPACITOR		C8402	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
212		A	CAPACITOR		C8403	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
213		A	CAPACITOR		C8404	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		
214		A	CAPACITOR		C8405	1-164-227-11	CERAMIC CHIP 0.022UF 10.00% 25V		
215		A	CAPACITOR		C8406	1-164-004-11	CERAMIC CHIP 0.1UF 10.00% 25V		
216		A	CAPACITOR		C8407	1-135-960-91	CERAMIC CHIP 10UF 10% 25V		
217		A	CAPACITOR		C8408	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
218		A	CAPACITOR		C8409	1-164-245-11	CERAMIC CHIP 0.015UF 10.00% 25V		
219		A	CAPACITOR		C8410	1-162-969-11	CERAMIC CHIP 0.0068UF 10.00% 25V		
220		A	CAPACITOR		C8412	1-162-968-11	CERAMIC CHIP 0.0047UF 10.00% 50V		
221		A	CAPACITOR		C8413	1-127-760-11	CERAMIC CHIP 4.7UF 10% 6.3V		
222		A	CAPACITOR		C8414	1-164-004-11	CERAMIC CHIP 0.1UF 10.00% 25V		

No.	#	Board	Type	Δ/V^*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
223		A	CAPACITOR		C8415	1-164-004-11	CERAMIC CHIP 0.1UF 10.00% 25V		
224		A	CAPACITOR		C8416	1-127-760-11	CERAMIC CHIP 4.7UF 10% 6.3V		
225		A	CAPACITOR		C8417	1-127-760-11	CERAMIC CHIP 4.7UF 10% 6.3V		
226		A	CAPACITOR		C8418	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
227		A	CAPACITOR		C8419	1-137-894-21	ELECT CHIP 470UF 20% 25V		
228		A	CAPACITOR		C8420	1-127-738-91	CERAMIC CHIP 4.7UF 10% 25V		
229		A	CAPACITOR		C8421	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
230		A	CAPACITOR		C8422	1-128-536-11	ELECT CHIP 100UF 20.00% 25V		
231		A	CAPACITOR		C8423	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
232		A	CAPACITOR		C8424	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
233		A	CAPACITOR		C8425	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
234		A	CAPACITOR		C8426	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
235		A	CAPACITOR		C8427	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
236		A	CAPACITOR		C8428	1-128-360-11	ELECT CHIP 220UF 20.00% 10V		
237		A	CAPACITOR		C8429	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
238		A	CAPACITOR		C8430	1-135-960-91	CERAMIC CHIP 10UF 10% 25V		
239		A	CAPACITOR		C8431	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
240		A	CAPACITOR		C8432	1-135-346-21	ELECT CHIP 39UF 20% 16V		
241		A	CAPACITOR		C8433	1-135-346-21	ELECT CHIP 39UF 20% 16V		
242		A	CAPACITOR		C8434	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
243		A	CAPACITOR		C8435	1-137-894-21	ELECT CHIP 470UF 20% 25V		
244		A	CAPACITOR		C8436	1-137-894-21	ELECT CHIP 470UF 20% 25V		
245		A	CAPACITOR		C8437	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
246		A	CAPACITOR		C8439	1-127-760-11	CERAMIC CHIP 4.7UF 10% 6.3V		
247		A	CAPACITOR		C8440	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
248		A	CAPACITOR		C8442	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
249		A	CAPACITOR		C8443	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
250		A	CAPACITOR		C8444	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
251		A	CAPACITOR		C8445	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
252		A	CAPACITOR		C8446	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
253		A	CAPACITOR		C8447	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
254		A	CAPACITOR		C8448	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
255		A	CAPACITOR		C8450	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
256		A	CAPACITOR		C9401	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		
257		A	CAPACITOR		C9402	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		
258		A	CAPACITOR		C9403	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		
259		A	CAPACITOR		C9404	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		
260		A	CAPACITOR		C9406	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		
261		A	CAPACITOR		C9407	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		
262		A	CAPACITOR		C9408	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		
263		A	CAPACITOR		C9409	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		
264		A	CAPACITOR		C9411	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
265		A	CAPACITOR		C9412	1-164-505-11	CERAMIC CHIP 2.2UF 16V		
266		A	CAPACITOR		C9413	1-164-505-11	CERAMIC CHIP 2.2UF 16V		
267		A	CAPACITOR		C9415	1-126-404-11	ELECT CHIP 4.7UF 20.00% 50V		
268		A	CAPACITOR		C9416	1-126-404-11	ELECT CHIP 4.7UF 20.00% 50V		
269		A	CAPACITOR		C9417	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
270		A	CAPACITOR		C9418	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
271		A	CAPACITOR		C9419	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
272		A	CAPACITOR		C9420	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
273		A	CAPACITOR		C9421	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
274		A	CAPACITOR		C9422	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
275		A	CAPACITOR		C9423	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		
276		A	CAPACITOR		C9424	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		
277		A	CAPACITOR		C9425	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		
278		A	CAPACITOR		C9426	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		
279		A	CAPACITOR		C9428	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		
280		A	CAPACITOR		C9429	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		
281		A	CAPACITOR		C9430	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		
282		A	CAPACITOR		C9431	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		
283		A	CAPACITOR		C9433	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
284		A	CAPACITOR		C9434	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
285		A	CAPACITOR		C9435	1-164-505-11	CERAMIC CHIP 2.2UF 16V		
286		A	CAPACITOR		C9436	1-164-505-11	CERAMIC CHIP 2.2UF 16V		
287		A	CAPACITOR		C9438	1-126-404-11	ELECT CHIP 4.7UF 20.00% 50V		
288		A	CAPACITOR		C9439	1-126-404-11	ELECT CHIP 4.7UF 20.00% 50V		
289		A	CAPACITOR		C9440	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
290		A	CAPACITOR		C9441	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
291		A	CAPACITOR		C9442	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
292		A	CAPACITOR		C9443	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
293		A	CAPACITOR		C9444	1-115-566-11	CERAMIC CHIP 4.7UF 10.00% 10V		
294		A	CAPACITOR		C9445	1-115-566-11	CERAMIC CHIP 4.7UF 10.00% 10V		
295		A	CAPACITOR		C9448	1-164-505-11	CERAMIC CHIP 2.2UF 16V		
296		A	CAPACITOR		C9451	1-164-505-11	CERAMIC CHIP 2.2UF 16V		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
297		A	CAPACITOR		C9701	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
298		A	CAPACITOR		C9702	1-128-360-11	ELECT CHIP 220UF 20.00% 10V		
299		A	CAPACITOR		C9703	1-126-205-11	ELECT CHIP 47UF 20.00% 6.3V		
300		A	CAPACITOR		C9704	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
301		A	CAPACITOR		C9705	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
302		A	CAPACITOR		C9706	1-164-388-91	CERAMIC CHIP 270PF 5.00% 50V		
303		A	CAPACITOR		C9707	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
304		A	CAPACITOR		C9708	1-115-467-11	CERAMIC CHIP 0.22UF 10.00% 10V		
305		A	CAPACITOR		C9709	1-126-404-11	ELECT CHIP 4.7UF 20.00% 50V		
306		A	CAPACITOR		C9710	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V		
307		A	CONNECTOR		CN7001	1-573-290-21	PIN, CONNECTOR (1.5MM) (SMD)4P		
308		A	CONNECTOR	*	CN7002	1-764-250-11	PIN, CONNECTOR (PC BOARD) 4P		
309		A	CONNECTOR		CN8401	1-794-519-21	PIN, CONNECTOR (PC BOARD) 14P		
310		A	CONNECTOR	*	CN8402	1-764-250-11	PIN, CONNECTOR (PC BOARD) 4P		
311		A	CONNECTOR		CN8403	1-774-769-11	CONNECTOR, FFC/FPC 25P		
312		A	CONNECTOR	*	CN8604	1-573-768-21	PIN, CONNECTOR (1.5MM) (SMD)5P		
313		A	CONNECTOR	*	CN9401	1-770-130-11	CONNECTOR (SQUARE TYPE) 21P		
314		A	CONNECTOR	*	CN9402	1-770-130-11	CONNECTOR (SQUARE TYPE) 21P		
315		A	CONNECTOR	*	CN9403	1-779-268-21	PIN, CONNECTOR (1.5MM)(SMD)11P		
316		A	CONNECTOR		CN9404	1-764-177-11	PIN, CONNECTOR (SMD)(1.5MM) 7P		
317		A	CONNECTOR		CN9405	1-766-382-21	PIN, CONNECTOR (1.5MM)(SMD)10P		
318		A	CONNECTOR		CN9701	1-778-226-21	CONNECTOR, BOARD TO BOARD 6P		
319		A	CONNECTOR		CN9702	1-778-226-21	CONNECTOR, BOARD TO BOARD 6P		
320		A	CONNECTOR		CN9703	1-774-769-11	CONNECTOR, FFC/FPC 25P		
321		A	CONNECTOR		CN9704	1-774-769-11	CONNECTOR, FFC/FPC 25P		
322		A	DIODE		D2001	8-719-404-50	DIODE MA111-TX		
323		A	DIODE		D2202	8-719-404-50	DIODE MA111-TX		
324		A	DIODE		D7001	8-719-056-85	DIODE UDZ-TE-17-8.2B		
325		A	DIODE		D7002	8-719-056-85	DIODE UDZ-TE-17-8.2B		
326		A	DIODE		D7003	8-719-081-97	DIODE MMDL914T1		
327		A	DIODE		D7004	8-719-081-97	DIODE MMDL914T1		
328		A	DIODE		D7007	8-719-081-97	DIODE MMDL914T1		
329		A	DIODE		D7008	8-719-081-97	DIODE MMDL914T1		
330		A	DIODE		D7009	8-719-081-97	DIODE MMDL914T1		
331		A	DIODE		D7010	8-719-081-97	DIODE MMDL914T1		
332		A	DIODE		D7011	8-719-081-97	DIODE MMDL914T1		
333		A	DIODE		D7012	8-719-081-97	DIODE MMDL914T1		
334		A	DIODE		D8402	8-719-081-34	DIODE RB160M-30TR		
335		A	DIODE		D8403	8-719-081-34	DIODE RB160M-30TR		
336		A	DIODE		D8404	8-719-404-50	DIODE MA111-TX		
337		A	DIODE		D8405	8-719-404-50	DIODE MA111-TX		
338		A	DIODE		D8406	8-719-080-41	DIODE RB063L-30TE25		
339		A	DIODE		D8407	8-719-081-99	DIODE MM3Z13VT1		
340		A	DIODE		D8408	6-500-294-01	DIODE PTZ-TE25-3.9B		
341		A	DIODE		D8409	8-719-068-71	DIODE PTZ-TE25-13A		
342		A	DIODE		D8411	8-719-081-99	DIODE MM3Z13VT1		
343		A	DIODE		D8413	8-719-081-97	DIODE MMDL914T1		
344		A	DIODE		D8414	8-719-081-97	DIODE MMDL914T1		
345		A	DIODE		D8418	8-719-081-97	DIODE MMDL914T1		
346		A	DIODE		D9401	8-719-083-82	DIODE UDZS-TE17-12B		
347		A	DIODE		D9402	8-719-069-60	DIODE UDZSTE-179.1B		
348		A	DIODE		D9403	8-719-069-60	DIODE UDZSTE-179.1B		
349		A	DIODE		D9404	8-719-069-60	DIODE UDZSTE-179.1B		
350		A	DIODE		D9405	8-719-069-60	DIODE UDZSTE-179.1B		
351		A	DIODE		D9406	8-719-069-60	DIODE UDZSTE-179.1B		
352		A	DIODE		D9407	8-719-069-60	DIODE UDZSTE-179.1B		
353		A	DIODE		D9408	8-719-069-60	DIODE UDZSTE-179.1B		
354		A	DIODE		D9409	8-719-069-60	DIODE UDZSTE-179.1B		
355		A	DIODE		D9410	8-719-069-60	DIODE UDZSTE-179.1B		
356		A	DIODE		D9411	8-719-069-60	DIODE UDZSTE-179.1B		
357		A	DIODE		D9413	8-719-083-82	DIODE UDZS-TE17-12B		
358		A	DIODE		D9414	8-719-069-60	DIODE UDZSTE-179.1B		
359		A	DIODE		D9415	8-719-069-60	DIODE UDZSTE-179.1B		
360		A	DIODE		D9416	8-719-069-60	DIODE UDZSTE-179.1B		
361		A	DIODE		D9417	8-719-069-60	DIODE UDZSTE-179.1B		
362		A	DIODE		D9418	8-719-069-60	DIODE UDZSTE-179.1B		
363		A	DIODE		D9419	8-719-069-60	DIODE UDZSTE-179.1B		
364		A	DIODE		D9420	8-719-069-60	DIODE UDZSTE-179.1B		
365		A	DIODE		D9421	8-719-069-60	DIODE UDZSTE-179.1B		
366		A	DIODE		D9423	8-719-069-60	DIODE UDZSTE-179.1B		
367		A	DIODE		D9424	8-719-069-60	DIODE UDZSTE-179.1B		
368		A	DIODE		D9425	8-719-069-60	DIODE UDZSTE-179.1B		
369		A	DIODE		D9426	8-719-081-97	DIODE MMDL914T1		
370		A	DIODE		D9427	8-719-069-60	DIODE UDZSTE-179.1B		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
371		A	DIODE		D9428	8-719-069-60	DIODE UDZSTE-179.1B		
372		A	DIODE		D9429	8-719-081-97	DIODE MMDL914T1		
373		A	DIODE		D9701	8-719-083-52	DIODE UDZSTE-1716B		
374		A	DIODE		D9702	8-719-083-52	DIODE UDZSTE-1716B		
375		A	FUSE	△	F8401	1-533-651-11	IC LINK 1.6A 24V		
376		A	FERRITE BEAD		FB2001	1-414-445-11	FERRITE 0UH		
377		A	FERRITE BEAD		FB2002	1-469-775-21	FERRITE 0UH		
378		A	FERRITE BEAD		FB8401	1-469-775-21	FERRITE 0UH		
379		A	FERRITE BEAD		FB8402	1-469-775-21	FERRITE 0UH		
380		A	FERRITE BEAD		FB8403	1-469-775-21	FERRITE 0UH		
381		A	FERRITE BEAD		FB8404	1-414-445-11	FERRITE 0UH		
382		A	FERRITE BEAD		FB8405	1-469-775-21	FERRITE 0UH		
383		A	FERRITE BEAD		FB8406	1-469-775-21	FERRITE 0UH		
384		A	FERRITE BEAD		FB8407	1-414-445-11	FERRITE 0UH		
385		A	FERRITE BEAD		FB8408	1-469-775-21	FERRITE 0UH		
386		A	FERRITE BEAD		FB8609	1-469-775-21	FERRITE 0UH		
387		A	FERRITE BEAD		FB9401	1-400-333-21	FERRITE 0UH		
388		A	FERRITE BEAD		FB9402	1-400-333-21	FERRITE 0UH		
389		A	FERRITE BEAD		FB9403	1-400-333-21	FERRITE 0UH		
390		A	FILTER		FL7001	1-234-126-21	FERRITE 0UH		
391		A	IC		IC2001	8-759-460-72	IC BA033FP-E2		
392		A	IC		IC2002	6-704-607-01	IC M24C16-WMN6T(B)		
393		A	IC		IC2003	6-702-515-01	IC SAA5665HL/M1D/0724		
394		A	IC		IC2004	6-706-419-01	IC LM393DT (A)		
395		A	IC		IC2005	8-759-672-39	IC PST5731MT		
396		A	IC		IC2006	8-759-196-95	IC TC7SH04FU-TE85R		
397		A	IC		IC2007	8-759-392-01	IC TC7SH86FU-TE85R		
398		A	IC		IC2008	6-705-950-01	IC K6F2008V2E-LF70000		
399		A	IC		IC2009	8-759-523-81	IC TC74VHC08FT(EL)		
400		A	IC		IC2010	1-540-151-21	SOCKET, IC		
401		A	IC		IC2201	8-753-212-10	IC CXA2163AQ-T6		
402		A	IC		IC2202	6-701-173-01	IC MC74LVXT4053DTR2		
403		A	IC		IC2205	8-759-366-35	IC TC4W66F(TE12R)		
404		A	IC		IC2206	8-759-481-08	IC TC7SET02FU(TE85R)		
405		A	IC		IC2501	8-752-089-33	IC CXA2069Q-TL		
406		A	IC		IC2604	8-759-533-85	IC L88M05T-FA-TL		
407		A	IC		IC2605	8-752-108-35	IC CXA2171AQ		
408		A	IC		IC2606	8-759-598-44	IC TC7WH08FK(TE85R)		
409		A	IC		IC7001	6-701-031-11	IC MSP3411G-QA-B11		
410		A	IC		IC7002	8-759-198-31	IC UPC1093J-1-T		
411		A	IC		IC7003	6-702-817-12	IC BD3869AF-E2		
412		A	IC		IC7004	8-759-359-49	IC NJM3414AV(TE2)		
413		A	IC		IC7007	6-705-560-01	IC TDA7263		
414		A	IC		IC7009	8-759-278-58	IC NJM4558V-TE2		
415		A	IC		IC7010	8-759-278-58	IC NJM4558V-TE2		
416		A	IC		IC7011	8-759-460-79	IC BA09FP-E2		
417		A	IC		IC7012	6-702-912-01	IC S-80942CNMC-G9CT2G		
418		A	IC		IC8401	6-702-510-01	IC TPS5120DBTR		
419		A	IC		IC8402	8-759-394-36	IC BA09T		
420		A	IC		IC8403	8-759-450-47	IC BA05T		
421		A	COIL		L2001	1-412-030-11	INDUCTOR 22UH		
422		A	COIL		L2002	1-412-030-11	INDUCTOR 22UH		
423		A	COIL		L2003	1-412-029-11	INDUCTOR 10UH		
424		A	COIL		L2004	1-412-030-11	INDUCTOR 22UH		
425		A	COIL		L2005	1-412-030-11	INDUCTOR 22UH		
426		A	COIL		L2006	1-412-029-11	INDUCTOR 10UH		
427		A	COIL		L2202	1-412-031-11	INDUCTOR 47UH		
428		A	COIL		L2203	1-412-031-11	INDUCTOR 47UH		
429		A	COIL		L2204	1-412-031-11	INDUCTOR 47UH		
430		A	COIL		L2205	1-412-029-11	INDUCTOR 10UH		
431		A	COIL		L2206	1-412-029-11	INDUCTOR 10UH		
432		A	COIL		L2501	1-412-029-11	INDUCTOR 10UH		
433		A	COIL		L2502	1-412-030-11	INDUCTOR 22UH		
434		A	COIL		L2503	1-412-029-11	INDUCTOR 10UH		
435		A	COIL		L2604	1-412-029-11	INDUCTOR 10UH		
436		A	COIL		L2605	1-469-525-91	INDUCTOR 10UH		
437		A	COIL		L2606	1-412-028-11	INDUCTOR 4.7UH		
438		A	COIL		L7001	1-412-029-11	INDUCTOR 10UH		
439		A	COIL		L7002	1-412-990-41	INDUCTOR 8.2UH		
440		A	COIL		L7003	1-412-029-11	INDUCTOR 10UH		
441		A	COIL		L7004	1-412-029-11	INDUCTOR 10UH		
442		A	COIL		L7005	1-412-029-11	INDUCTOR 10UH		
443		A	COIL		L7006	1-412-029-11	INDUCTOR 10UH		
444		A	COIL		L7007	1-412-029-11	INDUCTOR 10UH		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
445		A	COIL		L7009	1-412-029-11	INDUCTOR 10UH		
446		A	COIL		L8401	1-424-916-21	INDUCTOR 10UH		
447		A	COIL		L8402	1-424-922-21	INDUCTOR 10UH		
448		A	COIL		L9701	1-412-029-11	INDUCTOR 10UH		
449		A	COIL		L9702	1-412-029-11	INDUCTOR 10UH		
450		A	IC LINK	△	PS7001	1-533-674-11	IC LINK 0.5A 50V		
451		A	IC LINK	△	PS7002	1-576-390-91	IC LINK 2.5A 50V		
452		A	IC LINK	△	PS8602	1-576-731-21	IC LINK 2.5A 24V		
453		A	IC LINK	△	PS9701	1-533-674-11	IC LINK 0.5A 50V		
454		A	TRANSISTOR		Q2001	6-550-585-01	TRANSISTOR 2PC4081R-115		
455		A	TRANSISTOR		Q2002	8-729-424-08	TRANSISTOR UN2111		
456		A	TRANSISTOR		Q2003	8-729-421-22	TRANSISTOR UN2211		
457		A	TRANSISTOR		Q2004	6-550-586-01	TRANSISTOR 2PA1576R-115		
458		A	TRANSISTOR		Q2201	6-550-585-01	TRANSISTOR 2PC4081R-115		
459		A	TRANSISTOR		Q2202	6-550-585-01	TRANSISTOR 2PC4081R-115		
460		A	TRANSISTOR		Q2203	6-550-585-01	TRANSISTOR 2PC4081R-115		
461		A	TRANSISTOR		Q2204	6-550-585-01	TRANSISTOR 2PC4081R-115		
462		A	TRANSISTOR		Q2205	6-550-585-01	TRANSISTOR 2PC4081R-115		
463		A	TRANSISTOR		Q2206	6-550-585-01	TRANSISTOR 2PC4081R-115		
464		A	TRANSISTOR		Q2208	8-729-027-43	TRANSISTOR DTC114EKA-T146		
465		A	TRANSISTOR		Q2209	6-550-586-01	TRANSISTOR 2PA1576R-115		
466		A	TRANSISTOR		Q2210	6-550-585-01	TRANSISTOR 2PC4081R-115		
467		A	TRANSISTOR		Q2211	6-550-585-01	TRANSISTOR 2PC4081R-115		
468		A	TRANSISTOR		Q2216	6-550-585-01	TRANSISTOR 2PC4081R-115		
469		A	TRANSISTOR		Q2217	6-550-586-01	TRANSISTOR 2PA1576R-115		
470		A	TRANSISTOR		Q2501	6-550-585-01	TRANSISTOR 2PC4081R-115		
471		A	TRANSISTOR		Q2502	6-550-586-01	TRANSISTOR 2PA1576R-115		
472		A	TRANSISTOR		Q2503	6-550-585-01	TRANSISTOR 2PC4081R-115		
473		A	TRANSISTOR		Q2504	6-550-586-01	TRANSISTOR 2PA1576R-115		
474		A	TRANSISTOR		Q2505	6-550-586-01	TRANSISTOR 2PA1576R-115		
475		A	TRANSISTOR		Q2506	6-550-586-01	TRANSISTOR 2PA1576R-115		
476		A	TRANSISTOR		Q2507	6-550-585-01	TRANSISTOR 2PC4081R-115		
477		A	TRANSISTOR		Q2508	6-550-585-01	TRANSISTOR 2PC4081R-115		
478		A	TRANSISTOR		Q2509	6-550-585-01	TRANSISTOR 2PC4081R-115		
479		A	TRANSISTOR		Q2601	6-550-586-01	TRANSISTOR 2PA1576R-115		
480		A	TRANSISTOR		Q2602	6-550-586-01	TRANSISTOR 2PA1576R-115		
481		A	TRANSISTOR		Q2603	6-550-586-01	TRANSISTOR 2PA1576R-115		
482		A	TRANSISTOR		Q2604	6-550-586-01	TRANSISTOR 2PA1576R-115		
483		A	TRANSISTOR		Q2605	6-550-586-01	TRANSISTOR 2PA1576R-115		
484		A	TRANSISTOR		Q2606	6-550-586-01	TRANSISTOR 2PA1576R-115		
485		A	TRANSISTOR		Q2607	6-550-586-01	TRANSISTOR 2PA1576R-115		
486		A	TRANSISTOR		Q7001	6-550-585-01	TRANSISTOR 2PC4081R-115		
487		A	TRANSISTOR		Q7002	6-550-586-01	TRANSISTOR 2PA1576R-115		
488		A	TRANSISTOR		Q7005	1-801-806-11	TR DTC144EKA		
489		A	TRANSISTOR		Q7006	1-801-806-11	TR DTC144EKA		
490		A	TRANSISTOR		Q7007	8-729-422-27	TRANSISTOR 2SD601A-Q		
491		A	TRANSISTOR		Q7008	8-729-920-21	TRANSISTOR DTC314TK-T-146		
492		A	TRANSISTOR		Q7009	8-729-920-21	TRANSISTOR DTC314TK-T-146		
493		A	TRANSISTOR		Q7012	8-729-032-65	TRANSISTOR 2SD2396H		
494		A	TRANSISTOR		Q7013	6-550-586-01	TRANSISTOR 2PA1576R-115		
495		A	TRANSISTOR		Q7014	1-801-806-11	TR DTC144EKA		
496		A	TRANSISTOR		Q7015	6-550-585-01	TRANSISTOR 2PC4081R-115		
497		A	TRANSISTOR		Q7016	8-729-015-39	TRANSISTOR DTC323TK		
498		A	TRANSISTOR		Q7017	8-729-015-39	TRANSISTOR DTC323TK		
499		A	TRANSISTOR		Q8401	8-729-054-66	TRANSISTOR HAT2071R-EL		
500		A	TRANSISTOR		Q8402	8-729-054-66	TRANSISTOR HAT2071R-EL		
501		A	TRANSISTOR		Q8403	8-729-053-79	TRANSISTOR IRF7901D1-TR		
502		A	TRANSISTOR		Q8404	8-729-027-43	TRANSISTOR DTC114EKA-T146		
503		A	TRANSISTOR		Q8405	8-729-054-36	TRANSISTOR UPA1716G-E2		
504		A	TRANSISTOR		Q8406	6-550-586-01	TRANSISTOR 2PA1576R-115		
505		A	TRANSISTOR		Q9401	6-550-586-01	TRANSISTOR 2PA1576R-115		
506		A	TRANSISTOR		Q9402	8-729-015-39	TRANSISTOR DTC323TK		
507		A	TRANSISTOR		Q9403	8-729-015-39	TRANSISTOR DTC323TK		
508		A	TRANSISTOR		Q9404	8-729-015-39	TRANSISTOR DTC323TK		
509		A	TRANSISTOR		Q9405	8-729-015-39	TRANSISTOR DTC323TK		
510		A	TRANSISTOR		Q9406	6-550-586-01	TRANSISTOR 2PA1576R-115		
511		A	TRANSISTOR		Q9407	6-550-586-01	TRANSISTOR 2PA1576R-115		
512		A	TRANSISTOR		Q9408	6-550-586-01	TRANSISTOR 2PA1576R-115		
513		A	TRANSISTOR		Q9409	6-550-586-01	TRANSISTOR 2PA1576R-115		
514		A	TRANSISTOR		Q9701	6-550-585-01	TRANSISTOR 2PC4081R-115		
515		A	TRANSISTOR		Q9702	6-550-586-01	TRANSISTOR 2PA1576R-115		
516		A	TRANSISTOR		Q9703	6-550-586-01	TRANSISTOR 2PA1576R-115		
517		A	TRANSISTOR		Q9704	1-801-806-11	TR DTC144EKA		
518		A	TRANSISTOR		Q9705	6-550-585-01	TRANSISTOR 2PC4081R-115		

No.	#	Board	Type	Δ / [*]	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
519		A	RESISTOR		R2002	1-216-837-11	METAL CHIP 22K 5% 1/10W		
520		A	RESISTOR		R2003	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
521		A	RESISTOR		R2004	1-216-845-11	METAL CHIP 100K 5% 1/10W		
522		A	RESISTOR		R2005	1-216-845-11	METAL CHIP 100K 5% 1/10W		
523		A	RESISTOR		R2006	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
524		A	RESISTOR		R2007	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
525		A	RESISTOR		R2008	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
526		A	RESISTOR		R2009	1-216-809-11	METAL CHIP 100 5% 1/10W		
527		A	RESISTOR		R2010	1-216-809-11	METAL CHIP 100 5% 1/10W		
528		A	RESISTOR		R2011	1-216-821-11	METAL CHIP 1K 5% 1/10W		
529		A	RESISTOR		R2012	1-216-809-11	METAL CHIP 100 5% 1/10W		
530		A	RESISTOR		R2013	1-216-843-11	METAL CHIP 68K 5% 1/10W		
531		A	RESISTOR		R2014	1-216-833-11	METAL CHIP 10K 5% 1/10W		
532		A	RESISTOR		R2015	1-216-833-11	METAL CHIP 10K 5% 1/10W		
533		A	RESISTOR		R2016	1-216-845-11	METAL CHIP 100K 5% 1/10W		
534		A	RESISTOR		R2017	1-216-833-11	METAL CHIP 10K 5% 1/10W		
535		A	RESISTOR		R2018	1-216-809-11	METAL CHIP 100 5% 1/10W		
536		A	RESISTOR		R2019	1-216-864-11	SHORT CHIP 0		
537		A	RESISTOR		R2020	1-216-809-11	METAL CHIP 100 5% 1/10W		
538		A	RESISTOR		R2021	1-216-864-11	SHORT CHIP 0		
539		A	RESISTOR		R2022	1-216-809-11	METAL CHIP 100 5% 1/10W		
540		A	RESISTOR		R2023	1-216-809-11	METAL CHIP 100 5% 1/10W		
541		A	RESISTOR		R2024	1-216-809-11	METAL CHIP 100 5% 1/10W		
542		A	RESISTOR		R2025	1-216-809-11	METAL CHIP 100 5% 1/10W		
543		A	RESISTOR		R2026	1-216-809-11	METAL CHIP 100 5% 1/10W		
544		A	RESISTOR		R2027	1-216-809-11	METAL CHIP 100 5% 1/10W		
545		A	RESISTOR		R2028	1-216-809-11	METAL CHIP 100 5% 1/10W		
546		A	RESISTOR		R2029	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
547		A	RESISTOR		R2030	1-216-817-11	METAL CHIP 470 5% 1/10W		
548		A	RESISTOR		R2031	1-216-809-11	METAL CHIP 100 5% 1/10W		
549		A	RESISTOR		R2032	1-216-809-11	METAL CHIP 100 5% 1/10W		
550		A	RESISTOR		R2033	1-216-809-11	METAL CHIP 100 5% 1/10W		
551		A	RESISTOR		R2034	1-216-809-11	METAL CHIP 100 5% 1/10W		
552		A	RESISTOR		R2035	1-216-809-11	METAL CHIP 100 5% 1/10W		
553		A	RESISTOR		R2036	1-216-809-11	METAL CHIP 100 5% 1/10W		
554		A	RESISTOR		R2037	1-216-809-11	METAL CHIP 100 5% 1/10W		
555		A	RESISTOR		R2038	1-216-809-11	METAL CHIP 100 5% 1/10W		
556		A	RESISTOR		R2039	1-216-809-11	METAL CHIP 100 5% 1/10W		
557		A	RESISTOR		R2040	1-216-809-11	METAL CHIP 100 5% 1/10W		
558		A	RESISTOR		R2041	1-218-725-11	METAL CHIP 24K 0.5% 1/10W		
559		A	RESISTOR		R2042	1-216-809-11	METAL CHIP 100 5% 1/10W		
560		A	RESISTOR		R2043	1-216-809-11	METAL CHIP 100 5% 1/10W		
561		A	RESISTOR		R2044	1-216-809-11	METAL CHIP 100 5% 1/10W		
562		A	RESISTOR		R2045	1-216-809-11	METAL CHIP 100 5% 1/10W		
563		A	RESISTOR		R2046	1-216-809-11	METAL CHIP 100 5% 1/10W		
564		A	RESISTOR		R2047	1-216-809-11	METAL CHIP 100 5% 1/10W		
565		A	RESISTOR		R2048	1-216-809-11	METAL CHIP 100 5% 1/10W		
566		A	RESISTOR		R2049	1-216-809-11	METAL CHIP 100 5% 1/10W		
567		A	RESISTOR		R2050	1-216-809-11	METAL CHIP 100 5% 1/10W		
568		A	RESISTOR		R2051	1-216-809-11	METAL CHIP 100 5% 1/10W		
569		A	RESISTOR		R2052	1-216-809-11	METAL CHIP 100 5% 1/10W		
570		A	RESISTOR		R2054	1-216-809-11	METAL CHIP 100 5% 1/10W		
571		A	RESISTOR		R2055	1-216-809-11	METAL CHIP 100 5% 1/10W		
572		A	RESISTOR		R2056	1-216-809-11	METAL CHIP 100 5% 1/10W		
573		A	RESISTOR		R2057	1-216-809-11	METAL CHIP 100 5% 1/10W		
574		A	RESISTOR		R2058	1-216-809-11	METAL CHIP 100 5% 1/10W		
575		A	RESISTOR		R2060	1-216-803-11	METAL CHIP 33 5% 1/10W		
576		A	RESISTOR		R2061	1-216-833-11	METAL CHIP 10K 5% 1/10W		
577		A	RESISTOR		R2062	1-216-803-11	METAL CHIP 33 5% 1/10W		
578		A	RESISTOR		R2063	1-216-803-11	METAL CHIP 33 5% 1/10W		
579		A	RESISTOR		R2064	1-216-809-11	METAL CHIP 100 5% 1/10W		
580		A	RESISTOR		R2065	1-216-810-11	METAL CHIP 120 5% 1/10W		
581		A	RESISTOR		R2066	1-216-809-11	METAL CHIP 100 5% 1/10W		
582		A	RESISTOR		R2067	1-216-833-11	METAL CHIP 10K 5% 1/10W		
583		A	RESISTOR		R2068	1-216-841-11	METAL CHIP 47K 5% 1/10W		
584		A	RESISTOR		R2069	1-216-810-11	METAL CHIP 120 5% 1/10W		
585		A	RESISTOR		R2070	1-216-833-11	METAL CHIP 10K 5% 1/10W		
586		A	RESISTOR		R2071	1-216-809-11	METAL CHIP 100 5% 1/10W		
587		A	RESISTOR		R2072	1-216-809-11	METAL CHIP 100 5% 1/10W		
588		A	RESISTOR		R2073	1-216-809-11	METAL CHIP 100 5% 1/10W		
589		A	RESISTOR		R2074	1-216-809-11	METAL CHIP 100 5% 1/10W		
590		A	RESISTOR		R2075	1-216-809-11	METAL CHIP 100 5% 1/10W		
591		A	RESISTOR		R2076	1-216-809-11	METAL CHIP 100 5% 1/10W		
592		A	RESISTOR		R2077	1-216-809-11	METAL CHIP 100 5% 1/10W		

No.	#	Board	Type	Δ / [*]	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
593		A	RESISTOR		R2078	1-216-864-11	SHORT CHIP 0		
594		A	RESISTOR		R2079	1-216-809-11	METAL CHIP 100 5% 1/10W		
595		A	RESISTOR		R2080	1-216-810-11	METAL CHIP 120 5% 1/10W		
596		A	RESISTOR		R2082	1-216-833-11	METAL CHIP 10K 5% 1/10W		
597		A	RESISTOR		R2083	1-216-833-11	METAL CHIP 10K 5% 1/10W		
598		A	RESISTOR		R2084	1-216-833-11	METAL CHIP 10K 5% 1/10W		
599		A	RESISTOR		R2085	1-216-833-11	METAL CHIP 10K 5% 1/10W		
600		A	RESISTOR		R2086	1-216-833-11	METAL CHIP 10K 5% 1/10W		
601		A	RESISTOR		R2087	1-216-295-91	SHORT CHIP 0		
602		A	RESISTOR		R2088	1-216-864-11	SHORT CHIP 0		
603		A	RESISTOR		R2089	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
604		A	RESISTOR		R2090	1-216-833-11	METAL CHIP 10K 5% 1/10W		
605		A	RESISTOR		R2091	1-216-809-11	METAL CHIP 100 5% 1/10W		
606		A	RESISTOR		R2093	1-216-809-11	METAL CHIP 100 5% 1/10W		
607		A	RESISTOR		R2094	1-216-809-11	METAL CHIP 100 5% 1/10W		
608		A	RESISTOR		R2096	1-216-809-11	METAL CHIP 100 5% 1/10W		
609		A	RESISTOR		R2098	1-216-809-11	METAL CHIP 100 5% 1/10W		
610		A	RESISTOR		R2099	1-216-809-11	METAL CHIP 100 5% 1/10W		
611		A	RESISTOR		R2100	1-216-809-11	METAL CHIP 100 5% 1/10W		
612		A	RESISTOR		R2111	1-216-809-11	METAL CHIP 100 5% 1/10W		
613		A	RESISTOR		R2112	1-216-864-11	SHORT CHIP 0		
614		A	RESISTOR		R2202	1-218-847-11	METAL CHIP 1K 0.5% 1/10W		
615		A	RESISTOR		R2203	1-218-847-11	METAL CHIP 1K 0.5% 1/10W		
616		A	RESISTOR		R2207	1-216-823-11	METAL CHIP 1.5K 5% 1/10W		
617		A	RESISTOR		R2208	1-216-823-11	METAL CHIP 1.5K 5% 1/10W		
618		A	RESISTOR		R2209	1-216-823-11	METAL CHIP 1.5K 5% 1/10W		
619		A	RESISTOR		R2210	1-216-853-11	METAL CHIP 470K 5% 1/10W		
620		A	RESISTOR		R2211	1-216-853-11	METAL CHIP 470K 5% 1/10W		
621		A	RESISTOR		R2212	1-216-853-11	METAL CHIP 470K 5% 1/10W		
622		A	RESISTOR		R2213	1-216-853-11	METAL CHIP 470K 5% 1/10W		
623		A	RESISTOR		R2214	1-216-853-11	METAL CHIP 470K 5% 1/10W		
624		A	RESISTOR		R2215	1-216-853-11	METAL CHIP 470K 5% 1/10W		
625		A	RESISTOR		R2216	1-216-809-11	METAL CHIP 100 5% 1/10W		
626		A	RESISTOR		R2217	1-216-809-11	METAL CHIP 100 5% 1/10W		
627		A	RESISTOR		R2218	1-216-809-11	METAL CHIP 100 5% 1/10W		
628		A	RESISTOR		R2219	1-216-809-11	METAL CHIP 100 5% 1/10W		
629		A	RESISTOR		R2220	1-216-809-11	METAL CHIP 100 5% 1/10W		
630		A	RESISTOR		R2221	1-216-809-11	METAL CHIP 100 5% 1/10W		
631		A	RESISTOR		R2223	1-216-821-11	METAL CHIP 1K 5% 1/10W		
632		A	RESISTOR		R2225	1-216-821-11	METAL CHIP 1K 5% 1/10W		
633		A	RESISTOR		R2227	1-216-821-11	METAL CHIP 1K 5% 1/10W		
634		A	RESISTOR		R2228	1-218-881-11	METAL CHIP 27K 0.5% 1/10W		
635		A	RESISTOR		R2229	1-216-855-11	METAL CHIP 680K 5% 1/10W		
636		A	RESISTOR		R2230	1-216-828-11	METAL CHIP 3.9K 5% 1/10W		
637		A	RESISTOR		R2234	1-216-855-11	METAL CHIP 680K 5% 1/10W		
638		A	RESISTOR		R2235	1-218-847-11	METAL CHIP 1K 0.5% 1/10W		
639		A	RESISTOR		R2238	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W		
640		A	RESISTOR		R2239	1-216-809-11	METAL CHIP 100 5% 1/10W		
641		A	RESISTOR		R2240	1-216-864-11	SHORT CHIP 0		
642		A	RESISTOR		R2241	1-216-809-11	METAL CHIP 100 5% 1/10W		
643		A	RESISTOR		R2243	1-216-864-11	SHORT CHIP 0		
644		A	RESISTOR		R2245	1-216-809-11	METAL CHIP 100 5% 1/10W		
645		A	RESISTOR		R2246	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W		
646		A	RESISTOR		R2247	1-216-809-11	METAL CHIP 100 5% 1/10W		
647		A	RESISTOR		R2248	1-216-809-11	METAL CHIP 100 5% 1/10W		
648		A	RESISTOR		R2250	1-216-864-11	SHORT CHIP 0		
649		A	RESISTOR		R2251	1-216-817-11	METAL CHIP 470 5% 1/10W		
650		A	RESISTOR		R2254	1-216-833-11	METAL CHIP 10K 5% 1/10W		
651		A	RESISTOR		R2255	1-216-833-11	METAL CHIP 10K 5% 1/10W		
652		A	RESISTOR		R2256	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
653		A	RESISTOR		R2257	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
654		A	RESISTOR		R2258	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
655		A	RESISTOR		R2259	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
656		A	RESISTOR		R2260	1-216-864-11	SHORT CHIP 0		
657		A	RESISTOR		R2261	1-216-833-11	METAL CHIP 10K 5% 1/10W		
658		A	RESISTOR		R2271	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
659		A	RESISTOR		R2272	1-216-821-11	METAL CHIP 1K 5% 1/10W		
660		A	RESISTOR		R2273	1-216-833-11	METAL CHIP 10K 5% 1/10W		
661		A	RESISTOR		R2278	1-216-809-11	METAL CHIP 100 5% 1/10W		
662		A	RESISTOR		R2279	1-216-809-11	METAL CHIP 100 5% 1/10W		
663		A	RESISTOR		R2280	1-216-809-11	METAL CHIP 100 5% 1/10W		
664		A	RESISTOR		R2282	1-216-823-11	METAL CHIP 1.5K 5% 1/10W		
665		A	RESISTOR		R2283	1-216-809-11	METAL CHIP 100 5% 1/10W		
666		A	RESISTOR		R2284	1-216-817-11	METAL CHIP 470 5% 1/10W		

No.	#	Board	Type	Δ / [*]	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
667		A	RESISTOR		R2501	1-216-837-11	METAL CHIP 22K 5% 1/10W		
668		A	RESISTOR		R2502	1-216-833-11	METAL CHIP 10K 5% 1/10W		
669		A	RESISTOR		R2503	1-216-813-11	METAL CHIP 220 5% 1/10W		
670		A	RESISTOR		R2504	1-216-813-11	METAL CHIP 220 5% 1/10W		
671		A	RESISTOR		R2505	1-216-864-11	SHORT CHIP 0		
672		A	RESISTOR		R2507	1-216-813-11	METAL CHIP 220 5% 1/10W		
673		A	RESISTOR		R2508	1-216-809-11	METAL CHIP 100 5% 1/10W		
674		A	RESISTOR		R2509	1-216-809-11	METAL CHIP 100 5% 1/10W		
675		A	RESISTOR		R2510	1-216-821-11	METAL CHIP 1K 5% 1/10W		
676		A	RESISTOR		R2511	1-216-821-11	METAL CHIP 1K 5% 1/10W		
677		A	RESISTOR		R2512	1-216-805-11	METAL CHIP 47 5% 1/10W		
678		A	RESISTOR		R2513	1-216-823-11	METAL CHIP 1.5K 5% 1/10W		
679		A	RESISTOR		R2514	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
680		A	RESISTOR		R2515	1-216-809-11	METAL CHIP 100 5% 1/10W		
681		A	RESISTOR		R2516	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
682		A	RESISTOR		R2517	1-216-823-11	METAL CHIP 1.5K 5% 1/10W		
683		A	RESISTOR		R2519	1-218-843-11	METAL CHIP 680 0.5% 1/10W		
684		A	RESISTOR		R2520	1-218-843-11	METAL CHIP 680 0.5% 1/10W		
685		A	RESISTOR		R2521	1-218-839-11	METAL CHIP 470 0.5% 1/10W		
686		A	RESISTOR		R2522	1-218-843-11	METAL CHIP 680 0.5% 1/10W		
687		A	RESISTOR		R2523	1-218-843-11	METAL CHIP 680 0.5% 1/10W		
688		A	RESISTOR		R2524	1-216-805-11	METAL CHIP 47 5% 1/10W		
689		A	RESISTOR		R2527	1-218-839-11	METAL CHIP 470 0.5% 1/10W		
690		A	RESISTOR		R2529	1-216-805-11	METAL CHIP 47 5% 1/10W		
691		A	RESISTOR		R2530	1-216-809-11	METAL CHIP 100 5% 1/10W		
692		A	RESISTOR		R2531	1-216-821-11	METAL CHIP 1K 5% 1/10W		
693		A	RESISTOR		R2532	1-216-805-11	METAL CHIP 47 5% 1/10W		
694		A	RESISTOR		R2534	1-216-801-11	METAL CHIP 22 5% 1/10W		
695		A	RESISTOR		R2535	1-216-821-11	METAL CHIP 1K 5% 1/10W		
696		A	RESISTOR		R2536	1-216-801-11	METAL CHIP 22 5% 1/10W		
697		A	RESISTOR		R2537	1-216-864-11	SHORT CHIP 0		
698		A	RESISTOR		R2539	1-216-864-11	SHORT CHIP 0		
699		A	RESISTOR		R2601	1-211-985-11	METAL CHIP 47 0.5% 1/10W		
700		A	RESISTOR		R2602	1-211-985-11	METAL CHIP 47 0.5% 1/10W		
701		A	RESISTOR		R2603	1-211-985-11	METAL CHIP 47 0.5% 1/10W		
702		A	RESISTOR		R2604	1-216-817-11	METAL CHIP 470 5% 1/10W		
703		A	RESISTOR		R2605	1-216-817-11	METAL CHIP 470 5% 1/10W		
704		A	RESISTOR		R2606	1-216-817-11	METAL CHIP 470 5% 1/10W		
705		A	RESISTOR		R2607	1-216-805-11	METAL CHIP 47 5% 1/10W		
706		A	RESISTOR		R2608	1-216-805-11	METAL CHIP 47 5% 1/10W		
707		A	RESISTOR		R2609	1-216-805-11	METAL CHIP 47 5% 1/10W		
708		A	RESISTOR		R2611	1-216-809-11	METAL CHIP 100 5% 1/10W		
709		A	RESISTOR		R2612	1-216-809-11	METAL CHIP 100 5% 1/10W		
710		A	RESISTOR		R2613	1-216-809-11	METAL CHIP 100 5% 1/10W		
711		A	RESISTOR		R2614	1-216-849-11	METAL CHIP 220K 5% 1/10W		
712		A	RESISTOR		R2615	1-216-864-11	SHORT CHIP 0		
713		A	RESISTOR		R2616	1-216-817-11	METAL CHIP 470 5% 1/10W		
714		A	RESISTOR		R2618	1-216-849-11	METAL CHIP 220K 5% 1/10W		
715		A	RESISTOR		R2619	1-216-805-11	METAL CHIP 47 5% 1/10W		
716		A	RESISTOR		R2620	1-216-805-11	METAL CHIP 47 5% 1/10W		
717		A	RESISTOR		R2621	1-216-851-11	METAL CHIP 330K 5% 1/10W		
718		A	RESISTOR		R2622	1-216-849-11	METAL CHIP 220K 5% 1/10W		
719		A	RESISTOR		R2623	1-216-864-11	SHORT CHIP 0		
720		A	RESISTOR		R2624	1-216-809-11	METAL CHIP 100 5% 1/10W		
721		A	RESISTOR		R2625	1-216-809-11	METAL CHIP 100 5% 1/10W		
722		A	RESISTOR		R2626	1-216-809-11	METAL CHIP 100 5% 1/10W		
723		A	RESISTOR		R2627	1-216-809-11	METAL CHIP 100 5% 1/10W		
724		A	RESISTOR		R2628	1-216-809-11	METAL CHIP 100 5% 1/10W		
725		A	RESISTOR		R2629	1-216-822-11	METAL CHIP 1.2K 5% 1/10W		
726		A	RESISTOR		R2630	1-216-823-11	METAL CHIP 1.5K 5% 1/10W		
727		A	RESISTOR		R2631	1-216-823-11	METAL CHIP 1.5K 5% 1/10W		
728		A	RESISTOR		R2632	1-216-805-11	METAL CHIP 47 5% 1/10W		
729		A	RESISTOR		R2633	1-216-805-11	METAL CHIP 47 5% 1/10W		
730		A	RESISTOR		R2634	1-218-871-11	METAL CHIP 10K 0.5% 1/10W		
731		A	RESISTOR		R2636	1-216-805-11	METAL CHIP 47 5% 1/10W		
732		A	RESISTOR		R2639	1-216-797-11	METAL CHIP 10 5% 1/10W		
733		A	RESISTOR		R2646	1-216-817-11	METAL CHIP 470 5% 1/10W		
734		A	RESISTOR		R2649	1-216-809-11	METAL CHIP 100 5% 1/10W		
735		A	RESISTOR		R2650	1-218-285-11	METAL CHIP 75 5% 1/10W		
736		A	RESISTOR		R2651	1-218-285-11	METAL CHIP 75 5% 1/10W		
737		A	RESISTOR		R2662	1-216-809-11	METAL CHIP 100 5% 1/10W		
738		A	RESISTOR		R2663	1-216-809-11	METAL CHIP 100 5% 1/10W		
739		A	RESISTOR		R2664	1-216-809-11	METAL CHIP 100 5% 1/10W		
740		A	RESISTOR		R2665	1-216-809-11	METAL CHIP 100 5% 1/10W		

No.	#	Board	Type	Δ / [*]	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
741		A	RESISTOR		R2666	1-216-864-11	SHORT CHIP 0		
742		A	RESISTOR		R2678	1-216-849-11	METAL CHIP 220K 5% 1/10W		
743		A	RESISTOR		R2679	1-216-849-11	METAL CHIP 220K 5% 1/10W		
744		A	RESISTOR		R2683	1-216-849-11	METAL CHIP 220K 5% 1/10W		
745		A	RESISTOR		R7001	1-216-821-11	METAL CHIP 1K 5% 1/10W		
746		A	RESISTOR		R7004	1-216-295-91	SHORT CHIP 0		
747		A	RESISTOR		R7005	1-216-295-91	SHORT CHIP 0		
748		A	RESISTOR		R7007	1-216-841-11	METAL CHIP 47K 5% 1/10W		
749		A	RESISTOR		R7009	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
750		A	RESISTOR		R7010	1-216-845-11	METAL CHIP 100K 5% 1/10W		
751		A	RESISTOR		R7011	1-216-809-11	METAL CHIP 100 5% 1/10W		
752		A	RESISTOR		R7013	1-216-809-11	METAL CHIP 100 5% 1/10W		
753		A	RESISTOR		R7014	1-216-809-11	METAL CHIP 100 5% 1/10W		
754		A	RESISTOR		R7016	1-216-830-11	METAL CHIP 5.6K 5% 1/10W		
755		A	RESISTOR		R7017	1-216-830-11	METAL CHIP 5.6K 5% 1/10W		
756		A	RESISTOR		R7022	1-216-835-11	METAL CHIP 15K 5% 1/10W		
757		A	RESISTOR		R7023	1-216-835-11	METAL CHIP 15K 5% 1/10W		
758		A	RESISTOR		R7024	1-216-845-11	METAL CHIP 100K 5% 1/10W		
759		A	RESISTOR		R7025	1-216-845-11	METAL CHIP 100K 5% 1/10W		
760		A	RESISTOR		R7026	1-216-017-91	RES-CHIP 47 5% 1/10W		
761		A	RESISTOR		R7027	1-216-017-91	RES-CHIP 47 5% 1/10W		
762		A	RESISTOR		R7030	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
763		A	RESISTOR		R7032	1-216-821-11	METAL CHIP 1K 5% 1/10W		
764		A	RESISTOR		R7039	1-216-830-11	METAL CHIP 5.6K 5% 1/10W		
765		A	RESISTOR		R7040	1-216-830-11	METAL CHIP 5.6K 5% 1/10W		
766		A	RESISTOR		R7041	1-218-890-11	METAL CHIP 62K 0.5% 1/10W		
767		A	RESISTOR		R7042	1-218-890-11	METAL CHIP 62K 0.5% 1/10W		
768		A	RESISTOR		R7043	1-216-833-11	METAL CHIP 10K 5% 1/10W		
769		A	RESISTOR		R7045	1-216-833-11	METAL CHIP 10K 5% 1/10W		
770		A	RESISTOR		R7046	1-216-809-11	METAL CHIP 100 5% 1/10W		
771		A	RESISTOR		R7047	1-216-833-11	METAL CHIP 10K 5% 1/10W		
772		A	RESISTOR		R7048	1-216-853-11	METAL CHIP 470K 5% 1/10W		
773		A	RESISTOR		R7049	1-216-853-11	METAL CHIP 470K 5% 1/10W		
774		A	RESISTOR		R7050	1-216-809-11	METAL CHIP 100 5% 1/10W		
775		A	RESISTOR		R7051	1-216-809-11	METAL CHIP 100 5% 1/10W		
776		A	RESISTOR		R7052	1-216-826-11	METAL CHIP 2.7K 5% 1/10W		
777		A	RESISTOR		R7053	1-216-826-11	METAL CHIP 2.7K 5% 1/10W		
778		A	RESISTOR		R7054	1-216-864-11	SHORT CHIP 0		
779		A	RESISTOR		R7057	1-216-833-11	METAL CHIP 10K 5% 1/10W		
780		A	RESISTOR		R7058	1-216-833-11	METAL CHIP 10K 5% 1/10W		
781		A	RESISTOR		R7063	1-216-837-11	METAL CHIP 22K 5% 1/10W		
782		A	RESISTOR		R7064	1-216-841-11	METAL CHIP 47K 5% 1/10W		
783		A	RESISTOR		R7069	1-216-821-11	METAL CHIP 1K 5% 1/10W		
784		A	RESISTOR		R7072	1-216-839-11	METAL CHIP 33K 5% 1/10W		
785		A	RESISTOR		R7073	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
786		A	RESISTOR		R7075	1-216-823-11	METAL CHIP 1.5K 5% 1/10W		
787		A	RESISTOR		R7076	1-216-807-11	METAL CHIP 68 5% 1/10W		
788		A	RESISTOR		R7078	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
789		A	RESISTOR		R7080	1-216-823-11	METAL CHIP 1.5K 5% 1/10W		
790		A	RESISTOR		R7081	1-216-823-11	METAL CHIP 1.5K 5% 1/10W		
791		A	RESISTOR		R7082	1-216-839-11	METAL CHIP 33K 5% 1/10W		
792		A	RESISTOR		R7085	1-216-845-11	METAL CHIP 100K 5% 1/10W		
793		A	RESISTOR		R7087	1-216-845-11	METAL CHIP 100K 5% 1/10W		
794		A	RESISTOR		R7088	1-216-823-11	METAL CHIP 1.5K 5% 1/10W		
795		A	RESISTOR		R7089	1-216-807-11	METAL CHIP 68 5% 1/10W		
796		A	RESISTOR		R7090	1-220-261-11	RES-CHIP 470 5% 1/4W		
797		A	RESISTOR		R7091	1-220-261-11	RES-CHIP 470 5% 1/4W		
798		A	RESISTOR		R7092	1-220-261-11	RES-CHIP 470 5% 1/4W		
799		A	RESISTOR		R7093	1-220-261-11	RES-CHIP 470 5% 1/4W		
800		A	RESISTOR		R7098	1-216-864-11	SHORT CHIP 0		
801		A	RESISTOR		R7099	1-216-864-11	SHORT CHIP 0		
802		A	RESISTOR		R7101	1-216-864-11	SHORT CHIP 0		
803		A	RESISTOR		R7102	1-216-836-11	METAL CHIP 18K 5% 1/10W		
804		A	RESISTOR		R7104	1-216-836-11	METAL CHIP 18K 5% 1/10W		
805		A	RESISTOR		R7108	1-216-864-11	SHORT CHIP 0		
806		A	RESISTOR		R7110	1-216-864-11	SHORT CHIP 0		
807		A	RESISTOR		R7115	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
808		A	RESISTOR		R7118	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
809		A	RESISTOR		R7121	1-216-845-11	METAL CHIP 100K 5% 1/10W		
810		A	RESISTOR		R7122	1-216-845-11	METAL CHIP 100K 5% 1/10W		
811		A	RESISTOR		R7123	1-216-840-11	METAL CHIP 39K 5% 1/10W		
812		A	RESISTOR		R7124	1-216-844-11	METAL CHIP 82K 5% 1/10W		
813		A	RESISTOR		R7125	1-216-840-11	METAL CHIP 39K 5% 1/10W		
814		A	RESISTOR		R7126	1-216-844-11	METAL CHIP 82K 5% 1/10W		

No.	#	Board	Type	Δ/\ast	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
815		A	RESISTOR		R7145	1-216-296-11	SHORT CHIP 0		
816		A	RESISTOR		R7155	1-216-864-11	SHORT CHIP 0		
817		A	RESISTOR		R7156	1-216-813-11	METAL CHIP 220 5% 1/10W		
818		A	RESISTOR		R7157	1-216-813-11	METAL CHIP 220 5% 1/10W		
819		A	RESISTOR		R7158	1-216-864-11	SHORT CHIP 0		
820		A	RESISTOR		R7159	1-216-833-11	METAL CHIP 10K 5% 1/10W		
821		A	RESISTOR		R7162	1-216-823-11	METAL CHIP 1.5K 5% 1/10W		
822		A	RESISTOR		R7167	1-216-295-91	SHORT CHIP 0		
823		A	RESISTOR		R7169	1-216-296-11	SHORT CHIP 0		
824		A	RESISTOR		R7170	1-216-845-11	METAL CHIP 100K 5% 1/10W		
825		A	RESISTOR		R7171	1-216-845-11	METAL CHIP 100K 5% 1/10W		
826		A	RESISTOR		R7172	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
827		A	RESISTOR		R7173	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
828		A	RESISTOR		R7174	1-216-839-11	METAL CHIP 33K 5% 1/10W		
829		A	RESISTOR		R7175	1-216-845-11	METAL CHIP 100K 5% 1/10W		
830		A	RESISTOR		R7176	1-216-839-11	METAL CHIP 33K 5% 1/10W		
831		A	RESISTOR		R7177	1-216-845-11	METAL CHIP 100K 5% 1/10W		
832		A	RESISTOR		R7180	1-216-864-11	SHORT CHIP 0		
833		A	RESISTOR		R7181	1-216-833-11	METAL CHIP 10K 5% 1/10W		
834		A	RESISTOR		R7182	1-216-845-11	METAL CHIP 100K 5% 1/10W		
835		A	RESISTOR		R7183	1-216-296-11	SHORT CHIP 0		
836		A	RESISTOR		R7184	1-216-864-11	SHORT CHIP 0		
837		A	RESISTOR		R7185	1-216-864-11	SHORT CHIP 0		
838		A	RESISTOR		R7186	1-216-833-11	METAL CHIP 10K 5% 1/10W		
839		A	RESISTOR		R7187	1-216-296-11	SHORT CHIP 0		
840		A	RESISTOR		R7188	1-216-833-11	METAL CHIP 10K 5% 1/10W		
841		A	RESISTOR		R7189	1-216-295-91	SHORT CHIP 0		
842		A	RESISTOR		R7191	1-216-864-11	SHORT CHIP 0		
843		A	RESISTOR		R7193	1-216-296-11	SHORT CHIP 0		
844		A	RESISTOR		R7194	1-216-296-11	SHORT CHIP 0		
845		A	RESISTOR		R7199	1-543-949-22	FERRITE 0UH		
846		A	RESISTOR		R7200	1-216-864-11	SHORT CHIP 0		
847		A	RESISTOR		R7201	1-216-833-11	METAL CHIP 10K 5% 1/10W		
848		A	RESISTOR		R7202	1-216-296-11	SHORT CHIP 0		
849		A	RESISTOR		R7203	1-216-296-11	SHORT CHIP 0		
850		A	RESISTOR		R7204	1-216-296-11	SHORT CHIP 0		
851		A	RESISTOR		R7205	1-216-295-91	SHORT CHIP 0		
852		A	RESISTOR		R7206	1-216-295-91	SHORT CHIP 0		
853		A	RESISTOR		R7207	1-216-295-91	SHORT CHIP 0		
854		A	RESISTOR		R7208	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
855		A	RESISTOR		R8403	1-218-873-11	METAL CHIP 12K 0.5% 1/10W		
856		A	RESISTOR		R8404	1-218-862-11	METAL CHIP 4.3K 0.5% 1/10W		
857		A	RESISTOR		R8406	1-216-841-11	METAL CHIP 47K 5% 1/10W		
858		A	RESISTOR		R8407	1-216-841-11	METAL CHIP 47K 5% 1/10W		
859		A	RESISTOR		R8408	1-218-868-11	METAL CHIP 7.5K 0.5% 1/10W		
860		A	RESISTOR		R8409	1-216-864-11	SHORT CHIP 0		
861		A	RESISTOR		R8410	1-216-864-11	SHORT CHIP 0		
862		A	RESISTOR		R8411	1-216-821-11	METAL CHIP 1K 5% 1/10W		
863		A	RESISTOR		R8412	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
864		A	RESISTOR		R8413	1-216-845-11	METAL CHIP 100K 5% 1/10W		
865		A	RESISTOR		R8414	1-218-871-11	METAL CHIP 10K 0.5% 1/10W		
866		A	RESISTOR		R8415	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W		
867		A	RESISTOR		R8416	1-218-864-11	METAL CHIP 5.1K 0.5% 1/10W		
868		A	RESISTOR		R8417	1-218-837-11	METAL CHIP 390 0.5% 1/10W		
869		A	RESISTOR		R8418	1-218-878-11	METAL CHIP 20K 0.5% 1/10W		
870		A	RESISTOR		R8419	1-216-847-11	METAL CHIP 150K 5% 1/10W		
871		A	RESISTOR		R8420	1-218-883-11	METAL CHIP 33K 0.5% 1/10W		
872		A	RESISTOR		R8421	1-218-889-11	METAL CHIP 56K 0.5% 1/10W		
873		A	RESISTOR		R8422	1-216-845-11	METAL CHIP 100K 5% 1/10W		
874		A	RESISTOR		R8423	1-218-887-11	METAL CHIP 47K 0.5% 1/10W		
875		A	RESISTOR		R8424	1-216-295-91	SHORT CHIP 0		
876		A	RESISTOR		R8426	1-469-869-21	FERRITE 0UH		
877		A	RESISTOR		R8427	1-216-805-11	METAL CHIP 47 5% 1/10W		
878		A	RESISTOR		R8428	1-216-805-11	METAL CHIP 47 5% 1/10W		
879		A	RESISTOR		R8430	1-216-295-91	SHORT CHIP 0		
880		A	RESISTOR		R8431	1-216-847-11	METAL CHIP 150K 5% 1/10W		
881		A	RESISTOR		R8432	1-216-839-11	METAL CHIP 33K 5% 1/10W		
882		A	RESISTOR		R8433	1-400-180-21	INDUCTOR 0UH		
883		A	RESISTOR		R8436	1-216-864-11	SHORT CHIP 0		
884		A	RESISTOR		R8437	1-216-864-11	SHORT CHIP 0		
885		A	RESISTOR		R8439	1-216-821-11	METAL CHIP 1K 5% 1/10W		
886		A	RESISTOR		R8440	1-216-833-11	METAL CHIP 10K 5% 1/10W		
887		A	RESISTOR		R8442	1-216-864-11	SHORT CHIP 0		
888		A	RESISTOR		R8443	1-216-864-11	SHORT CHIP 0		

No.	#	Board	Type	Δ / [*]	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
889		A	RESISTOR		R8444	1-216-845-11	METAL CHIP 100K 5% 1/10W		
890		A	RESISTOR		R8445	1-216-847-11	METAL CHIP 150K 5% 1/10W		
891		A	RESISTOR		R8454	1-216-864-11	SHORT CHIP 0		
892		A	RESISTOR		R8456	1-216-864-11	SHORT CHIP 0		
893		A	RESISTOR		R8459	1-216-864-11	SHORT CHIP 0		
894		A	RESISTOR		R8460	1-216-864-11	SHORT CHIP 0		
895		A	RESISTOR		R8463	1-216-864-11	SHORT CHIP 0		
896		A	RESISTOR		R8464	1-216-864-11	SHORT CHIP 0		
897		A	RESISTOR		R8465	1-216-864-11	SHORT CHIP 0		
898		A	RESISTOR		R8466	1-216-864-11	SHORT CHIP 0		
899		A	RESISTOR		R8467	1-216-864-11	SHORT CHIP 0		
900		A	RESISTOR		R8468	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
901		A	RESISTOR		R8469	1-216-864-11	SHORT CHIP 0		
902		A	RESISTOR		R9401	1-216-813-11	METAL CHIP 220 5% 1/10W		
903		A	RESISTOR		R9402	1-216-813-11	METAL CHIP 220 5% 1/10W		
904		A	RESISTOR		R9403	1-216-813-11	METAL CHIP 220 5% 1/10W		
905		A	RESISTOR		R9404	1-211-990-11	METAL CHIP 75 0.5% 1/10W		
906		A	RESISTOR		R9405	1-211-990-11	METAL CHIP 75 0.5% 1/10W		
907		A	RESISTOR		R9406	1-211-990-11	METAL CHIP 75 0.5% 1/10W		
908		A	RESISTOR		R9407	1-216-022-00	RES-CHIP 75 5% 1/10W		
909		A	RESISTOR		R9408	1-216-815-11	METAL CHIP 330 5% 1/10W		
910		A	RESISTOR		R9409	1-216-815-11	METAL CHIP 330 5% 1/10W		
911		A	RESISTOR		R9410	1-216-815-11	METAL CHIP 330 5% 1/10W		
912		A	RESISTOR		R9411	1-216-815-11	METAL CHIP 330 5% 1/10W		
913		A	RESISTOR		R9412	1-218-285-11	METAL CHIP 75 5% 1/10W		
914		A	RESISTOR		R9413	1-216-864-11	SHORT CHIP 0		
915		A	RESISTOR		R9414	1-216-837-11	METAL CHIP 22K 5% 1/10W		
916		A	RESISTOR		R9415	1-216-841-11	METAL CHIP 47K 5% 1/10W		
917		A	RESISTOR		R9416	1-216-853-11	METAL CHIP 470K 5% 1/10W		
918		A	RESISTOR		R9417	1-216-841-11	METAL CHIP 47K 5% 1/10W		
919		A	RESISTOR		R9418	1-216-853-11	METAL CHIP 470K 5% 1/10W		
920		A	RESISTOR		R9419	1-216-809-11	METAL CHIP 100 5% 1/10W		
921		A	RESISTOR		R9420	1-216-809-11	METAL CHIP 100 5% 1/10W		
922		A	RESISTOR		R9421	1-216-809-11	METAL CHIP 100 5% 1/10W		
923		A	RESISTOR		R9422	1-216-809-11	METAL CHIP 100 5% 1/10W		
924		A	RESISTOR		R9423	1-216-834-11	METAL CHIP 12K 5% 1/10W		
925		A	RESISTOR		R9424	1-216-809-11	METAL CHIP 100 5% 1/10W		
926		A	RESISTOR		R9425	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
927		A	RESISTOR		R9426	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
928		A	RESISTOR		R9427	1-216-809-11	METAL CHIP 100 5% 1/10W		
929		A	RESISTOR		R9428	1-216-813-11	METAL CHIP 220 5% 1/10W		
930		A	RESISTOR		R9429	1-216-813-11	METAL CHIP 220 5% 1/10W		
931		A	RESISTOR		R9430	1-218-285-11	METAL CHIP 75 5% 1/10W		
932		A	RESISTOR		R9431	1-216-813-11	METAL CHIP 220 5% 1/10W		
933		A	RESISTOR		R9432	1-216-022-00	RES-CHIP 75 5% 1/10W		
934		A	RESISTOR		R9433	1-216-815-11	METAL CHIP 330 5% 1/10W		
935		A	RESISTOR		R9434	1-216-815-11	METAL CHIP 330 5% 1/10W		
936		A	RESISTOR		R9435	1-216-815-11	METAL CHIP 330 5% 1/10W		
937		A	RESISTOR		R9436	1-216-815-11	METAL CHIP 330 5% 1/10W		
938		A	RESISTOR		R9437	1-216-864-11	SHORT CHIP 0		
939		A	RESISTOR		R9438	1-216-837-11	METAL CHIP 22K 5% 1/10W		
940		A	RESISTOR		R9439	1-216-809-11	METAL CHIP 100 5% 1/10W		
941		A	RESISTOR		R9440	1-216-841-11	METAL CHIP 47K 5% 1/10W		
942		A	RESISTOR		R9441	1-216-853-11	METAL CHIP 470K 5% 1/10W		
943		A	RESISTOR		R9442	1-216-841-11	METAL CHIP 47K 5% 1/10W		
944		A	RESISTOR		R9443	1-216-853-11	METAL CHIP 470K 5% 1/10W		
945		A	RESISTOR		R9444	1-216-834-11	METAL CHIP 12K 5% 1/10W		
946		A	RESISTOR		R9445	1-216-809-11	METAL CHIP 100 5% 1/10W		
947		A	RESISTOR		R9446	1-216-809-11	METAL CHIP 100 5% 1/10W		
948		A	RESISTOR		R9447	1-216-809-11	METAL CHIP 100 5% 1/10W		
949		A	RESISTOR		R9448	1-216-809-11	METAL CHIP 100 5% 1/10W		
950		A	RESISTOR		R9449	1-216-809-11	METAL CHIP 100 5% 1/10W		
951		A	RESISTOR		R9450	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
952		A	RESISTOR		R9451	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
953		A	RESISTOR		R9452	1-216-809-11	METAL CHIP 100 5% 1/10W		
954		A	RESISTOR		R9453	1-216-809-11	METAL CHIP 100 5% 1/10W		
955		A	RESISTOR		R9454	1-216-809-11	METAL CHIP 100 5% 1/10W		
956		A	RESISTOR		R9455	1-216-022-00	RES-CHIP 75 5% 1/10W		
957		A	RESISTOR		R9458	1-216-821-11	METAL CHIP 1K 5% 1/10W		
958		A	RESISTOR		R9460	1-216-821-11	METAL CHIP 1K 5% 1/10W		
959		A	RESISTOR		R9463	1-216-864-11	SHORT CHIP 0		
960		A	RESISTOR		R9465	1-216-864-11	SHORT CHIP 0		
961		A	RESISTOR		R9466	1-216-845-11	METAL CHIP 100K 5% 1/10W		
962		A	RESISTOR		R9467	1-216-864-11	SHORT CHIP 0		

No.	#	Board	Type	Δ / [*]	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
963		A	RESISTOR		R9468	1-216-845-11	METAL CHIP 100K 5% 1/10W		
964		A	RESISTOR		R9470	1-218-831-11	METAL CHIP 220 0.5% 1/10W		
965		A	RESISTOR		R9471	1-218-831-11	METAL CHIP 220 0.5% 1/10W		
966		A	RESISTOR		R9472	1-218-831-11	METAL CHIP 220 0.5% 1/10W		
967		A	RESISTOR		R9474	1-218-831-11	METAL CHIP 220 0.5% 1/10W		
968		A	RESISTOR		R9475	1-218-831-11	METAL CHIP 220 0.5% 1/10W		
969		A	RESISTOR		R9476	1-218-831-11	METAL CHIP 220 0.5% 1/10W		
970		A	RESISTOR		R9477	1-218-831-11	METAL CHIP 220 0.5% 1/10W		
971		A	RESISTOR		R9478	1-218-831-11	METAL CHIP 220 0.5% 1/10W		
972		A	RESISTOR		R9479	1-218-831-11	METAL CHIP 220 0.5% 1/10W		
973		A	RESISTOR		R9480	1-216-864-11	SHORT CHIP 0		
974		A	RESISTOR		R9482	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
975		A	RESISTOR		R9483	1-216-864-11	SHORT CHIP 0		
976		A	RESISTOR		R9485	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
977		A	RESISTOR		R9486	1-216-826-11	METAL CHIP 2.7K 5% 1/10W		
978		A	RESISTOR		R9701	1-218-831-11	METAL CHIP 220 0.5% 1/10W		
979		A	RESISTOR		R9702	1-216-817-11	METAL CHIP 470 5% 1/10W		
980		A	RESISTOR		R9703	1-218-831-11	METAL CHIP 220 0.5% 1/10W		
981		A	RESISTOR		R9704	1-218-831-11	METAL CHIP 220 0.5% 1/10W		
982		A	RESISTOR		R9705	1-216-001-00	RES-CHIP 10 5% 1/10W		
983		A	RESISTOR		R9706	1-218-831-11	METAL CHIP 220 0.5% 1/10W		
984		A	RESISTOR		R9707	1-216-841-11	METAL CHIP 47K 5% 1/10W		
985		A	RESISTOR		R9708	1-216-853-11	METAL CHIP 470K 5% 1/10W		
986		A	RESISTOR		R9709	1-216-839-11	METAL CHIP 33K 5% 1/10W		
987		A	RESISTOR		R9710	1-216-842-11	METAL CHIP 56K 5% 1/10W		
988		A	RESISTOR		R9711	1-216-833-11	METAL CHIP 10K 5% 1/10W		
989		A	RESISTOR		R9712	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
990		A	RESISTOR		R9713	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W		
991		A	RESISTOR		R9714	1-216-864-11	SHORT CHIP 0		
992		A	RESISTOR		R9715	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
993		A	RESISTOR		R9716	1-216-809-11	METAL CHIP 100 5% 1/10W		
994		A	RESISTOR		R9717	1-216-864-11	SHORT CHIP 0		
995		A	RESISTOR		R9718	1-543-949-22	FERRITE 0UH		
996		A	RESISTOR		R9719	1-543-949-22	FERRITE 0UH		
997		A	RESISTOR		R9720	1-216-809-11	METAL CHIP 100 5% 1/10W		
998		A	RESISTOR		R9721	1-216-809-11	METAL CHIP 100 5% 1/10W		
999		A	VARISTOR		VD9404	1-803-974-21	VARISTOR, CHIP (1608)		
1000		A	VARISTOR		VD9405	1-803-974-21	VARISTOR, CHIP (1608)		
1001		A	CRYSTAL		X2001	1-767-654-21	VIBRATOR, CRYSTAL		
1002		A	CRYSTAL		X2201	1-781-914-21	VIBRATOR, CRYSTAL		
1003		A	CRYSTAL		X2602	1-795-214-21	VIBRATOR, CERAMIC (4MHZ)		
1004		A	CRYSTAL		X7001	1-795-612-11	VIBRATOR, CRYSTAL		
1005		H1	CAPACITOR		C1501	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1006		H1	CAPACITOR		C7601	1-164-227-11	CERAMIC CHIP 0.022UF 10.00% 25V		
1007		H1	CAPACITOR		C7602	1-164-227-11	CERAMIC CHIP 0.022UF 10.00% 25V		
1008		H1	CAPACITOR		C7603	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
1009		H1	CAPACITOR		C7604	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
1010		H1	CONNECTOR	*	CN1501	1-580-789-22	PIN, CONNECTOR (SMD) 6P		
1011		H1	DIODE		D7601	8-719-062-19	DIODE MA3200WA-TX		
1012		H1	DIODE		D7602	8-719-062-19	DIODE MA3200WA-TX		
1013		H1	JACK		J7601	1-815-103-11	JACK		
1014		H1	RESISTOR		R1501	1-216-813-11	METAL CHIP 220 5% 1/10W		
1015		H1	RESISTOR		R1502	1-216-817-11	METAL CHIP 470 5% 1/10W		
1016		H1	RESISTOR		R1503	1-218-457-11	METAL CHIP 910 5% 1/10W		
1017		H1	RESISTOR		R1504	1-216-826-11	METAL CHIP 2.7K 5% 1/10W		
1018		H1	RESISTOR		R7601	1-216-797-11	METAL CHIP 10 5% 1/10W		
1019		H1	RESISTOR		R7602	1-216-797-11	METAL CHIP 10 5% 1/10W		
1020		H1	RESISTOR		R7604	1-216-864-11	SHORT CHIP 0		
1021		H1	SWITCH		S1501	1-572-595-11	SWITCH, TACTIL (REFLOW TYPE)		
1022		H1	SWITCH		S1502	1-572-595-11	SWITCH, TACTIL (REFLOW TYPE)		
1023		H1	SWITCH		S1503	1-572-595-11	SWITCH, TACTIL (REFLOW TYPE)		
1024		H1	SWITCH		S1504	1-572-595-11	SWITCH, TACTIL (REFLOW TYPE)		
1025		H1	SWITCH		S1505	1-572-595-11	SWITCH, TACTIL (REFLOW TYPE)		
1026		H2	CAPACITOR		C9101	1-162-945-11	CERAMIC CHIP 22PF 5.00% 50V		
1027		H2	CAPACITOR		C9102	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
1028		H2	CAPACITOR		C9103	1-117-137-11	ELECT CHIP 33UF 20.00% 10V		
1029		H2	CAPACITOR		C9104	1-115-566-11	CERAMIC CHIP 4.7UF 10.00% 10V		
1030		H2	CAPACITOR		C9105	1-115-566-11	CERAMIC CHIP 4.7UF 10.00% 10V		
1031		H2	CONNECTOR	*	CN9101	1-760-388-11	CONNECTOR PIN (SMD) 9P		
1032		H2	CONNECTOR		CN9102	1-580-056-21	PIN, CONNECTOR (SMD) 3P		
1033		H2	DIODE		D9101	8-719-064-07	DIODE SML-310LTT86		
1034		H2	DIODE		D9102	6-500-861-01	DIODE SML-020MVT-T86		
1035		H2	DIODE		D9103	8-719-062-19	DIODE MA3200WA-TX		
1036		H2	DIODE		D9104	8-719-062-19	DIODE MA3200WA-TX		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1037		H2	DIODE		D9105	8-719-062-19	DIODE MA3200WA-TX		
1038		H2	DIODE		D9106	8-719-062-19	DIODE MA3200WA-TX		
1039		H2	IC		IC9101	6-600-117-01	IC GP1UM27SRK		
1040		H2	TRANSISTOR		Q9101	8-729-027-43	TRANSISTOR DTC114EKA-T146		
1041		H2	TRANSISTOR		Q9102	8-729-027-43	TRANSISTOR DTC114EKA-T146		
1042		H2	TRANSISTOR		Q9103	8-729-027-43	TRANSISTOR DTC114EKA-T146		
1043		H2	RESISTOR		R9101	1-216-818-11	METAL CHIP 560 5% 1/10W		
1044		H2	RESISTOR		R9103	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1045		H2	RESISTOR		R9107	1-216-817-11	METAL CHIP 470 5% 1/10W		
1046		H2	RESISTOR		R9108	1-216-805-11	METAL CHIP 47 5% 1/10W		
1047		H2	RESISTOR		R9110	1-216-820-11	METAL CHIP 820 5% 1/10W		
1048		H2	SWITCH		S9101	1-554-419-00	SWITCH, PUSH (1 KEY)		
1049		TU	CAPACITOR		C6401	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
1050		TU	CAPACITOR		C6404	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V		
1051		TU	CAPACITOR		C6405	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
1052		TU	CAPACITOR		C6406	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		
1053		TU	CAPACITOR		C6407	1-164-156-11	CERAMIC CHIP 0.1UF 25V		
1054		TU	CAPACITOR		C6408	1-164-156-11	CERAMIC CHIP 0.1UF 25V		
1055		TU	CAPACITOR		C6409	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V		
1056		TU	CONNECTOR		CN6401	1-778-227-41	CONNECTOR, BOARD TO BOARD 6P		
1057		TU	CONNECTOR		CN6402	1-778-227-41	CONNECTOR, BOARD TO BOARD 6P		
1058		TU	COIL		L6401	1-543-949-22	FERRITE 0UH		
1059		TU	COIL		L6402	1-412-987-31	INDUCTOR 4.7UH		
1060		TU	COIL		L6403	1-412-987-31	INDUCTOR 4.7UH		
1061		TU	COIL		L6404	1-412-989-11	INDUCTOR 6.8UH		
1062		TU	TRANSISTOR		Q6401	8-729-026-49	TRANSISTOR 2SA1037AK-T146-R		
1063		TU	TRANSISTOR		Q6402	8-729-026-49	TRANSISTOR 2SA1037AK-T146-R		
1064		TU	RESISTOR		R6401	1-543-949-22	FERRITE 0UH		
1065		TU	RESISTOR		R6402	1-216-809-11	METAL CHIP 100 5% 1/10W		
1066		TU	RESISTOR		R6403	1-216-864-11	SHORT CHIP 0		
1067		TU	RESISTOR		R6405	1-216-864-11	SHORT CHIP 0		
1068		TU	RESISTOR		R6406	1-216-809-11	METAL CHIP 100 5% 1/10W		
1069		TU	RESISTOR		R6407	1-216-809-11	METAL CHIP 100 5% 1/10W		
1070		TU	RESISTOR		R6408	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1071		TU	RESISTOR		R6409	1-216-809-11	METAL CHIP 100 5% 1/10W		
1072		TU	RESISTOR		R6410	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1073		TU	TUNER		TU6401	8-598-536-20	FRONTEND BTF-EF412		
1074		U1	CAPACITOR		C7701	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
1075		U1	CAPACITOR		C7702	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
1076		U1	CAPACITOR		C7703	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
1077		U1	CAPACITOR		C7704	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
1078		U1	CAPACITOR		C7705	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
1079		U1	CAPACITOR		C7706	1-115-156-11	CERAMIC CHIP 1UF 10V		
1080		U1	CAPACITOR		C7707	1-115-156-11	CERAMIC CHIP 1UF 10V		
1081		U1	CAPACITOR		C9001	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		
1082		U1	CAPACITOR		C9002	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		
1083		U1	CAPACITOR		C9003	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		
1084		U1	CAPACITOR		C9004	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		
1085		U1	CONNECTOR	*	CN7701	1-779-268-21	PIN, CONNECTOR (1.5MM)(SMD)11P		
1086		U1	CONNECTOR		CN9001	1-766-382-21	PIN, CONNECTOR (1.5MM)(SMD)10P		
1087		U1	DIODE		D7701	8-719-069-60	DIODE UDZSTE-179.1B		
1088		U1	DIODE		D7702	8-719-069-60	DIODE UDZSTE-179.1B		
1089		U1	DIODE		D7703	8-719-069-60	DIODE UDZSTE-179.1B		
1090		U1	JACK		J7701	1-770-053-12	TERMINAL BLOCK, S(LIGHT ANGLE)		
1091		U1	JACK	*	J9001	1-816-949-11	PIN JACK 3P		
1092		U1	JACK		J9002	1-816-459-11	JACK, PIN 2P		
1093		U1	RESISTOR		R7701	1-216-815-11	METAL CHIP 330 5% 1/10W		
1094		U1	RESISTOR		R7702	1-216-864-11	SHORT CHIP 0		
1095		U1	RESISTOR		R7703	1-216-864-11	SHORT CHIP 0		
1096		U1	RESISTOR		R7704	1-216-813-11	METAL CHIP 220 5% 1/10W		
1097		U1	RESISTOR		R7705	1-216-815-11	METAL CHIP 330 5% 1/10W		
1098		U1	RESISTOR		R7706	1-216-813-11	METAL CHIP 220 5% 1/10W		
1099		U1	RESISTOR		R7707	1-216-853-11	METAL CHIP 470K 5% 1/10W		
1100		U1	RESISTOR		R7708	1-216-813-11	METAL CHIP 220 5% 1/10W		
1101		U1	RESISTOR		R7709	1-216-022-00	RES-CHIP 75 5% 1/10W		
1102		U1	RESISTOR		R7710	1-216-853-11	METAL CHIP 470K 5% 1/10W		
1103		U1	RESISTOR		R7711	1-216-813-11	METAL CHIP 220 5% 1/10W		
1104		U1	RESISTOR		R7713	1-216-813-11	METAL CHIP 220 5% 1/10W		
1105		U1	RESISTOR		R7714	1-216-813-11	METAL CHIP 220 5% 1/10W		
1106		U1	RESISTOR		R7730	1-216-809-11	METAL CHIP 100 5% 1/10W		
1107		U1	RESISTOR		R7731	1-216-809-11	METAL CHIP 100 5% 1/10W		
1108		U1	RESISTOR		R7732	1-216-864-11	SHORT CHIP 0		
1109		U1	RESISTOR		R9001	1-216-864-11	SHORT CHIP 0		
1110		U1	RESISTOR		R9002	1-216-864-11	SHORT CHIP 0		

No.	#	Board	Type	Δ / [*]	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1111		U1	RESISTOR		R9003	1-216-864-11	SHORT CHIP 0		
1112		U1	RESISTOR		R9004	1-216-815-11	METAL CHIP 330 5% 1/10W		
1113		U1	RESISTOR		R9005	1-216-815-11	METAL CHIP 330 5% 1/10W		
1114		U1	RESISTOR		R9006	1-216-853-11	METAL CHIP 470K 5% 1/10W		
1115		U1	RESISTOR		R9007	1-216-853-11	METAL CHIP 470K 5% 1/10W		
1116		U1	RESISTOR		R9017	1-216-864-11	SHORT CHIP 0		
1117		U1	RESISTOR		R9021	1-216-864-11	SHORT CHIP 0		
1118		U1	RESISTOR		R9024	1-216-864-11	SHORT CHIP 0		
1119		U1	VARISTOR		VD7701	1-803-974-21	VARISTOR, CHIP (1608)		
1120		U1	VARISTOR		VD9001	1-803-974-21	VARISTOR, CHIP (1608)		
1121		U1	VARISTOR		VD9002	1-803-974-21	VARISTOR, CHIP (1608)		
1122		U1	VARISTOR		VD9003	1-803-974-21	VARISTOR, CHIP (1608)		
1123		U1	VARISTOR		VD9004	1-803-974-21	VARISTOR, CHIP (1608)		
1124		U2	CAPACITOR		C9301	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		
1125		U2	CAPACITOR		C9302	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		
1126		U2	CAPACITOR		C9303	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		
1127		U2	CAPACITOR		C9304	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V		
1128		U2	CAPACITOR		C9305	1-126-404-11	ELECT CHIP 4.7UF 20.00% 50V		
1129		U2	CAPACITOR		C9306	1-126-404-11	ELECT CHIP 4.7UF 20.00% 50V		
1130		U2	CONNECTOR		CN9301	1-764-177-11	PIN, CONNECTOR (SMD)(1.5MM) 7P		
1131		U2	DIODE		D9301	8-719-069-60	DIODE UDZSTE-179.1B		
1132		U2	DIODE		D9302	8-719-069-60	DIODE UDZSTE-179.1B		
1133		U2	JACK		J9301	1-794-623-21	JACK, PIN 2P		
1134		U2	TRANSISTOR		Q9301	8-729-015-39	TRANSISTOR DTC323TK		
1135		U2	TRANSISTOR		Q9302	8-729-015-39	TRANSISTOR DTC323TK		
1136		U2	RESISTOR		R9301	1-216-815-11	METAL CHIP 330 5% 1/10W		
1137		U2	RESISTOR		R9302	1-216-815-11	METAL CHIP 330 5% 1/10W		
1138		U2	RESISTOR		R9303	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1139		U2	RESISTOR		R9304	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1140		U2	RESISTOR		R9311	1-216-853-11	METAL CHIP 470K 5% 1/10W		
1141		U2	RESISTOR		R9312	1-216-864-11	SHORT CHIP 0		
1142		U2	RESISTOR		R9313	1-216-864-11	SHORT CHIP 0		
1143		U2	RESISTOR		R9314	1-216-864-11	SHORT CHIP 0		
1144		U2	RESISTOR		R9315	1-216-864-11	SHORT CHIP 0		
1145		U2	RESISTOR		R9316	1-803-974-21	VARISTOR, CHIP (1608)		
1146		U2	SWITCH		S9301	1-692-431-21	SWITCH, TACTILE		
1147		B	CAPACITOR		C1002	1-126-391-11	ELECT CHIP 47UF 20.00% 6.3V		
1148		B	CAPACITOR		C1005	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
1149		B	CAPACITOR		C1006	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1150		B	CAPACITOR		C1007	1-162-968-11	CERAMIC CHIP 0.0047UF 10.00% 50V		
1151		B	CAPACITOR		C1008	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1152		B	CAPACITOR		C1009	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1153		B	CAPACITOR		C1010	1-162-917-11	CERAMIC CHIP 15PF 5.00% 50V		
1154		B	CAPACITOR		C1011	1-162-917-11	CERAMIC CHIP 15PF 5.00% 50V		
1155		B	CAPACITOR		C1012	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
1156		B	CAPACITOR		C1013	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1157		B	CAPACITOR		C1014	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1158		B	CAPACITOR		C1015	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1159		B	CAPACITOR		C1016	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1160		B	CAPACITOR		C1017	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1161		B	CAPACITOR		C1018	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1162		B	CAPACITOR		C1019	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1163		B	CAPACITOR		C1028	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1164		B	CAPACITOR		C1029	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1165		B	CAPACITOR		C1040	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1166		B	CAPACITOR		C1041	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1167		B	CAPACITOR		C1042	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1168		B	CAPACITOR		C1043	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1169		B	CAPACITOR		C1044	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1170		B	CAPACITOR		C1045	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1171		B	CAPACITOR		C1048	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1172		B	CAPACITOR		C1049	1-164-947-11	CERAMIC CHIP 0.01UF 50V		
1173		B	CAPACITOR		C1050	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
1174		B	CAPACITOR		C1051	1-125-837-91	CERAMIC CHIP 1UF 10% 6.3V		
1175		B	CAPACITOR		C1054	1-126-391-11	ELECT CHIP 47UF 20.00% 6.3V		
1176		B	CAPACITOR		C1055	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1177		B	CAPACITOR		C1057	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V		
1178		B	CAPACITOR		C1059	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
1179		B	CAPACITOR		C1060	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
1180		B	CAPACITOR		C1192	1-126-390-11	ELECT CHIP 22UF 20.00% 6.3V		
1181		B	CAPACITOR		C3002	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1182		B	CAPACITOR		C3003	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
1183		B	CAPACITOR		C3011	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1184		B	CAPACITOR		C3012	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		

No.	#	Board	Type	Δ/V^*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1185		B	CAPACITOR		C3015	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1186		B	CAPACITOR		C3017	1-128-357-11	ELECT CHIP 10UF 20.00% 16V		
1187		B	CAPACITOR		C3024	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1188		B	CAPACITOR		C3025	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1189		B	CAPACITOR		C3026	1-126-392-11	ELECT CHIP 100UF 20.00% 6.3V		
1190		B	CAPACITOR		C3027	1-126-392-11	ELECT CHIP 100UF 20.00% 6.3V		
1191		B	CAPACITOR		C3028	1-126-395-11	ELECT CHIP 22UF 20.00% 16V		
1192		B	CAPACITOR		C3029	1-126-395-11	ELECT CHIP 22UF 20.00% 16V		
1193		B	CAPACITOR		C3030	1-126-395-11	ELECT CHIP 22UF 20.00% 16V		
1194		B	CAPACITOR		C3031	1-126-392-11	ELECT CHIP 100UF 20.00% 6.3V		
1195		B	CAPACITOR		C3032	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1196		B	CAPACITOR		C3033	1-126-392-11	ELECT CHIP 100UF 20.00% 6.3V		
1197		B	CAPACITOR		C3034	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1198		B	CAPACITOR		C3035	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1199		B	CAPACITOR		C3036	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1200		B	CAPACITOR		C3037	1-126-392-11	ELECT CHIP 100UF 20.00% 6.3V		
1201		B	CAPACITOR		C3038	1-126-390-11	ELECT CHIP 22UF 20.00% 6.3V		
1202		B	CAPACITOR		C3039	1-126-390-11	ELECT CHIP 22UF 20.00% 6.3V		
1203		B	CAPACITOR		C3040	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1204		B	CAPACITOR		C3041	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1205		B	CAPACITOR		C3042	1-107-726-91	CERAMIC CHIP 0.01UF 10.00% 16V		
1206		B	CAPACITOR		C3043	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1207		B	CAPACITOR		C3044	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1208		B	CAPACITOR		C3045	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1209		B	CAPACITOR		C3046	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1210		B	CAPACITOR		C3047	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1211		B	CAPACITOR		C3048	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1212		B	CAPACITOR		C3049	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1213		B	CAPACITOR		C3050	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1214		B	CAPACITOR		C3051	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1215		B	CAPACITOR		C3052	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1216		B	CAPACITOR		C3053	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1217		B	CAPACITOR		C3054	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1218		B	CAPACITOR		C3055	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1219		B	CAPACITOR		C3056	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1220		B	CAPACITOR		C3057	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1221		B	CAPACITOR		C3059	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
1222		B	CAPACITOR		C3060	1-137-710-11	CERAMIC CHIP 10UF 20% 6.3V		
1223		B	CAPACITOR		C3061	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1224		B	CAPACITOR		C3062	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1225		B	CAPACITOR		C3063	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1226		B	CAPACITOR		C3064	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1227		B	CAPACITOR		C3065	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1228		B	CAPACITOR		C3066	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1229		B	CAPACITOR		C3067	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1230		B	CAPACITOR		C3068	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1231		B	CAPACITOR		C3069	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1232		B	CAPACITOR		C3070	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1233		B	CAPACITOR		C3071	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1234		B	CAPACITOR		C3072	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1235		B	CAPACITOR		C3073	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1236		B	CAPACITOR		C3074	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1237		B	CAPACITOR		C3075	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1238		B	CAPACITOR		C3076	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1239		B	CAPACITOR		C3077	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1240		B	CAPACITOR		C3078	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1241		B	CAPACITOR		C3079	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1242		B	CAPACITOR		C3080	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1243		B	CAPACITOR		C3081	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1244		B	CAPACITOR		C3082	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1245		B	CAPACITOR		C3083	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1246		B	CAPACITOR		C3084	1-100-159-91	CERAMIC CHIP 22UF 10% 6.3V		
1247		B	CAPACITOR		C3085	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1248		B	CAPACITOR		C3088	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1249		B	CAPACITOR		C3089	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1250		B	CAPACITOR		C3090	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1251		B	CAPACITOR		C3091	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1252		B	CAPACITOR		C3093	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1253		B	CAPACITOR		C3094	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1254		B	CAPACITOR		C3095	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1255		B	CAPACITOR		C3096	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1256		B	CAPACITOR		C3097	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1257		B	CAPACITOR		C3098	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1258		B	CAPACITOR		C3100	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		

No.	#	Board	Type	Δ / [*]	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1259		B	CAPACITOR		C3101	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
1260		B	CAPACITOR		C3102	1-137-710-11	CERAMIC CHIP 10UF 20% 6.3V		
1261		B	CAPACITOR		C3103	1-137-710-11	CERAMIC CHIP 10UF 20% 6.3V		
1262		B	CAPACITOR		C3104	1-164-874-11	CERAMIC CHIP 100PF 5.00% 50V		
1263		B	CAPACITOR		C3105	1-164-874-11	CERAMIC CHIP 100PF 5.00% 50V		
1264		B	CAPACITOR		C3106	1-164-874-11	CERAMIC CHIP 100PF 5.00% 50V		
1265		B	CAPACITOR		C3107	1-164-874-11	CERAMIC CHIP 100PF 5.00% 50V		
1266		B	CAPACITOR		C3108	1-164-874-11	CERAMIC CHIP 100PF 5.00% 50V		
1267		B	CAPACITOR		C3109	1-164-874-11	CERAMIC CHIP 100PF 5.00% 50V		
1268		B	CAPACITOR		C3110	1-164-874-11	CERAMIC CHIP 100PF 5.00% 50V		
1269		B	CAPACITOR		C3301	1-119-667-11	CERAMIC CHIP 22UF 10V		
1270		B	CAPACITOR		C3302	1-125-837-91	CERAMIC CHIP 1UF 10% 6.3V		
1271		B	CAPACITOR		C3304	1-164-315-11	CERAMIC CHIP 470PF 5.00% 50V		
1272		B	CAPACITOR		C3305	1-137-710-11	CERAMIC CHIP 10UF 20% 6.3V		
1273		B	CAPACITOR		C3306	1-100-159-91	CERAMIC CHIP 22UF 10% 6.3V		
1274		B	CAPACITOR		C3307	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1275		B	CAPACITOR		C3308	1-100-159-91	CERAMIC CHIP 22UF 10% 6.3V		
1276		B	CAPACITOR		C3309	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1277		B	CAPACITOR		C3310	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1278		B	CAPACITOR		C3311	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1279		B	CAPACITOR		C3312	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1280		B	CAPACITOR		C3313	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1281		B	CAPACITOR		C3314	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1282		B	CAPACITOR		C3315	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1283		B	CAPACITOR		C3316	1-100-159-91	CERAMIC CHIP 22UF 10% 6.3V		
1284		B	CAPACITOR		C3317	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1285		B	CAPACITOR		C3318	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1286		B	CAPACITOR		C3319	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1287		B	CAPACITOR		C3320	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1288		B	CAPACITOR		C3321	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1289		B	CAPACITOR		C3322	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1290		B	CAPACITOR		C3323	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1291		B	CAPACITOR		C3324	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1292		B	CAPACITOR		C3325	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1293		B	CAPACITOR		C3326	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1294		B	CAPACITOR		C3327	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1295		B	CAPACITOR		C3328	1-119-667-11	CERAMIC CHIP 22UF 10V		
1296		B	CAPACITOR		C3329	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1297		B	CAPACITOR		C3330	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1298		B	CAPACITOR		C3331	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1299		B	CAPACITOR		C3332	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1300		B	CAPACITOR		C3333	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1301		B	CAPACITOR		C3334	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1302		B	CAPACITOR		C3335	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1303		B	CAPACITOR		C3336	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1304		B	CAPACITOR		C3337	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1305		B	CAPACITOR		C3338	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1306		B	CAPACITOR		C3339	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1307		B	CAPACITOR		C3340	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1308		B	CAPACITOR		C3341	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1309		B	CAPACITOR		C3342	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1310		B	CAPACITOR		C3343	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1311		B	CAPACITOR		C3344	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1312		B	CAPACITOR		C3345	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1313		B	CAPACITOR		C3346	1-126-391-11	ELECT CHIP 47UF 20.00% 6.3V		
1314		B	CAPACITOR		C3347	1-100-159-91	CERAMIC CHIP 22UF 10% 6.3V		
1315		B	CAPACITOR		C3348	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1316		B	CAPACITOR		C3350	1-100-159-91	CERAMIC CHIP 22UF 10% 6.3V		
1317		B	CAPACITOR		C3351	1-107-820-11	CERAMIC CHIP 0.1UF 16V		
1318		B	CAPACITOR		C5001	1-162-919-11	CERAMIC CHIP 22PF 5.00% 50V		
1319		B	CAPACITOR		C5002	1-162-919-11	CERAMIC CHIP 22PF 5.00% 50V		
1320		B	CAPACITOR		C5003	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1321		B	CAPACITOR		C5004	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1322		B	CAPACITOR		C5005	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1323		B	CAPACITOR		C5006	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1324		B	CAPACITOR		C5007	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1325		B	CAPACITOR		C5008	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1326		B	CAPACITOR		C5009	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1327		B	CAPACITOR		C5010	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1328		B	CAPACITOR		C5011	1-162-962-11	CERAMIC CHIP 470PF 10.00% 50V		
1329		B	CAPACITOR		C5012	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
1330		B	CAPACITOR		C5013	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
1331		B	CAPACITOR		C5014	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1332		B	CAPACITOR		C5015	1-162-908-11	CERAMIC CHIP 3PF 0.25PF 50V		

No.	#	Board	Type	Δ / [*]	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1333		B	CAPACITOR		C5016	1-125-837-91	CERAMIC CHIP 1UF 10% 6.3V		
1334		B	CAPACITOR		C5017	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1335		B	CAPACITOR		C5018	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1336		B	CAPACITOR		C5019	1-125-837-91	CERAMIC CHIP 1UF 10% 6.3V		
1337		B	CAPACITOR		C5020	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1338		B	CAPACITOR		C5023	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1339		B	CAPACITOR		C5024	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1340		B	CAPACITOR		C5025	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1341		B	CAPACITOR		C5026	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1342		B	CAPACITOR		C5027	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1343		B	CAPACITOR		C5028	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1344		B	CAPACITOR		C5029	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1345		B	CAPACITOR		C5030	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1346		B	CAPACITOR		C5031	1-137-710-11	CERAMIC CHIP 10UF 20% 6.3V		
1347		B	CAPACITOR		C5032	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1348		B	CAPACITOR		C5033	1-137-710-11	CERAMIC CHIP 10UF 20% 6.3V		
1349		B	CAPACITOR		C5034	1-100-159-91	CERAMIC CHIP 22UF 10% 6.3V		
1350		B	CAPACITOR		C5035	1-100-159-91	CERAMIC CHIP 22UF 10% 6.3V		
1351		B	CAPACITOR		C5037	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1352		B	CAPACITOR		C5039	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1353		B	CAPACITOR		C5040	1-126-392-11	ELECT CHIP 100UF 20.00% 6.3V		
1354		B	CAPACITOR		C5041	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1355		B	CAPACITOR		C5042	1-126-392-11	ELECT CHIP 100UF 20.00% 6.3V		
1356		B	CAPACITOR		C5801	1-100-159-91	CERAMIC CHIP 22UF 10% 6.3V		
1357		B	CAPACITOR		C5802	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1358		B	CAPACITOR		C5803	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1359		B	CAPACITOR		C5804	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1360		B	CAPACITOR		C5805	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1361		B	CAPACITOR		C5806	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1362		B	CAPACITOR		C5807	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1363		B	CAPACITOR		C5808	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1364		B	CAPACITOR		C5809	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1365		B	CAPACITOR		C5810	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1366		B	CAPACITOR		C5811	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1367		B	CAPACITOR		C5812	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1368		B	CAPACITOR		C5813	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1369		B	CAPACITOR		C5814	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1370		B	CAPACITOR		C5815	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1371		B	CAPACITOR		C5816	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1372		B	CAPACITOR		C5817	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1373		B	CAPACITOR		C5818	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1374		B	CAPACITOR		C5819	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1375		B	CAPACITOR		C5820	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1376		B	CAPACITOR		C5821	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1377		B	CAPACITOR		C5822	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1378		B	CAPACITOR		C5823	1-126-390-11	ELECT CHIP 22UF 20.00% 6.3V		
1379		B	CAPACITOR		C5824	1-128-934-91	CERAMIC CHIP 0.33UF 20% 10V		
1380		B	CAPACITOR		C5825	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1381		B	CAPACITOR		C5826	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1382		B	CAPACITOR		C5827	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1383		B	CAPACITOR		C5828	1-162-915-11	CERAMIC CHIP 10PF 0.50PF 50V		
1384		B	CAPACITOR		C5829	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1385		B	CAPACITOR		C5830	1-162-910-11	CERAMIC CHIP 5PF 0.25PF 50V		
1386		B	CAPACITOR		C5831	1-126-412-11	ELECT CHIP 220UF 20.00% 4V		
1387		B	CAPACITOR		C5832	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1388		B	CAPACITOR		C5833	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1389		B	CAPACITOR		C5835	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1390		B	CAPACITOR		C5836	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1391		B	CAPACITOR		C5837	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1392		B	CAPACITOR		C5838	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
1393		B	CAPACITOR		C5839	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1394		B	CAPACITOR		C5840	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1395		B	CAPACITOR		C5841	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1396		B	CAPACITOR		C5842	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1397		B	CAPACITOR		C5843	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1398		B	CAPACITOR		C5844	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1399		B	CAPACITOR		C5845	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1400		B	CAPACITOR		C5846	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1401		B	CAPACITOR		C5847	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1402		B	CAPACITOR		C5848	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1403		B	CAPACITOR		C5849	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1404		B	CAPACITOR		C5850	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1405		B	CAPACITOR		C5851	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1406		B	CAPACITOR		C5852	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1407		B	CAPACITOR		C5853	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1408		B	CAPACITOR		C5854	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1409		B	CAPACITOR		C5855	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1410		B	CAPACITOR		C5856	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1411		B	CAPACITOR		C5857	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1412		B	CAPACITOR		C5858	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1413		B	CAPACITOR		C5859	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1414		B	CAPACITOR		C5860	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1415		B	CAPACITOR		C5861	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1416		B	CAPACITOR		C5862	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1417		B	CAPACITOR		C5863	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1418		B	CAPACITOR		C5864	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1419		B	CAPACITOR		C5865	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1420		B	CAPACITOR		C5866	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1421		B	CAPACITOR		C5867	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1422		B	CAPACITOR		C5868	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1423		B	CAPACITOR		C5869	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1424		B	CAPACITOR		C5870	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1425		B	CAPACITOR		C5871	1-126-392-11	ELECT CHIP 100UF 20.00% 6.3V		
1426		B	CAPACITOR		C5872	1-126-392-11	ELECT CHIP 100UF 20.00% 6.3V		
1427		B	CAPACITOR		C5873	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1428		B	CAPACITOR		C5874	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1429		B	CAPACITOR		C5875	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1430		B	CAPACITOR		C5876	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1431		B	CAPACITOR		C5877	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1432		B	CAPACITOR		C5878	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1433		B	CAPACITOR		C5879	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1434		B	CAPACITOR		C5880	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1435		B	CAPACITOR		C5881	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1436		B	CAPACITOR		C5882	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1437		B	CAPACITOR		C5883	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1438		B	CAPACITOR		C5884	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1439		B	CAPACITOR		C5885	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1440		B	CAPACITOR		C5886	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1441		B	CAPACITOR		C5887	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1442		B	CAPACITOR		C5888	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1443		B	CAPACITOR		C5889	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1444		B	CAPACITOR		C5890	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1445		B	CAPACITOR		C5891	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1446		B	CAPACITOR		C5892	1-164-943-11	CERAMIC CHIP 0.01UF 10.00% 16V		
1447		B	CAPACITOR		C5893	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1448		B	CAPACITOR		C5894	1-164-935-11	CERAMIC CHIP 470PF 10.00% 50V		
1449		B	CAPACITOR		C5895	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
1450		B	CONNECTOR		CN1002	1-779-936-21	CONNECTOR, FFC/FPC 18P		
1451		B	CONNECTOR		CN1003	1-774-769-11	CONNECTOR, FFC/FPC 25P		
1452		B	CONNECTOR	*	CN1004	1-766-376-11	PIN, CONNECTOR (1.5MM)(SMD) 9P		
1453		B	CONNECTOR		CN1005	1-774-769-11	CONNECTOR, FFC/FPC 25P		
1454		B	CONNECTOR		CN1007	1-774-769-11	CONNECTOR, FFC/FPC 25P		
1455		B	CONNECTOR		CN1008	1-691-550-11	PIN, CONNECTOR (1.5MM)(SMD) 3P		
1456		B	CONNECTOR	*	CN5801	1-816-544-22	PIN, CONNECTOR (PC BOARD) 20P		
1457		B	DIODE		D1002	8-719-024-77	DIODE HN1D03FU-TE85L		
1458		B	DIODE		D1003	8-719-081-97	DIODE MMDL914T1		
1459		B	DIODE		D1005	8-719-081-97	DIODE MMDL914T1		
1460		B	DIODE		D1006	8-719-077-59	DIODE 1PS302		
1461		B	DIODE		D1007	8-719-077-59	DIODE 1PS302		
1462		B	DIODE		D1008	8-719-036-94	DIODE RD5.6SB-T1		
1463		B	DIODE		D1009	8-719-036-94	DIODE RD5.6SB-T1		
1464		B	DIODE		D1010	8-719-036-94	DIODE RD5.6SB-T1		
1465		B	DIODE		D1012	8-719-036-94	DIODE RD5.6SB-T1		
1466		B	DIODE		D1192	8-719-036-94	DIODE RD5.6SB-T1		
1467		B	DIODE		D5001	8-719-066-11	DIODE 1PS184-115		
1468		B	DIODE		D5002	8-719-066-11	DIODE 1PS184-115		
1469		B	DIODE		D5004	8-719-081-97	DIODE MMDL914T1		
1470		B	DIODE		D5005	8-719-081-97	DIODE MMDL914T1		
1471		B	DIODE		D5006	8-719-081-97	DIODE MMDL914T1		
1472		B	FERRITE BEAD		FB1001	1-414-445-11	FERRITE 0UH		
1473		B	FERRITE BEAD		FB1002	1-414-445-11	FERRITE 0UH		
1474		B	FERRITE BEAD		FB3009	1-414-234-22	FERRITE 0UH		
1475		B	FERRITE BEAD		FB3301	1-414-445-11	FERRITE 0UH		
1476		B	FERRITE BEAD		FB3302	1-414-864-11	FERRITE 0UH		
1477		B	FERRITE BEAD		FB3303	1-414-445-11	FERRITE 0UH		
1478		B	FERRITE BEAD		FB3304	1-414-445-11	FERRITE 0UH		
1479		B	FERRITE BEAD		FB3305	1-414-445-11	FERRITE 0UH		
1480		B	FERRITE BEAD		FB5001	1-414-445-11	FERRITE 0UH		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1481		B	FERRITE BEAD		FB5002	1-414-445-11	FERRITE 0UH		
1482		B	FERRITE BEAD		FB5003	1-414-445-11	FERRITE 0UH		
1483		B	FERRITE BEAD		FB5004	1-414-445-11	FERRITE 0UH		
1484		B	FERRITE BEAD		FB5005	1-414-445-11	FERRITE 0UH		
1485		B	FERRITE BEAD		FB5006	1-414-445-11	FERRITE 0UH		
1486		B	FERRITE BEAD		FB5007	1-414-445-11	FERRITE 0UH		
1487		B	FERRITE BEAD		FB5008	1-414-445-11	FERRITE 0UH		
1488		B	FERRITE BEAD		FB5009	1-414-445-11	FERRITE 0UH		
1489		B	FERRITE BEAD		FB5010	1-414-864-11	FERRITE 0UH		
1490		B	FERRITE BEAD		FB5011	1-414-864-11	FERRITE 0UH		
1491		B	FERRITE BEAD		FB5012	1-414-864-11	FERRITE 0UH		
1492		B	FERRITE BEAD		FB5013	1-414-864-11	FERRITE 0UH		
1493		B	FERRITE BEAD		FB5801	1-414-864-11	FERRITE 0UH		
1494		B	FERRITE BEAD		FB5802	1-414-864-11	FERRITE 0UH		
1495		B	FERRITE BEAD		FB5803	1-414-445-11	FERRITE 0UH		
1496		B	FERRITE BEAD		FB5804	1-414-445-11	FERRITE 0UH		
1497		B	FERRITE BEAD		FB5805	1-414-445-11	FERRITE 0UH		
1498		B	FERRITE BEAD		FB5806	1-414-445-11	FERRITE 0UH		
1499		B	FILTER		FL3001	1-234-560-21	FILTER, LOW PASS		
1500		B	FILTER		FL3002	1-234-559-21	FILTER, LOW PASS		
1501		B	FILTER		FL3003	1-234-559-21	FILTER, LOW PASS		
1502		B	FILTER		FL3004	1-234-177-21	FERRITE 0UH		
1503		B	FILTER		FL3005	1-234-177-21	FERRITE 0UH		
1504		B	FILTER		FL3006	1-234-177-21	FERRITE 0UH		
1505		B	FILTER		FL3007	1-234-177-21	FERRITE 0UH		
1506		B	FILTER		FL3008	1-234-677-21	FILTER, EMI		
1507		B	FILTER		FL3301	1-234-177-21	FERRITE 0UH		
1508		B	FILTER		FL3302	1-234-177-21	FERRITE 0UH		
1509		B	FILTER		FL3303	1-234-177-21	FERRITE 0UH		
1510		B	FILTER		FL3304	1-234-177-21	FERRITE 0UH		
1511		B	FILTER		FL5001	1-234-177-21	FERRITE 0UH		
1512		B	FILTER		FL5801	1-234-177-21	FERRITE 0UH		
1513		B	FILTER		FL5802	1-234-177-21	FERRITE 0UH		
1514		B	IC		IC1001	8-759-460-72	IC BA033FP-E2		
1515		B	IC		IC1002	8-759-476-80	IC LM75CIMX-3		
1516		B	IC		IC1006	6-804-736-02	IC HD64F2376-364-A		
1517		B	IC		IC1007	6-703-225-01	IC S-80928CNMC-G8YT2G		
1518		B	IC		IC1008	6-702-688-01	IC M24C64-WMN6T(B)		
1519		B	IC		IC1009	8-759-592-49	IC TC7SZ125FU(TE85R)		
1520		B	IC		IC1010	8-759-549-03	IC SN74LV132APWR		
1521		B	IC		IC3002	6-705-529-01	IC LMH6658MMX/J5000172		
1522		B	IC		IC3003	6-705-529-01	IC LMH6658MMX/J5000172		
1523		B	IC		IC3005	8-759-712-65	IC PQ070XZ01ZP		
1524		B	IC		IC3006	8-759-712-65	IC PQ070XZ01ZP		
1525		B	IC		IC3007	8-752-425-02	IC CXD3802BQ		
1526		B	IC		IC3008	6-706-155-01	IC MT48LC2M32B2P-6-Y14W		
1527		B	IC		IC3301	6-700-227-01	IC MM1561JFBE		
1528		B	IC		IC3302	8-752-422-52	IC CXD2097BQ		
1529		B	IC		IC3303	6-705-992-11	IC HY57V161610ETP-7DR		
1530		B	IC		IC3304	8-759-669-78	IC TLC2933IPWR-12		
1531		B	IC		IC5001	6-804-738-02	IC MX29LV800TTC-70G-364-A		
1532		B	IC		IC5002	8-759-549-03	IC SN74LV132APWR		
1533		B	IC		IC5003	8-759-669-44	IC SN74LVC74APWR-12		
1534		B	IC		IC5004	6-704-191-01	IC S-80829CNNB-B8OT2G		
1535		B	IC		IC5005	6-704-192-01	IC S-80822CNNB-B8HT2G		
1536		B	IC		IC5007	6-704-190-01	IC SN74ALVCH16823DGGR		
1537		B	IC		IC5008	8-759-712-65	IC PQ070XZ01ZP		
1538		B	IC		IC5009	8-759-712-65	IC PQ070XZ01ZP		
1539		B	IC		IC5801	6-705-992-11	IC HY57V161610ETP-7DR		
1540		B	IC		IC5802	6-703-689-01	IC CXD9756R		
1541		B	IC		IC5803	6-700-394-01	IC BA25BC0FP-E2		
1542		B	IC		IC5804	6-701-098-11	IC THC63LVDM83R-T		
1543		B	IC		IC7503	6-706-362-01	IC PW166B-10TL		
1544		B	COIL		L1001	1-412-030-11	INDUCTOR 22UH		
1545		B	COIL		L3001	1-469-525-91	INDUCTOR 10UH		
1546		B	COIL		L3004	1-469-525-91	INDUCTOR 10UH		
1547		B	COIL		L3005	1-412-026-11	INDUCTOR 1UH		
1548		B	COIL		L3006	1-412-026-11	INDUCTOR 1UH		
1549		B	COIL		L3007	1-469-525-91	INDUCTOR 10UH		
1550		B	COIL		L3008	1-469-525-91	INDUCTOR 10UH		
1551		B	COIL		L3009	1-469-525-91	INDUCTOR 10UH		
1552		B	COIL		L3010	1-412-029-11	INDUCTOR 10UH		
1553		B	COIL		L3301	1-469-525-91	INDUCTOR 10UH		
1554		B	COIL		L3302	1-469-528-91	INDUCTOR 100UH		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1555		B	COIL		L3303	1-469-528-91	INDUCTOR 100UH		
1556		B	TRANSISTOR		Q1006	8-729-013-28	TRANSISTOR HN1B01FU-TE85R		
1557		B	TRANSISTOR		Q1009	8-729-025-28	TRANSISTOR 2SK1828		
1558		B	TRANSISTOR		Q1010	8-729-025-28	TRANSISTOR 2SK1828		
1559		B	TRANSISTOR		Q1015	8-729-907-00	TRANSISTOR DTC114EU		
1560		B	TRANSISTOR		Q1016	8-729-907-00	TRANSISTOR DTC114EU		
1561		B	TRANSISTOR		Q1017	8-729-025-28	TRANSISTOR 2SK1828		
1562		B	TRANSISTOR		Q1018	8-729-025-28	TRANSISTOR 2SK1828		
1563		B	TRANSISTOR		Q3004	8-729-117-73	TRANSISTOR 2SC4178-F14		
1564		B	TRANSISTOR		Q3005	8-729-117-73	TRANSISTOR 2SC4178-F14		
1565		B	TRANSISTOR		Q3006	8-729-117-73	TRANSISTOR 2SC4178-F14		
1566		B	TRANSISTOR		Q3007	8-729-122-63	TRANSISTOR 2SA1226-E4		
1567		B	TRANSISTOR		Q3008	8-729-122-63	TRANSISTOR 2SA1226-E4		
1568		B	TRANSISTOR		Q3009	8-729-122-63	TRANSISTOR 2SA1226-E4		
1569		B	TRANSISTOR		Q3011	6-550-585-01	TRANSISTOR 2PC4081R-115		
1570		B	TRANSISTOR		Q3012	8-729-117-73	TRANSISTOR 2SC4178-F14		
1571		B	TRANSISTOR		Q3013	8-729-117-73	TRANSISTOR 2SC4178-F14		
1572		B	TRANSISTOR		Q3015	8-729-010-25	TRANSISTOR MSD601-RT1		
1573		B	TRANSISTOR		Q3304	6-550-586-01	TRANSISTOR 2PA1576R-115		
1574		B	TRANSISTOR		Q3305	6-550-585-01	TRANSISTOR 2PC4081R-115		
1575		B	TRANSISTOR		Q5801	6-550-014-01	TRANSISTOR SSM6N15FU(TE85R)		
1576		B	TRANSISTOR		Q5802	8-729-028-86	TRANSISTOR DTA143EUA-T106		
1577		B	TRANSISTOR		Q5803	8-729-907-00	TRANSISTOR DTC114EU		
1578		B	TRANSISTOR		Q5804	8-729-907-00	TRANSISTOR DTC114EU		
1579		B	TRANSISTOR		Q5805	8-729-046-75	TRANSISTOR SI2301DS-T1		
1580		B	TRANSISTOR		Q5806	8-729-907-00	TRANSISTOR DTC114EU		
1581		B	RESISTOR		R1005	1-218-990-11	SHORT CHIP 0		
1582		B	RESISTOR		R1010	1-218-965-11	RES-CHIP 10K 5% 1/16W		
1583		B	RESISTOR		R1011	1-218-965-11	RES-CHIP 10K 5% 1/16W		
1584		B	RESISTOR		R1012	1-218-973-11	RES-CHIP 47K 5% 1/16W		
1585		B	RESISTOR		R1013	1-218-965-11	RES-CHIP 10K 5% 1/16W		
1586		B	RESISTOR		R1014	1-218-973-11	RES-CHIP 47K 5% 1/16W		
1587		B	RESISTOR		R1015	1-218-965-11	RES-CHIP 10K 5% 1/16W		
1588		B	RESISTOR		R1016	1-218-961-11	RES-CHIP 4.7K 5% 1/16W		
1589		B	RESISTOR		R1017	1-216-805-11	METAL CHIP 47 5% 1/10W		
1590		B	RESISTOR		R1018	1-216-805-11	METAL CHIP 47 5% 1/10W		
1591		B	RESISTOR		R1020	1-216-864-11	SHORT CHIP 0		
1592		B	RESISTOR		R1023	1-216-864-11	SHORT CHIP 0		
1593		B	RESISTOR		R1024	1-216-864-11	SHORT CHIP 0		
1594		B	RESISTOR		R1025	1-216-864-11	SHORT CHIP 0		
1595		B	RESISTOR		R1026	1-216-864-11	SHORT CHIP 0		
1596		B	RESISTOR		R1027	1-216-864-11	SHORT CHIP 0		
1597		B	RESISTOR		R1028	1-216-864-11	SHORT CHIP 0		
1598		B	RESISTOR		R1029	1-218-990-11	SHORT CHIP 0		
1599		B	RESISTOR		R1034	1-218-961-11	RES-CHIP 4.7K 5% 1/16W		
1600		B	RESISTOR		R1036	1-216-864-11	SHORT CHIP 0		
1601		B	RESISTOR		R1037	1-216-864-11	SHORT CHIP 0		
1602		B	RESISTOR		R1048	1-218-961-11	RES-CHIP 4.7K 5% 1/16W		
1603		B	RESISTOR		R1049	1-218-961-11	RES-CHIP 4.7K 5% 1/16W		
1604		B	RESISTOR		R1055	1-218-961-11	RES-CHIP 4.7K 5% 1/16W		
1605		B	RESISTOR		R1058	1-220-183-81	RES-CHIP 1.1K 5% 1/16W		
1606		B	RESISTOR		R1059	1-218-957-11	RES-CHIP 2.2K 5% 1/16W		
1607		B	RESISTOR		R1060	1-218-941-81	RES-CHIP 100 5% 1/16W		
1608		B	RESISTOR		R1061	1-218-941-81	RES-CHIP 100 5% 1/16W		
1609		B	RESISTOR		R1062	1-218-941-81	RES-CHIP 100 5% 1/16W		
1610		B	RESISTOR		R1063	1-218-941-81	RES-CHIP 100 5% 1/16W		
1611		B	RESISTOR		R1064	1-218-941-81	RES-CHIP 100 5% 1/16W		
1612		B	RESISTOR		R1065	1-218-941-81	RES-CHIP 100 5% 1/16W		
1613		B	RESISTOR		R1066	1-218-941-81	RES-CHIP 100 5% 1/16W		
1614		B	RESISTOR		R1067	1-218-941-81	RES-CHIP 100 5% 1/16W		
1615		B	RESISTOR		R1068	1-218-965-11	RES-CHIP 10K 5% 1/16W		
1616		B	RESISTOR		R1070	1-218-965-11	RES-CHIP 10K 5% 1/16W		
1617		B	RESISTOR		R1071	1-218-965-11	RES-CHIP 10K 5% 1/16W		
1618		B	RESISTOR		R1072	1-218-929-11	RES-CHIP 10 5% 1/16W		
1619		B	RESISTOR		R1073	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1620		B	RESISTOR		R1074	1-218-945-11	RES-CHIP 220 5% 1/16W		
1621		B	RESISTOR		R1075	1-218-945-11	RES-CHIP 220 5% 1/16W		
1622		B	RESISTOR		R1076	1-218-945-11	RES-CHIP 220 5% 1/16W		
1623		B	RESISTOR		R1077	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1624		B	RESISTOR		R1081	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1625		B	RESISTOR		R1082	1-218-965-11	RES-CHIP 10K 5% 1/16W		
1626		B	RESISTOR		R1084	1-218-965-11	RES-CHIP 10K 5% 1/16W		
1627		B	RESISTOR		R1085	1-218-965-11	RES-CHIP 10K 5% 1/16W		
1628		B	RESISTOR		R1086	1-218-941-81	RES-CHIP 100 5% 1/16W		

No.	#	Board	Type	Δ / [*]	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1629		B	RESISTOR		R1087	1-218-941-81	RES-CHIP 100 5% 1/16W		
1630		B	RESISTOR		R1088	1-218-959-11	RES-CHIP 3.3K 5% 1/16W		
1631		B	RESISTOR		R1089	1-218-941-81	RES-CHIP 100 5% 1/16W		
1632		B	RESISTOR		R1090	1-218-941-81	RES-CHIP 100 5% 1/16W		
1633		B	RESISTOR		R1091	1-218-941-81	RES-CHIP 100 5% 1/16W		
1634		B	RESISTOR		R1092	1-218-941-81	RES-CHIP 100 5% 1/16W		
1635		B	RESISTOR		R1094	1-218-965-11	RES-CHIP 10K 5% 1/16W		
1636		B	RESISTOR		R1095	1-218-961-11	RES-CHIP 4.7K 5% 1/16W		
1637		B	RESISTOR		R1096	1-218-965-11	RES-CHIP 10K 5% 1/16W		
1638		B	RESISTOR		R1099	1-218-965-11	RES-CHIP 10K 5% 1/16W		
1639		B	RESISTOR		R1100	1-216-864-11	SHORT CHIP 0		
1640		B	RESISTOR		R1104	1-216-813-11	METAL CHIP 220 5% 1/10W		
1641		B	RESISTOR		R1105	1-216-864-11	SHORT CHIP 0		
1642		B	RESISTOR		R1107	1-216-818-11	METAL CHIP 560 5% 1/10W		
1643		B	RESISTOR		R1144	1-218-973-11	RES-CHIP 47K 5% 1/16W		
1644		B	RESISTOR		R1145	1-218-973-11	RES-CHIP 47K 5% 1/16W		
1645		B	RESISTOR		R1146	1-218-973-11	RES-CHIP 47K 5% 1/16W		
1646		B	RESISTOR		R1147	1-218-961-11	RES-CHIP 4.7K 5% 1/16W		
1647		B	RESISTOR		R1148	1-218-961-11	RES-CHIP 4.7K 5% 1/16W		
1648		B	RESISTOR		R1157	1-218-959-11	RES-CHIP 3.3K 5% 1/16W		
1649		B	RESISTOR		R1158	1-218-945-11	RES-CHIP 220 5% 1/16W		
1650		B	RESISTOR		R1163	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1651		B	RESISTOR		R1164	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1652		B	RESISTOR		R1165	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1653		B	RESISTOR		R1166	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1654		B	RESISTOR		R1167	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1655		B	RESISTOR		R1168	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1656		B	RESISTOR		R1169	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1657		B	RESISTOR		R1170	1-216-809-11	METAL CHIP 100 5% 1/10W		
1658		B	RESISTOR		R1171	1-216-809-11	METAL CHIP 100 5% 1/10W		
1659		B	RESISTOR		R1172	1-216-849-11	METAL CHIP 220K 5% 1/10W		
1660		B	RESISTOR		R1173	1-218-941-81	RES-CHIP 100 5% 1/16W		
1661		B	RESISTOR		R1174	1-216-864-11	SHORT CHIP 0		
1662		B	RESISTOR		R1177	1-216-864-11	SHORT CHIP 0		
1663		B	RESISTOR		R1202	1-218-724-11	METAL CHIP 22K 0.5% 1/10W		
1664		B	RESISTOR		R1203	1-218-724-11	METAL CHIP 22K 0.5% 1/10W		
1665		B	RESISTOR		R1204	1-218-710-11	METAL CHIP 5.6K 0.5% 1/10W		
1666		B	RESISTOR		R3001	1-216-809-11	METAL CHIP 100 5% 1/10W		
1667		B	RESISTOR		R3002	1-216-809-11	METAL CHIP 100 5% 1/10W		
1668		B	RESISTOR		R3003	1-216-809-11	METAL CHIP 100 5% 1/10W		
1669		B	RESISTOR		R3026	1-218-952-11	RES-CHIP 820 5% 1/16W		
1670		B	RESISTOR		R3027	1-218-952-11	RES-CHIP 820 5% 1/16W		
1671		B	RESISTOR		R3028	1-218-952-11	RES-CHIP 820 5% 1/16W		
1672		B	RESISTOR		R3030	1-216-864-11	SHORT CHIP 0		
1673		B	RESISTOR		R3031	1-216-864-11	SHORT CHIP 0		
1674		B	RESISTOR		R3032	1-216-864-11	SHORT CHIP 0		
1675		B	RESISTOR		R3033	1-216-864-11	SHORT CHIP 0		
1676		B	RESISTOR		R3034	1-216-864-11	SHORT CHIP 0		
1677		B	RESISTOR		R3035	1-216-864-11	SHORT CHIP 0		
1678		B	RESISTOR		R3053	1-218-675-11	METAL CHIP 200 0.5% 1/10W		
1679		B	RESISTOR		R3054	1-218-679-11	METAL CHIP 300 0.5% 1/10W		
1680		B	RESISTOR		R3055	1-218-679-11	METAL CHIP 300 0.5% 1/10W		
1681		B	RESISTOR		R3059	1-218-675-11	METAL CHIP 200 0.5% 1/10W		
1682		B	RESISTOR		R3060	1-218-679-11	METAL CHIP 300 0.5% 1/10W		
1683		B	RESISTOR		R3061	1-218-679-11	METAL CHIP 300 0.5% 1/10W		
1684		B	RESISTOR		R3062	1-216-809-11	METAL CHIP 100 5% 1/10W		
1685		B	RESISTOR		R3063	1-216-809-11	METAL CHIP 100 5% 1/10W		
1686		B	RESISTOR		R3064	1-216-809-11	METAL CHIP 100 5% 1/10W		
1687		B	RESISTOR		R3066	1-216-823-11	METAL CHIP 1.5K 5% 1/10W		
1688		B	RESISTOR		R3067	1-216-823-11	METAL CHIP 1.5K 5% 1/10W		
1689		B	RESISTOR		R3068	1-216-823-11	METAL CHIP 1.5K 5% 1/10W		
1690		B	RESISTOR		R3070	1-216-864-11	SHORT CHIP 0		
1691		B	RESISTOR		R3074	1-216-864-11	SHORT CHIP 0		
1692		B	RESISTOR		R3075	1-216-864-11	SHORT CHIP 0		
1693		B	RESISTOR		R3084	1-218-684-11	METAL CHIP 470 0.5% 1/10W		
1694		B	RESISTOR		R3085	1-218-684-11	METAL CHIP 470 0.5% 1/10W		
1695		B	RESISTOR		R3086	1-218-684-11	METAL CHIP 470 0.5% 1/10W		
1696		B	RESISTOR		R3090	1-218-684-11	METAL CHIP 470 0.5% 1/10W		
1697		B	RESISTOR		R3091	1-218-712-11	METAL CHIP 6.8K 0.5% 1/10W		
1698		B	RESISTOR		R3092	1-218-706-11	METAL CHIP 3.9K 0.5% 1/10W		
1699		B	RESISTOR		R3093	1-218-684-11	METAL CHIP 470 0.5% 1/10W		
1700		B	RESISTOR		R3094	1-218-708-11	METAL CHIP 4.7K 0.5% 1/10W		
1701		B	RESISTOR		R3096	1-218-684-11	METAL CHIP 470 0.5% 1/10W		
1702		B	RESISTOR		R3098	1-218-708-11	METAL CHIP 4.7K 0.5% 1/10W		

No.	#	Board	Type	Δ / [*]	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1703		B	RESISTOR		R3099	1-218-652-11	METAL CHIP 22 0.5% 1/10W		
1704		B	RESISTOR		R3100	1-218-708-11	METAL CHIP 4.7K 0.5% 1/10W		
1705		B	RESISTOR		R3101	1-216-847-11	METAL CHIP 150K 5% 1/10W		
1706		B	RESISTOR		R3104	1-218-668-11	METAL CHIP 100 0.5% 1/10W		
1707		B	RESISTOR		R3106	1-218-688-11	METAL CHIP 680 0.5% 1/10W		
1708		B	RESISTOR		R3107	1-218-668-11	METAL CHIP 100 0.5% 1/10W		
1709		B	RESISTOR		R3109	1-218-965-11	RES-CHIP 10K 5% 1/16W		
1710		B	RESISTOR		R3111	1-216-864-11	SHORT CHIP 0		
1711		B	RESISTOR		R3112	1-218-688-11	METAL CHIP 680 0.5% 1/10W		
1712		B	RESISTOR		R3113	1-216-864-11	SHORT CHIP 0		
1713		B	RESISTOR		R3115	1-216-864-11	SHORT CHIP 0		
1714		B	RESISTOR		R3116	1-216-864-11	SHORT CHIP 0		
1715		B	RESISTOR		R3120	1-218-965-11	RES-CHIP 10K 5% 1/16W		
1716		B	RESISTOR		R3121	1-218-965-11	RES-CHIP 10K 5% 1/16W		
1717		B	RESISTOR		R3122	1-218-692-11	METAL CHIP 1K 0.5% 1/10W		
1718		B	RESISTOR		R3123	1-218-692-11	METAL CHIP 1K 0.5% 1/10W		
1719		B	RESISTOR		R3124	1-218-693-11	METAL CHIP 1.1K 0.5% 1/10W		
1720		B	RESISTOR		R3125	1-218-692-11	METAL CHIP 1K 0.5% 1/10W		
1721		B	RESISTOR		R3126	1-216-864-11	SHORT CHIP 0		
1722		B	RESISTOR		R3127	1-218-708-11	METAL CHIP 4.7K 0.5% 1/10W		
1723		B	RESISTOR		R3128	1-218-696-11	METAL CHIP 1.5K 0.5% 1/10W		
1724		B	RESISTOR		R3129	1-216-864-11	SHORT CHIP 0		
1725		B	RESISTOR		R3131	1-218-720-11	METAL CHIP 15K 0.5% 1/10W		
1726		B	RESISTOR		R3136	1-218-965-11	RES-CHIP 10K 5% 1/16W		
1727		B	RESISTOR		R3137	1-216-864-11	SHORT CHIP 0		
1728		B	RESISTOR		R3138	1-218-941-81	RES-CHIP 100 5% 1/16W		
1729		B	RESISTOR		R3139	1-218-941-81	RES-CHIP 100 5% 1/16W		
1730		B	RESISTOR		R3141	1-216-864-11	SHORT CHIP 0		
1731		B	RESISTOR		R3142	1-216-864-11	SHORT CHIP 0		
1732		B	RESISTOR		R3143	1-218-990-11	SHORT CHIP 0		
1733		B	RESISTOR		R3145	1-218-990-11	SHORT CHIP 0		
1734		B	RESISTOR		R3146	1-218-933-11	RES-CHIP 22 5% 1/16W		
1735		B	RESISTOR		R3147	1-218-985-11	RES-CHIP 470K 5% 1/16W		
1736		B	RESISTOR		R3150	1-218-990-11	SHORT CHIP 0		
1737		B	RESISTOR		R3151	1-218-937-11	RES-CHIP 47 5% 1/16W		
1738		B	RESISTOR		R3152	1-218-937-11	RES-CHIP 47 5% 1/16W		
1739		B	RESISTOR		R3156	1-218-965-11	RES-CHIP 10K 5% 1/16W		
1740		B	RESISTOR		R3157	1-218-937-11	RES-CHIP 47 5% 1/16W		
1741		B	RESISTOR		R3158	1-218-965-11	RES-CHIP 10K 5% 1/16W		
1742		B	RESISTOR		R3159	1-218-965-11	RES-CHIP 10K 5% 1/16W		
1743		B	RESISTOR		R3162	1-218-937-11	RES-CHIP 47 5% 1/16W		
1744		B	RESISTOR		R3163	1-218-937-11	RES-CHIP 47 5% 1/16W		
1745		B	RESISTOR		R3164	1-218-965-11	RES-CHIP 10K 5% 1/16W		
1746		B	RESISTOR		R3166	1-218-965-11	RES-CHIP 10K 5% 1/16W		
1747		B	RESISTOR		R3168	1-218-990-11	SHORT CHIP 0		
1748		B	RESISTOR		R3169	1-218-990-11	SHORT CHIP 0		
1749		B	RESISTOR		R3301	1-218-937-11	RES-CHIP 47 5% 1/16W		
1750		B	RESISTOR		R3302	1-218-937-11	RES-CHIP 47 5% 1/16W		
1751		B	RESISTOR		R3308	1-218-937-11	RES-CHIP 47 5% 1/16W		
1752		B	RESISTOR		R3309	1-218-945-11	METAL CHIP 220 5% 1/16W		
1753		B	RESISTOR		R3310	1-218-945-11	METAL CHIP 220 5% 1/16W		
1754		B	RESISTOR		R3311	1-208-695-11	METAL CHIP 3.3K 0.5% 1/16W		
1755		B	RESISTOR		R3312	1-218-945-11	METAL CHIP 220 5% 1/16W		
1756		B	RESISTOR		R3313	1-218-990-11	SHORT CHIP 0		
1757		B	RESISTOR		R3316	1-218-990-11	SHORT CHIP 0		
1758		B	RESISTOR		R3317	1-218-990-11	SHORT CHIP 0		
1759		B	RESISTOR		R3318	1-220-180-11	METAL CHIP 620 5% 1/16W		
1760		B	RESISTOR		R3319	1-208-873-81	METAL CHIP 270 0.5% 1/16W		
1761		B	RESISTOR		R3324	1-218-990-11	SHORT CHIP 0		
1762		B	RESISTOR		R3325	1-218-941-81	RES-CHIP 100 5% 1/16W		
1763		B	RESISTOR		R3326	1-218-941-81	RES-CHIP 100 5% 1/16W		
1764		B	RESISTOR		R3344	1-218-933-11	RES-CHIP 22 5% 1/16W		
1765		B	RESISTOR		R3345	1-218-933-11	RES-CHIP 22 5% 1/16W		
1766		B	RESISTOR		R3352	1-218-990-11	SHORT CHIP 0		
1767		B	RESISTOR		R3353	1-218-990-11	SHORT CHIP 0		
1768		B	RESISTOR		R3363	1-218-941-81	RES-CHIP 100 5% 1/16W		
1769		B	RESISTOR		R3370	1-218-933-11	RES-CHIP 22 5% 1/16W		
1770		B	RESISTOR		R3371	1-218-985-11	RES-CHIP 470K 5% 1/16W		
1771		B	RESISTOR		R3372	1-218-969-11	RES-CHIP 22K 5% 1/16W		
1772		B	RESISTOR		R3373	1-218-933-11	RES-CHIP 22 5% 1/16W		
1773		B	RESISTOR		R3374	1-218-945-11	RES-CHIP 220 5% 1/16W		
1774		B	RESISTOR		R3375	1-218-953-11	RES-CHIP 1K 5% 1/16W		
1775		B	RESISTOR		R3376	1-218-947-11	RES-CHIP 330 5% 1/16W		
1776		B	RESISTOR		R3377	1-218-945-11	RES-CHIP 220 5% 1/16W		

No.	#	Board	Type	Δ / [*]	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1777		B	RESISTOR		R3378	1-218-959-11	RES-CHIP 3.3K 5% 1/16W		
1778		B	RESISTOR		R3379	1-208-696-11	METAL CHIP 3.6K 0.5% 1/16W		
1779		B	RESISTOR		R3380	1-218-990-11	SHORT CHIP 0		
1780		B	RESISTOR		R3381	1-218-985-11	RES-CHIP 470K 5% 1/16W		
1781		B	RESISTOR		R3382	1-218-965-11	RES-CHIP 10K 5% 1/16W		
1782		B	RESISTOR		R3383	1-218-990-11	SHORT CHIP 0		
1783		B	RESISTOR		R5002	1-216-859-11	METAL CHIP 1.5M 5% 1/10W		
1784		B	RESISTOR		R5003	1-216-864-11	SHORT CHIP 0		
1785		B	RESISTOR		R5004	1-218-990-11	SHORT CHIP 0		
1786		B	RESISTOR		R5008	1-216-802-11	METAL CHIP 27 5% 1/10W		
1787		B	RESISTOR		R5009	1-216-801-11	METAL CHIP 22 5% 1/10W		
1788		B	RESISTOR		R5011	1-216-864-11	SHORT CHIP 0		
1789		B	RESISTOR		R5012	1-216-864-11	SHORT CHIP 0		
1790		B	RESISTOR		R5013	1-218-959-11	RES-CHIP 3.3K 5% 1/16W		
1791		B	RESISTOR		R5016	1-218-959-11	RES-CHIP 3.3K 5% 1/16W		
1792		B	RESISTOR		R5017	1-216-864-11	SHORT CHIP 0		
1793		B	RESISTOR		R5018	1-216-864-11	SHORT CHIP 0		
1794		B	RESISTOR		R5019	1-216-805-11	METAL CHIP 47 5% 1/10W		
1795		B	RESISTOR		R5020	1-216-805-11	METAL CHIP 47 5% 1/10W		
1796		B	RESISTOR		R5022	1-216-827-11	METAL CHIP 3.3K 5% 1/10W		
1797		B	RESISTOR		R5029	1-216-864-11	SHORT CHIP 0		
1798		B	RESISTOR		R5035	1-218-990-11	SHORT CHIP 0		
1799		B	RESISTOR		R5036	1-218-990-11	SHORT CHIP 0		
1800		B	RESISTOR		R5037	1-218-990-11	SHORT CHIP 0		
1801		B	RESISTOR		R5042	1-218-990-11	SHORT CHIP 0		
1802		B	RESISTOR		R5043	1-218-941-81	RES-CHIP 100 5% 1/16W		
1803		B	RESISTOR		R5044	1-218-941-81	RES-CHIP 100 5% 1/16W		
1804		B	RESISTOR		R5047	1-216-827-11	METAL CHIP 3.3K 5% 1/10W		
1805		B	RESISTOR		R5049	1-216-801-11	METAL CHIP 22 5% 1/10W		
1806		B	RESISTOR		R5050	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1807		B	RESISTOR		R5052	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1808		B	RESISTOR		R5053	1-216-809-11	METAL CHIP 100 5% 1/10W		
1809		B	RESISTOR		R5054	1-216-827-11	METAL CHIP 3.3K 5% 1/10W		
1810		B	RESISTOR		R5056	1-216-864-11	SHORT CHIP 0		
1811		B	RESISTOR		R5059	1-216-864-11	SHORT CHIP 0		
1812		B	RESISTOR		R5060	1-216-864-11	SHORT CHIP 0		
1813		B	RESISTOR		R5063	1-216-864-11	SHORT CHIP 0		
1814		B	RESISTOR		R5064	1-218-990-11	SHORT CHIP 0		
1815		B	RESISTOR		R5065	1-218-990-11	SHORT CHIP 0		
1816		B	RESISTOR		R5066	1-218-990-11	SHORT CHIP 0		
1817		B	RESISTOR		R5067	1-218-990-11	SHORT CHIP 0		
1818		B	RESISTOR		R5068	1-216-801-11	METAL CHIP 22 5% 1/10W		
1819		B	RESISTOR		R5069	1-216-864-11	SHORT CHIP 0		
1820		B	RESISTOR		R5071	1-216-813-11	METAL CHIP 220 5% 1/10W		
1821		B	RESISTOR		R5072	1-216-827-11	METAL CHIP 3.3K 5% 1/10W		
1822		B	RESISTOR		R5073	1-216-827-11	METAL CHIP 3.3K 5% 1/10W		
1823		B	RESISTOR		R5074	1-216-803-11	METAL CHIP 33 5% 1/10W		
1824		B	RESISTOR		R5075	1-216-864-11	SHORT CHIP 0		
1825		B	RESISTOR		R5076	1-216-864-11	SHORT CHIP 0		
1826		B	RESISTOR		R5077	1-216-864-11	SHORT CHIP 0		
1827		B	RESISTOR		R5078	1-216-839-11	METAL CHIP 33K 5% 1/10W		
1828		B	RESISTOR		R5079	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1829		B	RESISTOR		R5081	1-216-809-11	METAL CHIP 100 5% 1/10W		
1830		B	RESISTOR		R5085	1-216-864-11	SHORT CHIP 0		
1831		B	RESISTOR		R5089	1-216-864-11	SHORT CHIP 0		
1832		B	RESISTOR		R5090	1-216-839-11	METAL CHIP 33K 5% 1/10W		
1833		B	RESISTOR		R5093	1-216-864-11	SHORT CHIP 0		
1834		B	RESISTOR		R5098	1-218-961-11	RES-CHIP 4.7K 5% 1/16W		
1835		B	RESISTOR		R5099	1-216-864-11	SHORT CHIP 0		
1836		B	RESISTOR		R5101	1-218-959-11	RES-CHIP 3.3K 5% 1/16W		
1837		B	RESISTOR		R5102	1-218-864-11	METAL CHIP 5.1K 0.5% 1/10W		
1838		B	RESISTOR		R5103	1-208-683-11	METAL CHIP 1K 0.5% 1/16W		
1839		B	RESISTOR		R5104	1-208-898-81	METAL CHIP 3K 0.5% 1/16W		
1840		B	RESISTOR		R5105	1-208-683-11	METAL CHIP 1K 0.5% 1/16W		
1841		B	RESISTOR		R5106	1-216-801-11	METAL CHIP 22 5% 1/10W		
1842		B	RESISTOR		R5107	1-216-864-11	SHORT CHIP 0		
1843		B	RESISTOR		R5108	1-216-805-11	METAL CHIP 47 5% 1/10W		
1844		B	RESISTOR		R5109	1-216-805-11	METAL CHIP 47 5% 1/10W		
1845		B	RESISTOR		R5110	1-216-805-11	METAL CHIP 47 5% 1/10W		
1846		B	RESISTOR		R5111	1-216-805-11	METAL CHIP 47 5% 1/10W		
1847		B	RESISTOR		R5112	1-216-864-11	SHORT CHIP 0		
1848		B	RESISTOR		R5113	1-216-864-11	SHORT CHIP 0		
1849		B	RESISTOR		R5127	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1850		B	RESISTOR		R5128	1-216-821-11	METAL CHIP 1K 5% 1/10W		

No.	#	Board	Type	Δ / [*]	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1851		B	RESISTOR		R5129	1-216-805-11	METAL CHIP 47 5% 1/10W		
1852		B	RESISTOR		R5801	1-218-961-11	RES-CHIP 4.7K 5% 1/16W		
1853		B	RESISTOR		R5803	1-218-961-11	RES-CHIP 4.7K 5% 1/16W		
1854		B	RESISTOR		R5805	1-216-864-11	SHORT CHIP 0		
1855		B	RESISTOR		R5806	1-216-864-11	SHORT CHIP 0		
1856		B	RESISTOR		R5808	1-218-941-81	RES-CHIP 100 5% 1/16W		
1857		B	RESISTOR		R5811	1-218-965-11	RES-CHIP 10K 5% 1/16W		
1858		B	RESISTOR		R5812	1-216-864-11	SHORT CHIP 0		
1859		B	RESISTOR		R5813	1-218-965-11	RES-CHIP 10K 5% 1/16W		
1860		B	RESISTOR		R5814	1-216-864-11	SHORT CHIP 0		
1861		B	RESISTOR		R5815	1-216-864-11	SHORT CHIP 0		
1862		B	RESISTOR		R5817	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1863		B	RESISTOR		R5818	1-216-864-11	SHORT CHIP 0		
1864		B	RESISTOR		R5819	1-218-937-11	RES-CHIP 47 5% 1/16W		
1865		B	RESISTOR		R5820	1-216-864-11	SHORT CHIP 0		
1866		B	RESISTOR		R5823	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1867		B	RESISTOR		R5824	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1868		B	RESISTOR		R5835	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1869		B	RESISTOR		R5837	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1870		B	RESISTOR		R5838	1-216-864-11	SHORT CHIP 0		
1871		B	RESISTOR		R5839	1-216-809-11	METAL CHIP 100 5% 1/10W		
1872		B	RESISTOR		R5840	1-400-180-21	INDUCTOR 0UH		
1873		B	RESISTOR		R5849	1-216-812-11	METAL CHIP 180 5% 1/10W		
1874		B	NETWORK		RB1001	1-234-372-21	RES, NETWORK 100X4 (1005)		
1875		B	NETWORK		RB1002	1-234-378-21	RES, NETWORK 10KX4 (1005)		
1876		B	NETWORK		RB1004	1-239-674-81	RESISTOR, NETWORK 100		
1877		B	NETWORK		RB1005	1-234-372-21	RES, NETWORK 100X4 (1005)		
1878		B	NETWORK		RB1006	1-234-372-21	RES, NETWORK 100X4 (1005)		
1879		B	NETWORK		RB1009	1-234-380-21	RES, NETWORK 47KX4 (1005)		
1880		B	NETWORK		RB1011	1-234-372-21	RES, NETWORK 100X4 (1005)		
1881		B	NETWORK		RB1012	1-234-372-21	RES, NETWORK 100X4 (1005)		
1882		B	NETWORK		RB1013	1-234-372-21	RES, NETWORK 100X4 (1005)		
1883		B	NETWORK		RB1014	1-234-372-21	RES, NETWORK 100X4 (1005)		
1884		B	NETWORK		RB1015	1-234-372-21	RES, NETWORK 100X4 (1005)		
1885		B	NETWORK		RB1016	1-234-372-21	RES, NETWORK 100X4 (1005)		
1886		B	NETWORK		RB1017	1-234-372-21	RES, NETWORK 100X4 (1005)		
1887		B	NETWORK		RB1018	1-234-372-21	RES, NETWORK 100X4 (1005)		
1888		B	NETWORK		RB1019	1-234-372-21	RES, NETWORK 100X4 (1005)		
1889		B	NETWORK		RB1021	1-234-372-21	RES, NETWORK 100X4 (1005)		
1890		B	NETWORK		RB1023	1-234-372-21	RES, NETWORK 100X4 (1005)		
1891		B	NETWORK		RB1024	1-239-674-81	RESISTOR, NETWORK 100		
1892		B	NETWORK		RB1025	1-234-372-21	RES, NETWORK 100X4 (1005)		
1893		B	NETWORK		RB1026	1-234-372-21	RES, NETWORK 100X4 (1005)		
1894		B	NETWORK		RB1027	1-234-372-21	RES, NETWORK 100X4 (1005)		
1895		B	NETWORK		RB1028	1-239-674-81	RESISTOR, NETWORK 100		
1896		B	NETWORK		RB1029	1-239-674-81	RESISTOR, NETWORK 100		
1897		B	NETWORK		RB1030	1-234-372-21	RES, NETWORK 100X4 (1005)		
1898		B	NETWORK		RB1031	1-234-372-21	RES, NETWORK 100X4 (1005)		
1899		B	NETWORK		RB1032	1-234-372-21	RES, NETWORK 100X4 (1005)		
1900		B	NETWORK		RB1033	1-234-372-21	RES, NETWORK 100X4 (1005)		
1901		B	NETWORK		RB3001	1-234-378-21	RES, NETWORK 10KX4 (1005)		
1902		B	NETWORK		RB3002	1-234-378-21	RES, NETWORK 10KX4 (1005)		
1903		B	NETWORK		RB3003	1-234-378-21	RES, NETWORK 10KX4 (1005)		
1904		B	NETWORK		RB3004	1-234-378-21	RES, NETWORK 10KX4 (1005)		
1905		B	NETWORK		RB3005	1-234-378-21	RES, NETWORK 10KX4 (1005)		
1906		B	NETWORK		RB3006	1-234-372-21	RES, NETWORK 100X4 (1005)		
1907		B	NETWORK		RB3007	1-234-372-21	RES, NETWORK 100X4 (1005)		
1908		B	NETWORK		RB3008	1-234-372-21	RES, NETWORK 100X4 (1005)		
1909		B	NETWORK		RB3009	1-234-372-21	RES, NETWORK 100X4 (1005)		
1910		B	NETWORK		RB3011	1-234-372-21	RES, NETWORK 100X4 (1005)		
1911		B	NETWORK		RB3012	1-234-372-21	RES, NETWORK 100X4 (1005)		
1912		B	NETWORK		RB3014	1-234-372-21	RES, NETWORK 100X4 (1005)		
1913		B	NETWORK		RB3015	1-234-372-21	RES, NETWORK 100X4 (1005)		
1914		B	NETWORK		RB3019	1-234-372-21	RES, NETWORK 100X4 (1005)		
1915		B	NETWORK		RB3020	1-234-372-21	RES, NETWORK 100X4 (1005)		
1916		B	NETWORK		RB3021	1-234-372-21	RES, NETWORK 100X4 (1005)		
1917		B	NETWORK		RB3022	1-234-372-21	RES, NETWORK 100X4 (1005)		
1918		B	NETWORK		RB3027	1-234-372-21	RES, NETWORK 100X4 (1005)		
1919		B	NETWORK		RB3301	1-234-371-21	RES, NETWORK 47X4 (1005)		
1920		B	NETWORK		RB3302	1-234-372-21	RES, NETWORK 100X4 (1005)		
1921		B	NETWORK		RB3303	1-234-372-21	RES, NETWORK 100X4 (1005)		
1922		B	NETWORK		RB3304	1-234-372-21	RES, NETWORK 100X4 (1005)		
1923		B	NETWORK		RB3305	1-234-372-21	RES, NETWORK 100X4 (1005)		
1924		B	NETWORK		RB3306	1-234-371-21	RES, NETWORK 47X4 (1005)		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1925		B	NETWORK		RB3307	1-234-371-21	RES, NETWORK 47X4 (1005)		
1926		B	NETWORK		RB3308	1-234-371-21	RES, NETWORK 47X4 (1005)		
1927		B	NETWORK		RB3309	1-234-372-21	RES, NETWORK 100X4 (1005)		
1928		B	NETWORK		RB3310	1-234-372-21	RES, NETWORK 100X4 (1005)		
1929		B	NETWORK		RB3311	1-234-372-21	RES, NETWORK 100X4 (1005)		
1930		B	NETWORK		RB3312	1-234-372-21	RES, NETWORK 100X4 (1005)		
1931		B	NETWORK		RB3313	1-234-372-21	RES, NETWORK 100X4 (1005)		
1932		B	NETWORK		RB3314	1-234-372-21	RES, NETWORK 100X4 (1005)		
1933		B	NETWORK		RB5001	1-234-371-21	RES, NETWORK 47X4 (1005)		
1934		B	NETWORK		RB5002	1-234-371-21	RES, NETWORK 47X4 (1005)		
1935		B	NETWORK		RB5003	1-234-371-21	RES, NETWORK 47X4 (1005)		
1936		B	NETWORK		RB5004	1-234-371-21	RES, NETWORK 47X4 (1005)		
1937		B	NETWORK		RB5005	1-234-371-21	RES, NETWORK 47X4 (1005)		
1938		B	NETWORK		RB5006	1-234-371-21	RES, NETWORK 47X4 (1005)		
1939		B	NETWORK		RB5013	1-234-371-21	RES, NETWORK 47X4 (1005)		
1940		B	NETWORK		RB5014	1-234-371-21	RES, NETWORK 47X4 (1005)		
1941		B	NETWORK		RB5015	1-234-371-21	RES, NETWORK 47X4 (1005)		
1942		B	NETWORK		RB5016	1-234-371-21	RES, NETWORK 47X4 (1005)		
1943		B	NETWORK		RB5017	1-234-371-21	RES, NETWORK 47X4 (1005)		
1944		B	NETWORK		RB5018	1-234-371-21	RES, NETWORK 47X4 (1005)		
1945		B	NETWORK		RB5019	1-234-400-21	CONDUCTOR, NETWORK (2010)		
1946		B	NETWORK		RB5020	1-234-400-21	CONDUCTOR, NETWORK (2010)		
1947		B	NETWORK		RB5021	1-234-400-21	CONDUCTOR, NETWORK (2010)		
1948		B	NETWORK		RB5022	1-234-400-21	CONDUCTOR, NETWORK (2010)		
1949		B	NETWORK		RB5023	1-234-371-21	RES, NETWORK 47X4 (1005)		
1950		B	NETWORK		RB5024	1-234-371-21	RES, NETWORK 47X4 (1005)		
1951		B	NETWORK		RB5025	1-234-371-21	RES, NETWORK 47X4 (1005)		
1952		B	NETWORK		RB5026	1-234-371-21	RES, NETWORK 47X4 (1005)		
1953		B	NETWORK		RB5027	1-239-674-81	RESISTOR, NETWORK 100		
1954		B	NETWORK		RB5028	1-234-370-21	RES, NETWORK 22X4 (1005)		
1955		B	NETWORK		RB5029	1-234-370-21	RES, NETWORK 22X4 (1005)		
1956		B	NETWORK		RB5030	1-234-370-21	RES, NETWORK 22X4 (1005)		
1957		B	NETWORK		RB5031	1-234-370-21	RES, NETWORK 22X4 (1005)		
1958		B	NETWORK		RB5032	1-239-674-81	RESISTOR, NETWORK 100		
1959		B	NETWORK		RB5801	1-234-371-21	RES, NETWORK 47X4 (1005)		
1960		B	NETWORK		RB5802	1-234-371-21	RES, NETWORK 47X4 (1005)		
1961		B	NETWORK		RB5803	1-234-371-21	RES, NETWORK 47X4 (1005)		
1962		B	NETWORK		RB5804	1-234-371-21	RES, NETWORK 47X4 (1005)		
1963		B	NETWORK		RB5805	1-234-371-21	RES, NETWORK 47X4 (1005)		
1964		B	NETWORK		RB5806	1-234-371-21	RES, NETWORK 47X4 (1005)		
1965		B	NETWORK		RB5807	1-234-370-21	RES, NETWORK 22X4 (1005)		
1966		B	NETWORK		RB5820	1-234-372-21	RES, NETWORK 100X4 (1005)		
1967		B	NETWORK		RB5821	1-234-372-21	RES, NETWORK 100X4 (1005)		
1968		B	NETWORK		RB5822	1-234-372-21	RES, NETWORK 100X4 (1005)		
1969		B	NETWORK		RB5823	1-234-372-21	RES, NETWORK 100X4 (1005)		
1970		B	CRYSTAL		X1001	1-813-326-21	VIBRATOR, CRYSTAL		
1971		B	CRYSTAL		X3002	1-795-951-21	QUARTZ CRYSTAL OSCILLATOR(SMD)		
1972		B	CRYSTAL		X5001	1-767-655-21	VIBRATOR, CRYSTAL		
1973		B	CRYSTAL		X5801	1-795-416-21	VIBRATOR, CRYSTAL		
1974		B	CRYSTAL		X5802	1-795-850-21	OSCILLATOR, CRYSTAL		
1975		G2	CAPACITOR	△	C6002	1-119-892-51	CERAMIC 470PF 10.00% 250V		
1976		G2	CAPACITOR		C6003	1-161-964-91	CERAMIC 0.0047UF 250V		
1977		G2	CAPACITOR	△	C6004	1-165-530-11	MYLAR 0.47UF 10 275V		
1978		G2	CAPACITOR	△	C6005	1-165-529-11	MYLAR 0.22UF 10 275V		
1979		G2	CAPACITOR	△	C6006	1-119-892-51	CERAMIC 470PF 10.00% 250V		
1980		G2	CAPACITOR		C6007	1-161-964-91	CERAMIC 0.0047UF 250V		
1981		G2	CAPACITOR		C6009	1-125-977-11	ELECT CHIP 100UF 20% 450V		
1982		G2	CAPACITOR		C6011	1-125-977-11	ELECT CHIP 100UF 20% 450V		
1983		G2	CAPACITOR		C6012	1-136-201-61	MYLAR 0.22UF 10.00% 400V		
1984		G2	CAPACITOR		C6013	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
1985		G2	CAPACITOR		C6015	1-162-960-11	CERAMIC CHIP 220PF 10.00% 50V		
1986		G2	CAPACITOR		C6016	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
1987		G2	CAPACITOR		C6017	1-107-905-11	ELECT 4.7UF 20.00% 50V		
1988		G2	CAPACITOR		C6018	1-107-888-11	ELECT 47UF 20.00% 25V		
1989		G2	CAPACITOR		C6019	1-136-479-11	FILM 0.001UF 5.00% 100V		
1990		G2	CAPACITOR		C6020	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
1991		G2	CAPACITOR		C6021	1-107-906-11	ELECT 10UF 20.00% 50V		
1992		G2	CAPACITOR		C6023	1-136-203-11	MYLAR 0.01UF 5.00% 630V		
1993		G2	CAPACITOR		C6025	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1994		G2	CAPACITOR		C6026	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
1995		G2	CAPACITOR		C6027	1-136-165-00	FILM 0.1UF 5.00% 50V		
1996		G2	CAPACITOR		C6028	1-165-585-21	ELECT CHIP 47UF 20% 25V		
1997		G2	CAPACITOR		C6029	1-126-398-11	ELECT CHIP 4.7UF 20.00% 35V		
1998		G2	CAPACITOR		C6030	1-107-909-11	ELECT 47UF 20.00% 50V		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1999		G2	CAPACITOR		C6031	1-131-872-91	CERAMIC CHIP 1000PF 10% 630V		
2000		G2	CAPACITOR		C6032	1-107-824-11	CERAMIC 220PF 5.00% 1KV		
2001		G2	CAPACITOR		C6033	1-107-824-11	CERAMIC 220PF 5.00% 1KV		
2002		G2	CAPACITOR		C6034	1-135-871-22	FILM 15000PF 3% 800V		
2003		G2	CAPACITOR		C6035	1-135-871-22	FILM 15000PF 3% 800V		
2004		G2	CAPACITOR		C6036	1-128-361-11	ELECT CHIP 470UF 20.00% 10V		
2005		G2	CAPACITOR		C6037	1-126-401-21	ELECT CHIP 1UF 20.00% 50V		
2006		G2	CAPACITOR		C6038	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
2007		G2	CAPACITOR		C6039	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
2008		G2	CAPACITOR		C6040	1-126-392-11	ELECT CHIP 100UF 20.00% 6.3V		
2009		G2	CAPACITOR		C6041	1-100-436-91	CERAMIC CHIP 0.033UF 10% 25V		
2010		G2	CAPACITOR		C6042	1-165-736-31	ELECT 680UF 20% 25V		
2011		G2	CAPACITOR		C6043	1-165-736-31	ELECT 680UF 20% 25V		
2012		G2	CAPACITOR		C6044	1-165-736-31	ELECT 680UF 20% 25V		
2013		G2	CAPACITOR		C6045	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
2014		G2	CAPACITOR		C6046	1-165-736-31	ELECT 680UF 20% 25V		
2015		G2	CAPACITOR		C6047	1-128-946-31	ELECT 2200UF 20% 10V		
2016		G2	CAPACITOR		C6048	1-128-405-11	ELECT CHIP 22UF 20% 50V		
2017		G2	CAPACITOR		C6049	1-128-953-31	ELECT 470UF 20% 25V		
2018		G2	CAPACITOR		C6051	1-100-791-21	ELECT CHIP 56UF 20% 25V		
2019		G2	CAPACITOR	△	C6052	1-113-889-11	CERAMIC 0.001UF 20.00% 250V		
2020		G2	CONNECTOR	△*	CN6002	1-691-961-11	PIN, CONNECTOR (PC BOARD) 3P		
2021		G2	CONNECTOR	*	CN6003	1-564-595-11	PLUG, CONNECTOR 14P		
2022		G2	CONNECTOR	*	CN6004	1-564-512-11	PLUG, CONNECTOR 9P		
2023		G2	CONNECTOR	*	CN6006	1-564-507-11	PLUG, CONNECTOR 4P		
2024		G2	DIODE		D6001	8-719-510-53	DIODE D4SB60L		
2025		G2	DIODE		D6004	8-719-083-83	DIODE UDZS-TE17-15B		
2026		G2	DIODE		D6005	8-719-080-69	DIODE M1FS4-4063		
2027		G2	DIODE		D6006	8-719-081-97	DIODE MMDL914T1		
2028		G2	DIODE		D6007	8-719-948-45	DIODE ERA22-08		
2029		G2	DIODE		D6008	8-719-083-83	DIODE UDZS-TE17-15B		
2030		G2	DIODE		D6009	8-719-083-83	DIODE UDZS-TE17-15B		
2031		G2	DIODE		D6010	8-719-080-75	DIODE M1FL20U-4063		
2032		G2	DIODE		D6011	8-719-080-75	DIODE M1FL20U-4063		
2033		G2	DIODE		D6012	8-719-979-64	DIODE UF4005PKG23		
2034		G2	DIODE		D6013	8-719-083-83	DIODE UDZS-TE17-15B		
2035		G2	DIODE		D6014	8-719-083-83	DIODE UDZS-TE17-15B		
2036		G2	DIODE		D6015	8-719-080-75	DIODE M1FL20U-4063		
2037		G2	DIODE		D6016	8-719-510-12	DIODE D10SC4M		
2038		G2	DIODE		D6017	8-719-054-36	DIODE FCH10A06		
2039		G2	DIODE		D6018	8-719-054-36	DIODE FCH10A06		
2040		G2	DIODE		D6019	8-719-054-36	DIODE FCH10A06		
2041		G2	DIODE		D6020	8-719-054-36	DIODE FCH10A06		
2042		G2	DIODE		D6021	8-719-054-36	DIODE FCH10A06		
2043		G2	DIODE		D6022	8-719-080-75	DIODE M1FL20U-4063		
2044		G2	FUSE	△	F6001	1-576-231-12	FUSE 4A 250V		
2045		G2	FERRITE BEAD		FB6001	1-410-397-21	FERRITE 1.1UH		
2046		G2	FUSE HOLDER		FH6001	1-533-223-11	FUSE HOLDER 0A 0V		
2047		G2	FUSE HOLDER		FH6002	1-533-223-11	FUSE HOLDER 0A 0V		
2048		G2	IC		IC6001	6-600-102-01	IC STR-A6459		
2049		G2	IC		IC6002	6-705-768-01	IC MCZ3001UB		
2050		G2	IC		IC6003	8-759-540-60	IC TL431BCLPRA		
2051		G2	IC		IC6004	8-759-533-85	IC L88M05T-FA-TL		
2052		G2	IC		IC6005	8-759-540-60	IC TL431BCLPRA		
2053		G2	COIL		L6001	1-456-888-11	INDUCTOR 30MH		
2054		G2	COIL		L6002	1-456-888-11	INDUCTOR 30MH		
2055		G2	COIL	△	L6003	1-456-388-11	COIL, LINE FILTER		
2056		G2	COIL	△	L6004	1-456-388-11	COIL, LINE FILTER		
2057		G2	COIL		L6005	1-412-537-31	INDUCTOR 100UH		
2058		G2	COIL		L6006	1-469-848-21	INDUCTOR 10UH		
2059		G2	PHOTO COUPLER	△	PH6001	8-749-016-81	PHOTO COUPLER PC123Y22		
2060		G2	PHOTO COUPLER	△	PH6002	8-749-016-81	PHOTO COUPLER PC123Y22		
2061		G2	TRANSISTOR		Q6001	8-729-422-33	TRANSISTOR 2SD601A-Q-TX		
2062		G2	TRANSISTOR		Q6002	8-729-026-49	TRANSISTOR 2SA1037AK-T146-R		
2063		G2	TRANSISTOR		Q6003	8-729-026-49	TRANSISTOR 2SA1037AK-T146-R		
2064		G2	TRANSISTOR		Q6004	8-729-120-28	TRANSISTOR 2SC1623-L5L6		
2065		G2	TRANSISTOR		Q6005	6-550-526-01	TRANSISTOR 2SK2842-LB180		
2066		G2	TRANSISTOR		Q6006	6-550-526-01	TRANSISTOR 2SK2842-LB180		
2067		G2	TRANSISTOR		Q6007	8-729-422-33	TRANSISTOR 2SD601A-Q-TX		
2068		G2	RESISTOR	△	R6003	1-247-289-00	METAL 8.2M 5% 1W		
2069		G2	RESISTOR	△	R6010	1-219-512-11	METAL 2.2M 5% 1/2W		
2070		G2	RESISTOR		R6023	1-208-832-11	METAL CHIP 120K 0.5% 1/10W		
2071		G2	RESISTOR		R6024	1-208-832-11	METAL CHIP 120K 0.5% 1/10W		
2072		G2	RESISTOR		R6025	1-208-832-11	METAL CHIP 120K 0.5% 1/10W		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
2073		G2	RESISTOR		R6026	1-211-775-11	FUSIBLE 10 5% 1/4W		
2074		G2	RESISTOR		R6027	1-216-837-11	METAL CHIP 22K 5% 1/10W		
2075		G2	RESISTOR		R6028	1-216-833-11	METAL CHIP 10K 5% 1/10W		
2076		G2	RESISTOR		R6029	1-216-144-11	RES-CHIP 5.6 5% 1/8W		
2077		G2	RESISTOR		R6030	1-216-144-11	RES-CHIP 5.6 5% 1/8W		
2078		G2	RESISTOR		R6031	1-202-933-61	FUSIBLE 0.1 10% 1/2W		
2079		G2	RESISTOR		R6032	1-216-822-11	METAL CHIP 1.2K 5% 1/10W		
2080		G2	RESISTOR		R6033	1-218-878-11	METAL CHIP 20K 0.5% 1/10W		
2081		G2	RESISTOR		R6034	1-218-823-11	METAL CHIP 100 0.5% 1/10W		
2082		G2	RESISTOR		R6035	1-218-875-11	METAL CHIP 15K 0.5% 1/10W		
2083		G2	RESISTOR		R6037	1-208-847-11	METAL CHIP 510K 0.5% 1/10W		
2084		G2	RESISTOR		R6038	1-208-847-11	METAL CHIP 510K 0.5% 1/10W		
2085		G2	RESISTOR		R6039	1-208-847-11	METAL CHIP 510K 0.5% 1/10W		
2086		G2	RESISTOR		R6040	1-216-827-11	METAL CHIP 3.3K 5% 1/10W		
2087		G2	RESISTOR		R6042	1-260-127-11	CARBON 220K 5% 1/2W		
2088		G2	RESISTOR		R6043	1-216-845-11	METAL CHIP 100K 5% 1/10W		
2089		G2	RESISTOR		R6044	1-211-985-11	METAL CHIP 47 0.5% 1/10W		
2090		G2	RESISTOR		R6045	1-216-833-11	METAL CHIP 10K 5% 1/10W		
2091		G2	RESISTOR		R6046	1-216-833-11	METAL CHIP 10K 5% 1/10W		
2092		G2	RESISTOR		R6047	1-216-821-11	METAL CHIP 1K 5% 1/10W		
2093		G2	RESISTOR		R6048	1-216-833-11	METAL CHIP 10K 5% 1/10W		
2094		G2	RESISTOR		R6049	1-216-837-11	METAL CHIP 22K 5% 1/10W		
2095		G2	RESISTOR		R6050	1-216-833-11	METAL CHIP 10K 5% 1/10W		
2096		G2	RESISTOR		R6051	1-216-837-11	METAL CHIP 22K 5% 1/10W		
2097		G2	RESISTOR		R6052	1-218-883-11	METAL CHIP 33K 0.5% 1/10W		
2098		G2	RESISTOR		R6053	1-218-865-11	METAL CHIP 5.6K 0.5% 1/10W		
2099		G2	RESISTOR		R6054	1-249-393-11	CARBON 10 5% 1/4W		
2100		G2	RESISTOR		R6055	1-249-393-11	CARBON 10 5% 1/4W		
2101		G2	RESISTOR		R6056	1-249-393-11	CARBON 10 5% 1/4W		
2102		G2	RESISTOR		R6057	1-216-833-11	METAL CHIP 10K 5% 1/10W		
2103		G2	RESISTOR		R6058	1-216-833-11	METAL CHIP 10K 5% 1/10W		
2104		G2	RESISTOR		R6059	1-216-821-11	METAL CHIP 1K 5% 1/10W		
2105		G2	RESISTOR		R6060	1-216-864-11	SHORT CHIP 0		
2106		G2	RESISTOR		R6061	1-219-984-51	METAL 0.1 2% 2W		
2107		G2	RESISTOR		R6062	1-216-817-11	METAL CHIP 470 5% 1/10W		
2108		G2	RESISTOR		R6063	1-216-864-11	SHORT CHIP 0		
2109		G2	RESISTOR		R6064	1-216-833-11	METAL CHIP 10K 5% 1/10W		
2110		G2	RESISTOR		R6065	1-216-833-11	METAL CHIP 10K 5% 1/10W		
2111		G2	RESISTOR		R6066	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
2112		G2	RESISTOR		R6067	1-216-821-11	METAL CHIP 1K 5% 1/10W		
2113		G2	RESISTOR		R6068	1-216-864-11	SHORT CHIP 0		
2114		G2	RESISTOR		R6069	1-216-833-11	METAL CHIP 10K 5% 1/10W		
2115		G2	RESISTOR		R6070	1-216-864-11	SHORT CHIP 0		
2116		G2	RESISTOR		R6071	1-218-866-11	METAL CHIP 6.2K 0.5% 1/10W		
2117		G2	RESISTOR		R6072	1-218-848-11	METAL CHIP 1.1K 0.5% 1/10W		
2118		G2	RESISTOR		R6073	1-249-377-11	CARBON 0.47 5% 1/4W		
2119		G2	RESISTOR		R6074	1-216-821-11	METAL CHIP 1K 5% 1/10W		
2120		G2	RESISTOR		R6076	1-208-832-11	METAL CHIP 120K 0.5% 1/10W		
2121		G2	RESISTOR		R6077	1-216-144-11	RES-CHIP 5.6 5% 1/8W		
2122		G2	RESISTOR		R6078	1-216-144-11	RES-CHIP 5.6 5% 1/8W		
2123		G2	RESISTOR		R6079	1-208-847-11	METAL CHIP 510K 0.5% 1/10W		
2124		G2	RESISTOR		R6080	1-219-759-42	METAL 1M 5% 1/2W		
2125		G2	TRANSFORMER	△	T6001	1-433-844-11	TRANSFORMER, CONVERTER		
2126		G2	TRANSFORMER	△	T6002	1-443-166-11	POWER TRANSFORMER		
2127		G2	TRANSFORMER	△	T6003	1-443-164-11	POWER TRANSFORMER		
2128		G2	VARISTOR	△	VD6001	1-804-995-21	VARISTOR		

