

LINEAR INTEGRATED CIRCUIT

HIGH PRECISION VOLTAGE REGULATOR

- INPUT VOLTAGE UP TO 40V
- OUTPUT VOLTAGE ADJUSTABLE FROM 2 TO 37V
- POSITIVE OR NEGATIVE SUPPLY OPERATION
- SERIES, SHUNT, SWITCHING OR FLOATING OPERATION
- OUTPUT CURRENT TO 150 mA WITHOUT EXTERNAL PASS TRANSISTOR
- ADJUSTABLE CURRENT LIMITING


The L123 is a monolithic integrated programmable voltage regulator, assembled in 14-lead dual in-line plastic package and 10-lead Metal Can (TO-100 type). The circuit provides internal current limiting. When the output current exceeds 150 mA an external NPN or PNP pass element may be used. Provisions are made for adjustable current limiting and remote shut-down.

ABSOLUTE MAXIMUM RATINGS

		L123	L123 C
V_i	Input voltage	40 V	40 V
ΔV_{i-o}	Dropout voltage	40 V	40 V
I_o	Output current	150 mA	150 mA
I_{ref}	Current from V_{ref}	15 mA	25 mA
P_{tot}	Power dissipation (at $T_{amb} = 70^\circ\text{C}$) Plastic DIP TO-100	—	1 W
T_{op}	Operating junction temperature	520 mW	520 mW
T_{stg}	Storage temperature	-25 to 150 °C	0 to 70 °C
		-65 to 150 °C	-65 to 150 °C



MECHANICAL DATA

Dimensions in mm

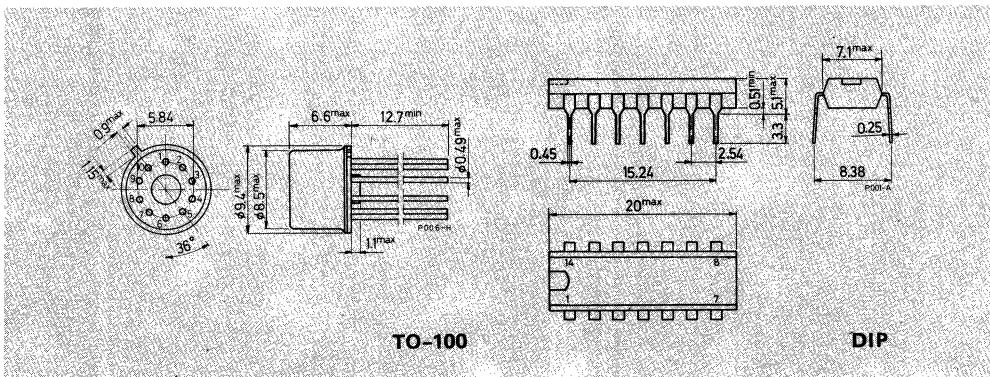

CONNECTION DIAGRAM AND ORDERING NUMBERS

(top views)





Type	TO-100	Plastic DIP
L123	L123T	—
L123C	L123CT	L123CB

BLOCK DIAGRAM

TEST CIRCUIT

(Pin configuration relative to the Plastic package)

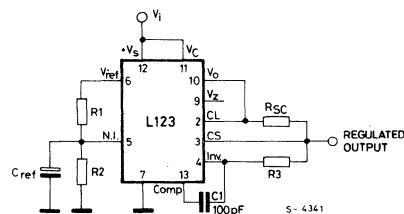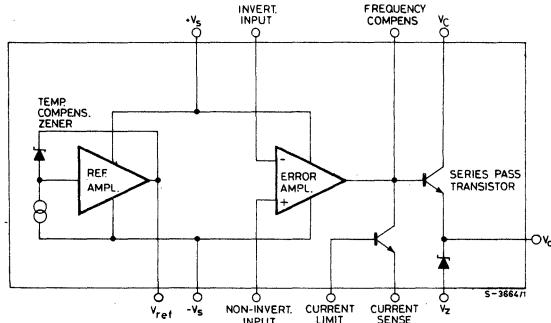

$$\begin{aligned}V_i &= 12V \\V_o &= 5V \\I_o &= 1 \text{ mA} \\R_1 // R_2 &\leq 10 \text{ k}\Omega\end{aligned}$$

THERMAL DATA

R_{th j-amb} Thermal resistance junction–ambient max 155 °C/W 80 °C/W



ELECTRICAL CHARACTERISTICS (Refer to the test circuit, $T_{amb} = 25^\circ C$ unless otherwise specified)

Parameter	Test conditions	L123C			L123			Unit
		Min.	Typ.	Max.	Min.	Typ.	Max.	
$\frac{\Delta V_o}{\Delta V_i}$	Line regulation $V_i = 12 \text{ to } 15V$ $V_i = 12 \text{ to } 40V$		0.01 0.1	0.1 0.5		0.01 0.02	0.1 0.2	% %
	$V_i = 12 \text{ to } 15V;$ $T_{min} \leq T_{amb} \leq T_{max}$			0.3			0.3	%
$\frac{\Delta V_o}{V_o}$	Load regulation $I_o = 1 \text{ to } 50 \text{ mA}$		0.03	0.2		0.03	0.15	%
	$T_{min} \leq T_{amb} \leq T_{max}$ $I_o = 1 \text{ to } 10 \text{ mA}$			0.6			0.6	%
V_{ref}	Reference voltage $I_{ref} = 160 \mu A$	6.8	7.15	7.5	6.95	7.15	7.35	V
SVR	Ripple rejection $f = 100 \text{ Hz to } 10 \text{ KHz}$ $C_{ref} = 0$ $C_{ref} = 5 \mu F$		74 86			74 86		dB dB
$\frac{\Delta V_o}{\Delta T}$	Output voltage drift			150			150	$\frac{\text{ppm}}{^\circ C}$
I_{sc}	Short circuit current limiting $R_{sc} = 10\Omega$ $V_o = 0$		65			65		mA
V_i	Input voltage range	9.5		40	9.5		40	V
V_o	Output voltage range	2		37	2		37	V
$V_i - V_o$		3		38	3		38	V
I_d	Quiescent drain current $I_o = 0$ $V_i = 30V$		2.3	4		2.3	5	mA
	Long term stability		0.1			0.1		$\frac{\%}{1000 \text{ hrs}}$
e_N	Output noise voltage $BW = 100 \text{ Hz to } 10 \text{ KHz}$ $C_{ref} = 0$ $C_{ref} = 5 \mu F$		20 2.5			20 2.5		μV μV
V_z	Output zener voltage (for plastic package only) $I_z = 1 \text{ mA}$	6.9		7.7				V

Note: $T_{min} = 0^\circ C$ (L123C); $-25^\circ C$ (L123).
 $T_{max} = 70^\circ C$ (L123C); $150^\circ C$ (L123).

Fig. 1 - Maximum output current vs. voltage drop




Fig. 4 - Load regulation characteristics without current limiting




Fig. 7 - Line regulation vs. voltage drop




Fig. 2 - Current limiting characteristics




Fig. 5 - Load regulation characteristics with current limiting




Fig. 8 - Load regulation vs. voltage drop




Fig. 3 - Current limiting characteristics vs. junction temperature




Fig. 6 - Load regulation characteristics with current limiting




Fig. 9 - Quiescent drain current vs. input voltage




Fig. 10 - Line transient response




Fig. 11 - Load transient response




Fig. 12 - Output impedance vs. frequency




Table I — Resistor values ($K\Omega$) for standard output voltages

Output Voltage	Applicable Figures	Fixed Output $\pm 5\%$		Output Adjustable $\pm 10\%$ (°)			Output Voltage	Applicable Figures	Fixed Output $\pm 5\%$		Output Adjustable $\pm 10\%$ (°)		
		R ₁	R ₂	R ₁	P ₁	R ₂			R ₁	R ₂	R ₁	P ₁	R ₂
		4.12	3.01	1.8	0.5	1.2	+100	19	3.57	102	2.2	10	91
+ 3	13, 16, 17 18, 21, 23	4.12	3.01	1.8	0.5	1.2	+100	19	3.57	102	2.2	10	91
+ 5	13, 16, 17 18, 21, 23	2.15	4.99	0.75	0.5	2.2	+250	19	3.57	255	2.2	10	240
+ 6	13, 16, 17 18, 21, 23	1.15	6.04	0.5	0.5	2.7	- 6(°)	15	3.57	2.43	1.2	0.5	0.75
+ 9	14, 16, 17 18, 21, 23	1.87	7.15	0.75	1	2.7	- 9	15	3.48	5.36	1.2	0.5	2
+12	14, 16, 17 18, 21, 23	4.87	7.15	2	1	3	- 12	15	3.57	8.45	1.2	0.5	3.3
+15	14, 16, 17 18, 21, 23	7.87	7.15	3.3	1	3	- 15	15	3.65	11.5	1.2	0.5	4.3
+28	14, 16, 17 18, 21, 23	21	7.15	5.6	1	2	- 28	15	3.57	24.3	1.2	0.5	10
+45	19	3.57	48.7	2.2	10	39	- 45	20	3.57	41.2	2.2	10	33
+75	19	3.57	78.7	2.2	10	68	-100	20	3.57	97.6	2.2	10	91
							-250	20	3.57	249	2.2	10	240

Note: (°) Replace R₁/R₂ divider with the circuit of fig. 24.

(°°) V⁺ must be connected to a +3V or greater supply.

Table II — Formulae for intermediate output voltages


Outputs from +2 to +7 volts Fig. 13, 17, 18, 21, 23, 16	Outputs from +4 to +250 volts Fig. 19	Current Limiting
$V_O = [V_{ref} \times \frac{R_2}{R_1 + R_2}]$	$V_O = [\frac{V_{ref}}{2} \times \frac{R_2 - R_1}{R_1}] ; R_3 = R_4$	$I_{LIMIT} = \frac{V_{SENSE}}{R_{sc}}$
Outputs from +7 to +37 volts Fig. 14, 16, 17, 18, 21, 23	Output from -6 to -250 volts Fig. 15, 20	$I_{KNEE} = [\frac{V_O \cdot R_3}{R_{sc} \cdot R_4} + \frac{V_{SENSE} \cdot (R_3 + R_4)}{R_{sc} \cdot R_4}]$
$V_O = [V_{ref} \times \frac{R_1 + R_2}{R_2}]$	$V_O = [\frac{V_{ref}}{2} \times \frac{R_1 + R_2}{R_1}] ; R_3 = R_4$	$I_{SHORT CKT} = [\frac{V_{SENSE}}{R_{sc}} \times \frac{R_3 + R_4}{R_4}]$

SSS

L123

APPLICATION INFORMATION (Pin numbers relative to the plastic package)

Fig. 13 - Basic low voltage regulator
($V_o = 2$ to 7V)




NOTE: $R_3 = \frac{R_1 \cdot R_2}{R_1 + R_2}$ for minimum temperature drift.

R_3 may be eliminated for minimum component count.

Typical performance

Regulated Output Voltage 5V
Line Regulation ($\Delta V_i = 3V$) 0.5 mV
Load Regulation ($\Delta I_O = 50$ mA) 1.5 mV

Fig. 14 - Basic high voltage regulator
($V_o = 7$ to 37V)




NOTE: $R_1 \cdot R_2$ for minimum temperature drift.

R_3 may be eliminated for minimum component count.

Typical performance

Regulated Output Voltage 15V
Line Regulation ($\Delta V_i = 3V$) 1.5 mV
Load Regulation ($\Delta I_O = 50$ mA) 4.5 mV


Fig. 15 - Negative voltage regulator



Typical performance

Regulated Output Voltage -15V
Line Regulation ($\Delta V_i = 3V$) 1 mV
Load Regulation ($\Delta I_O = 100$ mA) 2 mV

Fig. 16 - Positive voltage regulator (External NPN Pass Transistor)



Typical performance

Regulated Output Voltage +15V
Line Regulation ($\Delta V_i = 3V$) 1.5 mV
Load Regulation ($\Delta I_O = 1A$) 15 mV

APPLICATION INFORMATION (continued)

Fig. 17 – Positive voltage regulator (External PNP Pass Transistor)





Fig. 18 – Foldback current limiting



Typical performance

Regulated Output Voltage +5V
Line Regulation ($\Delta V_i = 3V$) 0.5 mV
Load Regulation ($\Delta I_O = 1A$) 5 mV

Typical performance

Regulated Output Voltage +5V
Line Regulation ($\Delta V_i = 3V$) 0.5 mV
Load Regulation ($\Delta I_O = 10 mA$) 1 mV
Current Limit Knee 20 mA

Fig. 19 – Positive floating regulator





Fig. 20 – Negative floating regulator



Typical performance


Regulated Output Voltage +100V
Line Regulation ($\Delta V_i = 20V$) 15 mV
Load Regulation ($\Delta I_O = 50 mA$) 20 mV

Typical performance

Regulated Output Voltage -100V
Line Regulation ($\Delta V_i = 20V$) 30 mV
Load Regulation ($\Delta I_O = 100 mA$) 20 mV

APPLICATION INFORMATION (continued)


Fig. 21 – Positive switching regulator

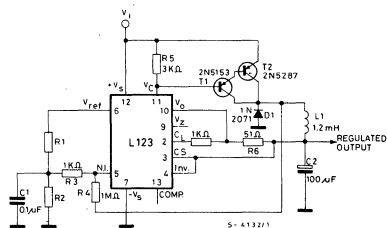

Typical performance

Regulated Output voltage +5V
 Line Regulation ($\Delta V_i = 30V$) 10 mV
 Load Regulation ($\Delta I_o = 2A$) 80 mV

Fig. 22 – Remote shutdown regulator with current limiting




Typical performance

Regulated Output Voltage +5V
 Line Regulation ($\Delta V_i = 3V$) 0.5 mV
 Load Regulation ($\Delta I_o = 50mA$) 1.5 mV

NOTE: Current limit transistor may be used for shutdown if current limiting is not required.

Fig. 23 – Shunt regulator



Typical performance

Regulated Output Voltage +5V
 Line Regulation ($\Delta V_i = 10V$) 2 mV
 Load Regulation ($\Delta I_o = 100mA$) 5 mV

Fig. 24 – Output voltage adjust

