

**SANYO****LA4166M****Recording and Playback System  
for Microcassette Players****Overview**

The LA4166M is a recording and playback system IC that incorporates an on-chip motor control governor, making it ideal for use in microcassette and compact cassette recorders. The LA4166M features single-pin control for selecting recording or playback mode and a recording-mode indicator LED driver. The LA4166M is pin-compatible with the LA4165M. The LA4166M incorporates a preamplifier, an automatic level control (ALC) circuit and a power amplifier.

The preamplifier functions as both recording microphone amplifier and playback equalization amplifier. The ALC circuit cuts high-level inputs and boosts low-level inputs during recording. The power amplifier outputs 215mW (typ) into a  $4\Omega$  speaker. The LA4166M operates from a 1.8 to 3.6V supply and is available in 24-pin MFPs.

**Features**

- On-chip motor control governor.
- Single-pin control for selecting recording or playback mode.
- Recording-mode indicator LED driver.
- Pin-compatible with LA4165M.
- Recording and playback preamplifier.
- ALC circuit.
- Power amplifier.
- 215mW (typ) output power into  $4\Omega$  speaker.
- 1.8 to 3.6V supply.
- 24-pin MFP.

**Specifications****Absolute Maximum Ratings at  $T_a = 25^\circ\text{C}$** 

Parameter	Symbol	Conditions	Ratings	Unit
Supply voltage	$V_{CC}$		4.5	V
Power dissipation	$P_D$		1.1	W
Operating temperature range	$T_{opr}$		-10 to +50	°C
Storage temperature range	$T_{stg}$		-55 to +150	°C



■ Any and all SANYO products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your SANYO representative nearest you before using any SANYO products described or contained herein in such applications.

■ SANYO assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO products described or contained herein.

**Package Dimensions**

unit:mm

3108-MFP24D

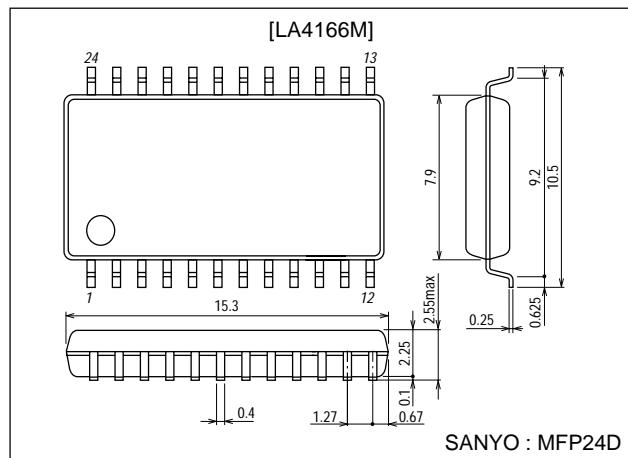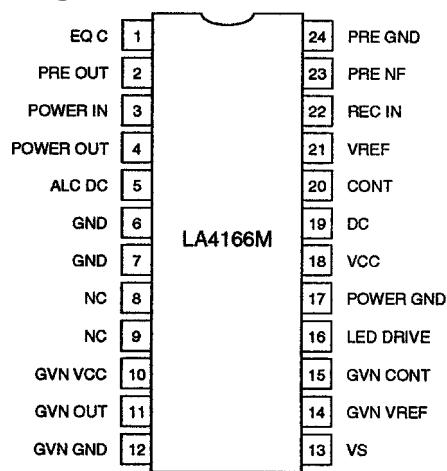**Pin Assignment**

Top view

## Recommended Operating Conditions at $T_a = 25^\circ C$

Parameter	Symbol	Conditions	Ratings		Unit
Supply voltage	$V_{CC}$			3	V
Supply voltage range	$V_{CC}$			1.8 to 3.6	V
Power amplifier load resistance	$R_{L1}$		4 (Playback mode)		$\Omega$
			10 (Recording mode)		$k\Omega$
Preamplifier load resistance	$R_{L2}$			10	$k\Omega$

## Electrical Characteristics at $T_a = 25^\circ C$ , $V_{CC}=3V$ , power amplifier $R_L=4\Omega$ (playback mode) or $10k\Omega$ (recording mode), preamplifier $R_L=10k\Omega$ , $f=1kHz$ , $0dBm=0.775V$ unless otherwise noted.

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Preamplifier and power amplifier quiescent supply current	$I_{CC0}$	Recording mode, $V_I=0V$	12	25	38	mA
		Playback mode, $V_I=0V$	13	26	39	mA
Preamplifier and power amplifier closed-loop voltage gain	$V_{G1}$	Recording mode, $V_O=-5dBm$	62.0	64.5	67.0	dB
		Playback mode, $V_O=-5dBm$	71.0	73.5	76.0	dB
Preamplifier closed-loop voltage gain	$V_{G2}$	Recording mode, $V_O=-10dBm$ , $R_{NF}=100\Omega$	32.5	35.0	37.5	dB
		Playback mode, $V_O=-10dBm$ , $R_{NF}=100\Omega$	42.5	45.0	47.5	dB
Preamplifier maximum output voltage	$V_O$	Playback mode, THD=1%	0.3	0.6	1.0	V
Preamplifier input noise voltage	$V_{NI}$	Playback mode, 20Hz to 20kHz output bandpass filter	0.5	1.1	2.0	$\mu V$
Preamplifier total harmonic distortion	$THD_1$	Playback mode, $V_O=0.4V$	0.01	0.11	1.0	%
Power amplifier voltage gain	$V_{G3}$	$V_O=-5dBm$ , $R_L=4\Omega$	26.0	28.5	31.0	dB
Power amplifier output power	$P_O$	THD=10%, $R_L=4\Omega$	180	215	350	mW
Power amplifier total harmonic distortion	$THD_2$	$P_O=30mW$ , $R_L=4\Omega$	0.05	0.5	1.5	%
Power amplifier output noise voltage	$V_{NO}$	$R_V=0\Omega$ , $R_L=4\Omega$ , 20Hz to 20kHz output bandpass filter	5	25	100	$\mu V$
ALC turn-ON input voltage	$V_I$		-66.5	-69.0	-71.5	dBm
ALC range	ALCR	See note 1.	30	38	45	dB
ALC total harmonic distortion	$THD_3$	$V_{REC\ IN}=-40dBm$	0.1	0.67	1.5	%
ALC output voltage	$V_O$	$V_{REC\ IN}=-40dBm$	0.35	0.46	0.55	V
LED drive current	$I_{LED}$	Using a red LED	1.0	2.5	4.5	mA
Governor reference voltage	$V_{GVN\ REG}$	$I_m=100mA$	1.1	1.25	1.4	V
Governor quiescent input current	$I_d$	$I_m=100mA$	2	3	6	mA
Governor current divider ratio	K	$I_m=50$ to $100mA$	45	50	55	
Governor residual output voltage	$V_{sat}$	$I_m=200mA$ , $V_{GVN\ REF}=V_{GVN\ CONT}$	0.1	0.3	0.5	V
Governor reference voltage vs. supply voltage characteristic		$V_{CC}=1.8$ to $4.5V$ , $I_m=100mA$ , See note 2.	0	0.1	0.5	%/V
Governor current divider ratio vs. supply voltage characteristic		$V_{CC}=2.0$ to $4.5V$ , $I_m=50$ to $100mA$ , See note 3.	0	0.1	0.5	%/V
Governor reference voltage ratio vs. output current characteristic		$I_m=50$ to $200mA$ , See note 4.	0	0.007	0.03	%/mA
Governor current divider ratio vs. output current characteristic		$I_m=50$ to $200mA$ , See note 5.	-0.05	0.005	0.05	%/mA

### Notes

1. Referred to ALC turn-ON voltage, input range for the output level to rise 2.5dB
2. The characteristic is given by the equation

$$\left( \frac{\Delta V_{GVN\ REF}}{V_{GVN\ REF}} \right) + \Delta V_{CC}$$

3. The characteristic is given by the equation

$$\left( \frac{\Delta K}{K} \right) + \Delta V_{CC}$$


4. The characteristic is given by the equation

$$\left( \frac{\Delta V_{GVN\ REF}}{V_{GVN\ REF}} \right) + \Delta I_m$$

5. The characteristic is given by the equation


$$\left( \frac{\Delta K}{K} \right) + \Delta I_m$$

## Block Diagram

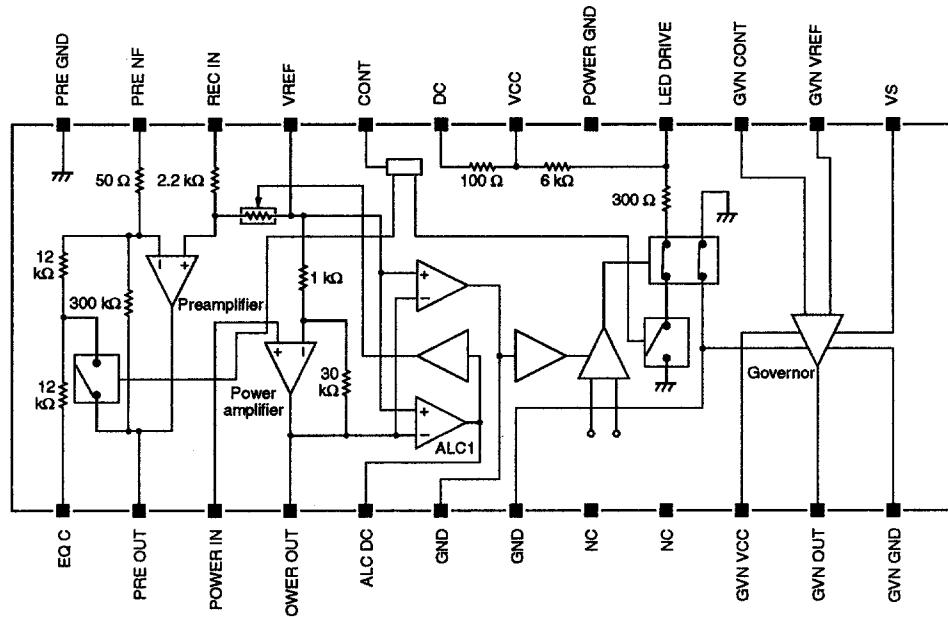


## Pin Description


Number	Name	Description
1	EQ C	Playback equalization capacitor connection
2	PRE OUT	Preamplifier output
3	POWER IN	Power amplifier input
4	POWER OUT	Power amplifier output
5	ALC DC	ALC characteristics control network connection
6, 7	GND	Ground
8, 9	NC	No connection
10	GVN V <sub>CC</sub>	1.8 to 3.6V governor supply
11	GVN OUT	Governor output
12	GVN GND	Governor ground
13	VS	Motor supply voltage
14	GVN VREF	Governor reference voltage output
15	GVN CONT	Governor control input
16	LED DRIVE	LED driver output
17	POWER GND	Power amplifier ground
18	V <sub>CC</sub>	1.8 to 3.6V supply
19	DC	Ripple-filter capacitor connection
20	CONT	Record and playback select input
21	VREF	Reference voltage output
22	REC IN	Recording signal input
23	PRE NF	Preamplifier gain control input
24	PRE GND	Preamplifier ground

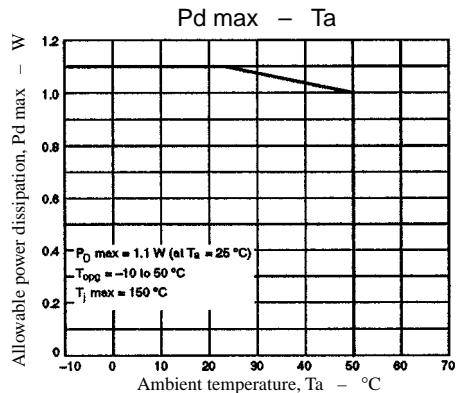

## Schematic Diagram

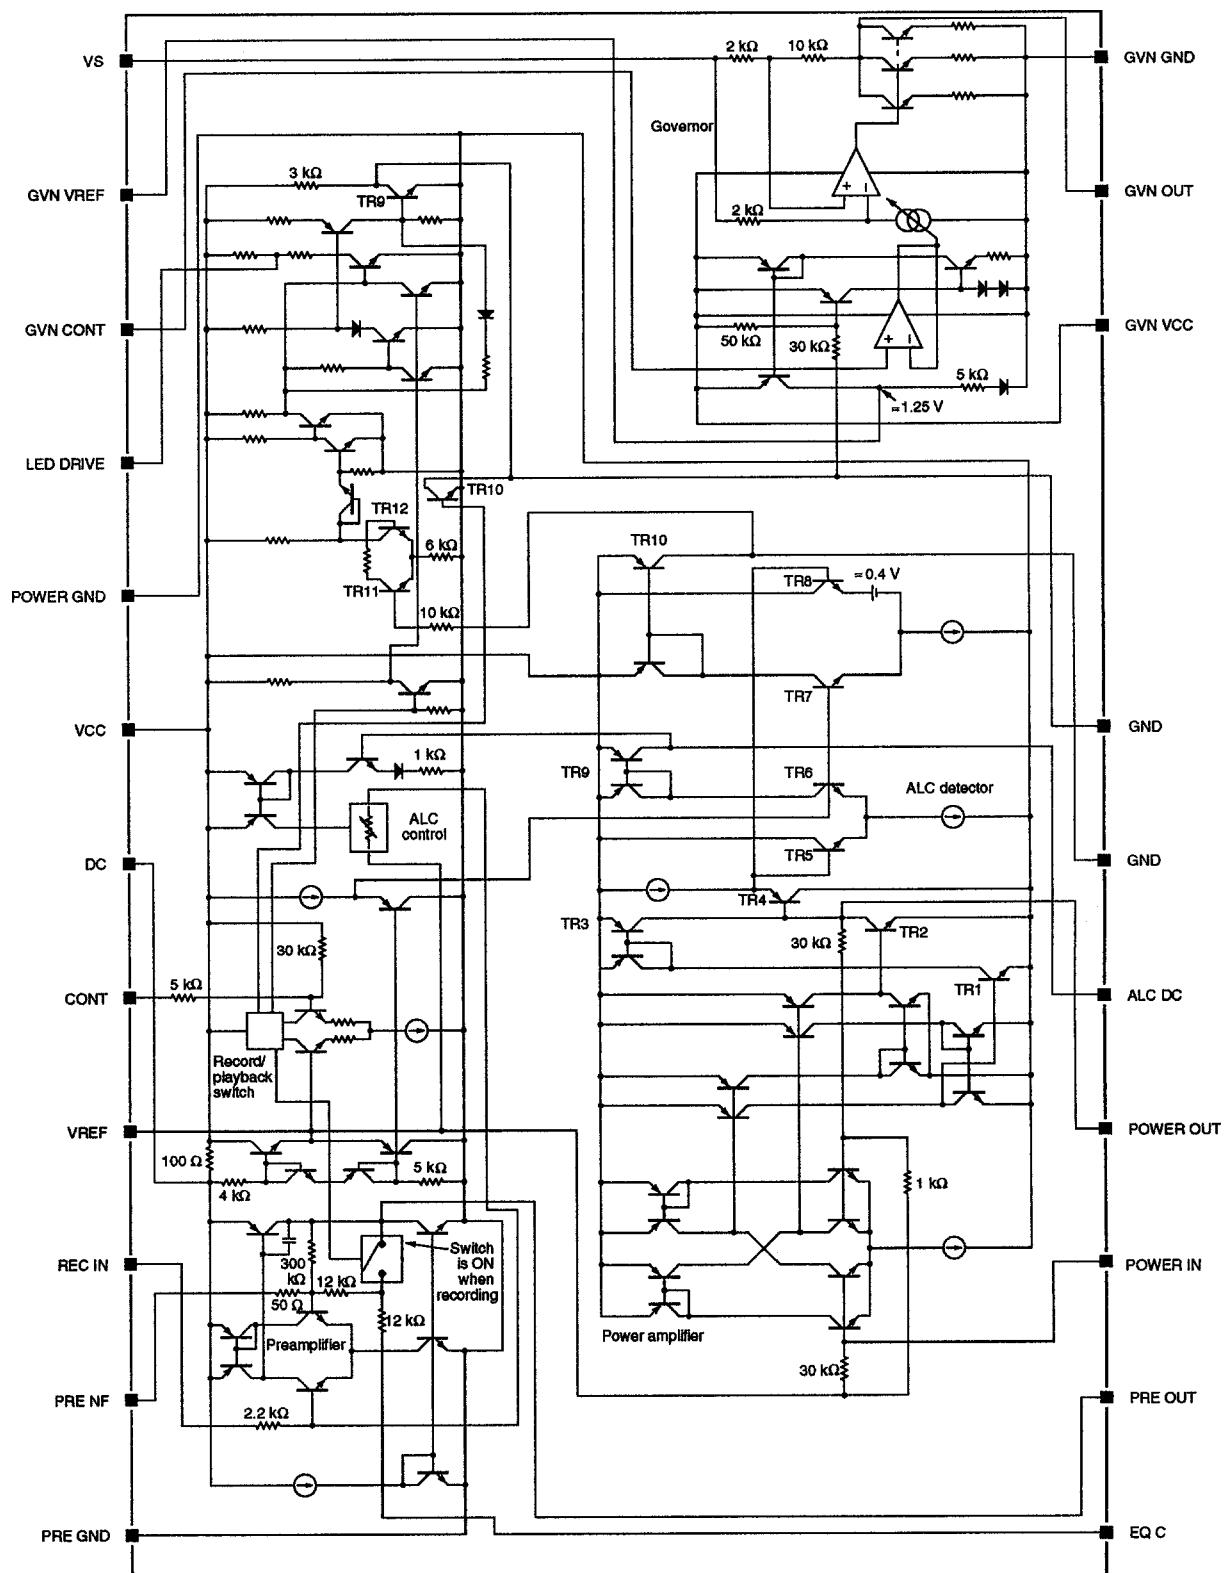

## Measurement Circuit

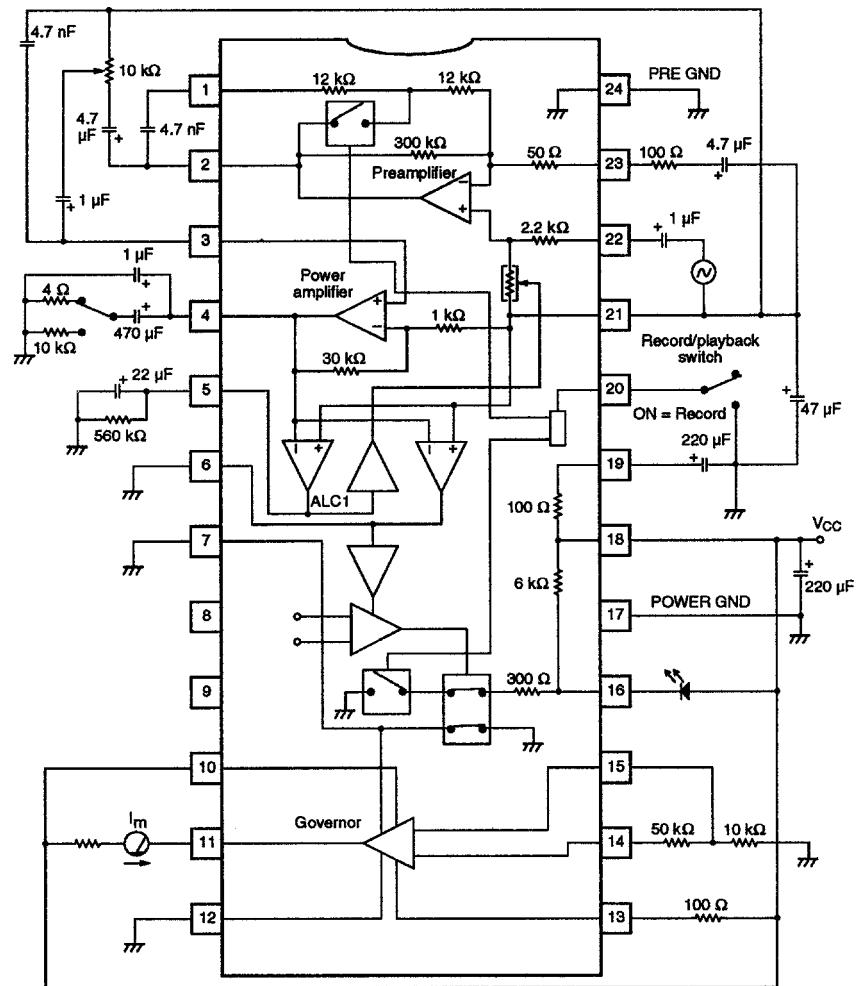

## Functional Description

The LA4166M comprises a preamplifier, an ALC, an LED driver, a power amplifier and a governor. The operation of these functional blocks in recording and playback modes is shown in table 1. Recording mode is selected when CONT is held at 0V, and playback mode, when CONT is open.

Table 1. Block operation

Mode	Preamplifier	ALC	LED driver	Power amplifier	Governor
Recording	ON	ON	ON	ON	ON
Playback	ON	OFF	OFF	ON	ON

## Typical Application

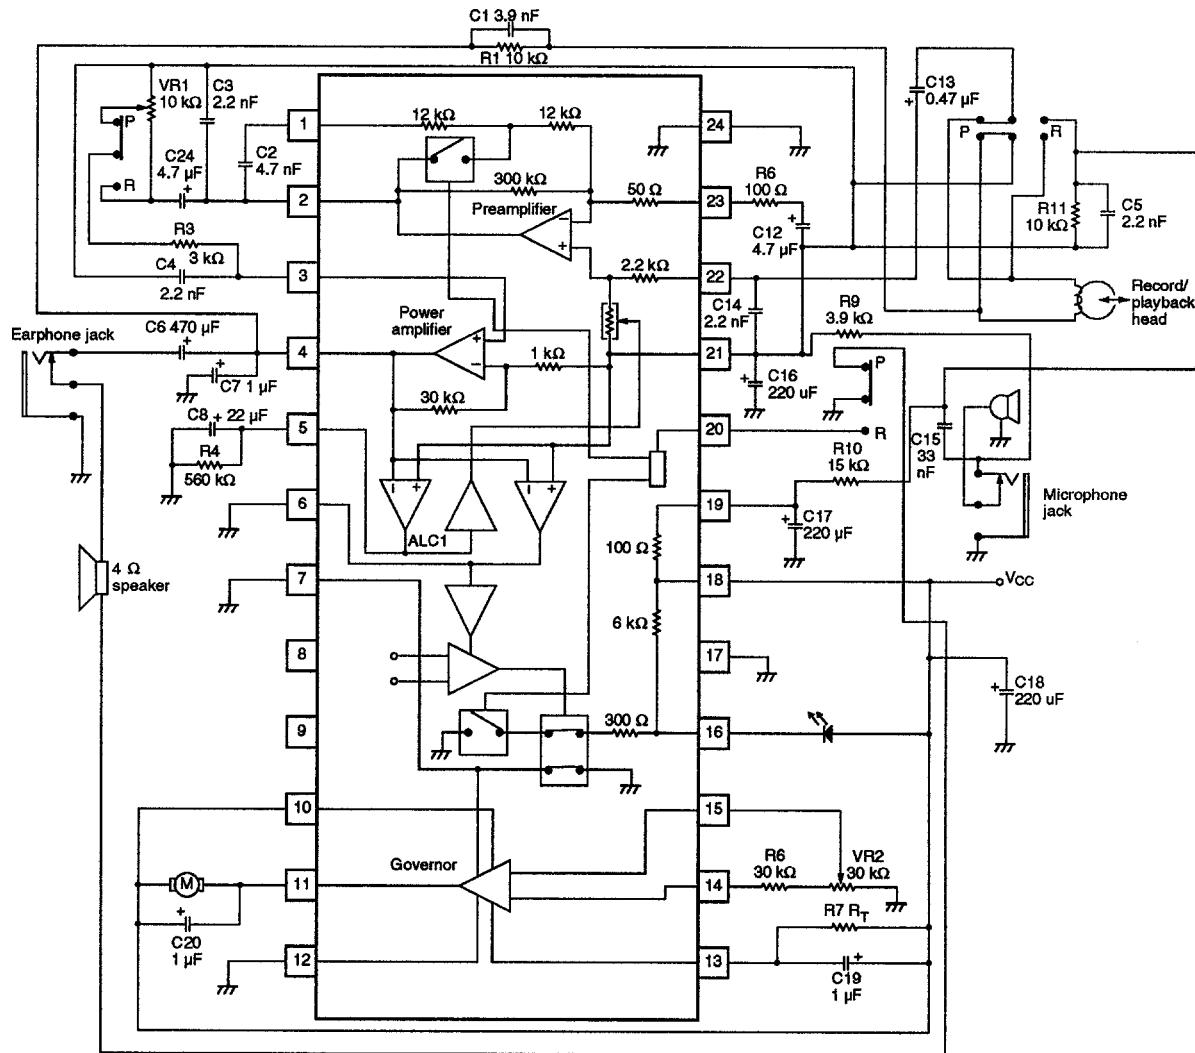


Figure 1. Application circuit

Note the external components are used to determine the LA4166M operating characteristics. For example, C2 determines the playback equalization characteristic, R8 determines the preamplifier gain, C8 and R4 determine the ALC attack and recovery times and C17 determines the power supply ripple rejection. The ripple rejection decreases as the capacitance C17 is decreased.

Other components are used to determine the overall circuit characteristics. For example, C1 and R1 determine the recording current and C7 prevents output oscillations.

Note also that LA4166M internal components determine other LA4166M characteristics. For example, the  $2.2\text{k}\Omega$  PRE IN input resistor determines the ALC range, and the  $1\text{k}\Omega$  and  $30\text{k}\Omega$  resistors at the power amplifier inverting input determine amplifier gain.

In addition, LED DRIVE should be left open when not using the LED indicator function, the double-pole switch that controls LED DRIVE is normally closed, the NC pins should be left open, and the GND pins should be tied to ground.

- Specifications of any and all SANYO products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- SANYO Electric Co., Ltd. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all SANYO products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of SANYO Electric Co., Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO product that you intend to use.
- Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of February, 2000. Specifications and information herein are subject to change without notice.