


1MBI600PX-140

IGBT Module P-Series

1400V / 600A 1 in one-package

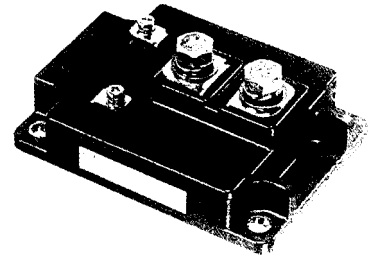


■ Features

- Small temperature dependence of the turn-off switching loss
- Easy to connect in parallel
- Wide RBSOA (square up to 2 time of rated current) and high short-circuit withstand capability
- Low loss and soft-switching (reduction of EMI noise)

■ Applications

- General purpose inverter
- AC Servo systems (Drive unit)
- UPS (Uninterruptible Power Supply)

■ Equivalent Circuit Schematic

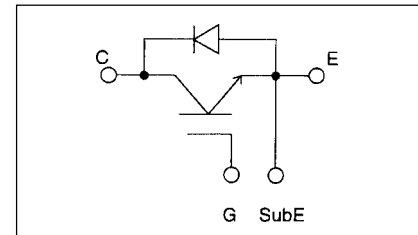

■ Maximum ratings and characteristics

● Absolute maximum ratings (at Tc=25°C unless otherwise specified)

Item	Symbol	Conditions	Rating	Unit		
Collector-Emitter voltage	V _{CES}		1400	V		
Gate-Emitter voltage	V _{GES}		±20	V		
Collector current	I _c	Continuous	T _c =25°C	800	A	
			T _c =80°C	600		
	I _c pulse	1ms	T _c =25°C	1600		
			T _c =80°C	1200		
	-I _c	Continuous	600			
-I _c pulse	1ms	1200				
Collector Power Dissipation	P _c		4100	W		
Junction temperature	T _j		+150	°C		
Storage temperature	T _{stg}		-40 to +125			
Isolation voltage	between terminal and copper base *1		V _{iso}	AC:1min.	2500	VAC
Screw Torque	Mounting *2			4.5	N·m	
	Terminals *3			11.0		
	*4			1.7		

*1 : All terminals should be connected together when isolation test will be done.

Recommendable value : *2 4.0±0.5 N·m(M6), *3 10.0±1.0 N·m(M8), *4 1.50±0.2 N·m(M4)

● Electrical characteristics (at T_j=25°C unless otherwise specified)


Item	Symbols	Conditions	Characteristics			Unit
			Min.	Typ.	Max.	
Zero gate voltage collector current	I _{CES}	V _{GE} =0V, V _{CES} =1400V	-	-	2.0	mA
Gate-Emitter leakage current	I _{GES}	V _{CES} =0V, V _{GE} =±20V	-	-	0.5	µA
Gate-Emitter threshold voltage	V _{GE(th)}	V _{CES} =20V, I _c =600mA	6.0	8.0	9.0	V
Collector-Emitter saturation voltage	V _{CES(sat)}	V _{GE} =15V, I _c =600A, T _j =25°C	-	2.85	3.2	V
Input capacitance	C _{ies}	V _{CES} =10V	-	60	-	nF
			-	9	-	
Output capacitance	C _{oes}	V _{GE} =0V	-	9	-	
Reverse transfer capacitance	C _{res}	f=1MHz	-	4	-	
Turn-on time	t _{on}	V _{CC} =600V	-	0.75	1.20	µs
		I _c =600A	-	0.20	0.60	
Turn-off time	t _{off}	V _{GE} =±15V	-	0.65	1.00	
		R _G =2.0 Ω	-	0.10	0.30	
Diode forward on voltage	V _F	I _F =600A, V _{GE} =0V	-	-	3.4	V
Reverse recovery time	t _{rr}	I _F =600A	-	-	0.35	µs

● Thermal resistance characteristics


Items	Symbols	Conditions	Characteristics			Unit
			Min.	Typ.	Max.	
Thermal resistance	R _{th(j-c)}	IGBT	-	-	0.03	°C/W
	R _{th(j-c)}	Diode	-	-	0.06	°C/W
Contact Thermal resistance	R _{th(c-f)} *4	the base to cooling fin	-	0.0063	-	°C/W

*4 : This is the value which is defined mounting on the additional cooling fin with thermal compound.


■ Characteristics (Representative)

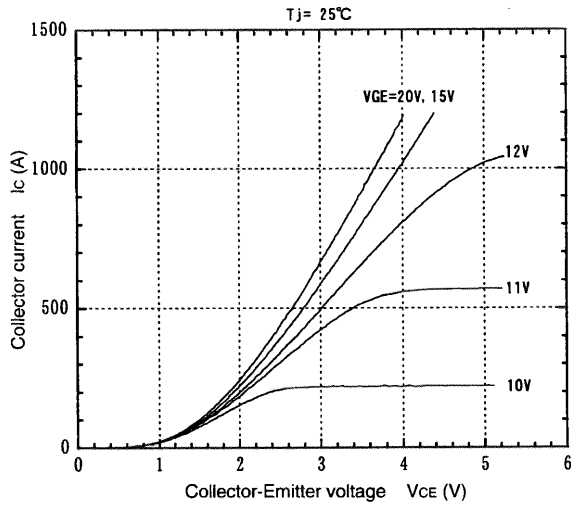


Collector current vs. Collector-Emittor voltage

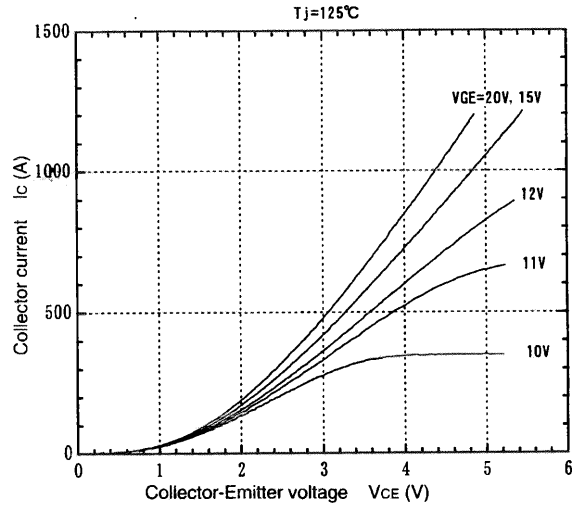


Collector current vs. Collector-Emittor voltage

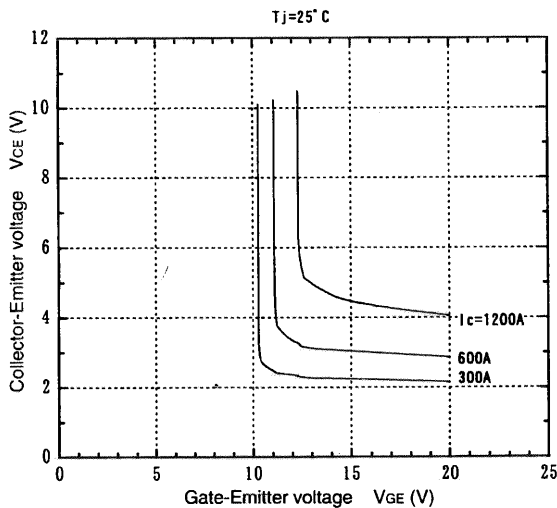


Collector-Emittor voltage vs. Gate-Emittor voltage

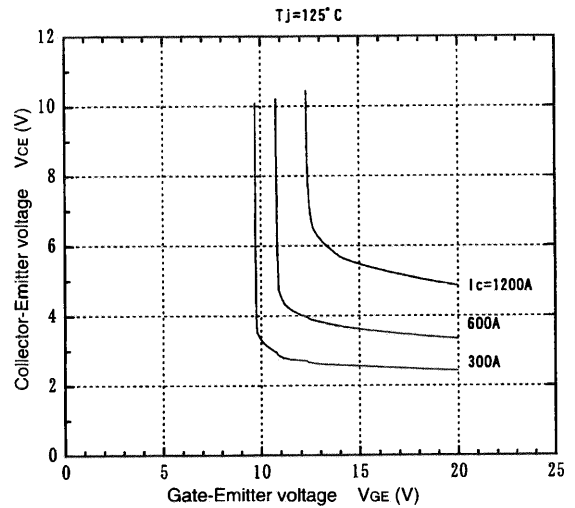







Collector-Emittor voltage vs. Gate-Emittor voltage


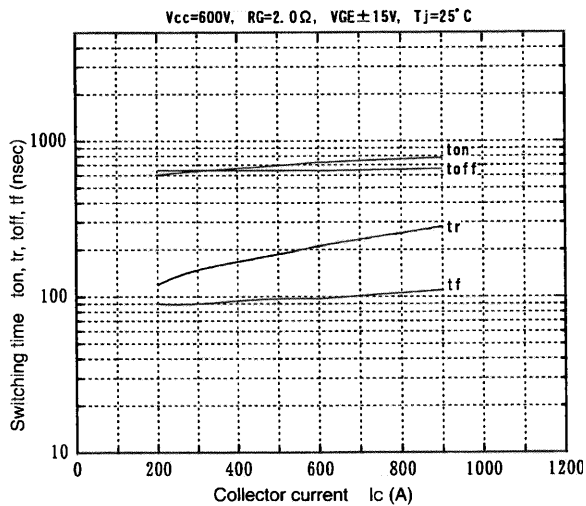


Switching time vs. Collector current

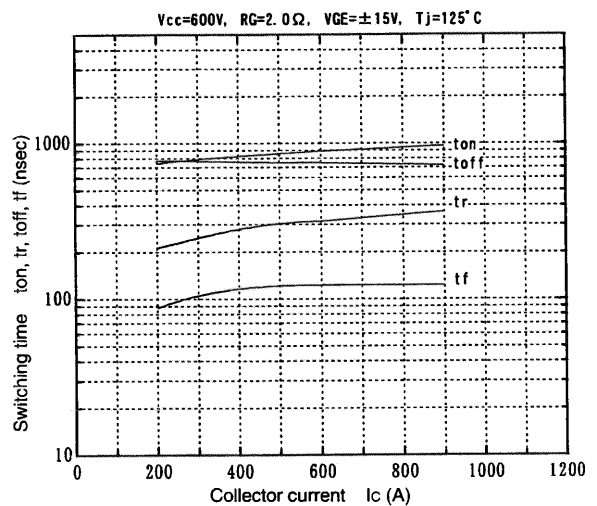


Switching time vs. Collector current

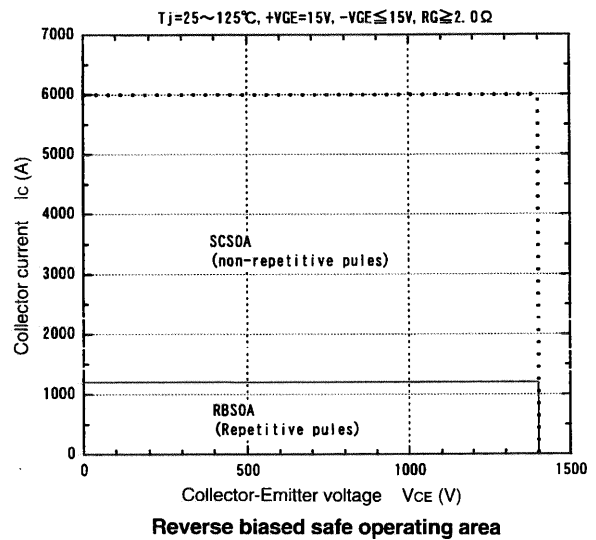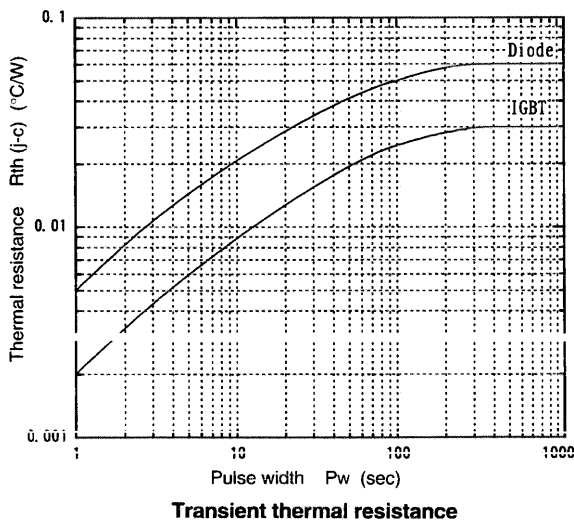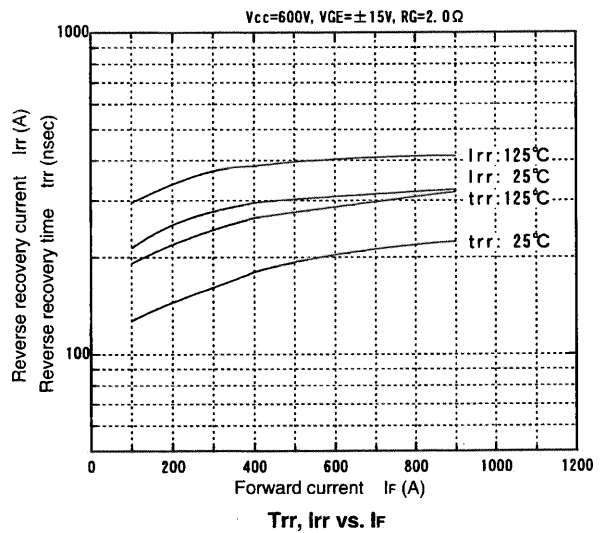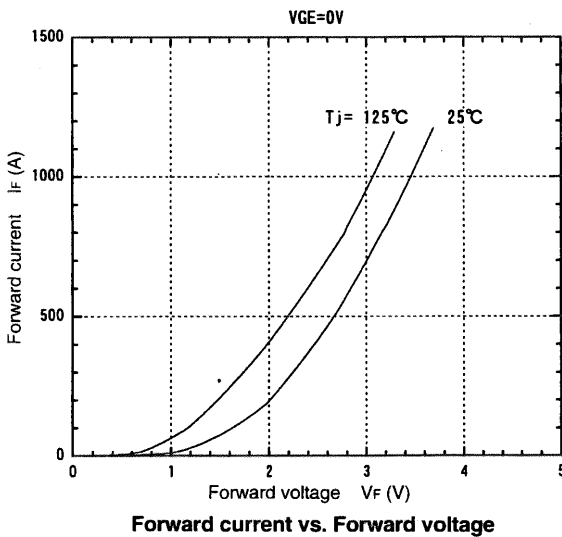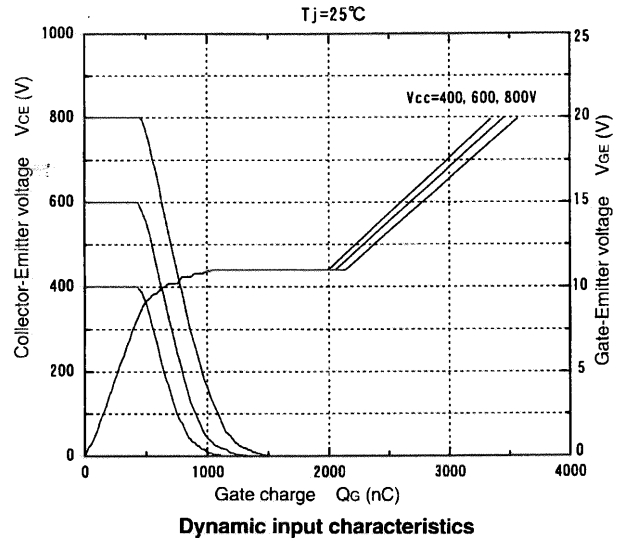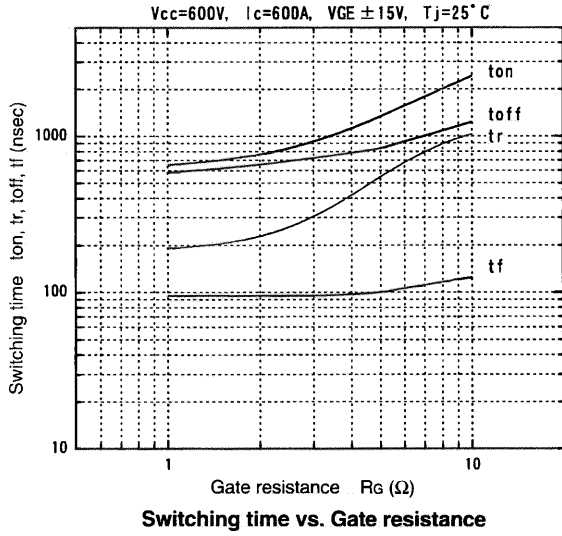

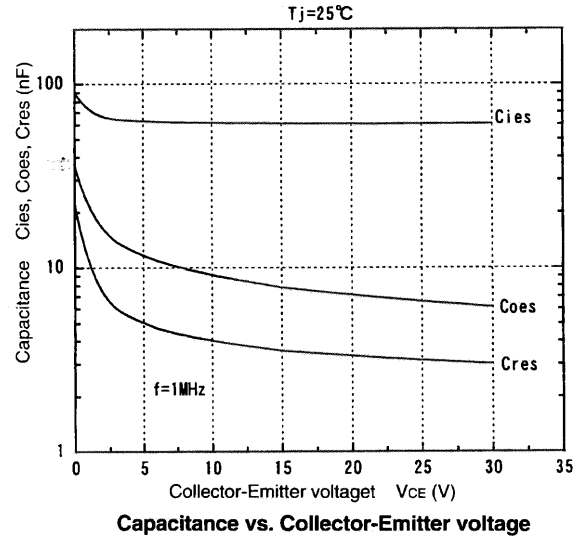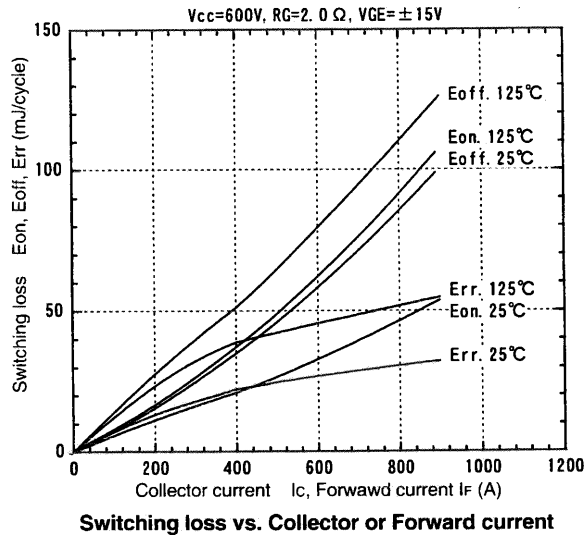

■ Outline Drawings, mm

M138

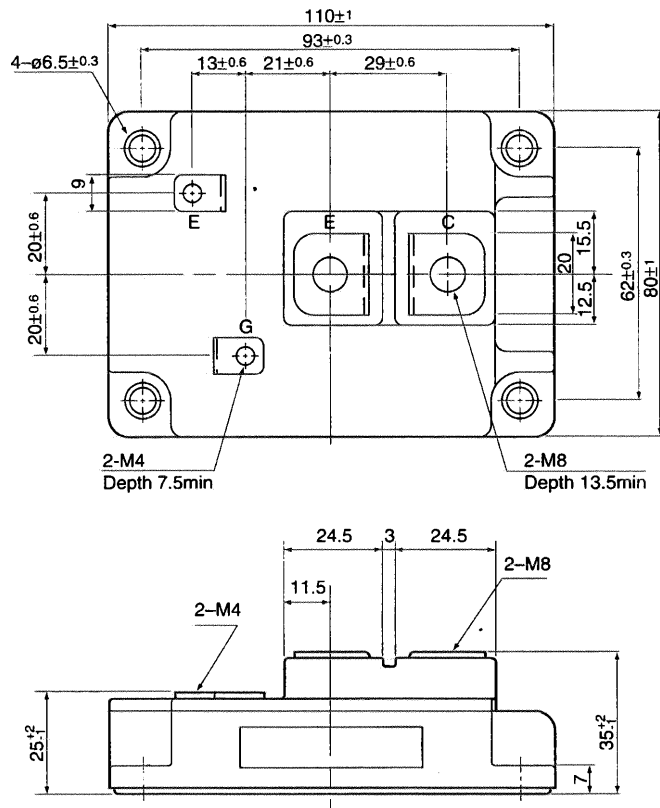

Mass : 530g