

1MBK30D-060S

Molded IGBT

600V / 30A Molded Package

■ Features

- Small molded package
- Low power loss
- Soft switching with low switching surge and noise
- High reliability, high ruggedness (RBSOA, SCSOA etc.)
- Comprehensive line-up

■ Applications


- Inverter for Motor drive
- AC and DC Servo drive amplifier
- Uninterruptible power supply

■ Maximum ratings and characteristics

● Absolute maximum ratings (Tc=25°C)

Item	Symbol	Rating	Unit		
Collector-Emitter voltage	V _{CES}	600	V		
Gate-Emitter voltage	V _{GES}	±20	V		
Collector current	DC	T _c =25°C	I _{C25}	50	A
		T _c =100°C	I _{C100}	30	A
	1ms	T _c =25°C	I _{CP}	90	A
Max. power dissipation (IGBT)	P _C	150	W		
Max. power dissipation (FWD)	P _C	80	W		
Operating temperature	T _j	+150	°C		
Storage temperature	T _{stg}	-40 to +150	°C		
Screw torque	-	39.2 to 58.8	N·m		

■ Equivalent Circuit Schematic

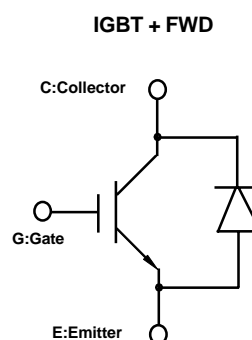

● Electrical characteristics (at Tc=25°C unless otherwise specified)

Item	Symbol	Characteristics			Conditions	Unit	
		Min.	Typ.	Max.			
Zero gate voltage collector current	I _{CES}	–	–	1.0	V _{GE} =0V, V _{CES} =600V	mA	
Gate-Emitter leakage current	I _{GES}	–	–	10	V _{CE} =0V, V _{GE} =±20V	μA	
Gate-Emitter threshold voltage	V _{GE(th)}	4.0	5.0	6.0	V _{CE} =20V, I _C =30mA	V	
Collector-Emitter saturation voltage	V _{CE(sat)}	–	2.4	2.9	V _{GE} =15V, I _C =30A	V	
Input capacitance	C _{ies}	–	1960	–	V _{GE} =0V	pF	
Output capacitance	C _{oes}	–	222	–	V _{CE} =25V		
Reverse transfer capacitance	C _{res}	–	101	–	f=1MHz		
Switching Time	Turn-on time	t _{on*}	–	0.15	–	V _{CC} =300V, I _C =30A	μs
		t _{r*}	–	0.09	–	V _{GE} =±15V	
		t _{rr2}	–	0.03	–	R _G =36 ohm	
	Turn-off time	t _{off}	–	0.50	0.62	(Half Bridge)	Inductance Load
		t _f	–	0.10	0.17		
	Turn-on time	t _{on*}	–	0.15	–	V _{CC} =300V, I _C =30A	μs
		t _{r*}	–	0.09	–	V _{GE} =+15V	
t _{rr2}		–	0.03	–	R _G =10 ohm		
Turn-off time	t _{off}	–	0.50	0.62	(Half Bridge)	Inductance Load	
	t _f	–	0.10	0.17			
FWD forward on voltage	V _F	–	2.0	2.5	I _F =30A, V _{GE} =0V	V	
Reverse recovery time	t _{rr}	–	0.06	0.10	I _F =30A, V _{GE} =-10V, V _R =300V, di/dt=100A/μs	μs	


*Turn-on characteristics include t_{rr2}. See a figure in next page.

● Thermal resistance characteristics

Item	Symbol	Characteristics			Conditions	Unit
		Min.	Typ.	Max.		
Thermal resistance	R _{th(j-c)}	–	–	0.83	IGBT	°C/W
	R _{th(j-c)}	–	–	1.56	FWD	°C/W

Outline drawings, mm


TO-247

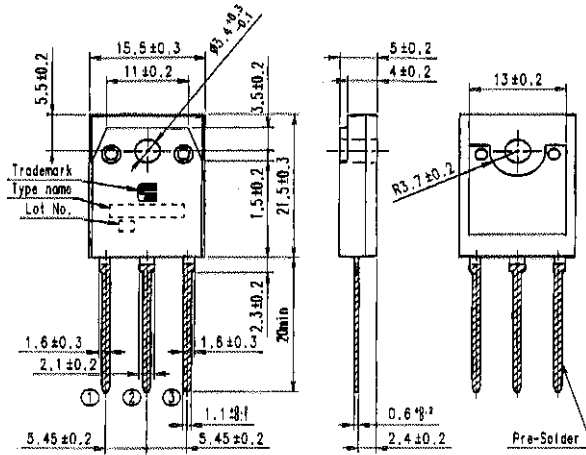


CONNECTION

- ① Gate
- ② Collector
- ③ Emitter

Switching waveform (Inductance load)

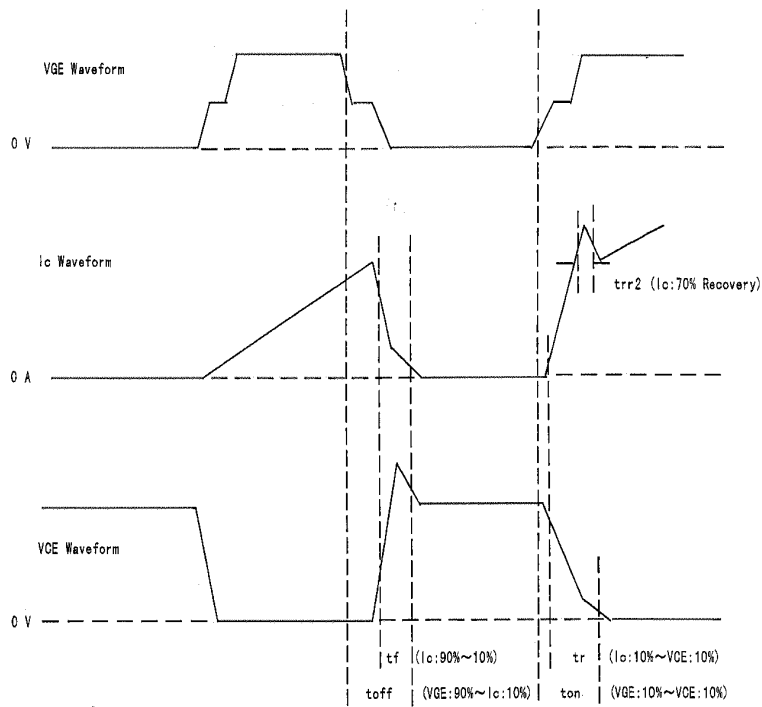


Mesurement circuit

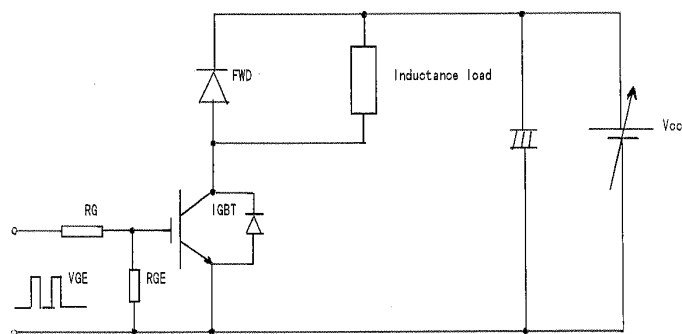


Characteristics


Collector current vs. Collector-Emitter voltage
T_j=25°C

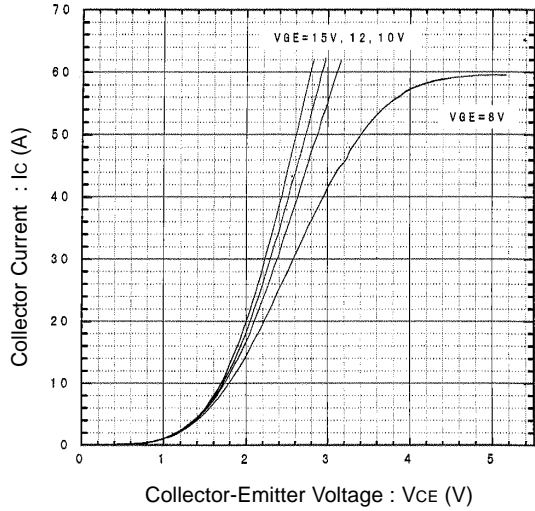


Collector current vs. Collector-Emitter voltage
T_j=125°C

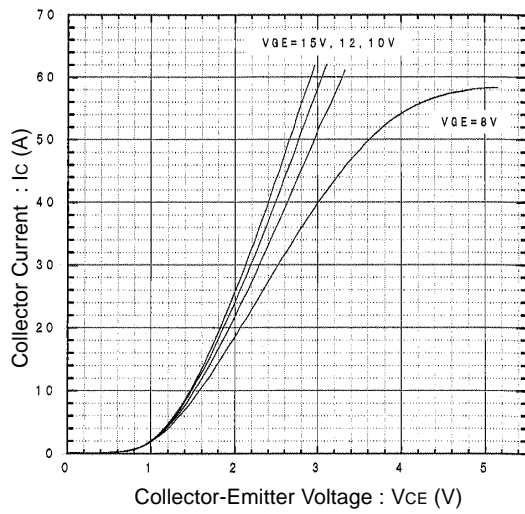


Collector-Emitter voltage vs. Gate-Emitter voltage
T_j=25°C

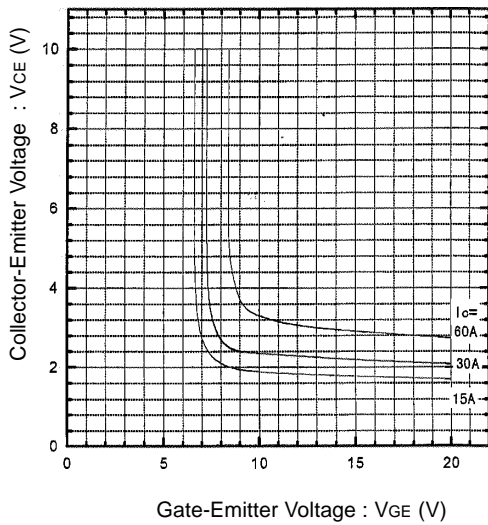


Collector-Emitter voltage vs. Gate-Emitter voltage
T_j=125°C

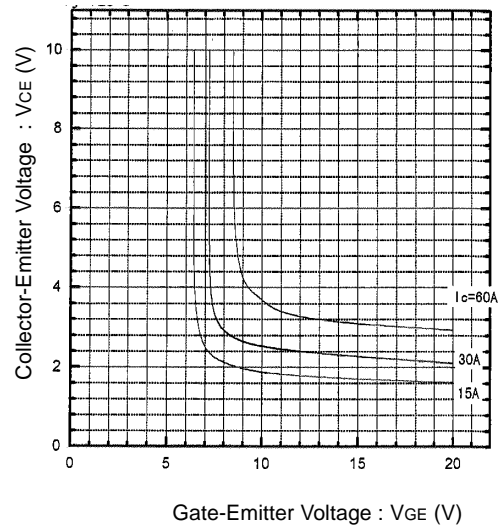

Switching time vs. Collector current
V_{CC}=300V, R_G=10Ω, V_{GE}=+15V, T_j=125°C

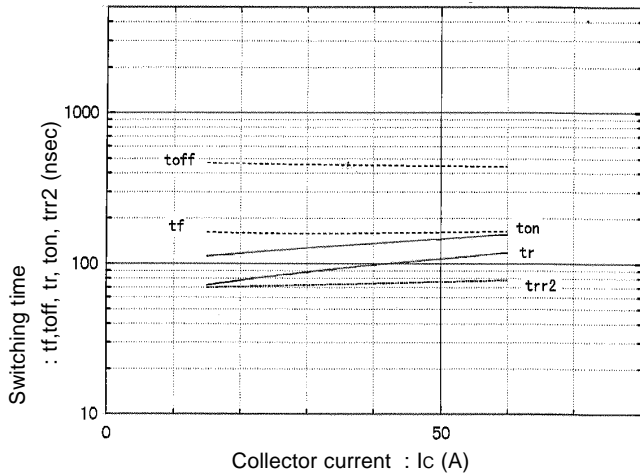


Switching time vs. Collector current
V_{CC}=300V, R_G=36Ω, V_{GE}=±15V, T_j=125°C

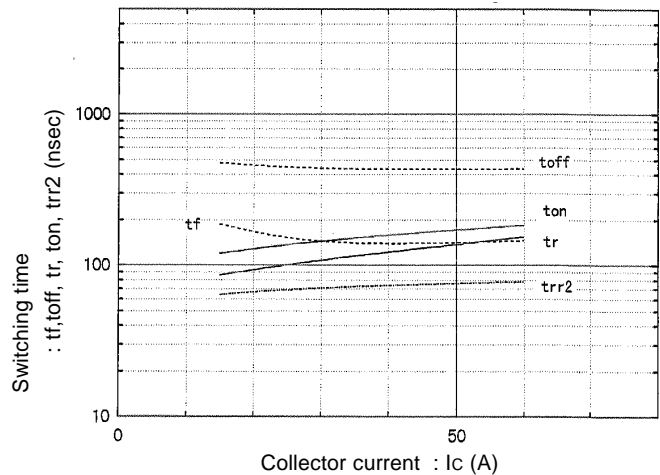

Characteristics


Switching time vs. R_G

V_{CC}=300V, I_C=30A, V_{GE}=+15V, T_J=125°C

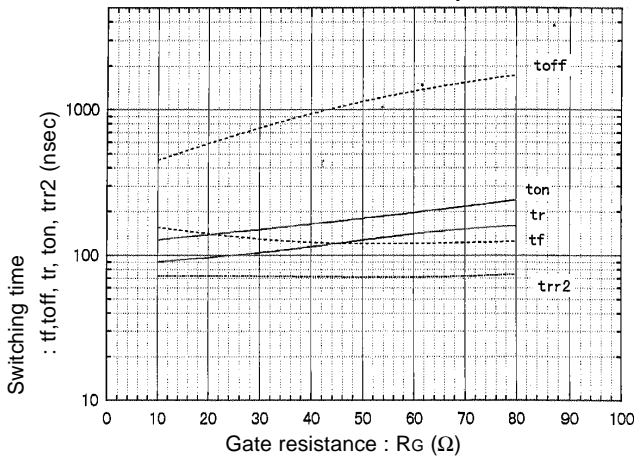


Switching time vs. R_G

V_{CC}=300V, I_C=30A, V_{GE}=±15V, T_J=125°C

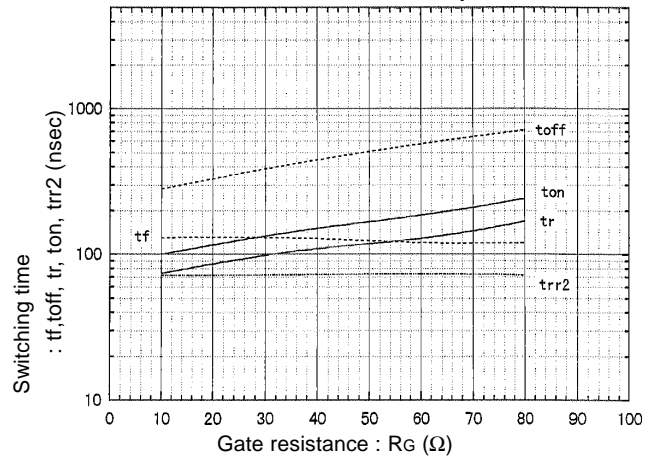


Dynamic input characteristics

T_J=25°C

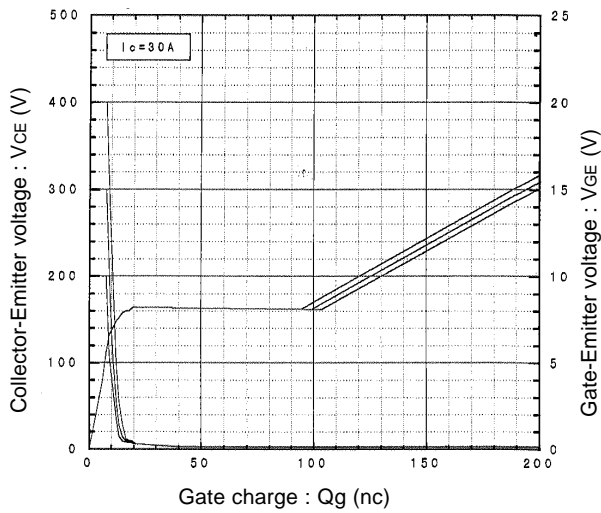


Capacitance vs. Collector-Emitter voltage

T_J=25°C

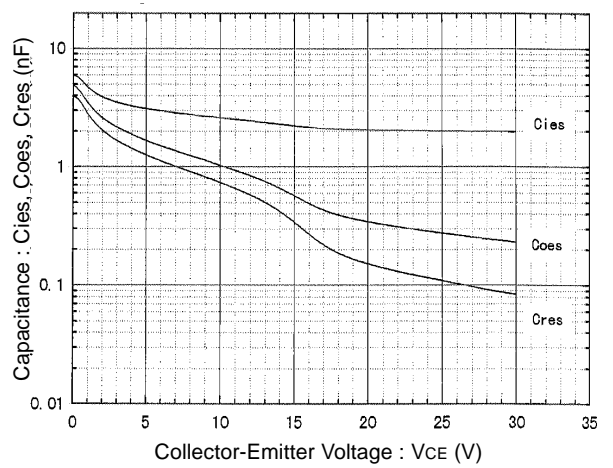


Reverse Biased Safe Operating Area

R_G=10Ω, +V_{GE}≤20V, -V_{GE}=15V, T_J≤125°C

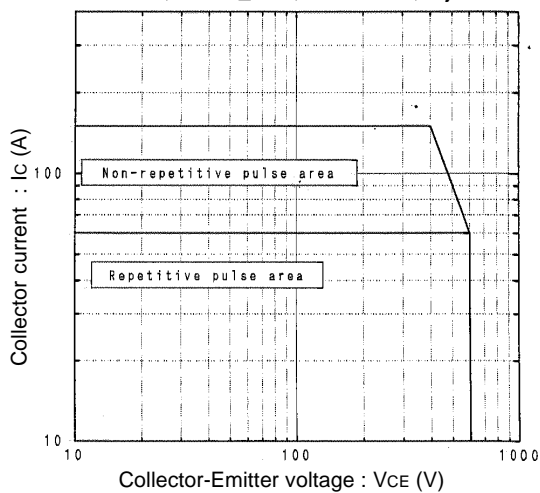


Forward Bias Safe Operating Area

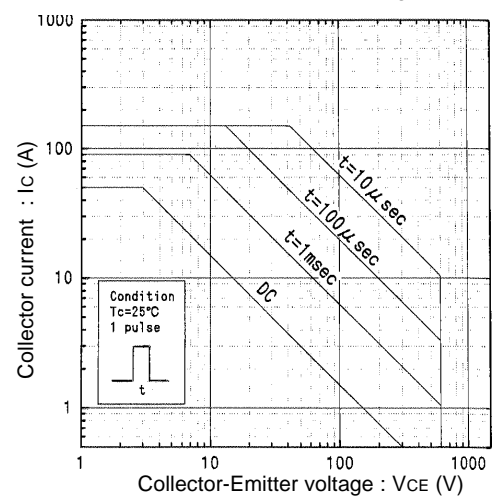


■ Characteristics


Reverse recovery time vs. Forward Current
 $V_R=300V, -di/dt=100A/\mu sec$

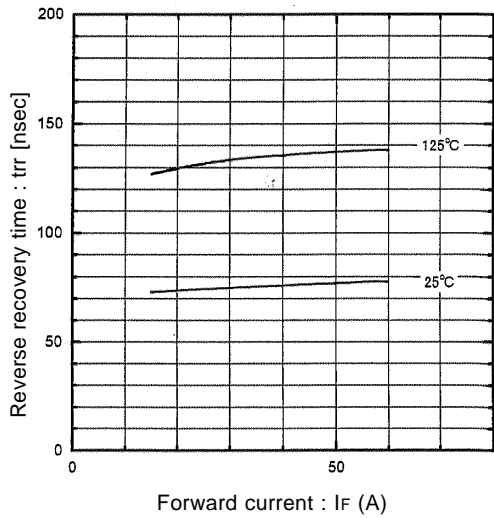


Reverse recovery current vs. Forward current
 $V_R=300V, -di/dt=100A/\mu sec$

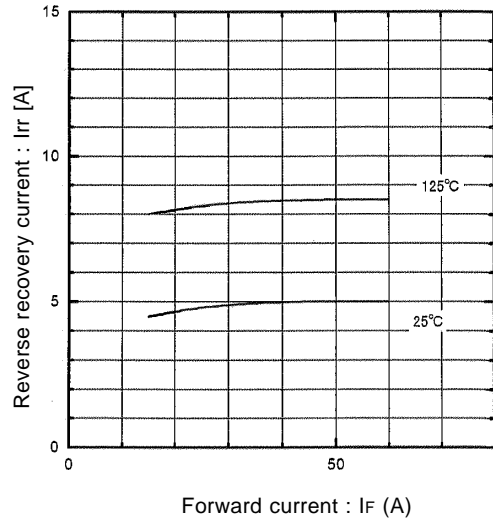

Forward Voltage vs. Forward current

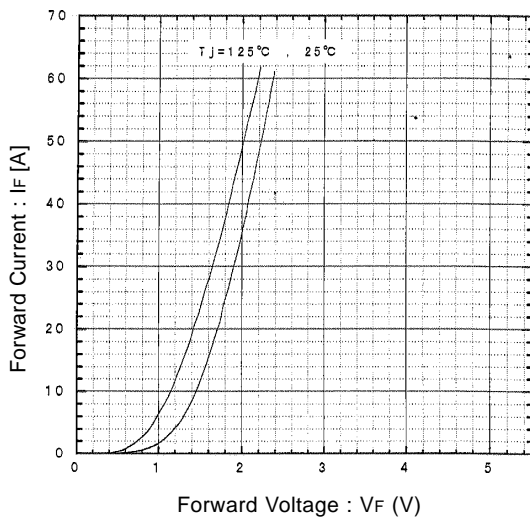

Reverse recovery characteristics vs. -di/dt
 $V_R=300V, I_F=30A, T_j=125^\circ C$

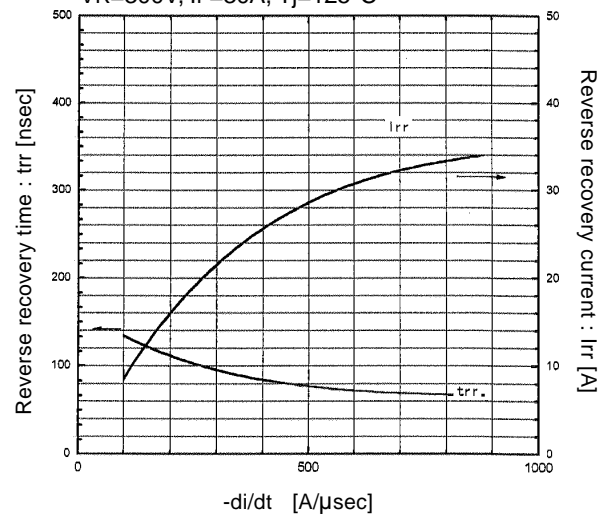

Transient thermal resistance

