

Green Mode Off-line Power Switch with Brown-Out Protections

REV.00

General Description

The LD7932R integrates with a 700V power MOSFET and a current mode PWM controller in a DIP-7 package. It takes less components counts or circuit space, especially ideal for those total solutions of low cost.

The implemented functions include low startup current, green-mode power-saving operation, leading-edge blanking of the current sensing and internal slope compensation. It also features more protections like OLP (Over Load Protection) and OVP (Over Voltage Protection) to prevent circuit from being damaged under abnormal conditions.

Furthermore, the Frequency Swapping function is to reduce the noise level and thus helps the power circuit designers to easily deal with the EMI filter design by spending minimum amount of component cost and developing time.


Features

- Built-in 700V Power MOSFET
- High-Voltage CMOS Process with Excellent ESD Protection
- Very Low Startup Current (<math><17\mu\text{A}</math>)
- Current Mode Control
- Green Mode Control
- UVLO (Under Voltage Lockout)
- LEB (Leading-Edge Blanking) on CS Pin
- Internal Frequency Swapping
- Internal Slope Compensation
- OVP (Over Voltage Protection) on Vcc Pin
- Brownout Protection
- OLP (Over Load Protection)


Applications

- Switching AC/DC Adaptor
- Open Frame Switching Power Supply

Typical Application

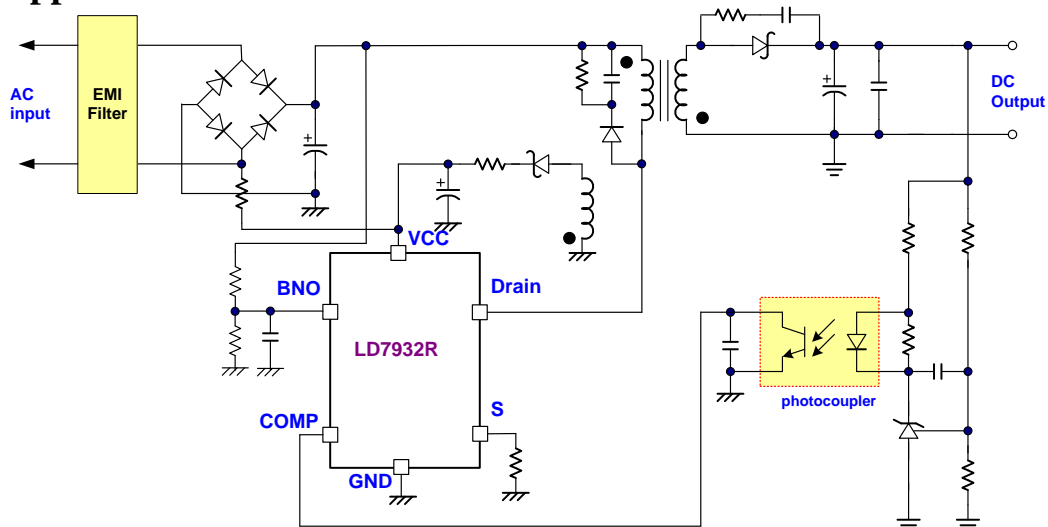

Pin Configuration

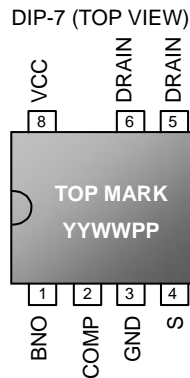

YY: Year code
 WW: Week code
 PP: Production code

Ordering Information

| Part number | Package | Top Mark | Shipping |
|-------------|---------|-------------|--------------------|
| LD7932R GM7 | DIP-7 | LD7932R GM7 | 3600 /tube /Carton |

The LD7932R is Green Packaged/ ROHS compliant.

Protection Mode


| Switching Freq. | VCC OVP | OLP | BNO Pin |
|-----------------|---------------|---------------------|---------------|
| 65kHz | Auto recovery | Auto recovery/ 65ms | Auto recovery |

Pin Descriptions

| PIN | NAME | FUNCTION |
|-----|-------|---|
| 1 | BNO | Brownout Protection Pin. Connect a resistor divider with this pin to AC mains input to set the brownout level and line compensation. If its voltage drops below threshold voltage, the PWM output will be turned off. |
| 2 | COMP | Voltage feedback pin (same as the COMP pin in UC384X). Connect a photo-coupler to close the control loop and achieve the regulation. |
| 3 | GND | Ground of the controller |
| 4 | S | Source of internal power MOSFET. Connect a sense resistor to ground. |
| 5 | Drain | Drain terminal of the internal power MOSFET |
| 6 | Drain | Drain terminal of the internal power MOSFET |
| 8 | VCC | Supply voltage pin |

Output Power Table & De-rating Curve

| Product | Drain Current | Rds(on) * | 230VAC \pm 15% ** | | 90~264VAC ** | |
|---------|---------------|------------|---------------------|------------|--------------|------------|
| | | | Adapter | Open Frame | Adapter | Open Frame |
| LD7932R | 2A | 6 Ω | 14W | 16W | 12W | 14W |

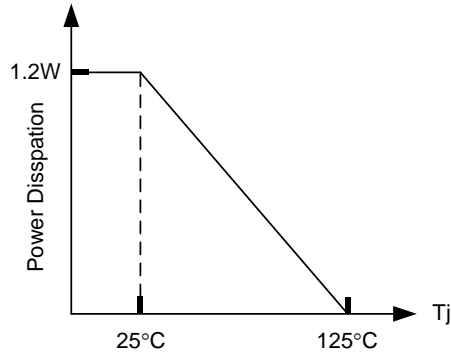


*Typ. @25°C, V_{CC}=12V Drain Current=1A

**Calculated maximum Input Power Rating at Ta=25°C

Recommended Operating Conditions

| Item | Min. | Max. | Unit |
|--------------------------------|------|------|----------|
| Supply Voltage V _{CC} | 10 | 24 | V |
| Start-up resistor Value | 540K | 1.8M | Ω |
| COMP pin Capacitor Value | 4.7 | 220 | nF |

Block Diagram

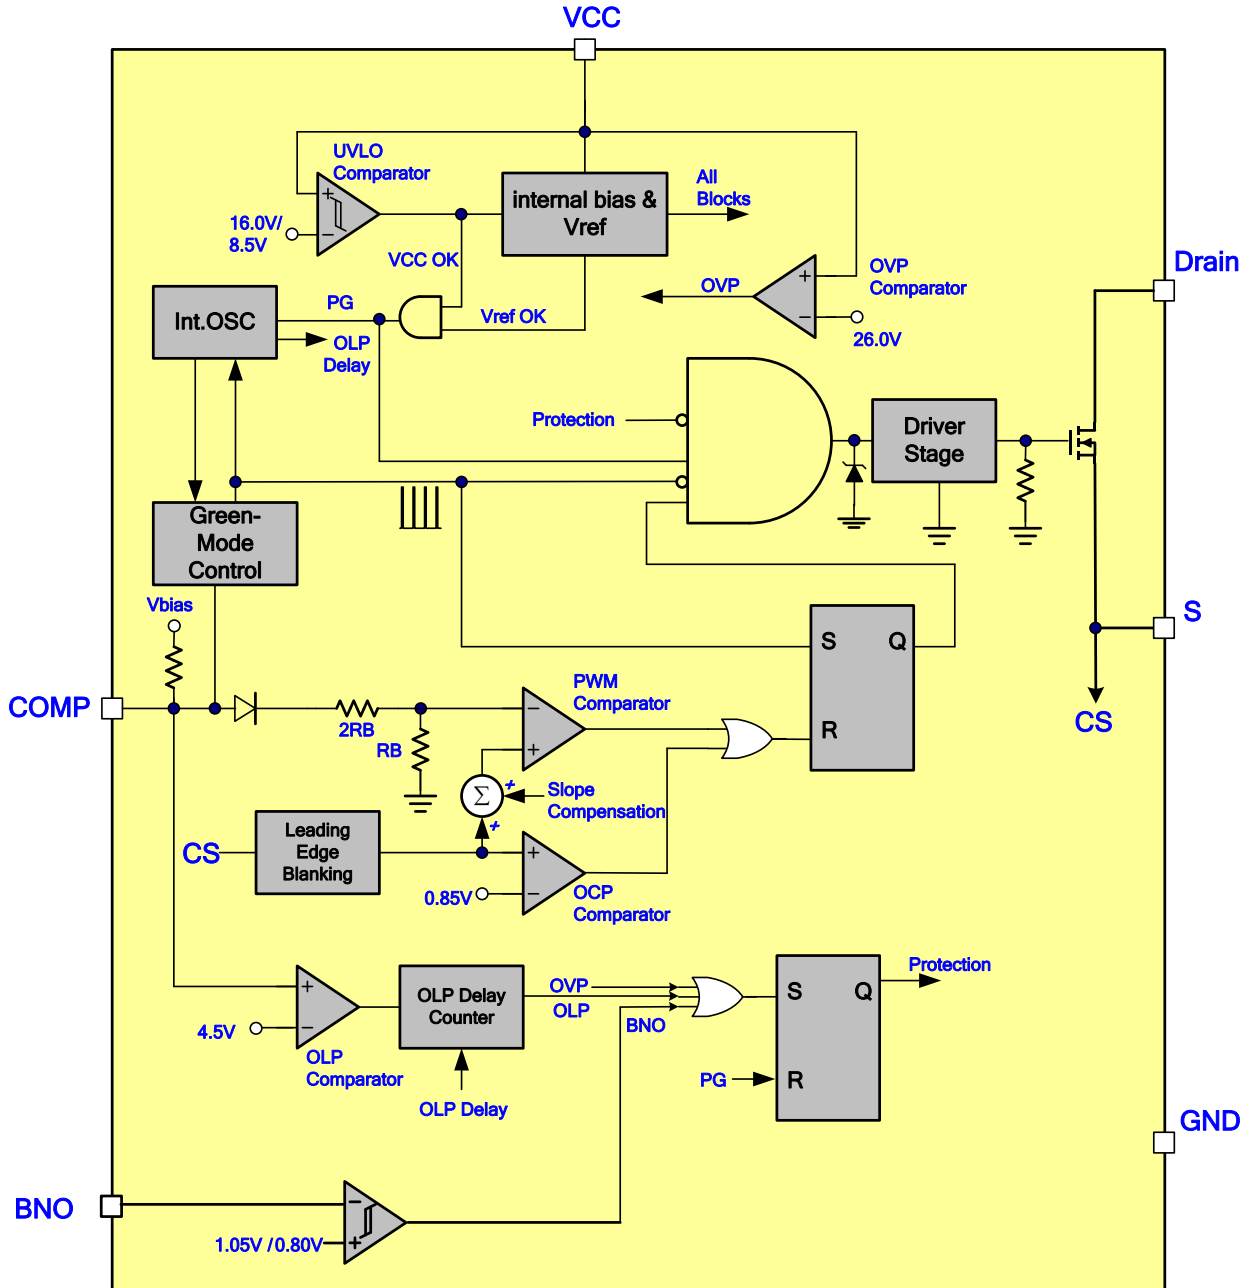

Absolute Maximum Ratings

| | |
|---|-----------------|
| Supply Voltage VCC..... | -0.3V ~29V |
| COMP, BNO, S..... | -0.3V ~6V |
| OUT..... | -0.3V ~Vcc+0.3V |
| Drain..... | -0.3V ~700V |
| Continuous drain current ¹ , TC=25°C..... | 2.0A |
| Maximum Junction Temperature..... | 150°C |
| Operating Ambient Temperature..... | -20°C to 85°C |
| Operating Junction Temperature..... | -40°C to 125°C |
| Storage Temperature Range..... | -65°C to 150°C |
| Package Thermal Resistance (DIP-7, θ_{JA})..... | 80°C/W |
| Total Power Dissipation of DIP-7, Ta=25°C..... | 1.2W |
| Lead temperature (Soldering, 10sec)..... | 260°C |
| ESD Voltage Protection, Human Body Model..... | 2.5 KV |
| ESD Voltage Protection, Machine Model..... | 250 V |

1. Repetitive rating: Pulse width limited by maximum junction temperature

2. w/o heat-sink, under natural convection

Caution:

Stresses beyond the ratings specified in "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating and operation of the device at these. Any other conditions above those indicated in the operational sections of this specification is not implied.

Electrical Characteristics

($T_A = +25^\circ\text{C}$ unless otherwise stated, $V_{CC}=15.0\text{V}$)

| PARAMETER | CONDITIONS | MIN | TYP | MAX | UNITS |
|---|---|------|-----------|------|------------------|
| Supply Voltage (Vcc Pin) | | | | | |
| Startup Current | | | 12 | 20 | μA |
| Operating Current (with 1nF load on OUT pin) | $V_{\text{COMP}}=0\text{V}$ | 0.65 | 1.0 | 1.25 | mA |
| | $V_{\text{COMP}}=3\text{V}$ | 1.5 | 2.0 | 2.5 | mA |
| | OLP Tripped/ Auto | 0.37 | 0.47 | 0.62 | mA |
| | OVP Tripped/ Auto | 0.37 | 0.47 | 0.62 | mA |
| UVLO (off) | | 7.5 | 8.5 | 9.5 | V |
| UVLO (on) | | 15 | 16 | 17 | V |
| OVP Level | | 25 | 26 | 27 | V |
| Voltage Feedback (Comp Pin) | | | | | |
| Short Circuit Current | $V_{\text{COMP}}=0\text{V}$ | 0.2 | 0.25 | 0.32 | mA |
| Open Loop Voltage | COMP pin open | 4.8 | 5.4 | 6.0 | V |
| Green Mode Threshold V_{COMP} | * | | 2.4 | | V |
| Zero Duty Threshold V_{COMP} | | 1.38 | 1.5 | 1.62 | V |
| Zero Duty Hysteresis | | 70 | 100 | 130 | mV |
| Current Sensing (CS Pin) | | | | | |
| Maximum Input Voltage, $V_{\text{CS_OFF}}$ | | 0.8 | 0.85 | 0.9 | V |
| Maximum Input Voltage, $V_{\text{CS_MIN}}$ | For High Line | 0.6 | 0.65 | 0.7 | V |
| Leading Edge Blanking Time | | | 350 | | ns |
| Internal Slope Compensation | 0% to D_{MAX} . (Linearly increase) | | 300 | | mV |
| Input impedance | * | 1 | | | $\text{M}\Omega$ |
| Delay to Output | * | | 100 | | ns |
| Max. Duty | * | 70 | 75 | 80 | % |
| Oscillator for Switching Frequency | | | | | |
| Frequency, FREQ | | 60 | 65 | 70 | kHz |
| Green Mode Frequency, FREQG | | | 22 | | kHz |
| Trembling Frequency | | | ± 4.0 | | kHz |
| Temp. Stability | $(-20^\circ\text{C} \sim 85^\circ\text{C})$ * | | 5 | | % |
| Voltage Stability | $(V_{\text{CC}}=11\text{V}-25\text{V})$ * | | | 1 | % |

| PARAMETER | CONDITIONS | MIN | TYP | MAX | UNITS |
|---------------------------------------|------------|------|------|------|-------|
| OLP (Over Load Protection) | | | | | |
| OLP Trip Level | | 4.3 | 4.5 | 4.7 | V |
| OLP Delay Time | | | 65 | | ms |
| Brownout Protection (BNO Pin) | | | | | |
| Brownout Turn-On Trip Level | | 1.00 | 1.05 | 1.10 | V |
| Brownout Turn-Off Trip Level | | 0.75 | 0.80 | 0.85 | V |
| BNO Pin De-bounce Time | | | 250 | | us |
| On Chip OTP (Over Temperature) | | | | | |
| OTP Level | * | | 140 | | °C |
| OTP Hysteresis | * | | 30 | | °C |
| Soft Start Duration | | | | | |
| Soft Start Duration | * | | 5 | | ms |

*: These parameters are guaranteed by design.

Electrical Characteristics for MOSFET

| PARAMETER | CONDITIONS | MIN | TYP | MAX | UNITS |
|--|---|-----|-----|-----|----------|
| Drain to Source Breakdown Voltage | | | | | |
| Breakdown Voltage BV_{DSS} | $V_{CC}=0V, COMP=0V, I_D=250\mu A$ | 700 | | | V |
| Drain Current | | | | | |
| Drain Current | $V_{CC}=15V, 25^\circ C$ | | | 2.0 | A |
| | $V_{CC}=15V, 100^\circ C$ | | | 1 | |
| Drain Leakage Current | | | | | |
| Drain-Source Leakage Current | $V_{DS}=700V, V_{CC}=0V, T_J=25^\circ C$ | 0 | | 1 | μA |
| | $V_{DS}=560V, V_{CC}=0V, T_J=125^\circ C$ | 0 | | 10 | |
| Drain on Resistance | | | | | |
| Drain to S pin On-Resistance | $I_D=1A; V_{CC}=15V; T_J=25^\circ C$ | | 6 | | Ω |

Typical Performance Characteristics

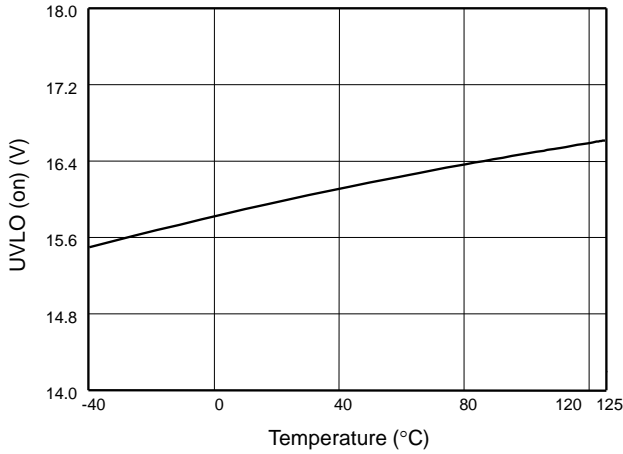


Fig. 1 UVLO (on) vs. Temperature

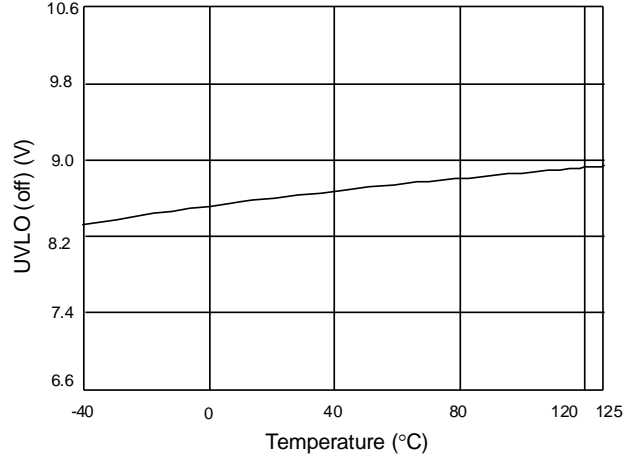


Fig. 2 UVLO (off) vs. Temperature

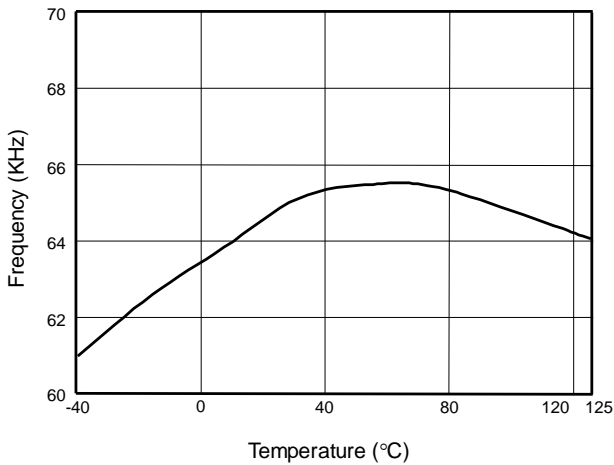


Fig. 3 Frequency vs. Temperature

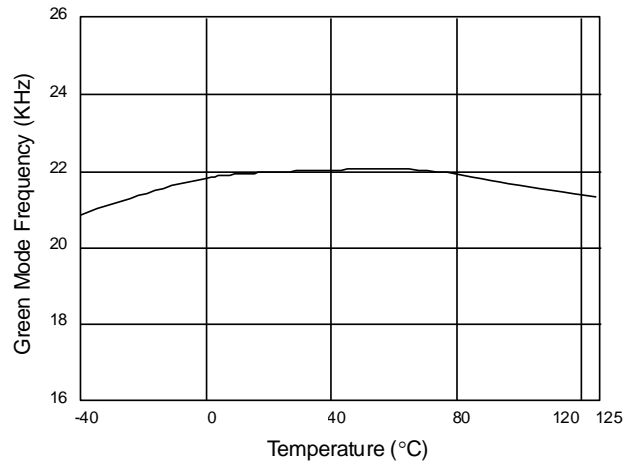


Fig. 4 Green Mode Frequency vs. Temperature

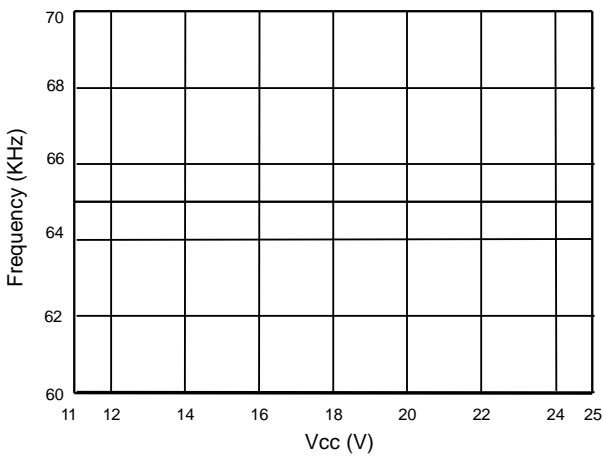


Fig. 5 Frequency vs. Vcc

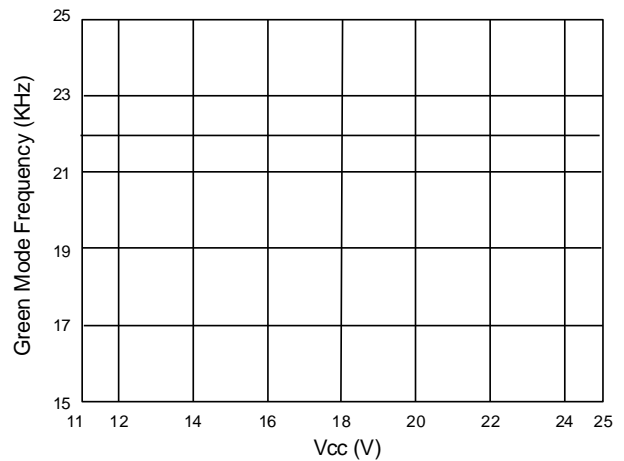


Fig. 6 Green Mode Frequency vs. Vcc

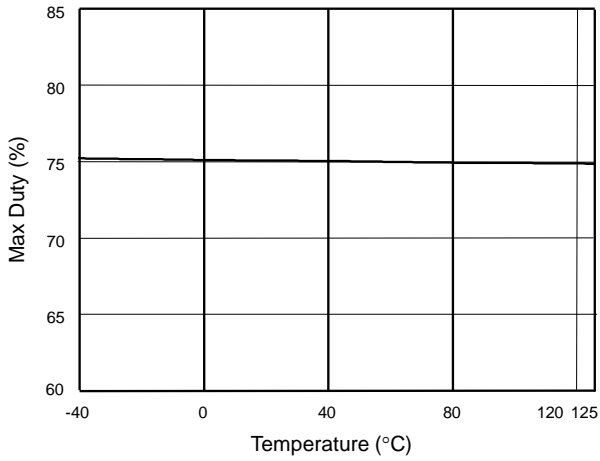


Fig. 7 Max Duty vs. Temperature

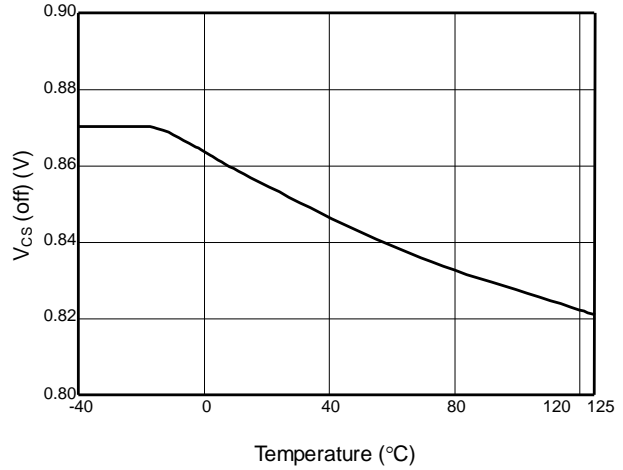


Fig. 8 V_{CS} (off) vs. Temperature

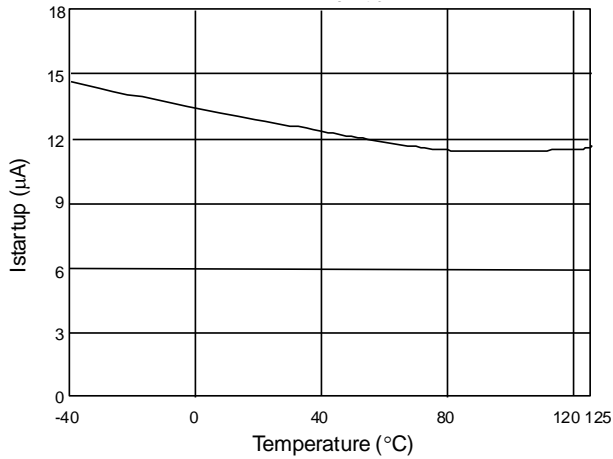


Fig. 9 Startup Current (I_{startup}) vs. Temperature

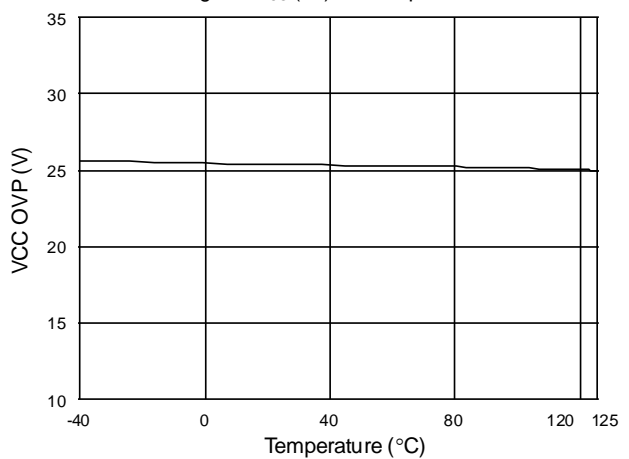


Fig. 10 VCC OVP vs. Temperature

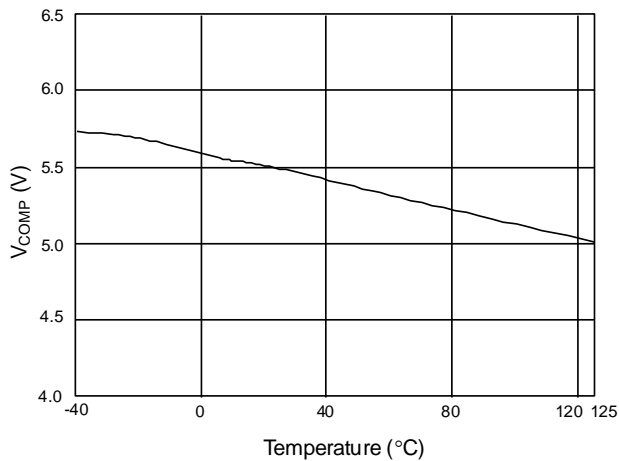


Fig. 11 V_{COMP} open loop voltage vs. Temperature

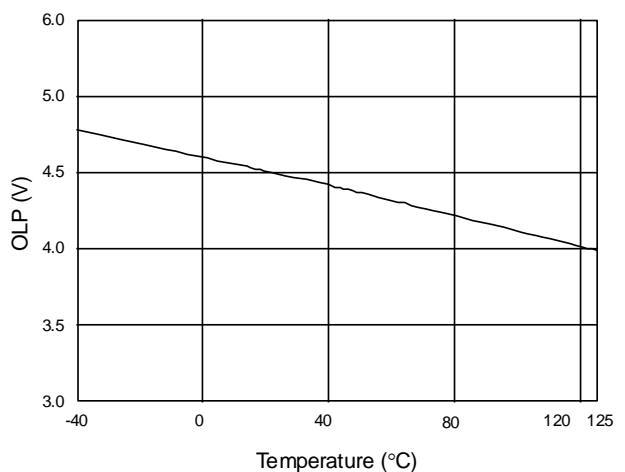


Fig. 12 OLP-Trip Level vs. Temperature

Application Information

Operation Overview

The LD7932R meets the green-power requirement and is intended for the use in those modern switching power suppliers and adaptors which demand higher power efficiency and power-saving. It integrated more functions to reduce the external components counts and the size. Its major features are described as below.

Under Voltage Lockout (UVLO)

An UVLO comparator is implemented in it to detect the voltage across VCC pin. It would assure the supply voltage enough to turn on the LD7932R PWM controller and further to drive the power MOSFET. As shown in Fig. 13, a hysteresis is built in to prevent shutdown from the voltage dip during startup. The turn-on and turn-off threshold level are set at 16.0V and 8.5V, respectively.

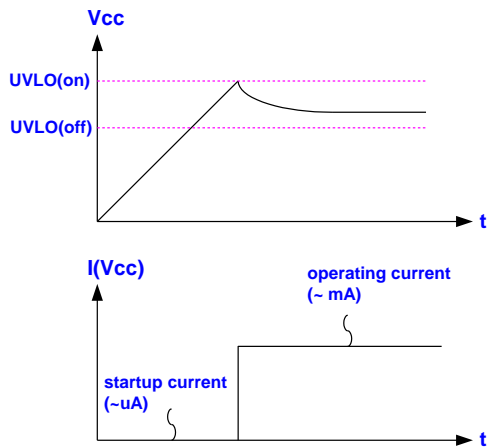


Fig. 13

Startup Current and Startup Circuit

The typical startup circuit to generate V_{CC} of the LD7932R is shown in Fig. 14. During the startup transient, the V_{CC} is below UVLO threshold. Before it has sufficient voltage to develop OUT pulse to drive the power MOSFET, R1 will provide the startup current to charge the capacitor C1. Once V_{CC} obtains enough voltage to turn on the LD7932R and further to deliver the gate drive signal, it will enable the auxiliary winding of the transformer to provide supply

current. Lower startup current requirement for the PWM controller will help to optimize the value of R1 and then minimize the power consumption for R1. In using CMOS process and the special circuit design, the maximum startup current required for LD7932R is only 20μA. A larger resistor of the R1 will usually spend more time to start up. To carefully select the value of R1 and C1 will optimize the power consumption and startup time.

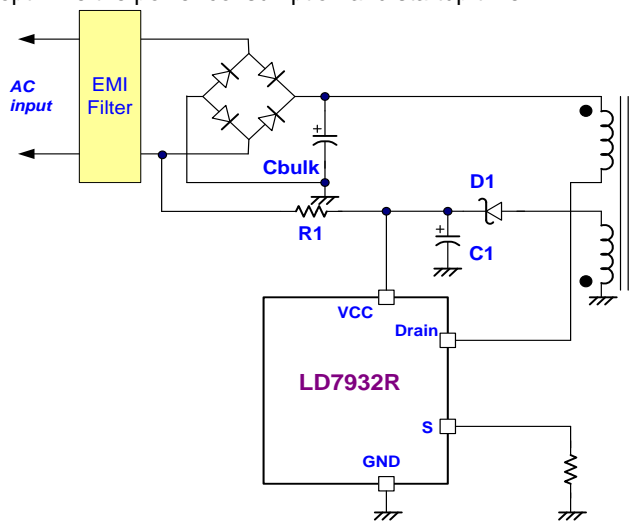


Fig. 14

Current Sensing and Leading-edge Blanking

The typical current mode of PWM controller feedbacks both of current signal and voltage signal to close the control loop and achieve regulation. The LD7932R detects the primary MOSFET current over CS pin for the peak current mode control and also for the pulse-by-pulse current limit.

In general, the power converter will provide more current when input voltage alters to high due to the signal propagation delay. This can be compensated through LD7932R. It's controlled by varying the current limit with the duty cycles in corresponding to V_{cs_off}. As shown in Fig.15, V_{cs_off} (corresponding to current limit) is in direct proportion to duty ratio in a certain segment and is fixed at high or low if duty ratio is over or below threshold values,

respectively. As a result, the current limit will be lowered at high-line inputs. This compensation control mechanism is developed with patents pending by Leadtrend Technology.

The maximum voltage threshold of the current sensing pin is set at 0.85V for low-line input. Thus the MOSFET peak current can be calculated as:

$$I_{PEAK(MAX)} = \frac{0.85V}{R_S}$$

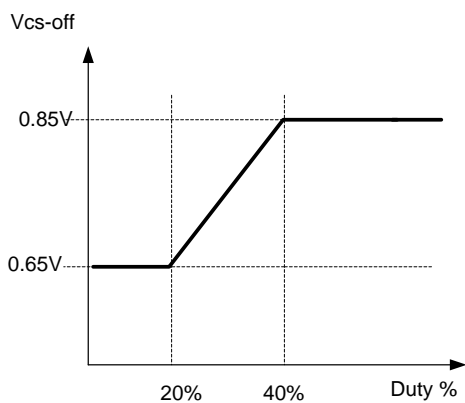


Fig. 15

A leading-edge blanking (LEB) time is included in the input of CS pin to prevent the false-trigger from the current spike. (As shown in Fig.16).

Maximum Duty-Cycle

The maximum duty-cycle of LD7932R is limited to 75% to avoid the transformer saturation.

Voltage Feedback Loop

The voltage feedback signal is provided from TL431 at the secondary side through the photo-coupler to the COMP pin of the LD7932R. Similar to UC3842, the LD7932R would carry a diode voltage offset at the stage to feed the voltage divider at the ratio of RA and RB, that is,

$$V_{-(PWM_{COMPARATOR})} = \frac{R_B}{R_A + R_B} \times (V_{COMP} - V_F)$$

A pull-high resistor is embedded internally and no external resistor is required.

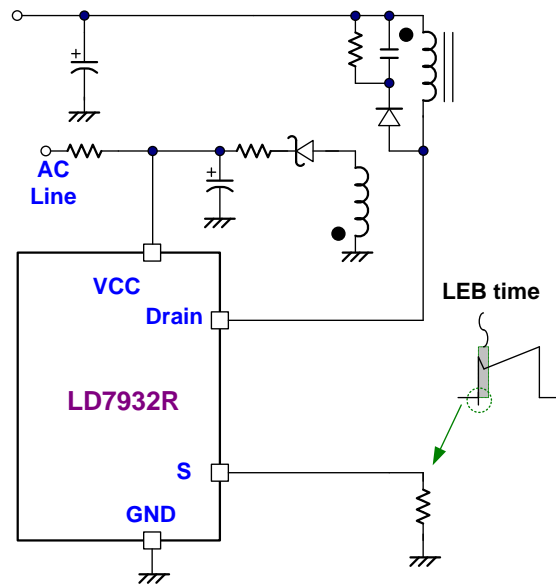


Fig. 16

Internal Slope Compensation

In the conventional applications, the problem of the stability is a critical issue for current mode controlling, when it operates over 50% duty-cycle. It injects a current ramp to increase slope compensation to RT/CT pin through a coupling capacitor. It therefore requires no extra design for the LD7932R since it has this function built-in already.

On/Off Control

The LD7932R can be turned off by pulling COMP pin lower than 1.5V. The gate output pin of the LD7932R will be disabled immediately under such condition. The off-mode can be released when the pull-low signal is removed.

Over Load Protection (OLP) - Auto Recovery

To protect the circuit from damage due to over-load condition, short or open-loop condition, the LD7932R is implemented with smart OLP function for it. It also

features auto recovery function; see Fig. 17 for the waveform. In case of fault condition, the feedback system will force the voltage loop toward to the saturation and then pull the voltage high over COMP pin (VCOMP). When the V_{COMP} ramps up to the OLP threshold of 4.5V and continues over OLP delay time, the protection will be activated and then turn off the gate output to stop the switching of power circuit.

With the protection mechanism, the average input power will be minimized to remain the component temperature and stress within the safety operating area.

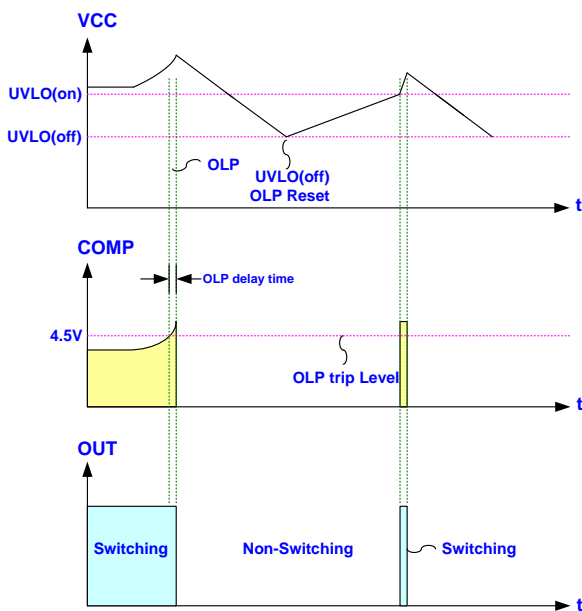


Fig. 17

OVP (Over Voltage Protection) on Vcc - Auto Recovery

The maximum VGS ratings of the power MOSFETs are mostly for 30V. To prevent the VGS enter fault condition, LD7932R is implemented with OVP function on Vcc. Whenever the Vcc voltage rises over OVP threshold, the output gate drive circuit will be shutdown simultaneously and the switching of the power MOSFET is disabled until the next UVLO(on).

The Vcc OVP function is auto-recoverable. If the OVP condition is not released, which is usually caused by open-loop of feedback, the Vcc will trip to OVP level and

shutdown the output again. The Vcc works in hiccup mode. Figure 18 shows its operation.

Otherwise, once the OVP condition is removed, the Vcc level will be resumed and the output will automatically return to the normal operation.

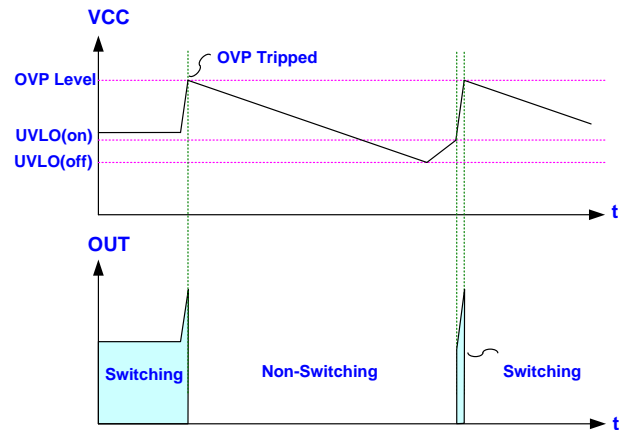


Fig. 18

Brownout Protection

The LD7932R is programmable to set the brownout protection point through BNO pin. The voltage across the BNO pin is proportional to the bulk capacitor voltage, referred as the line voltage. A brownout comparator is implemented to detect the abnormal line condition. As soon as the condition is detected, it will shut down the controller to prevent the damage. Figure 19 shows the operation. When VBNO falls below 0.80V, the gate output will be kept off even Vcc has already achieved UVLO(ON). It therefore makes Vcc hiccup between UVLO(ON) and UVLO(OFF). Unless the line voltage is large enough to pull VBNO larger than 1.05V, the gate output will not start switching even when the next UVLO(ON) is tripped. A hysteresis is implemented to prevent the false trigger during turn-on and turn-off. Figure 20 shows the circuit.

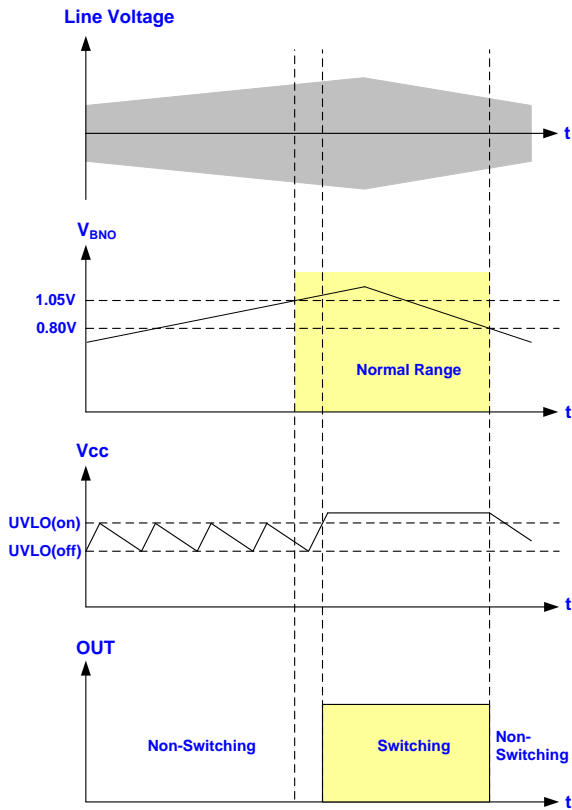


Fig. 19

Oscillator and Switching Frequency

The LD7932R is implemented with Frequency Swapping function which helps the power supply designers to both optimize EMI performance and lower system cost. The switching frequency substantially centers at 65KHz, and swap between a range of ± 4 KHz.

Green-Mode Operation

By using the green-mode control, the switching frequency can be reduced under the light load condition. This feature helps to improve the efficiency in light load conditions. The green-mode control is Leadtrend Technology's own property.


Fault Protection

There are several critical protections integrated in the LD7932R to prevent from damage to the power supply. Those damages usually come from open or short conditions on the pins of LD7932R.

In case under such conditions listed below, the gate output will turn off immediately to protect the power circuit.


1. CS pin floating
2. COMP pin floating

Reference Application Circuit --- 12.5W (5V/2.5A)

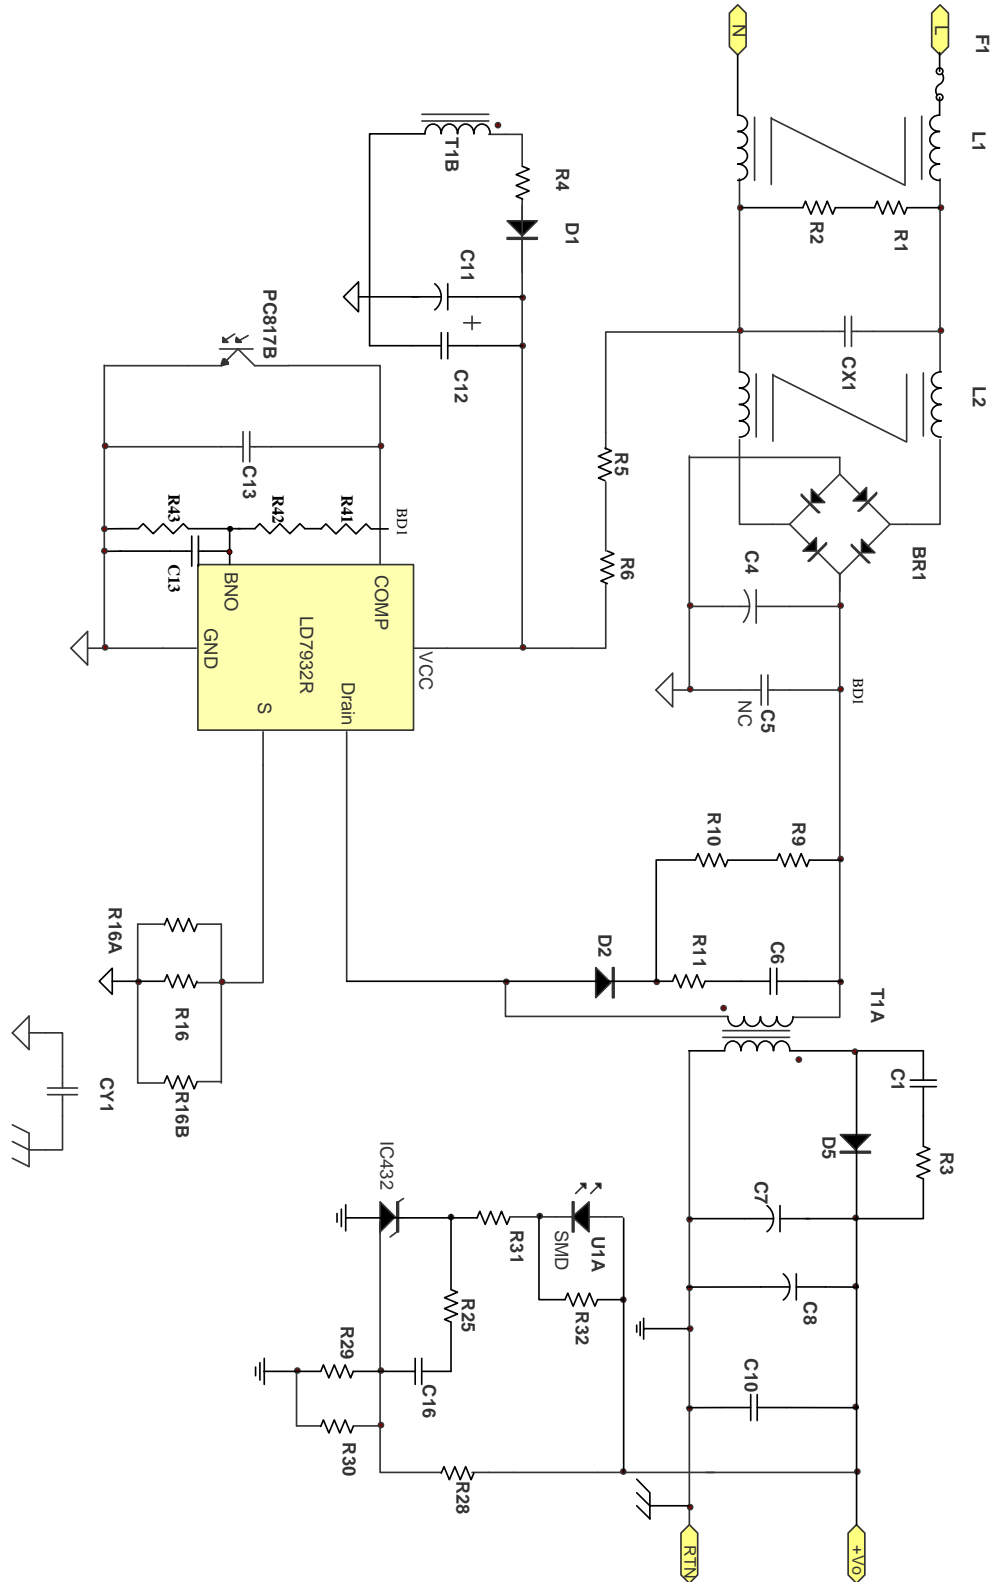

Package Information

DIP-7

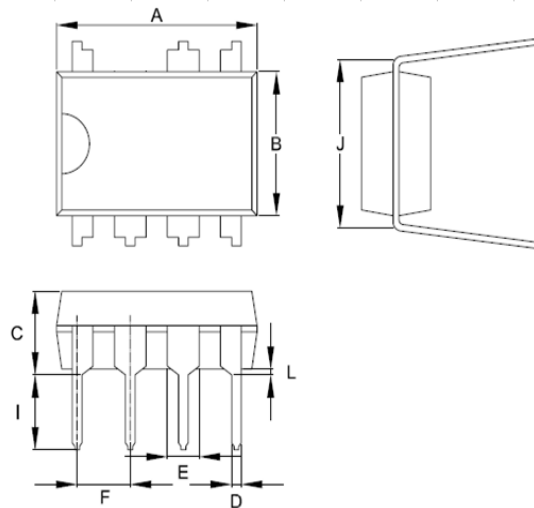

| Symbol | Dimension in Millimeters | | Dimensions in Inches | |
|--------|--------------------------|--------|----------------------|-------|
| | Min | Max | Min | Max |
| A | 9.017 | 10.160 | 0.355 | 0.400 |
| B | 6.096 | 7.112 | 0.240 | 0.280 |
| C | ----- | 5.334 | ----- | 0.210 |
| D | 0.356 | 0.584 | 0.014 | 0.023 |
| E | 1.143 | 1.778 | 0.045 | 0.070 |
| F | 2.337 | 2.743 | 0.092 | 0.108 |
| I | 2.921 | 3.556 | 0.115 | 0.14 |
| J | 7.366 | 8.255 | 0.29 | 0.325 |
| L | 0.381 | ----- | 0.015 | ----- |

Important Notice

Leadtrend Technology Inc. reserves the right to make changes or corrections to its products at any time without notice. Customers should verify the datasheets are current and complete before placing order.

Revision History

| Rev. | Date | Change Notice |
|------|-----------|------------------------|
| 00 | 6/19/2012 | Original Specification |