

# LH0062/LH0062C High Speed FET Operational Amplifier

## General Description


The LH0062/LH0062C is a precision, high speed FET input operational amplifier with more than an order of magnitude improvement in slew rate and bandwidth over conventional FET IC op amps. In addition it features very closely matched input characteristics, very high input impedance, and ultra low input currents with no compromise in noise, common mode rejection ratio or open loop gain. The device has internal unity gain frequency compensation, thus assuring stability in all normal applications. This considerably simplifies its application, since no external components are necessary for operation. However, unlike most internally compensated amplifiers, external frequency compensation may be added for optimum performance. For inverting applications, feed-forward compensation will boost the slew rate to over 120 V/ $\mu$ s and almost double the bandwidth. (See LB-2, LB-14, and LB-17 for discussions of the application of feed-forward techniques). Over-compensation can be used with the amplifier for greater stability when maximum bandwidth is not needed. Further, a single capacitor can be added to reduce the 0.1% settling time to under 1  $\mu$ s. In addition it is free of latch-up and may be simply offset nulled with negligible effect on offset drift or CMRR.

The LH0062 is designed for applications requiring wide bandwidth, high slew rate and fast settling time while at the same time demanding the high input impedance and low input currents characteristic of FET inputs. Thus it is particularly suited for such applications as video amplifiers, sample/hold circuits, high speed integrators, and buffers for A/D conversion and multiplex system. The LH0062 is specified for the full military temperature range of  $-55^{\circ}$  to  $+125^{\circ}$ C while the LH0062C is specified to operate over a  $-25^{\circ}$ C to  $+85^{\circ}$ C temperature range.

## Features


- High slew rate 70 V/ $\mu$ s
- Wide bandwidth 15 MHz
- Settling time (0.1%) 1  $\mu$ s
- Low input offset voltage 2 mV
- Low input offset current 1 pA
- Wide supply range  $\pm 5$ V to  $\pm 20$ V
- Internal 6 dB/octave frequency compensation
- Pin compatible with std IC op amps (TO-5 pkg)

## Schematic and Connection Diagrams

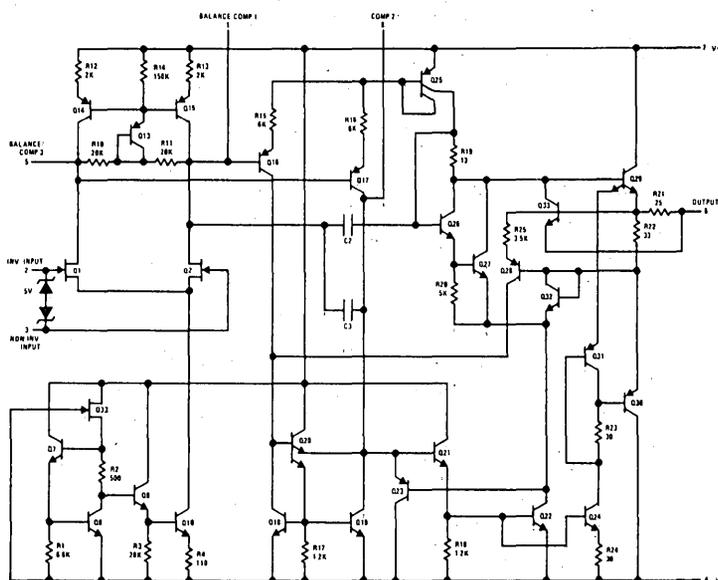


\*Pin Numbers Shown for TO-5 Package

**Metal Can Package**



Order Number  
LH0062H or LH0062CH  
See Package H08A

**Dual-In-Line Package**



Order Number  
LH0062D or LH0062CD  
See Package D14E

# Absolute Maximum Ratings

Supply Voltage	±20V	Operating Temperature	-55°C to +125°C
Power Dissipation (see graph)	500 mW	LH0062,	-25°C to +85°C
Input Voltage (Note 1)	±5V	LH0062C,	-65°C to +150°C
Differential Input Voltage (Note 2)	±30V	Storage Temperature Range	-65°C to +150°C
Short Circuit Duration	Continuous	Lead Temperature (Soldering, 10 sec)	300°C

## DC Electrical Characteristics (Note 1)

PARAMETER	CONDITIONS	LIMITS						UNITS	
		LH0062			LH0062C				
		MIN	TYP	MAX	MIN	TYP	MAX		
Input Offset Voltage	$R_S \leq 100 \text{ k}\Omega$ ; $T_A = 25^\circ\text{C}$		2	5		10	15	mV	
	$R_S \leq 100 \text{ k}\Omega$			7			20	mV	
Temperature Coefficient of Input Offset Voltage	$R_S \leq 100 \text{ k}\Omega$		5	25		10	35	$\mu\text{V}/^\circ\text{C}$	
Offset Voltage Drift with Time			4			5		$\mu\text{V}/\text{week}$	
Input Offset Current	$T_A = 25^\circ\text{C}$		0.2	2		1	5	pA	
				2			0.2	nA	
Temperature Coefficient of Input Offset Current			Doubles every $10^\circ\text{C}$			Doubles every $10^\circ\text{C}$			
Offset Current Drift with Time			0.1			0.1		pA/week	
Input Bias Current	$T_A = 25^\circ\text{C}$		5	10		10	65	pA	
				10			2	nA	
Temperature Coefficient of Input Bias Current			Doubles every $10^\circ\text{C}$			Doubles every $10^\circ\text{C}$			
Differential Input Resistance			$10^{12}$			$10^{12}$			
Common Mode Input Resistance			$10^{12}$			$10^{12}$			
Input Capacitance			4			4			
Input Voltage Range	$V_S = \pm 15\text{V}$	±10	±12			±10	±12		
Common Mode Rejection Ratio	$R_S \leq 10 \text{ k}\Omega$ , $V_{IN} = \pm 10\text{V}$	80	90			70	90		
Supply Voltage Rejection Ratio	$R_S \leq 10 \text{ k}\Omega$ , $\pm 5\text{V} \leq V_S \leq \pm 15\text{V}$	80	90			70	90		
Large Signal Voltage Gain	$R_L = 2 \text{ k}\Omega$ , $V_{OUT} = \pm 10\text{V}$ , $T_A = 25^\circ\text{C}$ , $V_S = \pm 15\text{V}$	50	200			25	160		
	$R_L = 2 \text{ k}\Omega$ , $V_{OUT} = \pm 10\text{V}$ , $V_S = \pm 15\text{V}$		25				25		
Output Voltage Swing	$R_L = 2 \text{ k}\Omega$ , $T_A = 25^\circ\text{C}$ , $V_S = \pm 15\text{V}$	±12	±13			±12	±13		
	$R_L = 2 \text{ k}\Omega$ , $V_S = \pm 15\text{V}$	±10				±10			
Output Current Swing	$V_{OUT} = \pm 10\text{V}$ , $T_A = 25^\circ\text{C}$	±10	±15			±10	±15		
Output Resistance			75				75		
Output Short Circuit Current	$T_A = 25^\circ\text{C}$		25				25		
Supply Current	$V_S = \pm 15\text{V}$		5				7		
			8				12		
Power Consumption	$V_S = \pm 15\text{V}$		240				360		

## AC Electrical Characteristics ( $T_A = 25^\circ\text{C}$ , $V_S = \pm 15\text{V}$ )


PARAMETER	CONDITIONS	LIMITS						UNITS
		LH0062			LH0062C			
		MIN	TYP	MAX	MIN	TYP	MAX	
Slew Rate	Voltage Follower	50	70		50	70		V/ $\mu\text{s}$
Large Signal Bandwidth	Voltage Follower		2			2		MHz
Small Signal Bandwidth			15			15		MHz
Rise Time			25			25		ns
Overshoot			10			15		%
Settling Time (0.1%)	$\Delta V_{IN} = 10\text{V}$		1			1		$\mu\text{s}$
Overload Recovery			0.9			0.9		$\mu\text{s}$
Input Noise Voltage	$f_S = 10 \text{ k}\Omega$ , $f_o = 10 \text{ Hz}$		150			150		$\text{nV}/\sqrt{\text{Hz}}$
Input Noise Voltage	$R_S = 10 \text{ k}\Omega$ , $f_o = 100 \text{ Hz}$		55			55		$\text{nV}/\sqrt{\text{Hz}}$
Input Noise Voltage	$R_S = 10 \text{ k}\Omega$ , $f_o = 1 \text{ kHz}$		35			35		$\text{nV}/\sqrt{\text{Hz}}$
Input Noise Voltage	$R_S = 10 \text{ k}\Omega$ , $f_o = 10 \text{ kHz}$		30			30		$\text{nV}/\sqrt{\text{Hz}}$
Input Noise Voltage	$\text{BW} = 10 \text{ Hz to } 10 \text{ kHz}$ , $R_S = 10 \text{ k}\Omega$		12			12		$\mu\text{V}_{\text{rms}}$
Input Noise Current	$\text{BW} = 10 \text{ Hz to } 10 \text{ kHz}$		<.1			<.1		pA $_{\text{rms}}$

Note 1: For supply voltages less than ±15V, the absolute maximum input voltage is equal to the supply voltage.  
 Note 2: Inputs are protected from excessive voltages by back-to-back diodes. Input currents should be limited to 1 mA.  
 Note 3: Unless otherwise specified, these specifications apply for -5V <  $V_S$  < 20V and -55°C <  $T_A$  < +125°C for the LH0062 and -25°C <  $T_A$  < +85°C for LH0062C. Typical values are given for  $T_A = 25^\circ\text{C}$ . Power supplies should be bypassed with 0.1  $\mu\text{F}$  ceramic capacitors.


# Typical Performance Characteristics

1  
LH0062/LH0062C


Maximum Power Dissipation




Input Offset Current vs Temperature




Input Bias Current vs Temperature




Large Signal Frequency Response




Voltage Follower Pulse Response




Open Loop Frequency Response




Large Signal Frequency Response




Inverter Pulse Response




Open Loop Frequency Response




Inverter Settling Time












Unity Gain Bandwidth



Voltage Follower Slew Rate




# Typical Performance Characteristics (Cont'd)

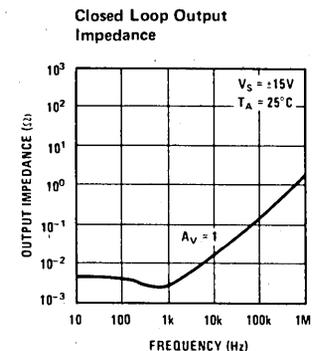


\*Noise Voltage Includes Contribution from Source Resistance

## Auxiliary Circuits


**Feedforward Compensation for Greater Inverting Slew Rate†**

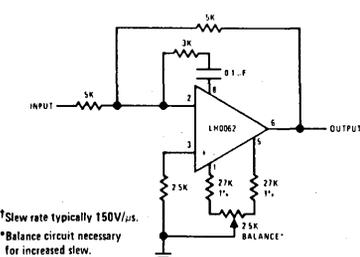

**Offset Balancing**




**Compensation for Minimum Settling† Time**




# Auxiliary Circuits (Cont'd)


Isolating Large Capacitive Loads



Overcompensation




Boosting Output Drive to ±100 mA




# Typical Applications\*


Fast Voltage Follower




Fast Summing Amplifier




Differential Amplifier




High Speed Subtractor

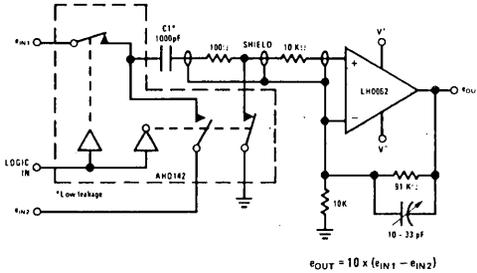


Wide Range AC Voltmeter

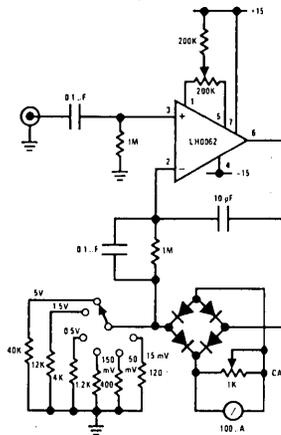


Fast Precision Voltage Comparator



Video DC Restoring Amplifier

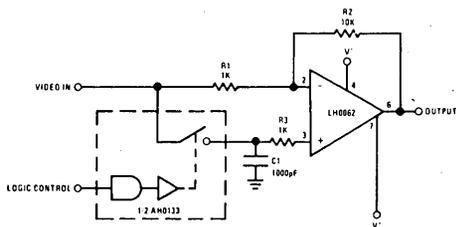


High Speed Positive Peak Detector

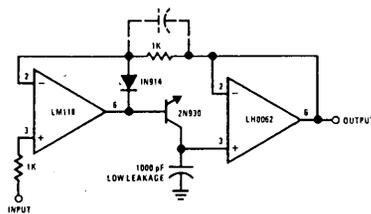

\*Pin numbers shown for TO-5 package

Typical Applications\* (Cont'd)

Precision Integrator

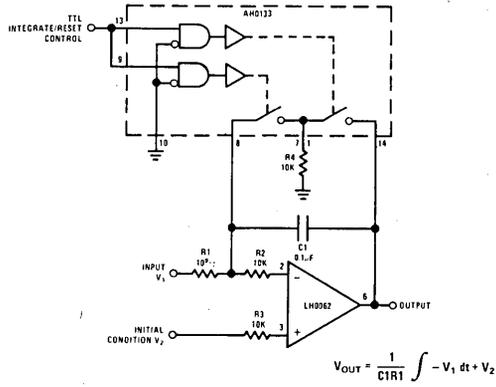

$$V_{OUT} = \frac{1}{C_1 R_1} \int -V_1 dt + V_2$$

\*Pin numbers shown for TO-5 package

Precision Wide Range Current to Period Converter

